

User Manual

ZKBio CVSecurity

Version: 3.0

Date: November 2024

Software Version: ZKBio CVSecurity_6.4.0_R

English

Thank you for choosing our product. Please read the instructions carefully before operation. Follow these instructions to ensure that the product is functioning properly. The images shown in this manual are for illustrative purposes only.



For further details, please visit our Company's website
www.zkteco.com.

Copyright © 2024 ZKTECO CO., LTD. All rights reserved.

Without the prior written consent of ZKTeco, no portion of this manual can be copied or forwarded in any way or form. All parts of this manual belong to ZKTeco and its subsidiaries (hereinafter the "Company" or "ZKTeco").

Trademark

ZKTeco is a registered trademark of ZKTeco. Other trademarks involved in this manual are owned by their respective owners.

Disclaimer

This manual contains information on the operation and maintenance of the ZKTeco equipment. The copyright in all the documents, drawings, etc. in relation to the ZKTeco supplied equipment vests in and is the property of ZKTeco. The contents hereof should not be used or shared by the receiver with any third party without express written permission of ZKTeco.

The contents of this manual must be read as a whole before starting the operation and maintenance of the supplied equipment. If any of the content(s) of the manual seems unclear or incomplete, please contact ZKTeco before starting the operation and maintenance of the said equipment.

It is an essential pre-requisite for the satisfactory operation and maintenance that the operating and maintenance personnel are fully familiar with the design and that the said personnel have received thorough training in operating and maintaining the machine/unit/equipment. It is further essential for the safe operation of the machine/unit/equipment that personnel has read, understood and followed the safety instructions contained in the manual.

In case of any conflict between terms and conditions of this manual and the contract specifications, drawings, instruction sheets or any other contract-related documents, the contract conditions/documents shall prevail. The contract specific conditions/documents shall apply in priority.

ZKTeco offers no warranty, guarantee or representation regarding the completeness of any information contained in this manual or any of the amendments made thereto. ZKTeco does not extend the warranty of any kind, including, without limitation, any warranty of design, merchantability or fitness for a particular purpose.

ZKTeco does not assume responsibility for any errors or omissions in the information or documents which are referenced by or linked to this manual. The entire risk as to the results and performance obtained from using the information is assumed by the user.

ZKTeco in no event shall be liable to the user or any third party for any incidental, consequential, indirect, special, or exemplary damages, including, without limitation, loss of business, loss of profits, business interruption, loss of business information or any pecuniary loss, arising out of, in connection with, or relating to the use of the information contained in or referenced by this manual, even if ZKTeco has been advised of the possibility of such damages.

This manual and the information contained therein may include technical, other inaccuracies or

typographical errors. ZKTeco periodically changes the information herein which will be incorporated into new additions/amendments to the manual. ZKTeco reserves the right to add, delete, amend or modify the information contained in the manual from time to time in the form of circulars, letters, notes, etc. for better operation and safety of the machine/unit/equipment. The said additions or amendments are meant for improvement /better operations of the machine/unit/equipment and such amendments shall not give any right to claim any compensation or damages under any circumstances.

ZKTeco shall in no way be responsible (i) in case the machine/unit/equipment functions due to any non-compliance of the instructions contained in this manual (ii) in case of operation of the machine/unit/equipment beyond the rate limits (iii) in case of operation of the machine and equipment in conditions different from the prescribed conditions of the manual.

The product will be updated from time to time without prior notice. The latest operation procedures and relevant documents are available on <http://www.zkteco.com>.

If there is any issue related to the product, please contact us.

ZKTeco Headquarters

Address ZKTeco Industrial Park, No. 32, Industrial Road,
Tangxia Town, Dongguan, China.

Phone +86 769 - 82109991

Fax +86 755 - 89602394

For business related queries, please write to us at: sales@zkteco.com.

To know more about our global branches, visit www.zkteco.com.

About the Company

ZKTeco is one of the world's largest manufacturer of RFID and Biometric (Fingerprint, Facial, Finger-vein) readers. Product offerings include Access Control readers and panels, Near & Far-range Facial Recognition Cameras, Elevator/Floor access controllers, Turnstiles, License Plate Recognition (LPR) gate controllers and Consumer products including battery-operated fingerprint and face-reader door locks. Our security solutions are multi-lingual and localized in over 18 different languages. At the ZKTeco state-of-the-art 700,000 square foot ISO9001-certified manufacturing facility, we control manufacturing, product design, component assembly, and logistics/shipping, all under one roof.

The founders of ZKTeco have been determined for independent research and development of biometric verification procedures and the productization of biometric verification SDK, which was initially widely applied in PC security and identity authentication fields. With the continuous enhancement of the development and plenty of market applications, the team has gradually constructed an identity authentication ecosystem and smart security ecosystem, which are based on biometric verification techniques. With years of experience in the industrialization of biometric verifications, ZKTeco was officially established in 2007 and now has been one of the globally leading enterprises in the biometric verification industry owning various patents and being selected as the National High-tech Enterprise for 6 consecutive years. Its products are protected by intellectual property rights.

About the Manual

This manual introduces the operations of **ZKBio CVSecurity**.

All figures displayed are for illustration purposes only. Figures in this manual may not be exactly consistent with the actual products

Document Conventions

Conventions used in this manual are listed below:

GUI Conventions

For Software	
Convention	Description
Bold font	Used to identify software interface names e.g. OK , Confirm , Cancel .
>	Multi-level menus are separated by these brackets. For example, File > Create > Folder.
For Device	
Convention	Description
< >	Button or key names for devices. For example, press <OK>.
[]	Window names, menu items, data table, and field names are inside square brackets. For example, pop up the [New User] window.
/	Multi-level menus are separated by forwarding slashes. For example, File/Create/Folder.

Symbols






Convention	Description
	This represents a note that needs to pay more attention to.
	The general information which helps in performing the operations faster.
	The information which is significant.
	Care taken to avoid danger or mistakes.
	The statement or event that warns of something or that serves as a cautionary example.

Table Of Contents

1	Installation And Login	18
1.1	Operating Environment Requirements	18
1.2	System Installation	19
1.3	Self-service License Reset	23
1.3.1	Online Deactivation + Online Activation	23
1.3.2	Offline Deactivation + Online Activation	26
1.3.3	Online Deactivation + Offline Activation	29
1.3.4	Offline Deactivation + Offline Activation	33
2	Personnel	40
2.1	Personnel Management	40
2.1.1	Person	41
2.1.2	Department	62
2.1.3	Position	64
2.1.4	Dismissed Personnel	66
2.1.5	Pending Review	67
2.1.6	Custom Attributes	67
2.1.7	List Library	69
2.1.8	Parameters	70
2.2	Card Management	74
2.2.1	Card	75
2.2.2	Wiegand Format	77
2.2.3	Issue Card Record	79
3	Access Control	81
3.1	Operation Scenario	81
3.2	Operation Process	81
3.3	Access Device	81
3.3.1	Device	81
3.3.2	I/O Board	92
3.3.3	Door	93
3.3.4	Reader	96
3.3.5	Auxiliary Input	97
3.3.6	Auxiliary Output	98
3.3.7	Event Type	99
3.3.8	Daylight Saving Time	100
3.3.9	Real-Time Monitoring	101
3.3.10	Alarm Monitoring	106

3.3.11	Map	107
3.4	Access Rule	109
3.4.1	Timezone	109
3.4.2	Holiday	110
3.4.3	Access Level	112
3.4.4	Set Access Level Allocation	117
3.4.5	Set Access Level Groups by Person	119
3.4.6	Set Access Level Groups by Department	121
3.4.7	Interlock	122
3.4.8	Linkage	123
3.4.9	Anti-Passback	126
3.4.10	The First-Person Normally Open	127
3.4.11	Multi-Person Group	129
3.4.12	Multi-People Open the Door	131
3.4.13	Verification Mode	133
3.4.14	Parameters	134
3.5	Advanced Function	136
3.5.1	Zone	136
3.5.2	Reader Definition	137
3.5.3	Who Is Inside?	139
3.5.4	Global Anti-Passback	141
3.5.5	Global Linkage	142
3.5.6	The Global Interlock Group	145
3.5.7	The Global Interlock	146
3.5.8	Personnel Availability	148
3.5.9	Occupancy Control	150
3.5.10	Muster Point	151
3.5.11	Muster Point Report	156
3.6	Access Control Reports	158
3.6.1	All Transactions	158
3.6.2	Events from Today	159
3.6.3	All Exception Events	160
3.6.4	Access Rights by Door	161
3.6.5	Access Rights by Personnel	162
3.6.6	First In and Last Out	163
4	Video Intercom	164
4.1	Basic Management	164
4.1.1	Building	164
4.1.2	Unit	166

4.1.3	Parameter	168
4.2	Device Management	169
4.2.1	DNK Device Operation Guide	169
4.2.2	IPBX Device Operation Guide	172
4.3	Access Management	174
4.3.1	Access Control Group	174
4.3.2	Set Access by Levels	177
4.3.3	Set Access by Person	179
4.4	Extension Management	181
4.4.1	Extension Number	181
4.4.2	Extension Assignment	185
4.4.3	Contact List	192
4.4.4	Voice Interaction	195
4.5	Video Intercom Reports	199
4.5.1	Call Records	199
4.5.2	Unlock Records	201
5	Smart Video Surveillance	204
5.1	Device Management	204
5.1.1	Device (Add Device)	204
5.1.2	Group Management	212
5.2	Video View	214
5.2.1	Video Preview	214
5.2.2	Video Playback	216
5.3	Decoding On the Wall	217
5.3.1	Decoder	217
5.3.2	TV Wall	218
5.3.3	Large Screen Control	220
5.4	Intelligent	223
5.4.1	Behavior Analysis	223
5.4.2	Crowd Situation	228
5.4.3	General Intelligence	230
5.4.4	Live Alarm	232
5.4.5	Global Linkage	234
5.4.6	Link Record	235
5.5	Statistics	236
5.5.1	Alarm Report	236
5.5.2	Patrol Report	237
5.5.3	Patrol Alarm	238
5.6	Video Patrol	239

5.6.1	Patrol Group	239
5.6.2	Patrol Plan	242
5.6.3	Real-Time Patrol	246
5.7	Map Management	248
5.7.1	Video Map	248
5.8	Maintenance Configuration	252
5.8.1	Developer Log	252
5.8.2	Client Request Log	252
5.8.3	CU Request	253
5.8.4	Parameters	254
5.9	ZKBio Video Client	255
5.9.1	Installing the Client	255
5.9.2	Configuration And Use	258
6	Time & Attendance Management	261
6.1	Operation Scenario	261
6.2	Operation Flow	261
6.3	Attendance Management	261
6.3.1	Personnel Verification Method	261
6.3.2	By Area	262
6.3.3	Attendance Device	264
6.3.4	Attendance Point	267
6.3.5	Roll Call	268
6.3.6	Command from Server	268
6.3.7	Device Operation Log	269
6.4	Attendance Setting	269
6.4.1	Attendance Rule Setting	269
6.4.2	Holidays	275
6.4.3	Leave Type	275
6.4.4	Automatic Report	277
6.4.5	Process Settings	277
6.5	Regular Shift Setting Schedule	278
6.5.1	Timetable	278
6.5.2	Personnel Schedule	283
6.5.3	Group Schedule	285
6.5.4	Schedule Details	288
6.6	Exception	288
6.6.1	Appended Log	288
6.6.2	Ask For Leave	289
6.6.3	Overtime	290

6.6.4	Adjust Rest	291
6.6.5	Shift Adjustment	292
6.6.6	Attendance Detail Report	293
6.6.7	Daily Attendance Report	296
6.6.8	Monthly Attendance Report	301
6.6.9	Calculate Report	304
6.6.10	Attendance Custom Report	308
7	Parking Management	310
7.1	Operation Scenario	310
7.2	Operation Flow	310
7.3	Basic Parking Setting	311
7.3.1	Parking Settings	311
7.3.2	Device	313
7.3.3	Parking Area	314
7.3.4	Entrance And Exit Area	315
7.3.5	Guard Booth	316
7.3.6	Channel	318
7.3.7	Vehicle Definition	319
7.3.8	Shift Settings	320
7.3.9	Manual Release Reason	321
7.4	Charge Management	323
7.4.1	Fixed Cars Are Charging Rules	323
7.4.2	Temporary Car Charging Rules	324
7.4.3	Overtime Charging Rules	326
7.4.4	Discount Strategy	328
7.4.5	Business Management	329
7.4.6	Financial Reconciliation	330
7.5	Vehicle Management	331
7.5.1	License Plate Registration	331
7.5.2	Vehicle Authorization	332
7.5.3	Fixed Vehicle Extension	335
7.5.4	Block&Allow List Management	335
7.6	Report Management	337
7.6.1	Vehicle Inside	337
7.6.2	Entry Record	338
7.6.3	Exit Record	338
7.6.4	Charge Record	338
7.6.5	Expired Vehicle	339
7.6.6	Fixed Vehicle Authorization Record	339

7.6.7	Device Operation Record	340
7.6.8	Handover Statistics	340
7.6.9	Daily Income Statistics	341
7.6.10	Monthly Income Statistics	341
7.7	Real-Time Monitoring	342
7.7.1	Sentry Booth Monitoring	342
7.7.2	Monitor Room	344
7.8	Ticket Dispenser Management	345
7.8.1	Authorized Products (BEST-W Protocol)	345
7.8.2	Set Parking Parameter	348
7.8.3	Add Ticket Dispenser	355
7.8.4	Lane Setting	358
7.8.5	Vehicle Authorization	360
7.8.6	Result Verification	362
7.8.7	Central Payment Station	364
7.8.8	Annex 1	366
8	Visitor Management	368
8.1	Operation Scenario	368
8.2	Operation Flow	368
8.3	Visitor Registration	368
8.3.1	Entry Registration	368
8.3.2	Visitor	376
8.4	Visitor Reservation	379
8.4.1	Visitor Reservation	379
8.4.2	Reservation Audit	382
8.4.3	Invite	383
8.4.4	Respondent Self-Approval	385
8.5	Basic Management	391
8.5.1	Parameters	391
8.5.2	Set Up Permission Groups by Visited Department (Visited Department Level)	409
8.5.3	Entry Place	411
8.5.4	Visit Reason	416
8.5.5	Custom Attributes	417
8.6	Advanced	418
8.6.1	Category	418
8.6.2	WatchList	420
8.6.3	Watch List Thumbnails	422
8.6.4	Alert Template	423
8.6.5	Linkage	424

8.7	Visitor Reports	427
8.7.1	Last Visited Location	427
8.7.2	Visitor History Record	427
8.7.3	Visitor Daily Visit Report	429
8.7.4	Visitor Weekly Visit Report	429
8.7.5	Visitor Monthly Visit Report	430
9	Space Management	431
9.1	Device Management	431
9.1.1	Search and Add Device	431
9.1.2	Delete	433
9.1.3	Control	433
9.2	Space Management	433
9.2.1	Space	433
9.2.2	Space Services	436
9.2.3	Space Facility	437
9.3	Reservation Management	439
9.3.1	Space Reservation	439
9.3.2	Reservation Details	440
9.4	Statistics Report	442
9.4.1	Space Usage Statistics	442
9.4.2	Sign-In Statistics	443
9.5	Notification	443
10	Elevator Control	446
10.1	Elevator Control Management	446
10.1.1	Operation Scenario	446
10.1.2	Operation Flow	446
10.1.3	Elevator Device	447
10.1.4	Elevator Control Rules	462
10.1.5	Parameters	471
10.1.6	Elevator Control Reports	472
10.1.7	Elevator Integration	475
11	Consumption (Offline)	482
11.1	Consumption System	482
11.1.1	Consumption Basic Management	482
11.1.2	Key Value Information	489
11.1.3	Card Information	490
11.2	Device Management	492
11.2.1	Consumption Device	492

11.2.2	Consumption Parameter	496
11.3	Card Management	497
11.3.1	Card Service	497
11.3.2	Top Up	500
11.3.3	Card Management	501
11.3.4	Income and Expenses	502
11.4	Consumer Details	503
11.5	Manual Supplement	505
11.5.1	New	505
11.5.2	Refresh	506
11.6	Subsidy	506
11.6.1	Subsidy Management	506
11.6.2	Consumption Report	511
11.6.3	Statistical Report	519
12	Consumption (Online) System	532
12.1	Consumption Basic Management	532
12.1.1	Piecewise Fixed Value	532
12.1.2	Consumption Time Zone	533
12.1.3	Restaurant Information	534
12.1.4	Meal Information	536
12.1.5	Categories	536
12.1.6	Commodity Information	537
12.1.7	Card Information	539
12.1.8	Consumption Parameter	541
12.1.9	Incoming Goods Management	542
12.1.10	AD Setting	543
12.2	Device Management	544
12.2.1	Consumption Device Management	544
12.2.2	Face Consumption Machine	545
12.3	Consumption Account	548
12.3.1	Account Service	548
12.3.2	Card Management	552
12.3.3	Wallet	553
12.3.4	Income and Expenses	553
12.3.5	Subsidy Management	554
12.4	Consumer Details	557
12.4.1	Consumption Details Report	557
12.4.2	Offline Consumption	558
12.4.3	Manual Supplement	558

12.5	Consumption Report.....	559
12.5.1	Top Up Table.....	559
12.5.2	Refund Table.....	559
12.5.3	Subsidy Table.....	560
12.5.4	Card Balance Table.....	561
12.6	Statistical Report.....	562
12.6.1	Personal Consumption Statistics.....	562
12.6.2	Personal Balance List.....	564
12.6.3	Personal Recharge Statistics.....	564
12.6.4	Department Summary Table.....	565
12.6.5	Restaurant Summary.....	566
12.6.6	Device Summary Table.....	568
12.6.7	Income and Expenditures Summary.....	569
12.6.8	Meal Summary Table.....	571
12.6.9	Commodity Summary.....	572
12.6.10	Recharge Summary Table.....	573
12.6.11	Personnel Meal Summary Table.....	573
12.6.12	Device Meal Summary Table.....	574
12.6.13	Monthly Statement Management.....	574
12.7	Consumption Ordering.....	575
12.7.1	Order Management.....	575
12.7.2	Meal Order Statics Report.....	576
12.7.3	Ordering Details Management.....	576
12.7.4	Ordering Statistics.....	577
13	Patrol Management.....	578
13.1	Operation Scenario.....	578
13.2	Operation Flow.....	578
13.3	Patrol Route Monitoring.....	578
13.3.1	Patrol Monitoring.....	578
13.4	Basic Settings (Patrol Basic Management).....	579
13.4.1	Device Addition (Device).....	579
13.4.2	Checkpoint.....	580
13.4.3	Parameters.....	581
13.5	Patrol Management.....	582
13.5.1	Set Up a Patrol Plan.....	582
13.5.2	Designated Patrol Personnel Group (Patrol Group).....	583
13.5.3	Set Up Patrol Routes (Route).....	585
13.6	Result Validation (Patrol Reports).....	587
13.6.1	All Transactions.....	587

13.6.2	Patrol Records Today	588
13.6.3	Patrol Route Statistics	589
13.6.4	Patrol Personnel Statistics	590
14	Entrance Control	592
14.1	Operation Scenario	592
14.2	Operation Flow	592
14.3	Channel Device	593
14.3.1	Passage	593
14.3.2	Device	594
14.3.3	Gate	601
14.3.4	Reader	602
14.3.5	Auxiliary Input	602
14.3.6	Event Type	603
14.3.7	Daylight Saving Time	604
14.3.8	Device monitoring	605
14.3.9	Real-Time monitoring	607
14.4	Entrance Control	608
14.4.1	Barrier Gate Permission Group	608
14.4.2	Set Access by Levels	611
14.4.3	Anti-Passback	612
14.4.4	Linkage Setting	613
14.4.5	Parameters	615
14.5	Passage Settings	616
14.5.1	Barrier Gate Passing Rules	616
14.5.2	Flap Barrier	618
14.5.3	Swing Barrier	619
14.6	Channel Reports	621
14.6.1	All Transactions	621
14.6.2	Today's Access Record	622
14.6.3	Personnel Last Access Location	623
14.6.4	All Exception Events	624
15	FaceKiosk	626
15.1	Facekiosk Device	626
15.1.1	Device	626
15.1.2	Set Attendance by Area	627
15.1.3	Set Attendance by Person	628
15.2	Media Advertisement Resources	628
15.2.1	Advertisement Resources	628

15.2.2	Advertisement Settings	629
15.3	FaceKiosk Reports	630
15.3.1	Verification Record	630
16	Locker	631
16.1	Locker Device Management	631
16.1.1	Device	631
16.1.2	Parameters	634
16.1.3	Visual Panel	635
16.1.4	Linkage	637
16.2	Locker Report	639
16.2.1	All Transaction	639
17	Energy Saving	641
17.1	Device Management	641
17.1.1	Gateway	641
17.1.2	Terminal	644
17.1.3	Event Type	647
17.1.4	Scene Management	647
17.1.5	Report Management	650
18	System Management	653
18.1	System Management	653
18.1.1	Operation Log	653
18.1.2	Database Management	654
18.1.3	Area Settings	656
18.1.4	E-mail Management	658
18.1.5	Dictionary Management	659
18.1.6	Data Cleaning	659
18.1.7	Resource File	661
18.1.8	Cloud Setting	662
18.1.9	Certificate Type	663
18.1.10	Print Template	664
18.1.11	System Monitoring	665
18.1.12	Parameters	668
18.2	Authority Management	669
18.2.1	User	669
18.2.2	Role	671
18.2.3	API Authorization	671
18.2.4	Client Register	673
18.2.5	Security Parameters	675

18.3	Communication Management	677
18.3.1	Device Commands	677
18.3.2	Communication Device	678
18.3.3	Product	678
18.3.4	Authorized Device	680
18.3.5	Communication Monitor	681
18.4	Third Party Integration	681
18.4.1	LED Device	681
18.4.2	Digifort Camera	686
18.4.3	Arteco Intergration	687
18.4.4	Line Notification	687
18.4.5	AD Management	690
18.4.6	SMS Management	692
19	Service Center	694
19.1	Device Center	694
19.1.1	Device	694
19.2	Event Center	694
19.2.1	The Event Type	694
19.2.2	The Event Record	695
19.3	Notification Center	695
19.4	Map Center	696
19.4.1	Real-Time Monitoring	696
19.4.2	Map Configuration	699
19.5	Scene Center	704
19.5.1	Scene Configuration	704
19.6	Push Center	713
19.6.1	Push Configuration	713
19.6.2	Push Exception Record	715

1 Installation And Login

1.1 Operating Environment Requirements

Category	Minimum Configuration Requirements
CPU	Core i5 quad-core with a clock speed of 2.8 GHz or higher
RAM	Not less than 8 GB
Hard Disk	Not less than 500GB (the remaining space of the system disk is more than 15GB)
OS	Windows 7/8/8.1/10/11, Windows Server 2008/2012/2016/2019/2022 (64-bit)
Graphics Card	Intel integrated graphics, video memory greater than 2.0G (Intel® HD Graphics 530 and above recommended)
Network Card	At least one network card, the recommended network speed is not less than 1000Mbit/s
Monitor	At least 21.5 inches, and the best resolution of the monitor is recommended: 1920 * 1080. It is recommended to set the display resolution to 1920 * 1080. Using other resolutions may cause the interface to be abnormal.
Browser	Support Chrome33+ (recommended)/Firefox27+/Explorer11+/Microsoft Edge 89+

Table 1- 1

Instruction:

The number of live channels supported under the minimum configuration requirements:

Resolution	Configuration a (H.264 format)	Configuration a (H.265 format)
CIF (512K)	38	38
4CIF/D1 (2M)	22	22
720P (2M 25fps)	10	10
1080P (4M 25fps)	6	6

Table 1- 2

In the video preview window, you can view the system CPU or memory usage in real time. If the CPU reaches 80%, it is not recommended to increase the video preview window, which will cause the video stream to freeze; if the CPU has reached 80% and the video window does not meet the actual application, the system configuration needs to be improved.

1.2 System Installation

Step 1: Obtain the installation package.

Instruction:

Before installing the software, it is recommended to close the anti-virus software in the system to avoid failing the environment detection. If the antivirus software detects abnormality, you can also choose to ignore it.

After running the application, there will be a few seconds of detection process, please be patient.

Step 2: Right-click the installation package installer, choose to run as an administrator, and the environment detection tool will automatically perform system environment detection. If an abnormality is detected during the installation process, the interface will give a prompt. The user can refer to the prompt information to repair, and re-test after repairing until all the test items are passed before proceeding to the next Step.

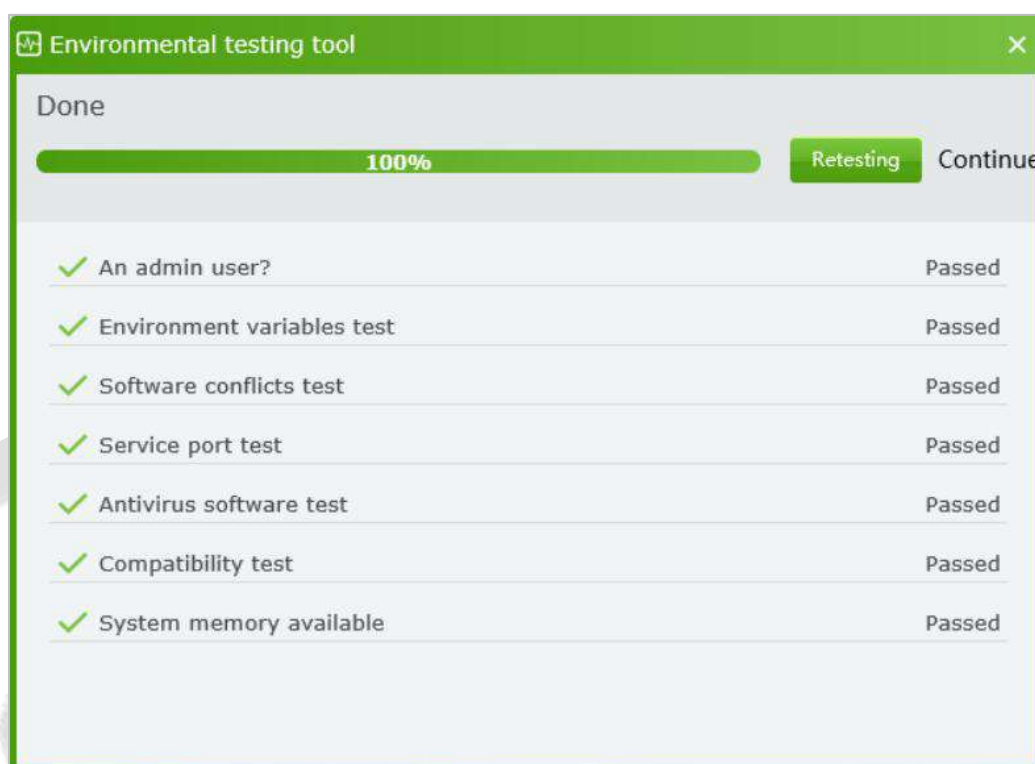


Figure 1- 1

Step 3: If the detection is normal, click **Continue**.

Step 4: Select "I agree to this agreement (A)" and click **Next**.

**Figure 1-2**

Step 5: After configuring the server port and other parameters, click **Next**.

Instruction:

The default port is 8098, and the Adms service port defaults to 8088.

If the port is occupied, please modify the port number manually. When modifying, try to avoid the occupied ports in the system, and can not overlap with the database port 5442, Redis port 6390, and 21 and 80 ports.

Check "Add firewall exception to this port" to prevent Windows Firewall from blocking the program from running.

The https protocol is used by default.

**Figure 1-3**

Step 6: After setting the installation directory, click **Next**.

Instruction:

The default installation path is C:\Program Files\ZKBioCVSecurity. You can also click **Browse** to customize the installation path. Please follow the interface prompts to ensure that the selected installation path has enough disk space.



Figure 1-4

Step 7: After setting the backup file storage path, click **Next**.

Instruction:

The system scans the entire disk by default, locates the drive letter with the largest free space, and creates a new SecurityDBBack folder. You can also click **Browse** to customize the storage path of the backup file.



Figure 1-5

Step 8: Select the modules needed for your project, then click **Next**

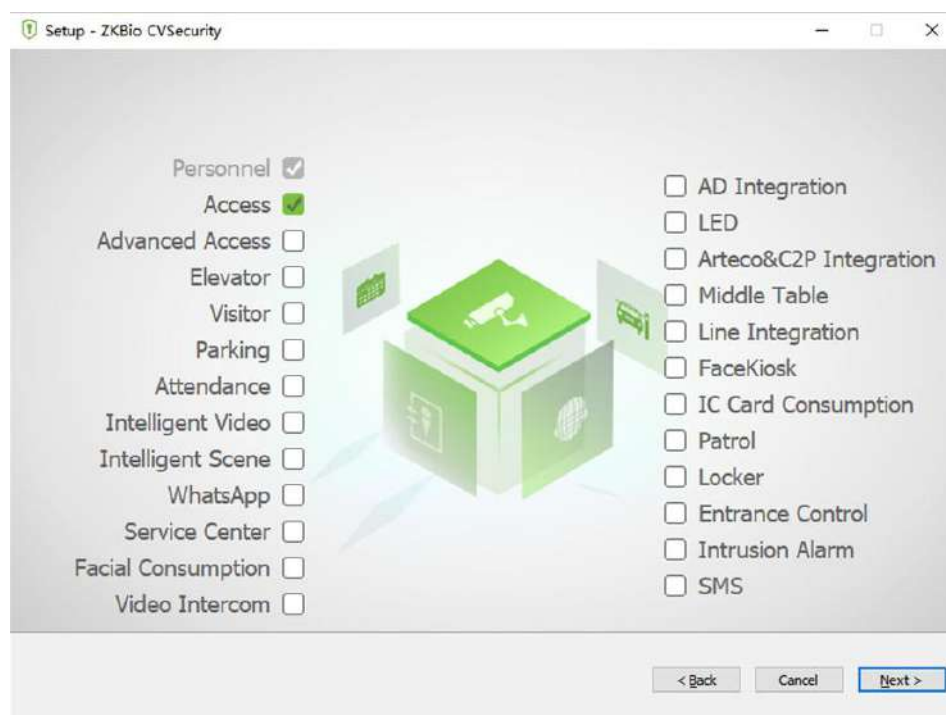


Figure 1- 6

Step 9: After the installation is complete, you will be prompted whether to restart the computer immediately (the default is "Yes"). Click **Finish** to restart the computer to complete the software installation.

Instruction:

After the software installation is complete, it will take a long time (about 2 minutes) for the service to start up. Please wait patiently for the service to start and then complete the operation.

Step 10: Enter the login page as shown in figure below, log in to the system.

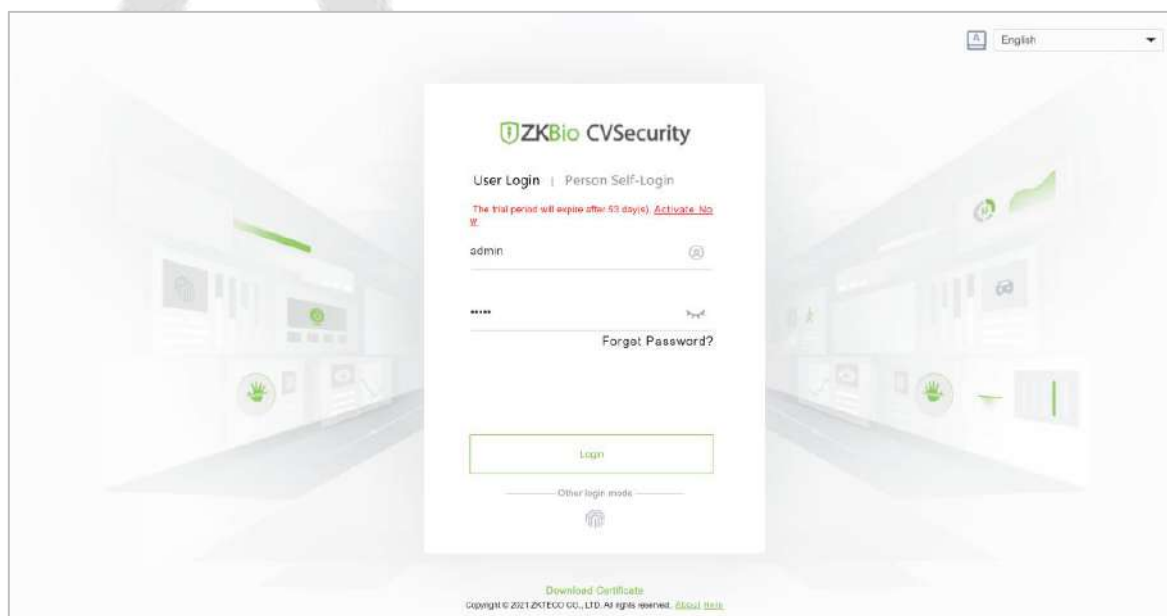


Figure 1- 7

1.3 Self-service License Reset

In general, the software license and the client's server correspond to each other, which means that once a license has been registered, it cannot be used on any other server. However, in special cases, customers may need to perform server migration. For example, if the performance of the original server is too low or if the original server is being damaged, etc., the customer needs to migrate the license to the new server.

At this point, customers can utilize the self-service license reset function, which enables users to reset the license associated with the original server and reactivate it on the new server. This not only enhances the efficiency of license migration but, more importantly, eliminates the need for users to purchase new licenses.

1.3.1 Online Deactivation + Online Activation

●Description:

Deactivate the original server online, and activate the new server online.

●Preconditions:

Both original server and the new server are being connected to the network.

●Steps:

1. Click **Admin > About > Online Deactivation**.

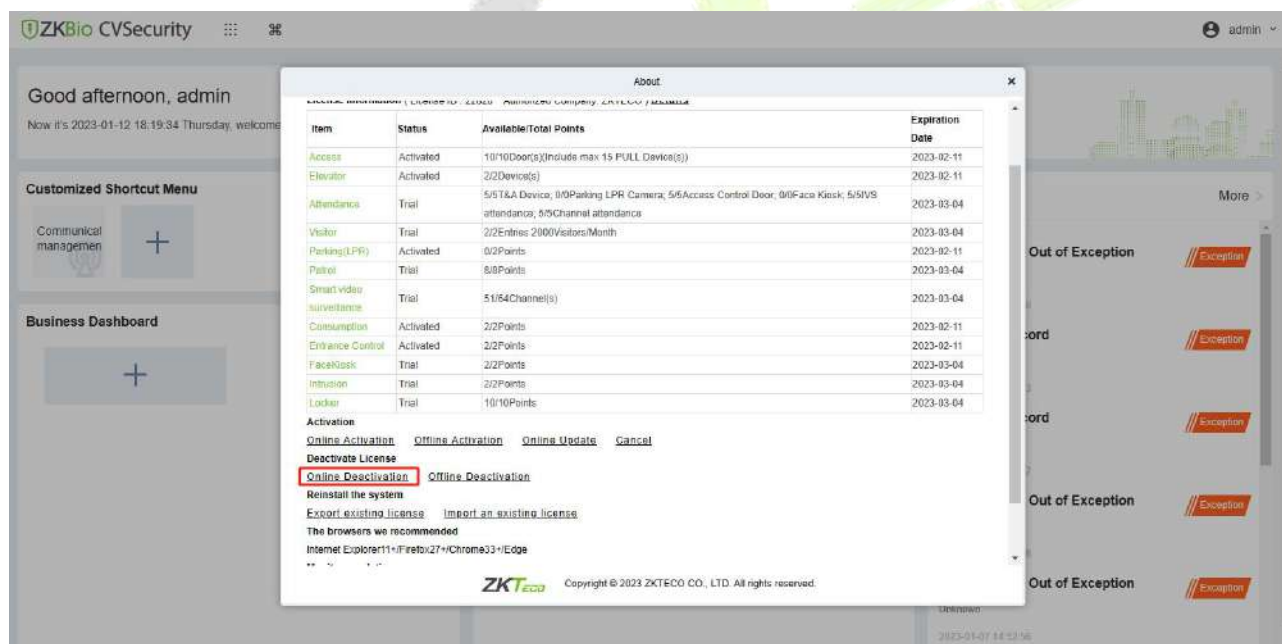


Figure 1- 8 Online Deactivation

2. Click **OK**.

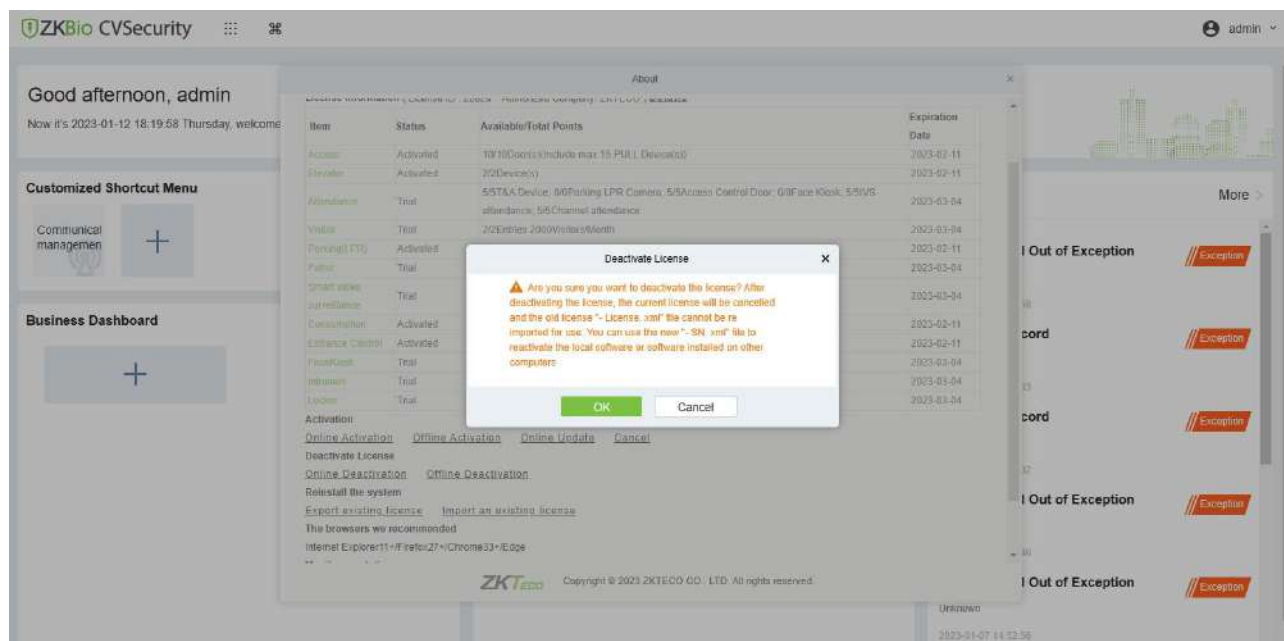


Figure 1- 9 Online Deactivation Confirm.

3. Click **Download**, then a license file with a suffix of SN.xml will be downloaded.


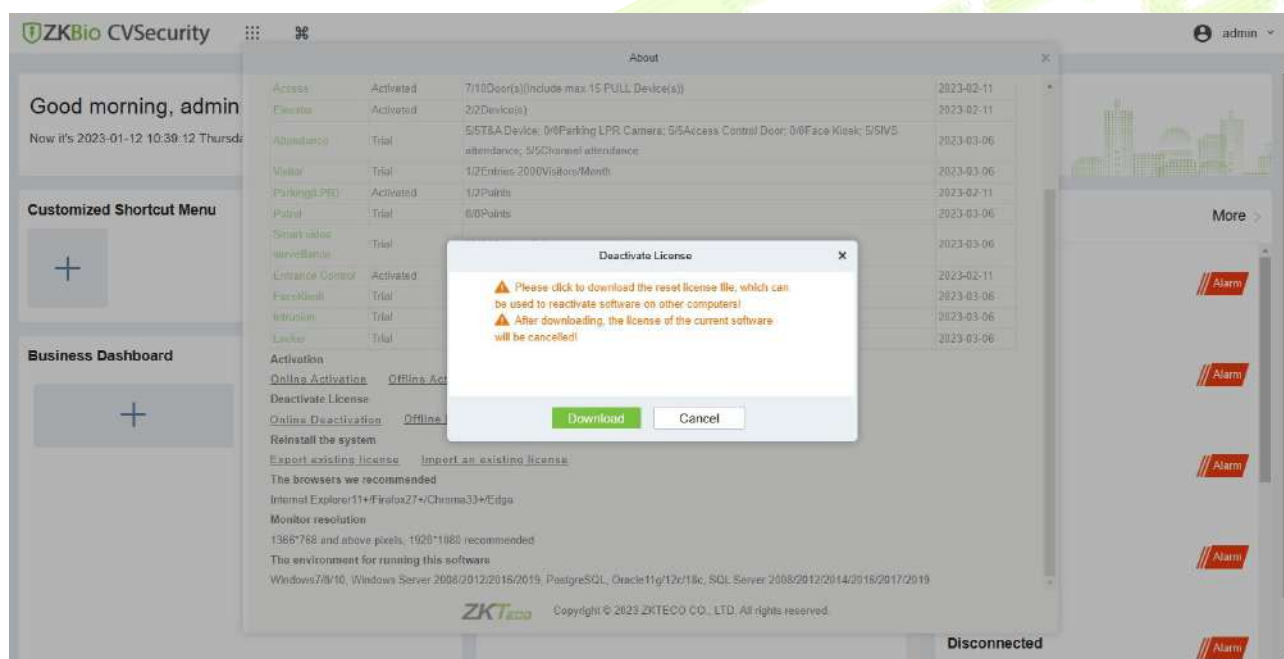


Figure 1- 10 Online Deactivation File Download.

4. Save the license file with a suffix of SN.xml you just downloaded.



5. Log in to a new server.

6. Click **Admin > About > Online Activation**. Fill in the relevant information, then click on **Browse** to upload the file you got from previous step with the SN.xml suffix

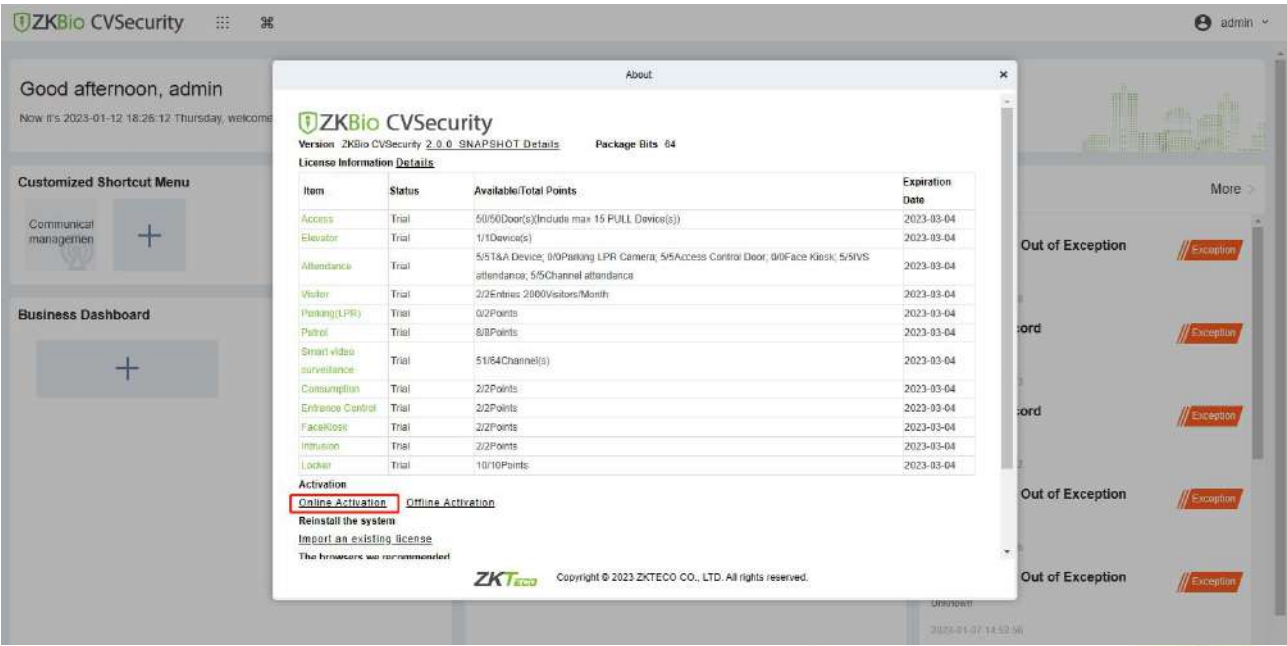


Figure 1- 11 Online Activation

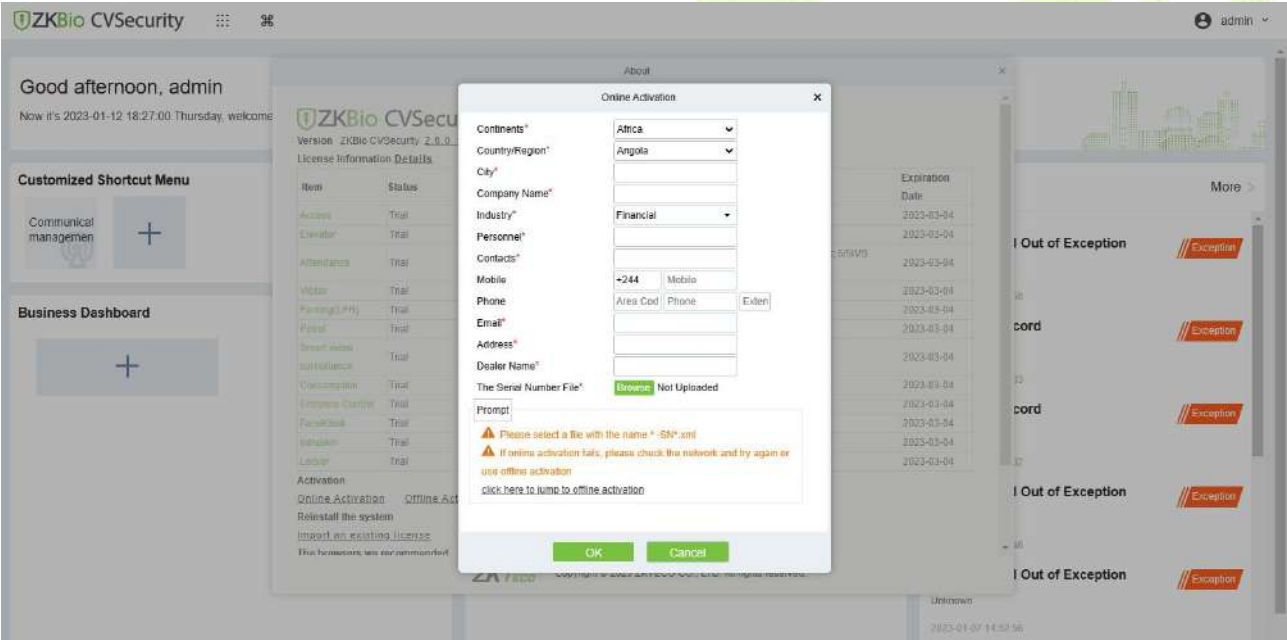


Figure 1- 12 Online Activation Confirm

7.The activation is successful. The following is the successful activation interface:



Figure 1- 13 License Activation Succeeded

1.3.2 Offline Deactivation + Online Activation

- Description:

Offline deactivate the original server, and then online, activate the new server.

- Preconditions:

The original server is not connected to the network, while the new server is connected to the network.

- Steps:

1. Click **Admin > About > Offline Deactivation**.

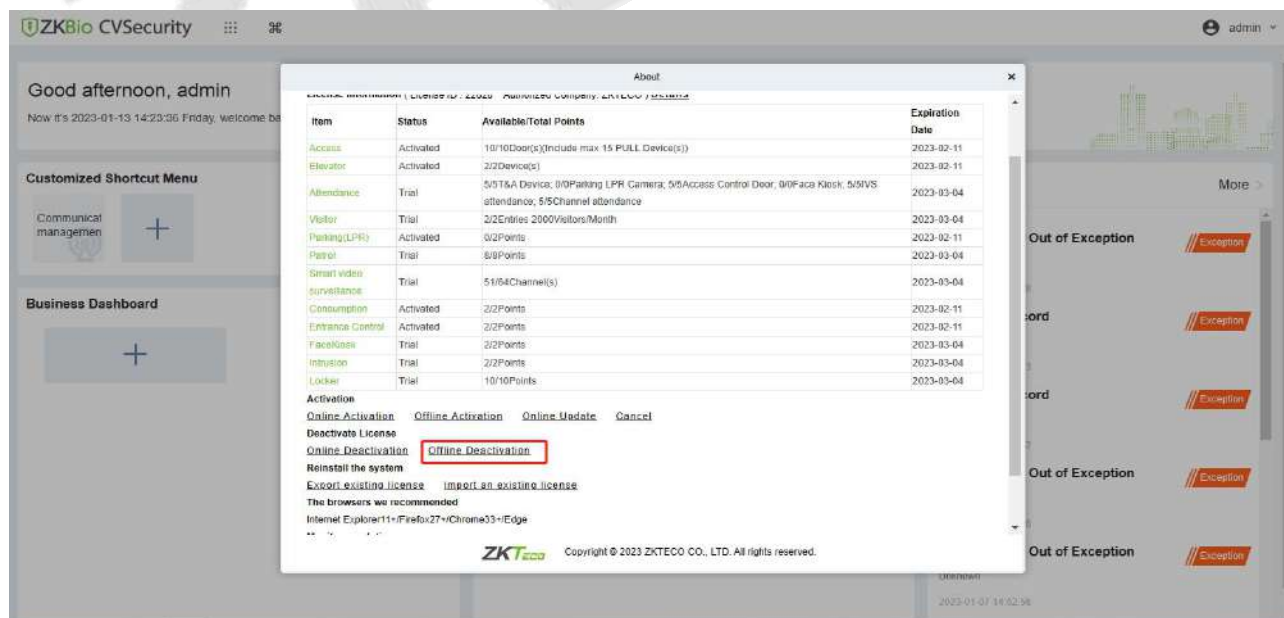


Figure 1- 14 Offline Deactivation

2. Click **OK**.

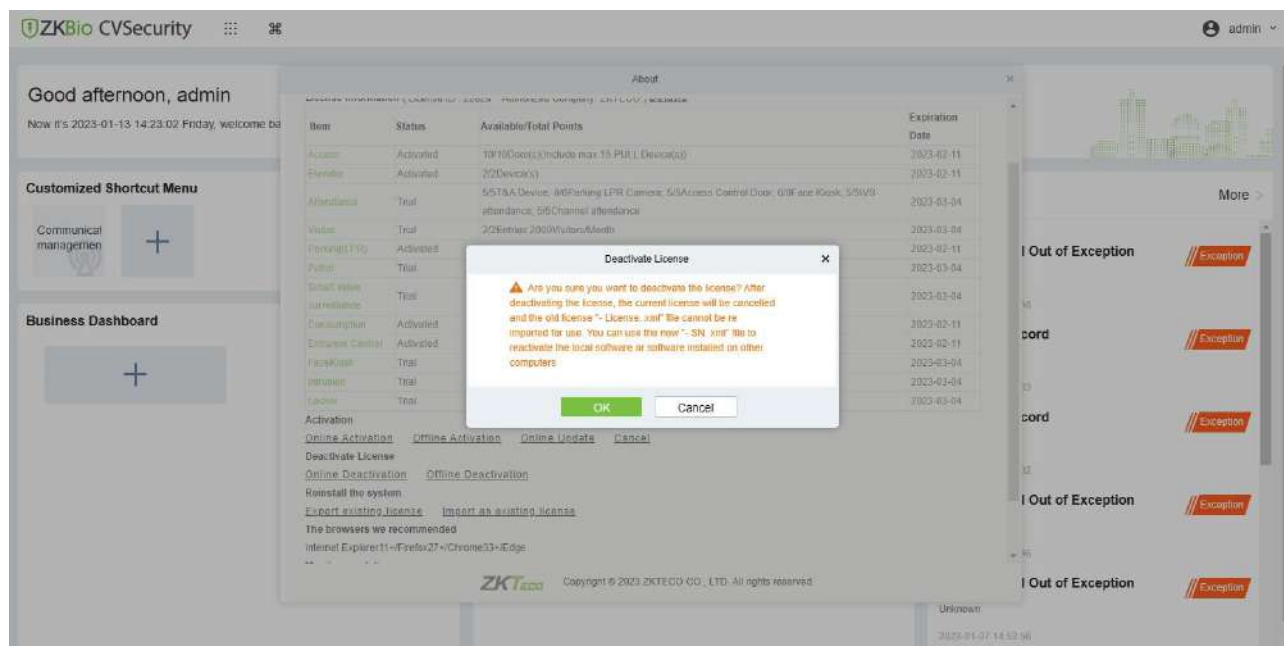


Figure 1- 15 Offline Deactivation Confirm

3. Click **Download**, and then a license file with a suffix of BackActi.xml will be downloaded.


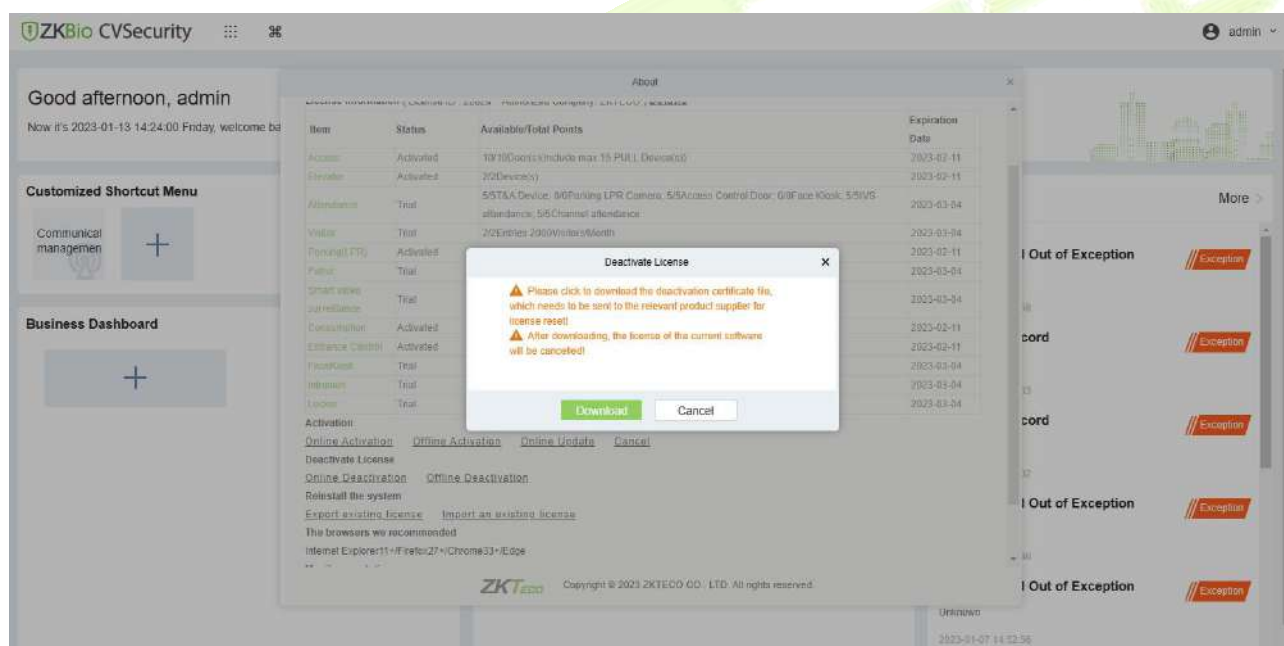


Figure 1- 16 Offline Deactivation File Download

4. Save the license file with a suffix of BackActi.xml that you just downloaded.



5. Open the ZKBio CVSecurity License Deactivate page.

Web Link: [ZKBio CVSecurity License Deactive \(zkteco.com\)](http://zkteco.com)

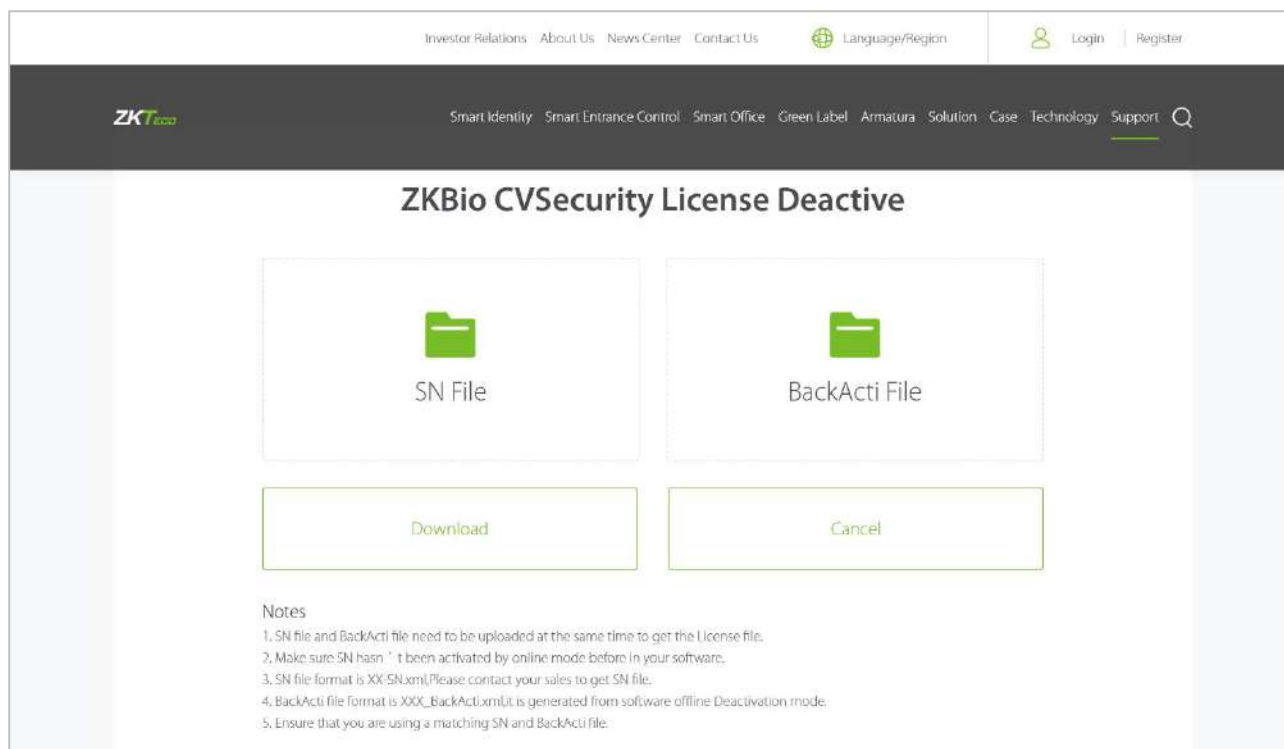


Figure 1- 17

6. Follow the instructions on the page to upload the SN file and the BackActi file downloaded in step 4 in turn.

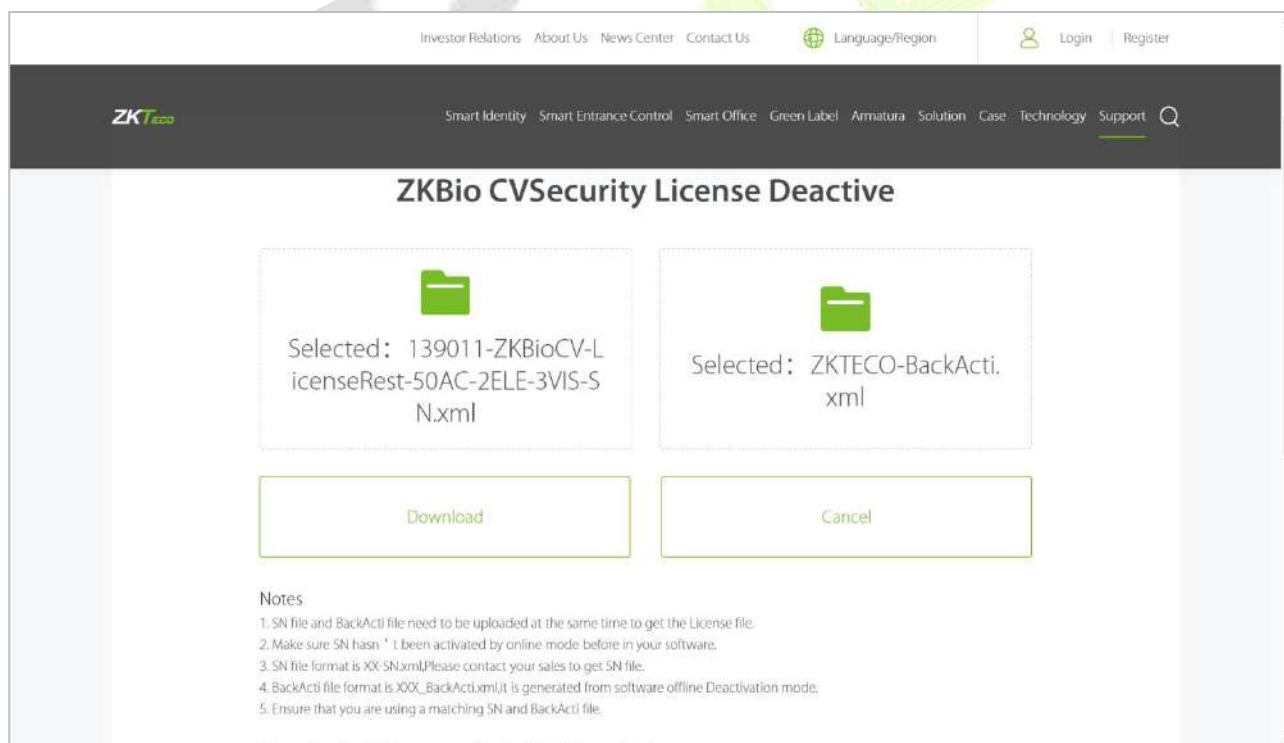


Figure 1- 18

7. Click the Download button to download the activation file.



8. Log in to a new server.

9. Click **Admin > About > Online Activation**. Fill in the relevant information, then click on Browse to

upload the file that you just got from previous step with the SN.xml suffix.

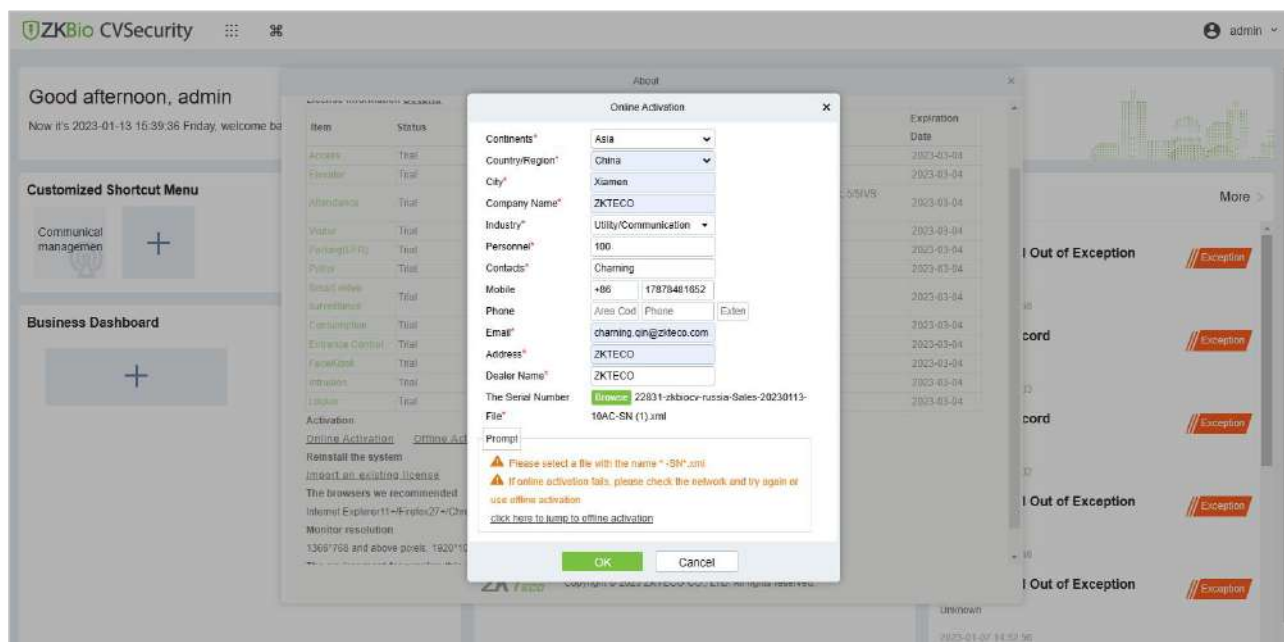


Figure 1- 19 Information Filling and File Uploading

10. The activation is successful. The following is the successful activation interface:



Figure 1- 20 License Activation Succeeded

1.3.3 Online Deactivation + Offline Activation

●Description:

Deactivate the original server online, and activate the new server offline.

●Preconditions:

Original server is connected to the network, and the new server is not connected to network.

●Steps:

1. Click Admin > About > Online Deactivation.

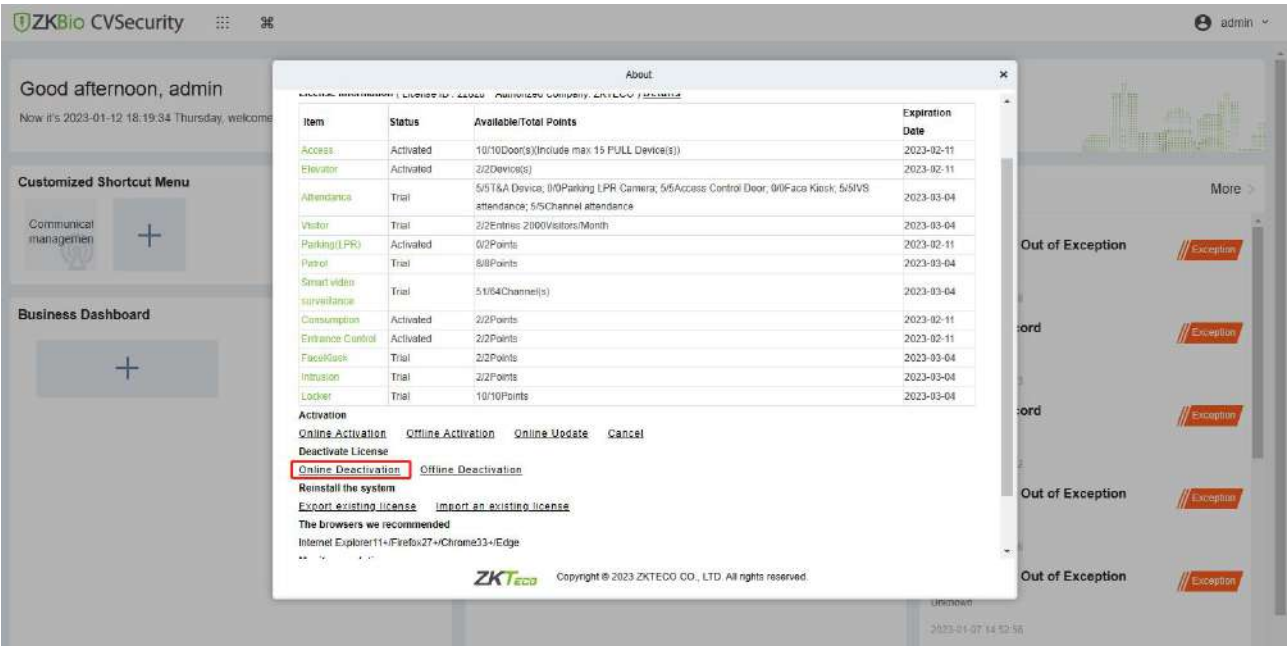


Figure 1- 21 Online Deactivation

2. Click OK.

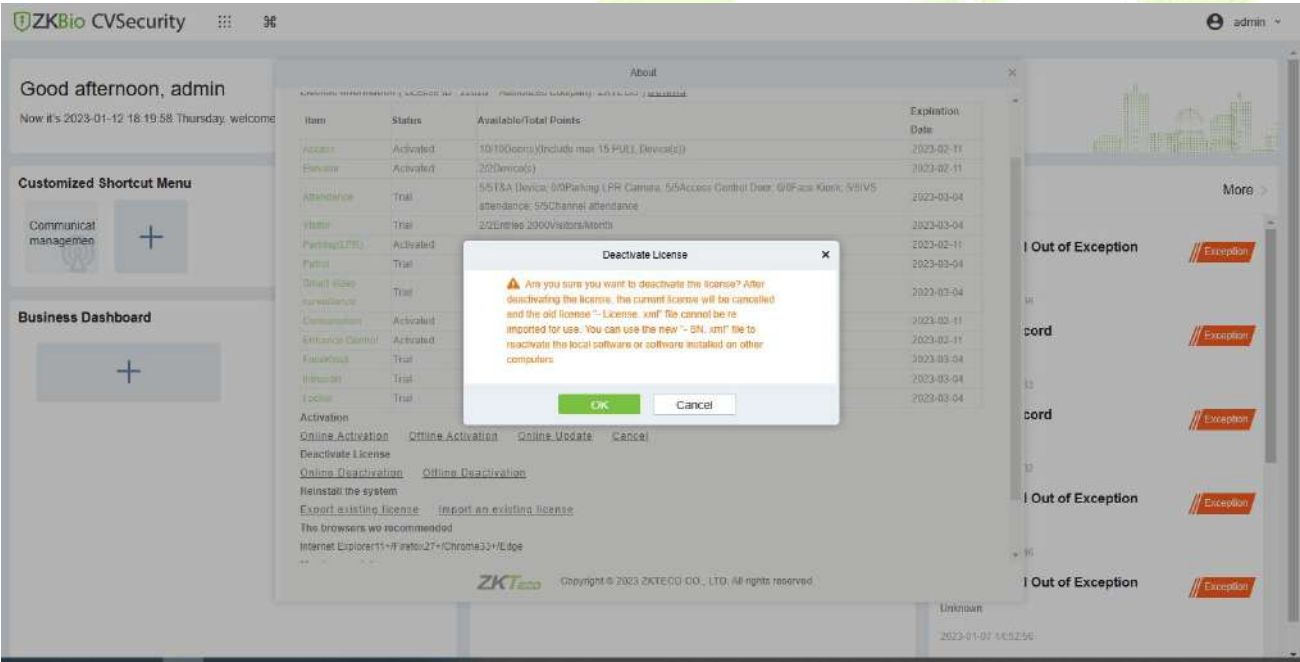


Figure 1- 22 Online Deactivation Confirm

3. Click Download, and then a license file with a suffix of SN.xml will be downloaded.

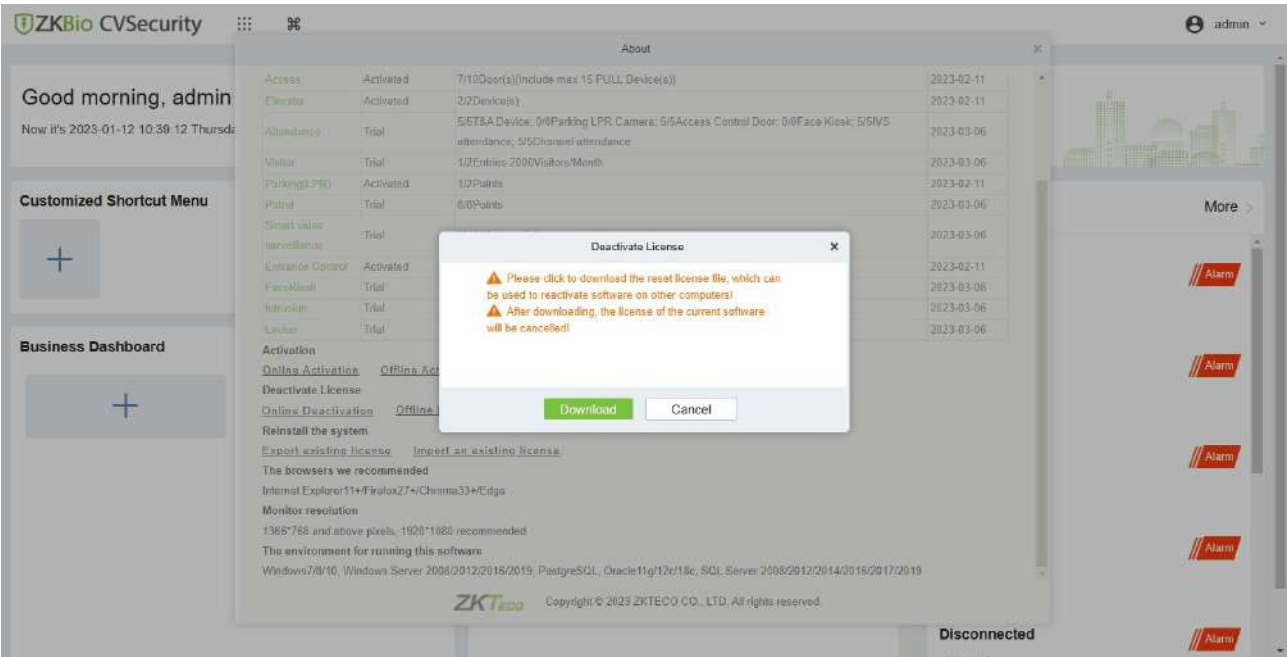


Figure 1- 23 Online Deactivation File Download

4. Save the license file with a suffix of SN.xml you just downloaded.



5. Log in to a new server.

6. Click Admin > About > Offline Activation. Fill in the relevant information, then click Browse to upload the file that you just got from the previous step with the SN.xml suffix.

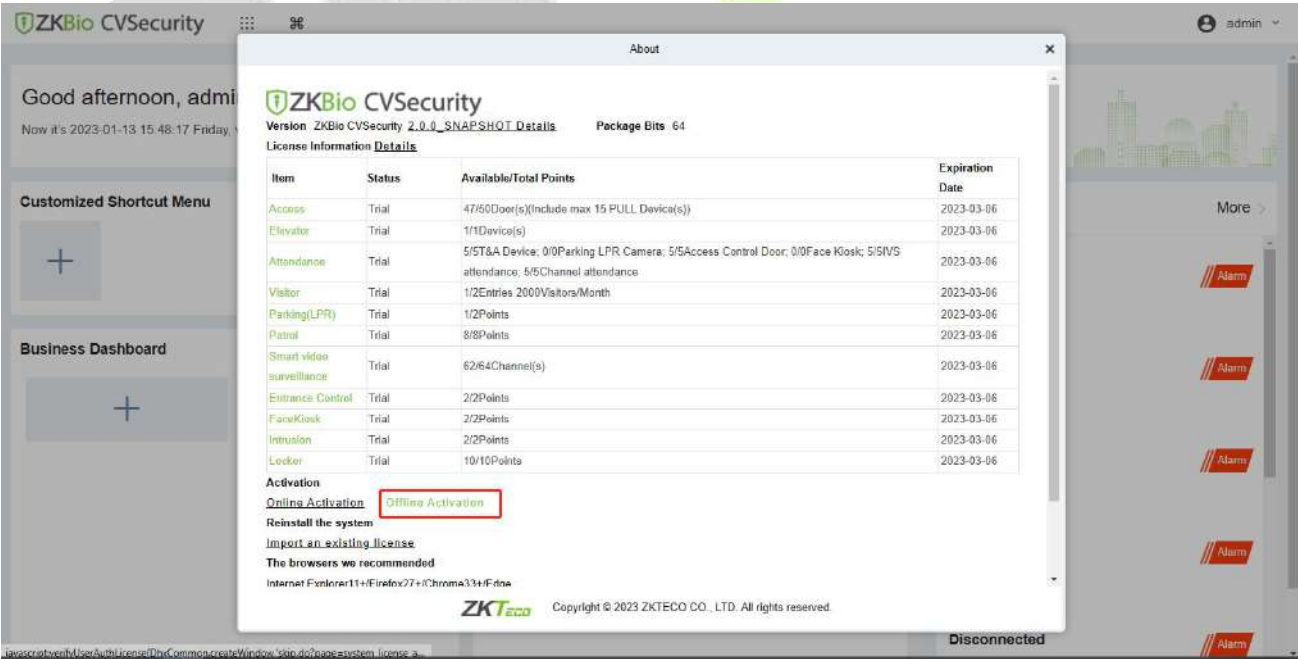


Figure 1- 24 Online Activation

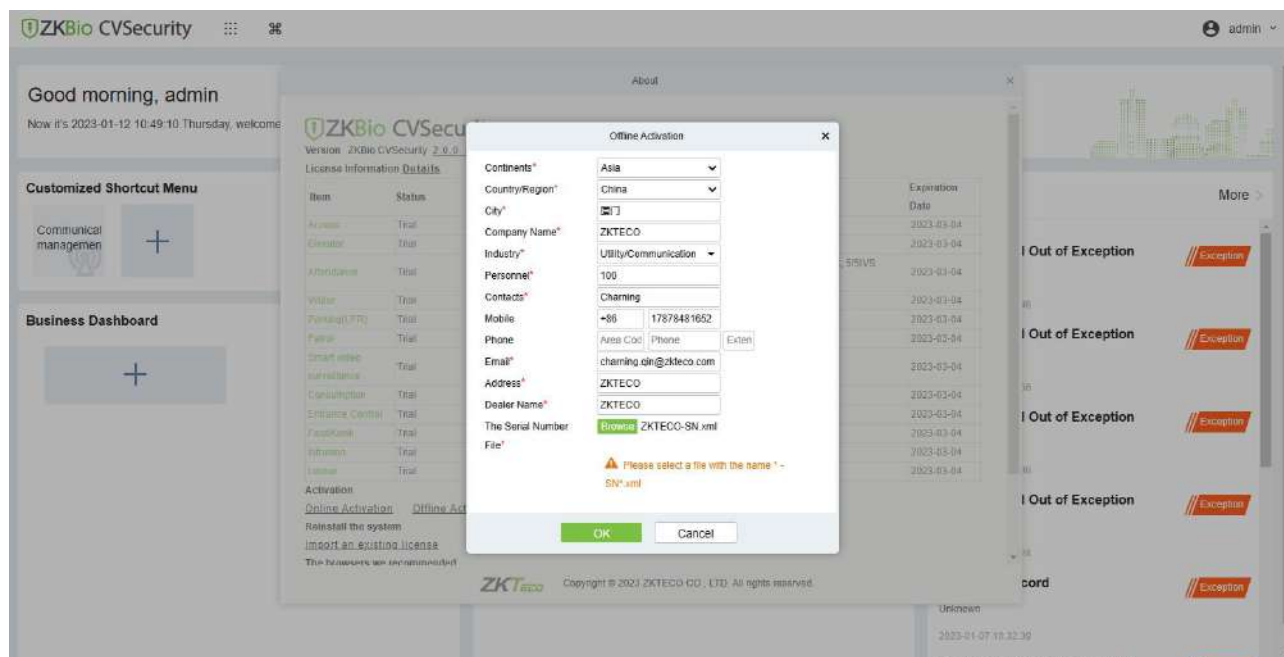


Figure 1- 25 Information Filling and File Uploading

7. Click Download, then a license file with a suffix of upk.xml will be downloaded.

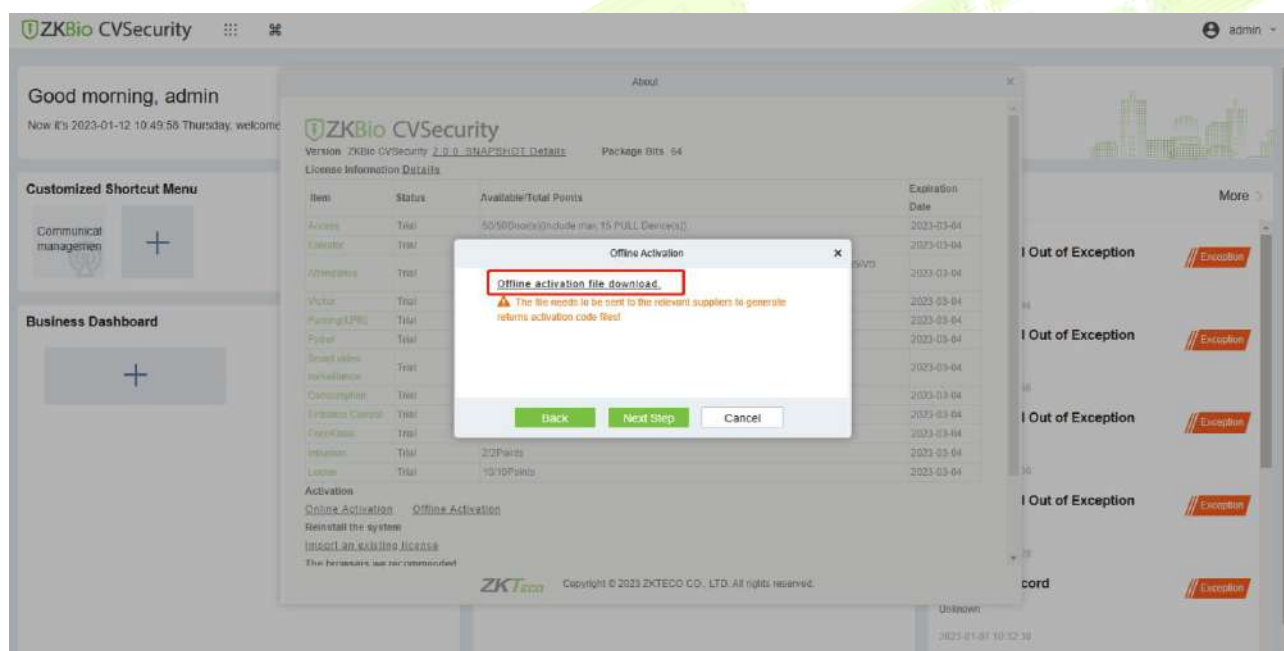


Figure 1- 26 Offline Activation File Download

8. Save the license file with a suffix of upk.xml that you just downloaded.

 ZKTECO_lic_upk.xml

9. Go to the website to create the xxx-License.xml file:

Web Link: [ZKBio CVSecurity Offline Activation License \(zkteco.com\)](https://zkteco.com)

 22828-ZKBioCV-HQ-Sales-20230111-XXXX-2Park-License.xml

10. Back to the the new server, click Admin > About > Offline Activation > Yes, and upload the file that you just got from previous step with the License.xml suffix

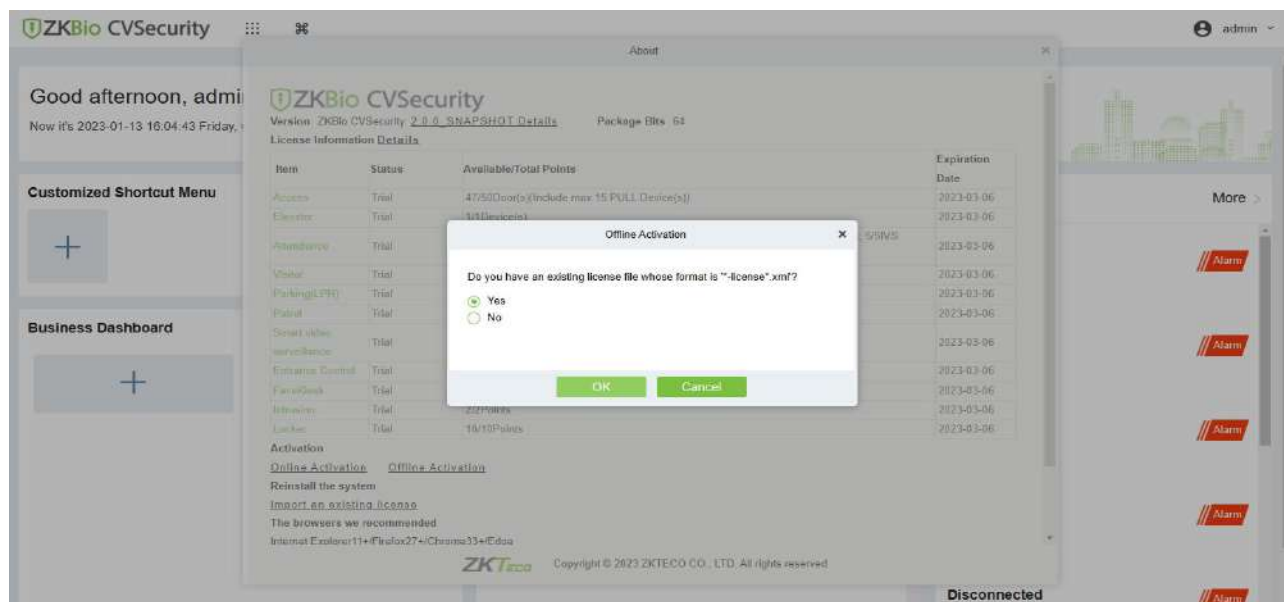


Figure 1- 27 Offline Activation File Upload

11. The activation is successful. The following is the successful activation interface:



Figure 1- 28 License Activation Succeeded

1.3.4 Offline Deactivation + Offline Activation

●Description:

Offline deactivate original server, and then offline activate the new server.

●Preconditions:

Both original server and new server are not connected to the network.

●Steps:

1. Click **Admin > About > Offline Deactivation**.

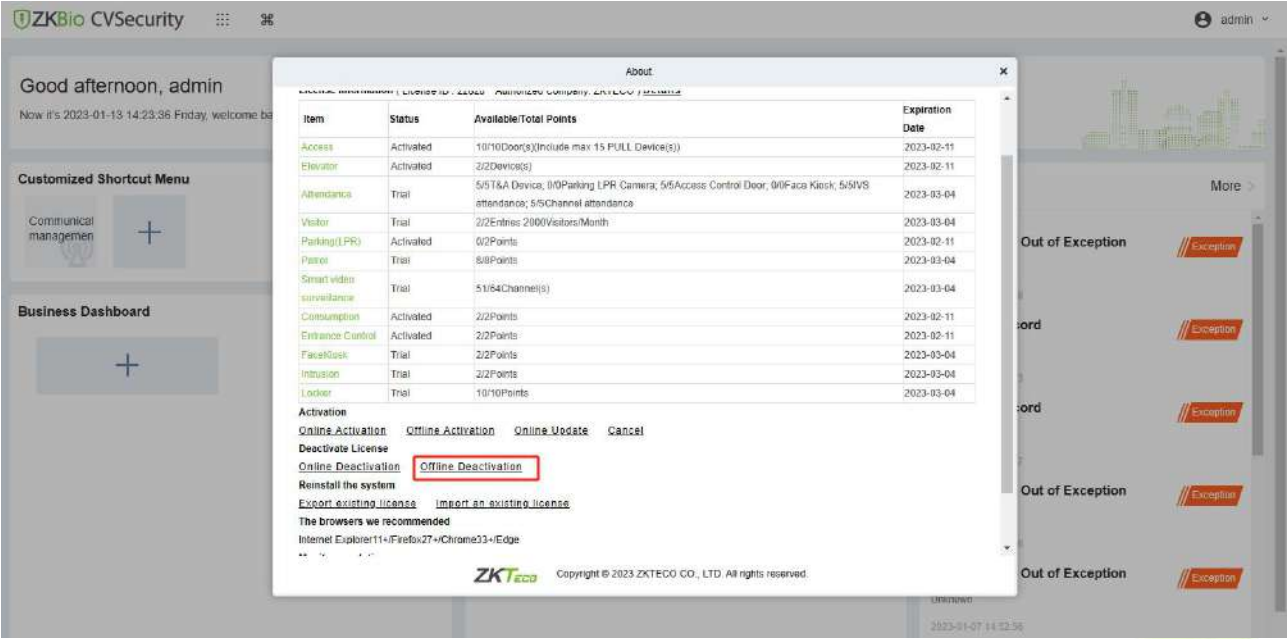


Figure 1- 29 Offline Deactivation

2. Click **OK**.

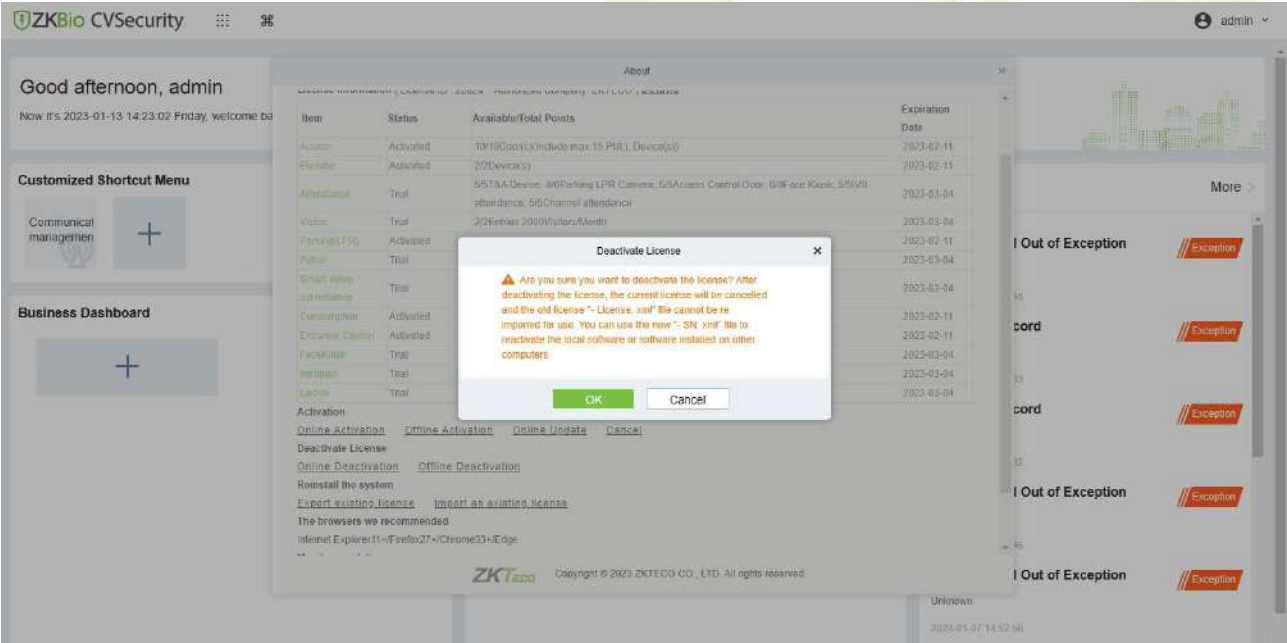


Figure 1- 30 Offline Deactivation Confirm

3. Click **Download**, and then a license file with a suffix of BackActi.xml will be downloaded.


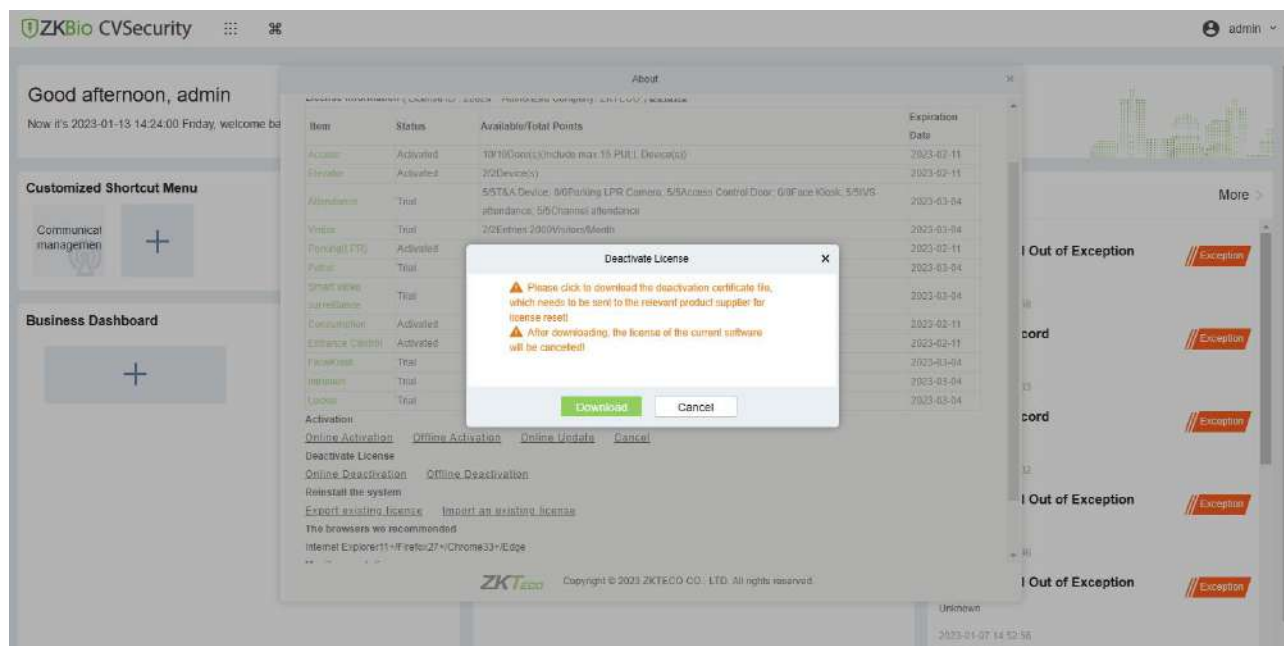


Figure 1- 31 Offline Deactivation File Download

4. Save the license file with a suffix of BackActi.xml you just downloaded.



5. Open the ZKBio CVSecurity License Deactivate page

Web Link: [ZKBio CVSecurity License Deactive \(zkteco.com\)](http://zkteco.com/ZKBio CVSecurity License Deactive)

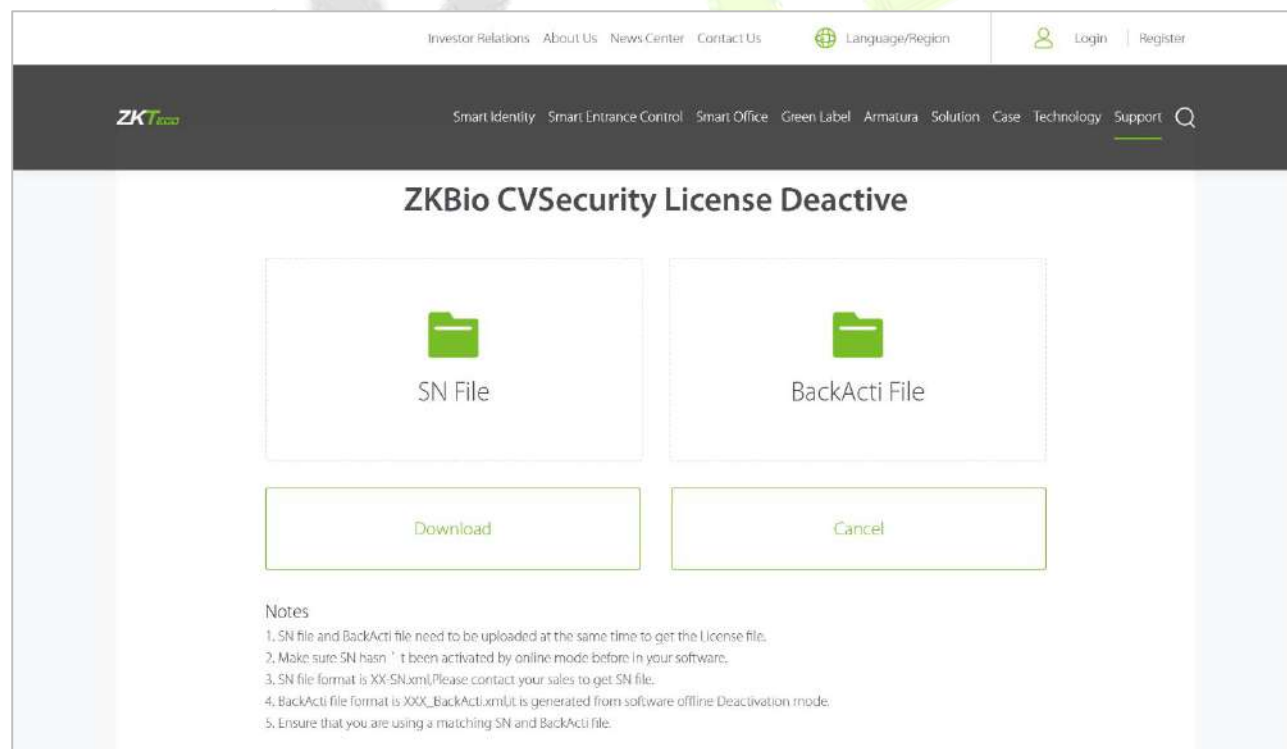


Figure 1- 32

6. Follow the instructions on the page to upload the SN file and BackActi File.



Figure 1- 33

7. Click the **Download** button to download the activation file.



8. Log in to a new server.

9. Click **Admin > About > Offline Activation**. Fill in the relevant information, then click Browse to upload the file that you just got from previous step with the SN.xml suffix.

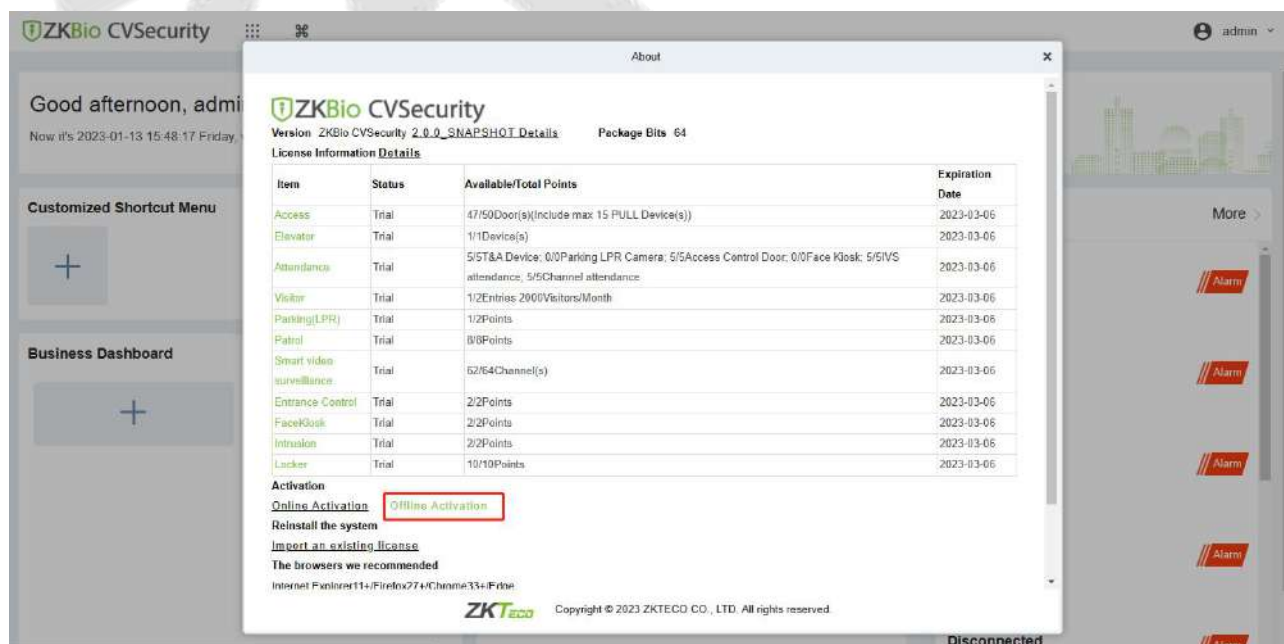


Figure 1- 34 Offline Activation

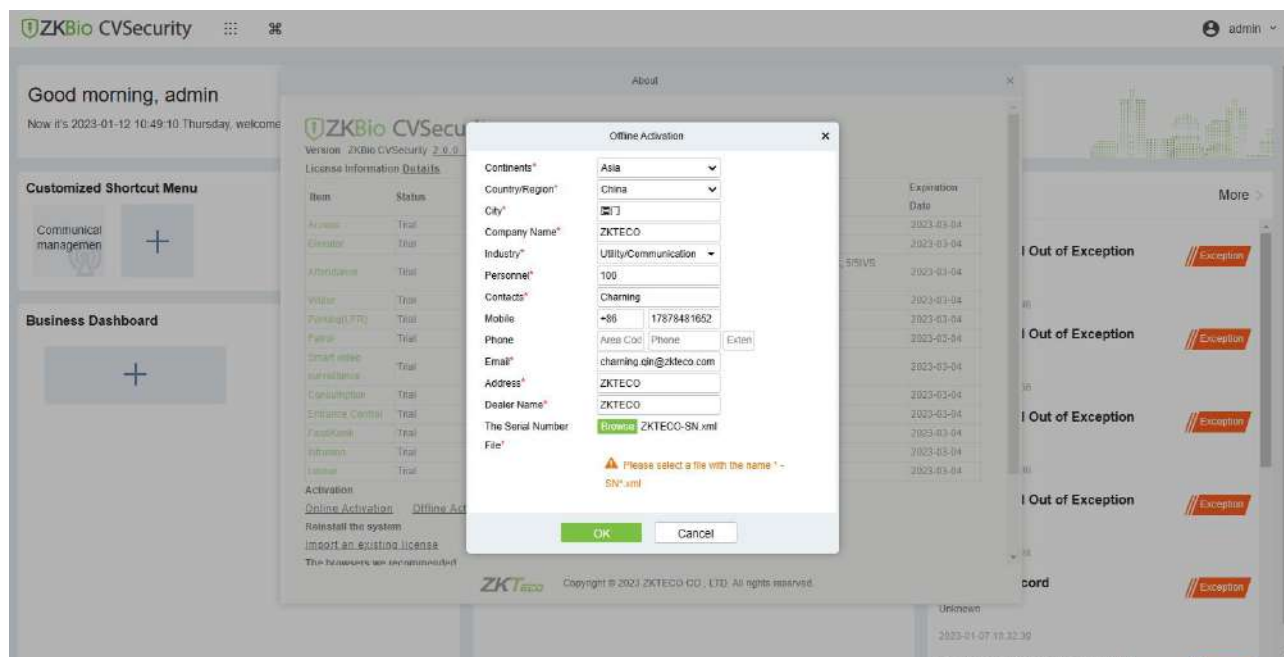


Figure 1- 35 Offline Activation Information Filling

10. Click **Download**, and then a license file with a suffix of upk.xml will be downloaded.


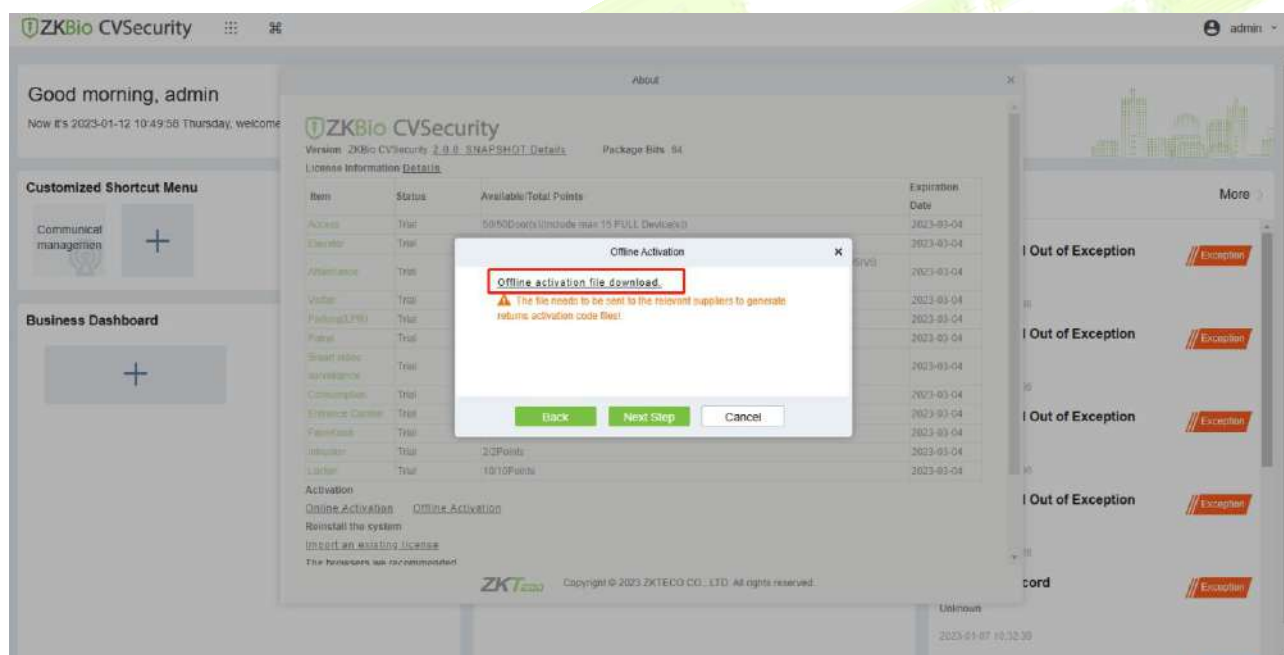


Figure 1- 36 Offline Activation File Download

11. Save the license file with a suffix of upk.xml that you just downloaded.



12. Open the ZKBio CVSecurity Offline Activation License page.

Web Link: [ZKBio CVSecurity Offline Activation License \(zkteco.com\)](http://zkteco.com)

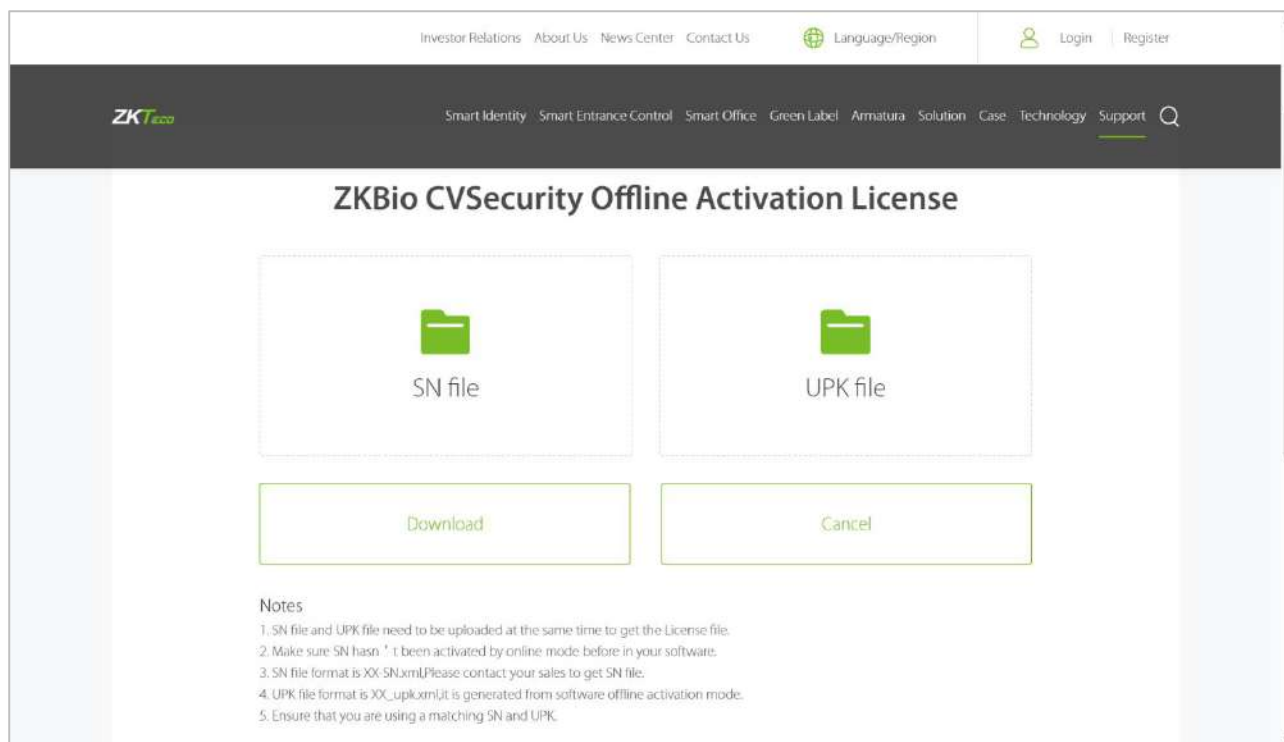


Figure 1- 37

13. Follow the instructions on the page to upload the files downloaded in step 7 and step 11 in turn.


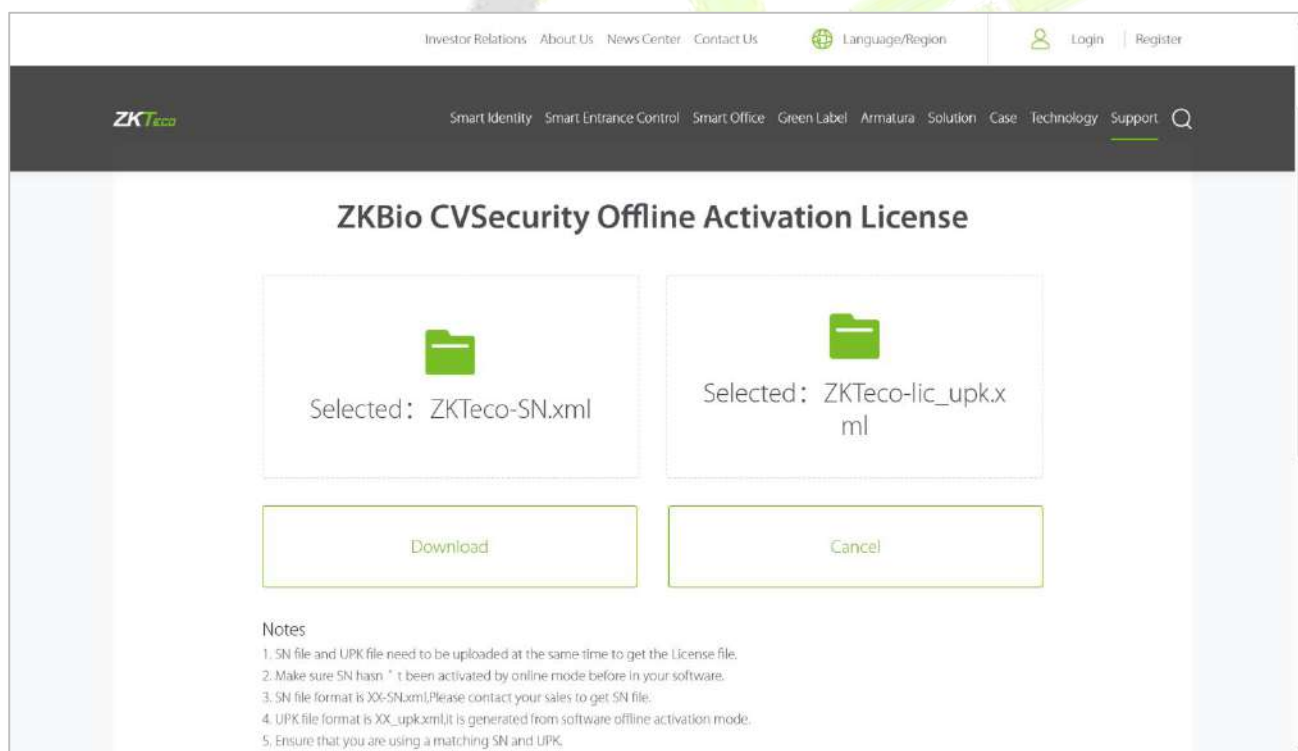


Figure 1- 38

14. Click the **Download** button to download the offline activation file.



15. Back to the the new server, click **Admin > About > Offline Activation > Yes**, and upload the file that you just got from the previous step with the License.xml suffix.

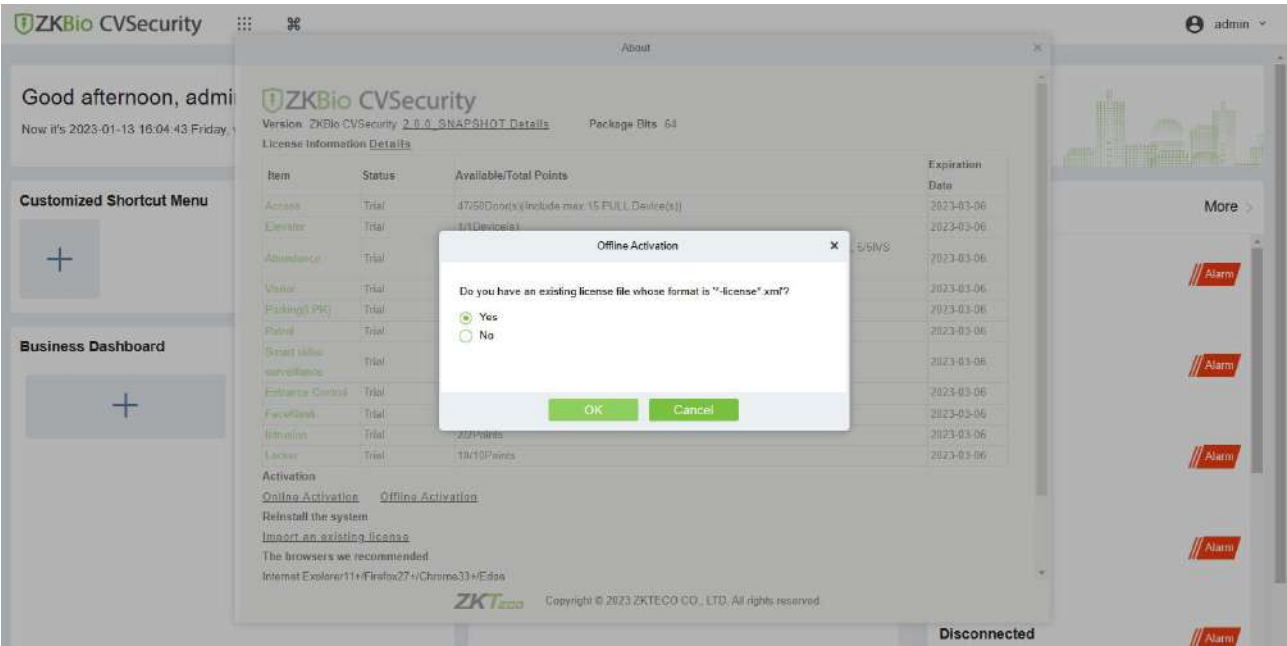


Figure 1- 39 Offline Activation File Download Confirm

16. The activation is successful. The following is the successful activation interface:

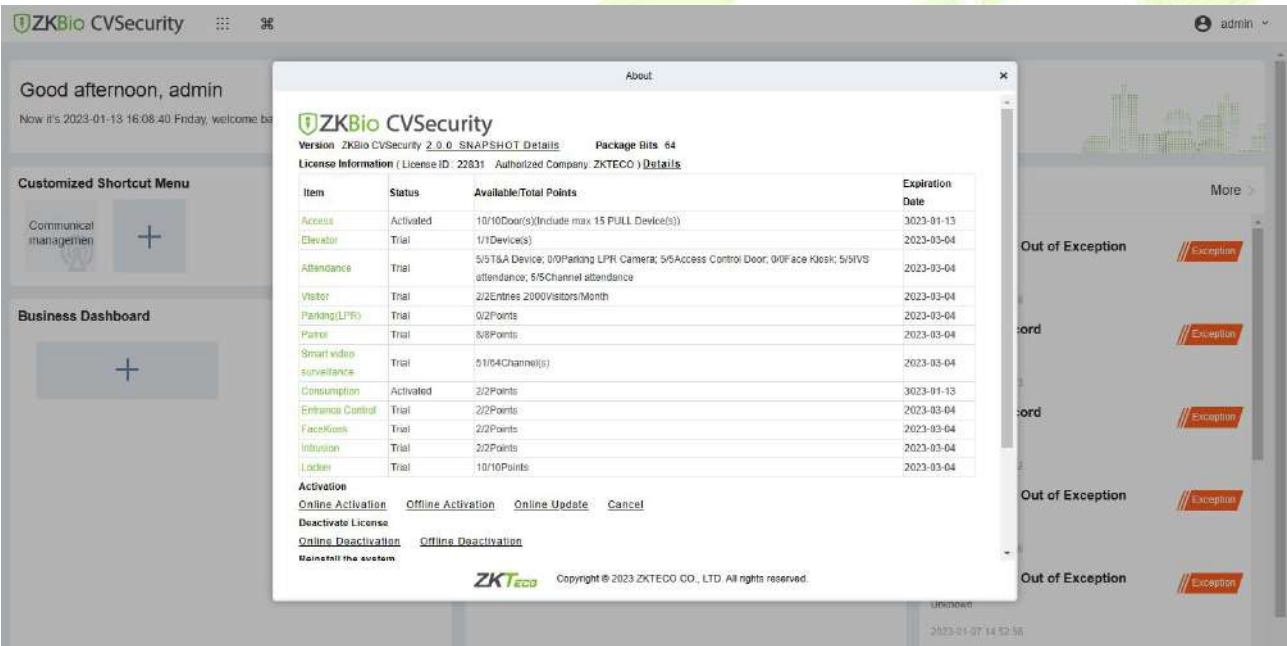


Figure 1- 40 License Activation Succeeded

2 Personnel

Before using the other functions, please configure the personnel system: Personnel and Card Management.

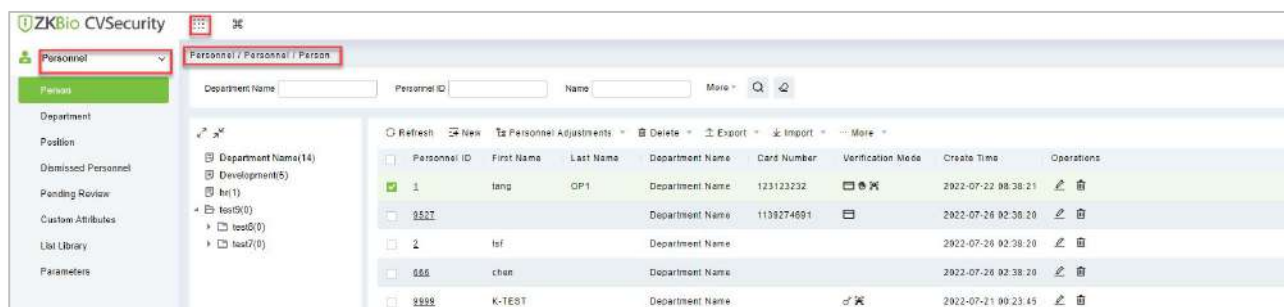


Figure 2- 1 Personnel

2.1 Personnel Management

Personnel Management includes these modules: Person, Department, Position, Dismissed Personnel, Pending review, Custom Attributes, List Library, and Parameters.

●Operating Procedures:

This operation process is suitable for guiding users how to configure and manage the basic personnel organization after the system is installed.

The flow of personnel organization configuration is shown in figure below.

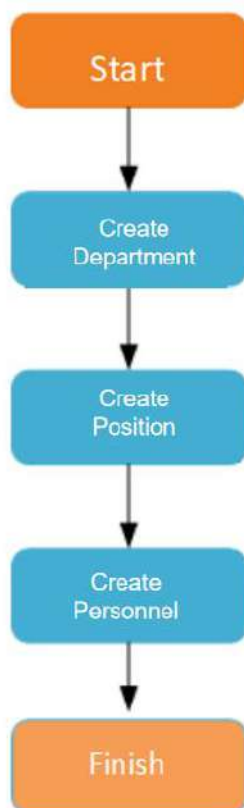


Figure 2- 2 Flowchart of Personnel Configuration

2.1.1 Person

When using this management program, the user shall register personnel in the system, or import personnel information from other software or documents into this system.

Main functions of Person include Refresh, Add (New), Personnel Adjustments, Delete, Export, Import, and more.

2.1.1.1 Add Personnel (New)

Click **Personnel > Personnel > New**.

Figure 2- 3 Add Personnel New

● Fields are as follows:

✎ **Notes:**(Personnel ID)

When configuring a personnel number, check whether the current device supports the maximum length and whether letters can be used in personnel ID.

To edit the settings of the maximum number of characters of each personnel number and whether letters can also be used, please click **Personnel > Parameters**.

Parameter	Description
Personnel ID	Default maximum support for 9 digits; if you need to support more digits or letters for IDs, please go to the Parameter menu to configure.
Department	Select from the pull-down menu and click OK . If the department was not set previously, only one department named Company Name will appear.
First Name/Last Name	The maximum number of characters is 50.
Gender	Set the gender of personnel.



Parameter	Description
Mobile Phone	<p>If you need to send a short message to this person, check the mobile phone box and select the option to send the message.</p> <p>Modem – SMS: A modem SMS is a dedicated device that connects to your PC or server, allowing you to send and receive SMS messages.</p> <p>AWS – SMS: AWS SMS is a managed service that delivers messages from publishers to subscribers.</p> <p>Mobile Phone <input type="text" value="232142423432"/> <input type="checkbox"/></p>
Certificate Type	There are four types of certificates: ID, Passport, Driver License and Others. Select one to upload.
Certificate Number	Enter certificate number.
Birthday	Input employee's actual birthday.
Email	<p>To send an email notification to this person, simply check the box and enter the available email ID of the individual.</p> <p>Email <input type="text" value="popy.xiao1@zkteco.com"/> <input checked="" type="checkbox"/></p>
Hire Date	It is the date on which the personnel are appointed. Click to select the date.
Position Name	Set a suitable name for the position. Any character, maximum combination of 100 characters. Position names should not be repeated.
Device Verification Password	Set password for personnel accounts. It can only contain up to 6-digits. If a password exceeds the specified length, the system will truncate it automatically. It cannot be the same with others password and the duress password.
Card Number	<p>The max length is 10, and it should not be repeated.</p> <p>Card Number <input type="text"/> <input checked="" type="checkbox"/> ZKBio CVSecurity Integration ACMS</p> <p>WhatsApp <input type="text"/> <input type="checkbox"/></p> <p>Issue Card from Device Mobile Credentials</p> <p>For more details on Mobile Credentials please refer to the documentation.</p>
Biometric Type	Click on icon  to register the person Fingerprints, Finger Vein, Palm, Face registration . Click on icon  to view Biometric template details and resgistered person face comparison photos and Plam comparison photos.
WhatsApp	<p>Please enter your WhatsApp account number, and check the box to send WhatsApp messages to this person.</p> <p>WhatsApp <input type="text"/> <input type="checkbox"/></p>
APP Push	<p>After verification, an app message notification will be sent to this person.</p> <p>APP Push <input checked="" type="checkbox"/></p>

Table 2- 1 Personnel ID

●Biometric Type:

This paper introduces the Steps of personnel biometric registration in ZKBio CVSecurity. The registered biometric data can be used for verification and identification of **Access Control**, attendance, and other equipment.

Biometric registration includes **fingerprint**, **finger vein**, **palm registration** and **face registration**. Since the interfaces of fingerprint registration and finger vein registration are similar, fingerprint registration and palm print registration are used as examples to illustrate the operation process.

●Description:

The server side of the box does not support external "palm meter, finger vein meter" to collect

biometric templates, and the fingerprint reader is only supported by the "Live20R" model.

●Preconditions:

On the computer terminal where the administrator registers the personnel information, connect the fingerprint reader device through the USB port.

●Steps:

Step 1: In the Personnel module, choose **Personnel Management > Person**.

Step 2: Click **Add** with the mouse, and the interface for adding personnel will pop up.

Step 3: On the interface for adding personnel, click the "👉" button.

Step 4: (Optional) If the driver is not installed, click the icon to pop up the registration and driver download box, download the driver, and complete the installation.

Step 5: After the driver is installed, fingerprint registration can be performed, as shown in figure below.

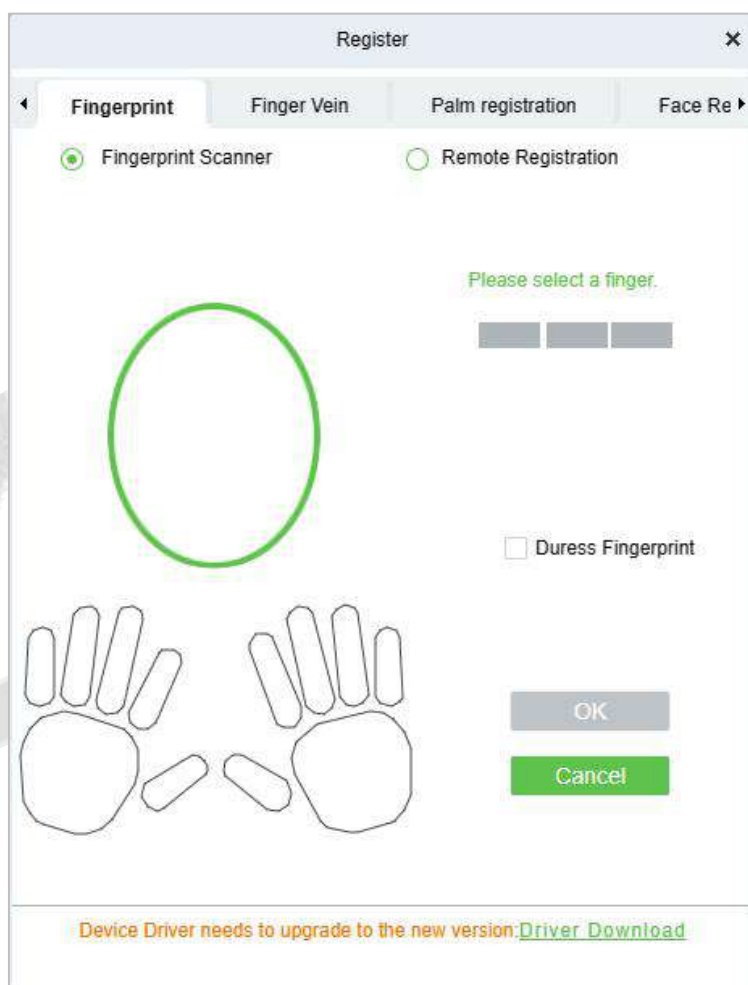



Figure 2- 4 Biometric Type

Step 6: Select the fingers respectively, press the fingerprint on the connected fingerprint reader three times in a row, and the system prompts the fingerprint to be registered successfully.

Step 7: Click **OK** to save and close the fingerprint registration interface.

Details Information:

Click this  button to view the details of Biometric Templates or upload a facial photo.

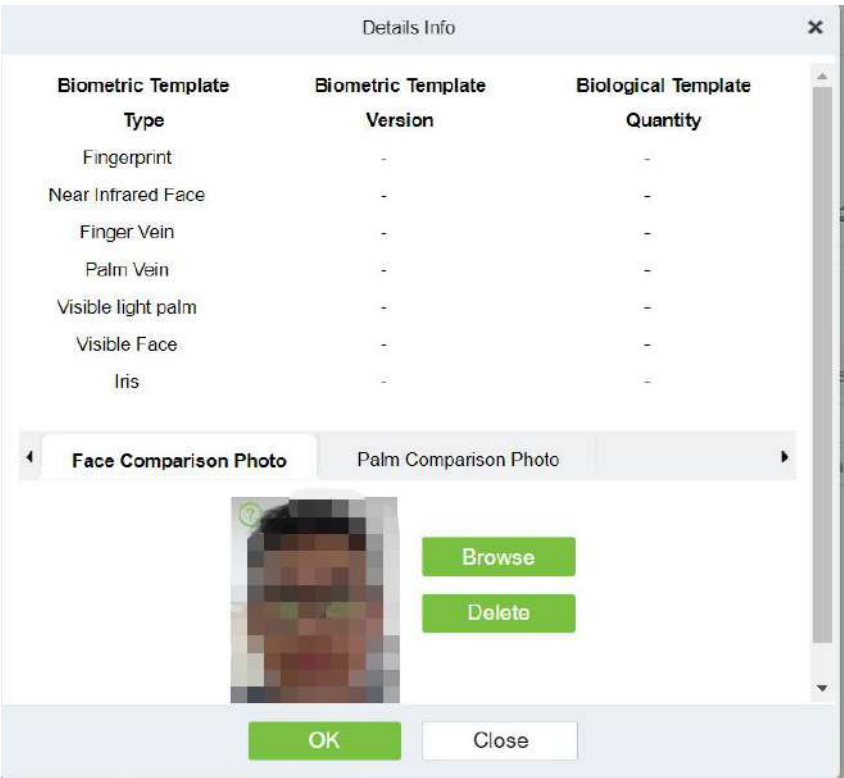



Figure 2- 5 Biometric Details

Face Comparison Photo

Click on **Browse** to upload a facial photo; you can click  to view the specifications for the photo.

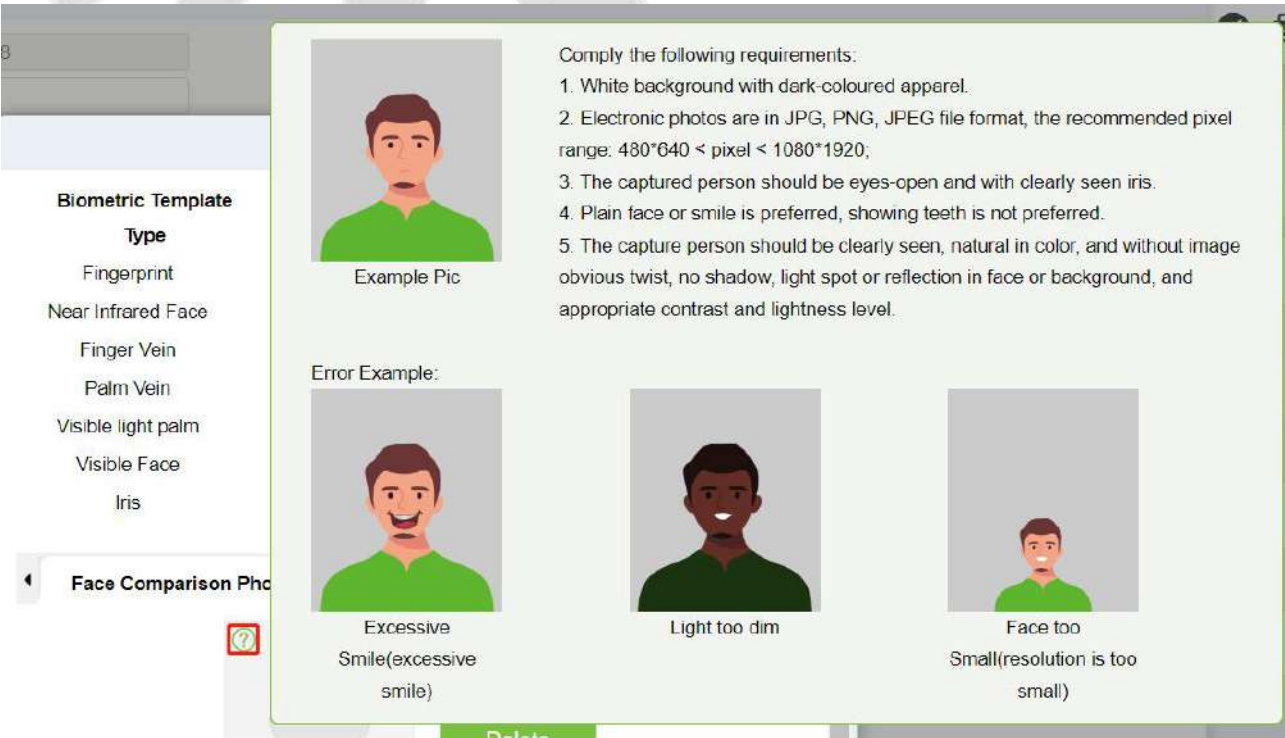


Figure 2- 6 Face Photo

● Access Control:

Click **Access Control** parameter for the personnel.

Figure 2- 7 Access Control

Fields are as follows:

Parameter	Description
Level settings	Click Add , then set passage rules of special positions in different time zones.
Superuser	In access controller operation, a super user is not restricted by the regulations on time zones, anti-passback and interlock and has extremely high door-opening priority.
Device Operation Role	Select administrator to get its levels.
Extend Passage	Extend the waiting time for the personnel through the access points. Suitable for physically challenged or people with other disabilities.
Access Disabled	Temporarily disable the personnel's access level. Only InBio Pro Controller supported
Set Valid Time	Set Temporary access level. Doors can be set to open only within certain time periods. If it is not checked, the time to open the door is always active.

Table 2- 2 Access Control

The 'Add to Levels' dialog box contains the following elements:

- Search fields: 'Level Name' and 'Time Zone' with a magnifying glass icon.
- Alternative list: A table with columns 'Level Name' and 'Time Zone'. It lists 'K-Test' (24-Hour Accessible), 'multibio' (multibio), and 'test' (24-Hour Accessible). Each row has a checkbox.
- Selected list: A table with columns 'Level Name' and 'Time Zone', currently showing 'Selected(0)'. It has a checkbox and a 'No data' message.
- Navigation buttons: A set of arrows for moving items between the lists.
- Footer: 'OK' and 'Cancel' buttons, and a pagination indicator '1-3' and '50 rows per page'.

Figure 2- 8 Level Settings

Note:

- 1.The system will automatically search for the relevant numbers in the departure library during verification.
- 2.The Personnel Information List, by default, is displayed as a table. If Graphic Display is selected, photos and numbers will be shown. Put the cursor on a photo to view details about the personnel.
- 3.Not all devices support the “Disabled” function. When a user adds a device, the system will notify the user whether the current device supports this function. If the user needs to use this function, please upgrade the device.
- 4.Not all the devices support the “Set Valid Time” function of setting the hour, minute, and second. Some devices only allow users to set the year, month, and day of the local time. When a user adds a device, the system will notify the user whether the current device support this function. If the user needs to use this function, please upgrade the device.

●Time Attendance:

Set the **Time Attendance** parameter for the personnel.

The 'Time Attendance' configuration window includes:

- Navigation tabs: Access Control, **Time Attendance**, Elevator Control, Plate Register, Passage Setting, FaceKiosk, Locker Setting, and Vidi.
- Attendance Area tree: A list of areas with checkboxes. 'Main Gate' is expanded, showing 'Tower A Gate' (checked), 'Tower B Gate', 'Main gate 2', 'Tower B Gate2', 'cf' (checked), and 'CBD-07 Gate'.
- Configuration options:
 - Attendance Mode: Normal Attendance
 - Device Operation Role: Employee
 - Verification Mode: Fingerprint
- Footer: 'OK' and 'Cancel' buttons.

Figure 2- 9 Time Attendance

Fields are as follows:

Parameter	Description
Attendance Mode	You can set the staff attendance area as Normal Attendance and No Punch Required .
Device Operation Role	It will set the authority for operating the device and send it to the corresponding device such as, Employee, Enroller, Administrator, and Superuser
Verification Mode	You can set verification mode as following options: Automatic Recognition, Fingerprint, PIN, Password, Card, Fingerprint/ Password, Fingerprint/Card, PIN+Fingerprint, Fingerprint+Password etc.

Table 2-3 Time Attendance

● Elevator Control:

Click **Elevator Control** and set the Elevator Control parameter for the personnel.

Figure 2- 10 Elevator Control

Fields are as follows:

Parameter	Description
Superuser	In elevator controller operation, a super user is not restricted by the regulations on time zones, holidays and has extremely high door-opening priority.
Default Floor	Select the floor that needs to be reached.
Open Side	Select the elevator door opening direction based on actual conditions. only DCS supported
Call Type	Select different roles based on user permissions. only DCS supported
Allow Lifts	Allowed elevator cars, only supported by KONE; Mitsubishi elevator no supported.
Nonstop Operation	Enabling this option will allow the elevator to directly reach the floor
Access Disabled	Checking the box will disable elevator privileges for that person; only EC16 control panel and DCS system supported.
Set Valid Time	Set Temporary Floor permission. Floor can be set to enable only within certain time periods. If it is not checked, the time to open the door is always active.

Table 2- 3 Elevator Control

Note: The Elevator level must be set in advance.

● **Plate Register:**

Click **Plate Register**, set the plate control parameter for the personnel.

Figure 2- 11 Plate Register

Fields are as follows:

Parameter	Description
License Plate	The user needs to register the license plate.
Parking Space Number	Parking space number corresponding to the vehicle.

Table 2- 4 Plate Register

Note: Each personnel may register a maximum of 6 license plates.

● **Passage Setting:**

Click **Passage Setting**, set the Passage Setting parameter for the personnel.

Figure 2- 12 Passage Setting

Fields are as follows:

Parameter	Description
Superuser	Set Superuser as Yes or No according to requirement.
Device Operation Role	It will set the authority for operating the device and send it to the corresponding device such as, Ordinary User , Administrator , and Enroller .

Table 2- 5 Passage Setting

●Facekiosk:

Click **Facekiosk**, set the Facekiosk parameter for the personnel.

Figure 2- 13 Facekiosk

Fields are as follows:

Parameter	Description
Device Operation Role	It will set the authority for operating the device and send it to the corresponding device such as, employee and Superuser.
Personnel Type	Select type of personnel such as Common, VIP, and Blocklist.

Table 2- 6 Facekiosk

●Locker Setting:

Assigning a cabinet that has a locker number for the personnel.

Click **Locker Setting**, view the locker number for this personnel.

Figure 2- 14 Locker

●Video Intercom Setting:

Assigning extension number to selected person from personnel module, an extension number is a number or code used within a company or organization to identify different telephone sets.

Click **Video Intercom Setting**, assign a room number or extension number to this person.

Figure 2- 15 Video Intercom Setting

Fields are as follows:

Parameter	Description
Extension Number	Assign an extension number to this person, click to select.
Extension Password	After selecting the Extension Number, the password will be automatically filled in, but the administrator can also modify it.
Extension Name	After selecting the Extension Number, it will be automatically filled in, and the administrator can also make changes.
Authorized Contacts	You can choose to assign this person to a contact list, which will be displayed in the Mobile APP after assignment.
Belonging Building	The building where the person resides
Unit Name	The unit where the person resides
Room Number	The room number where the person resides

Table 2- 7 Video Intercom

● More Card:

Click **More Card**, the user can register another card for this person.

Note: This feature requires the multi-card per person function to be enabled first. The operation method is: go to **Parameters -> Card Setting -> Multiple cards per personnel** and select **Yes**.

Edit

Personnel ID*

22001

First Name

someone

Gender

Certificate Type

Birthday

Hire Date

Device Verification Password

Biometrics Type

APP Push

☒

Department*

Community Manager

Last Name

del

Mobile Phone

Certificate Number

Email

Position Name

Card Number

WhatsApp

Browse

Capture

Secondary Card

OK

Cancel

Table 2- 8 More Card

● Personnel Details:

Click **Personnel Details**, to set the Personnel detail parameter for the personnel.

Access ControlTime AttendanceElevator ControlPlate RegisterPassage SettingFaceKioskPersonnel Detail

Employee Type

Job Title

Birthplace

Home Phone

Office Phone

Any exposure to suspected cases

☐ Yes

☐ No

City visited in past 14 days

Hire Type

Street

Country

Home Address

Office Address

Any symptoms in the last 14 days

☐ None

☐ Cough

☐ Fever

☐ Respiratory Issues

Remarks on health

Save and New

OK

Cancel

Figure 2- 16 Personnel Details

Note:If you need to display more fields, you can first add them under the **Custom Attributes** menu. After entering the information, click **OK** to save and exit, the person details will be displayed in the added list.

2.1.1.2 Personnel Adjustments

Click **Personnel > Person > Personnel Adjustment**.

● Adjust Department:

Click **Personnel > Person > Personnel Adjustment**, then select Adjust Department.

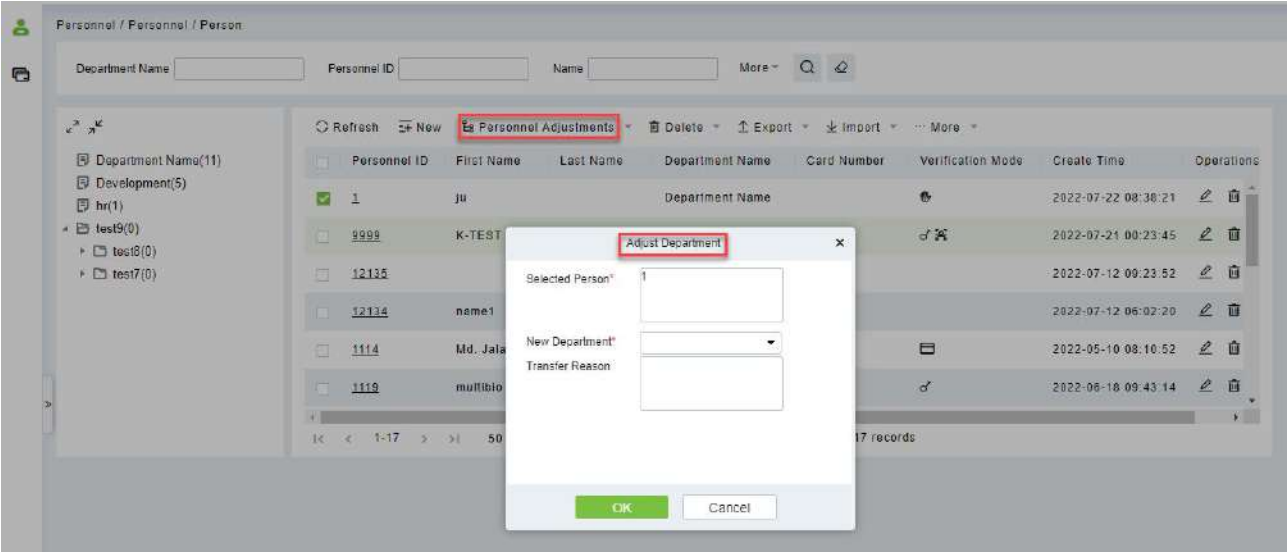


Figure 2- 17 Adjust Department

Fields are as follows:

Parameter	Description
New Department	Select new department from list.
Transfer Reason	Mention the reason for transfer.

Table 2- 9 Adjust Department

● Change Position:

Click **Personnel > Person > Personnel Adjustment**, then select Change Position.

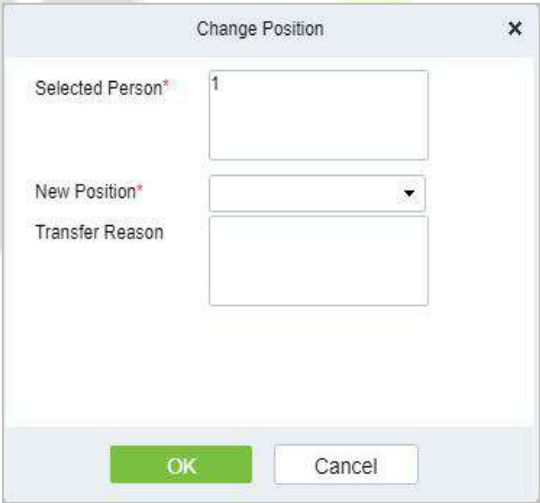


Figure 2- 18 Change Position

Parameter	Description
New Position	Select new Position from list.
Transfer Reason	Mention the reason for transfer.

Table 2- 10 Change Position

● Dismissal:

Click **Personnel > Person > Personnel Adjustment**, then select Dismissal.

Figure 2- 19 Dismissal

Fields are as follows:

Parameter	Description
Dismissal Date	Select date.
Dismissal Type	Select the type of dismissal from follows, Voluntary Redundancy, Transfer, Dismissed, Resignation.
Dismissal Reason	Mention the reason for Dismissal.

Table 2- 11 Dismissal

2.1.1.3 Delete

Click **Personnel > Person**, then select Delete.

- Delete Personnel:

Click **Personnel > Person > Delete**, then select Delete Personnel.

- Delete Biometric Data:

Click **Personnel > Person > Delete**, then select Delete Biometric Data.

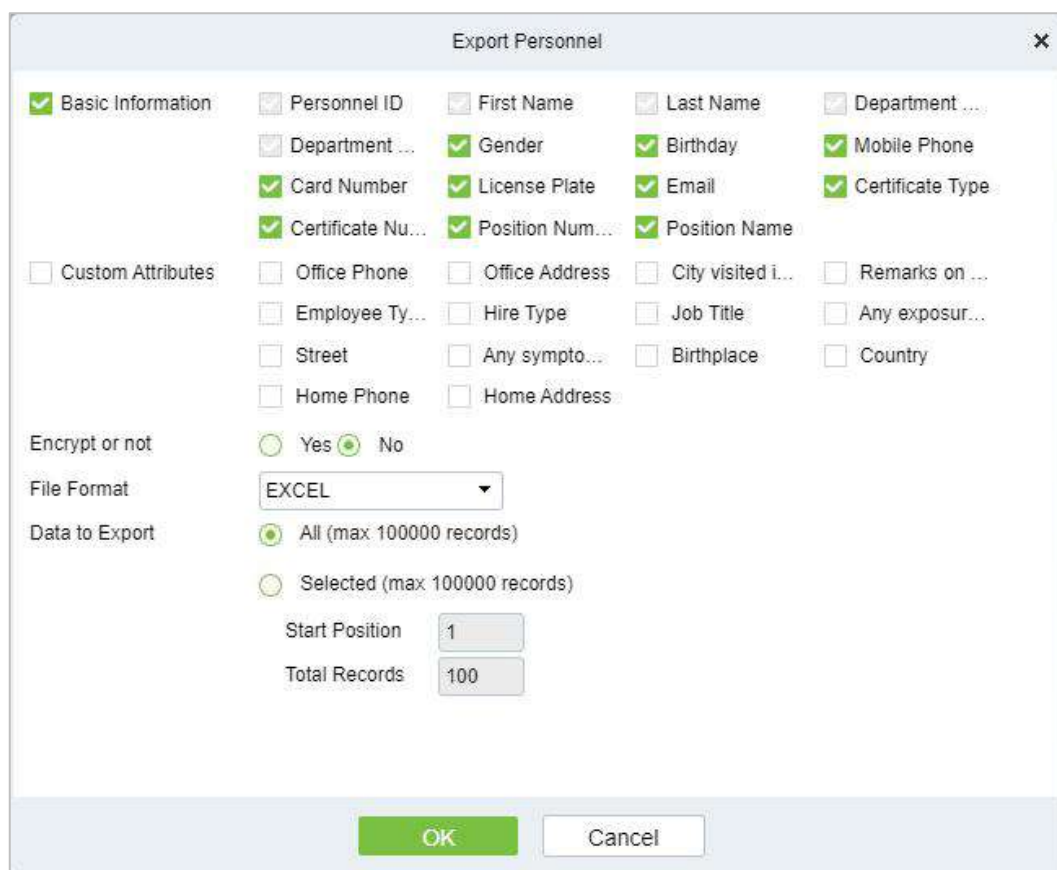
2.1.1.4 Export

Click **Personnel > Person**, then select Export.

- Export Personnel:

Click **Personnel > Person > Export**, then select Export Personnel.

Personnel's basic information is all checked (selected), check custom attributes as required.



Export Personnel

☒ Basic Information

☐ Personnel ID ☐ First Name ☐ Last Name ☐ Department ...

☐ Department ... ☒ Gender ☒ Birthday ☒ Mobile Phone

☒ Card Number ☒ License Plate ☒ Email ☒ Certificate Type

☒ Certificate Nu... ☒ Position Num... ☒ Position Name

☐ Custom Attributes

☐ Office Phone ☐ Office Address ☐ City visited i... ☐ Remarks on ...

☐ Employee Ty... ☐ Hire Type ☐ Job Title ☐ Any exposur...

☐ Street ☐ Any sympto... ☐ Birthplace ☐ Country

☐ Home Phone ☐ Home Address

Encrypt or not ☐ Yes ☒ No

File Format: EXCEL


Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)

Start Position: 1

Total Records: 100

OK Cancel

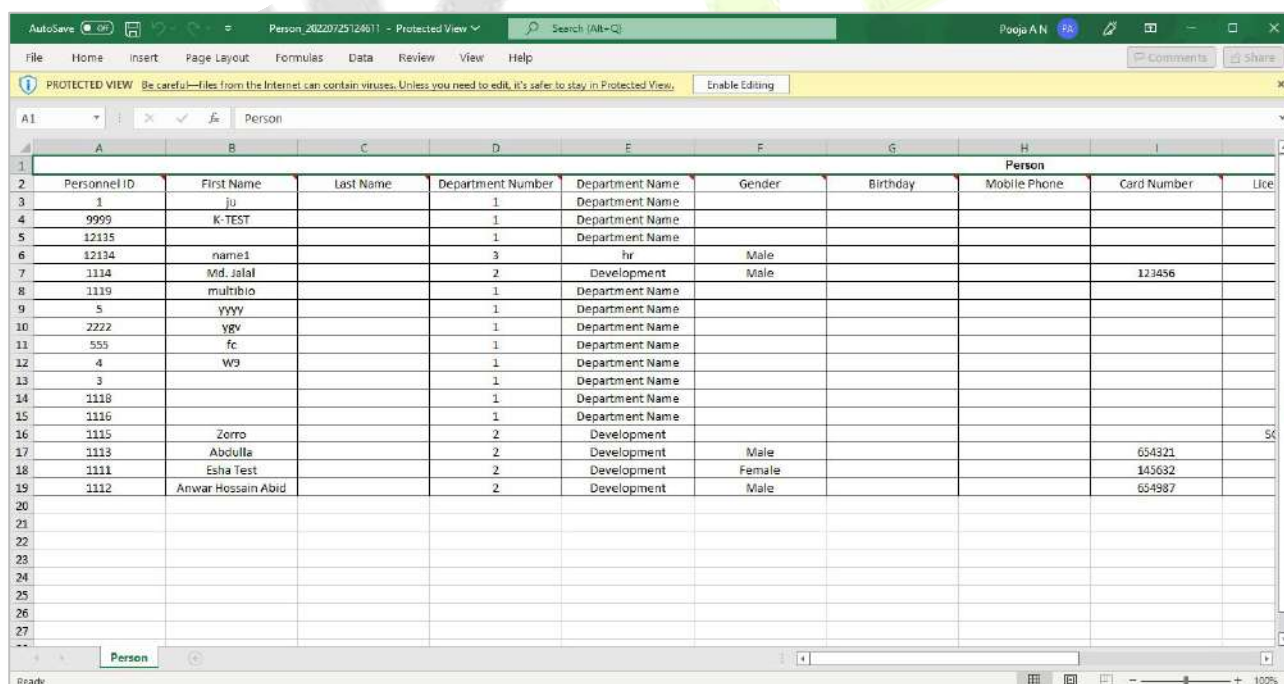Figure 2- 20 Export Personnel




Personnel ID	First Name	Last Name	Department Number	Department Name	Gender	Birthday	Mobile Phone	Card Number	Lice
1	Ju		1	Department Name					
9999	K-TEST		1	Department Name					
12115			1	Department Name					
12134	name1		3	hr	Male				
1114	Md. Jalal		2	Development	Male			123456	
1119	multibio		1	Department Name					
5	yyyy		1	Department Name					
2222	ygv		1	Department Name					
555	fc		1	Department Name					
4	W9		1	Department Name					
3			1	Department Name					
1118			1	Department Name					
1116			1	Department Name					
1115	Zorro		2	Development					
1113	Abdulla		2	Development	Male			654321	
1111	Esha Test		2	Development	Female			145632	
1112	Anwar Hossain Abid		2	Development	Male			654987	

Figure 2- 21 Export Personnel

● Export Biometric Template:

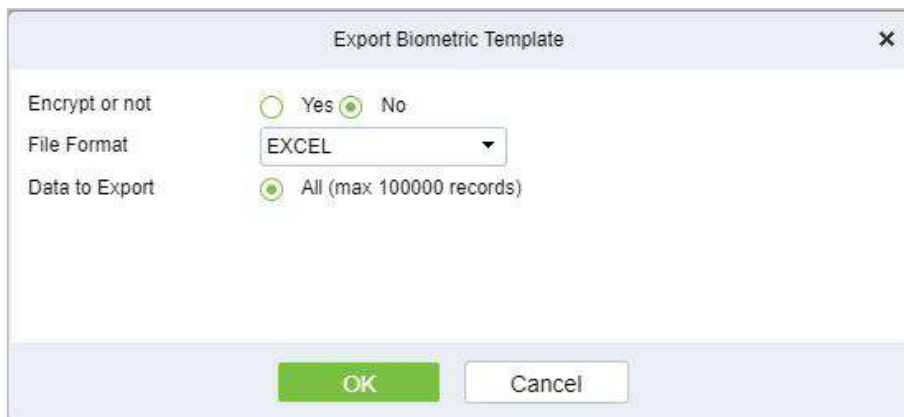Click **Personnel > Person > Export**, then select Export Biometric Template.



Export Biometric Template

Encrypt or not: ☐ Yes ☒ No

File Format: EXCEL

Data to Export: ☒ All (max 100000 records)

OK Cancel


Figure 2- 22 Export Biometric Template

Personnel Biometric Template											
Personnel ID	First Name	Last Name	Biometric Template Validity	Biometric Template Type Number	Biometric Template Type	Biometric Template Version	Biometric Template	Biometric Template No.	Biometric Template Index	Duress	
1	tang	OP1	Effective	8	Palm Vein	12	sPUBELUHR7Y0BAWAAWQEA7HUI0JG0AAVCEEHjwmy0EEQJLW1La CEWfnTqHie7vKH9IFTUIMamv8Cfr7RHfHccDpmpHdQYHMEUjgz1t1Oc EBITyDhzng5wteDnB4fufSrfqZA/eKnqSorsijSpIdVyfy3MTY3jhWW3z tbTf0DRUJD8ongj04/OY4P505P5j3qk1tp1ZYfWlpbwJHInN9ZEdAJ8mZ n9KD2oCHNNONISXJzHLnv+nA55qgbc35/UUI6TuzBm52+YqLRQYWRJ InBKyyZZaKEBUJVZQ6CoCm0aKJPCs3KVBCPreq3a6wCH+LPDRCKis0yLq 7BLKn0MApVWh9IRMbHJueRvQtwRgJfUdLTTdA7Xsq9Ux7TXN7idGQ+ buOBTSLreerrWIBUf/auwTbx8fb3zJTGmvoJzTpdBwiDKMo6xQZc0chL Kg4PPN8u0QITNaOfthobyf3EYshRI1gh5Yn5OVDp6j1H1gXxZLz/f6u/D ch+HSCQj4/yMISIExb1Fj+OEpLxMb0wBJ0xE/SJFZKwNfD1YSiyFNKEG Jj/ev/6iqx+mdgHG5v6XZj5G5d7vp0+Xp75VDI7JfHc08BYahGRQvA29 8B0q/EZKTARBalHp9YMV73n26FmwOZqNVVNLfraqmmCSbiZjgXT3s 7a3PaG/LuFJRH5sLD6Avqmcdb6fzL+7PnR+7TcF73iqrtbtB03Q+Ut 05XGdubnYDJaW0XxPqQGnVtZfGSGBPfHAPMokP7/yq5MAybkAuM0c AoL4uXINlPhR4QbRYXixeDnN7JlRIsW5ijJyU1oAvRsaYgr54v0yloOf Nv70bu07raD5rFOZy457xUZH2YTHaFuQ54o7UVJT4pBaMF/A6Z6/XF 5fViseJGPyYVYvbgprQU5CHLUVSzUn23dddlbXWIXUgHtk0KxjvPmd 9mvsL5no6P+V/rD9Vbp3Gu/pqblUb7Urg9e+1WYqanoTKIGr5xYRkzrK zryldh6ILZl4xb6/m3Zrcb2UcjEsrlV9NXb8BUxdzYnrbK68dJ7b4lzdD86 eUjV/ghv5kRAUTw5e7vrbwXW8CJ31rE+fr7bXr93DeeK6ZSJQTHma4H bAuGrarTMBITjinLc87KOb7bP84FM440RCLZBYCvDionEMVGTjpMYs2 EjY3cPYNjzxR8agckjDLyS32wGF0u36ak5PwYLT4mxJZcQnlpbRd5+rI h9eUgyGZZnc3FGHxyeVR+CXJzD1ZFRIWhlbWRgBX5/87v5SGTdkbIU5 YqL/6dFqeDjgbylIZaXqbZp61JnTC+gaKJNcpk8p1XgwbSja6VJRQ1wI MqnxrRmbq7Ugr2MNN+de45MbH2i7TLMaxTWod8NLTx7rPMN4hW0X xb/77fuD+Zdfn24F8szumXNJPKNS+GwaVb35XdfFrv1qEm0hgIDJdaH1 nFIEWh+Yg4PmTKb8AwppHSQI2hob8y45IDAeKRAKXSYnMwpdCDUw Q8+7CTH8+79BMIA7QWuNTA7AANUN2h67Vh6vUjpl05CDBu5UQ2+3	0	1	No	

Figure 2- 23 Export Biometric Template.

● Export Personnel Photo:

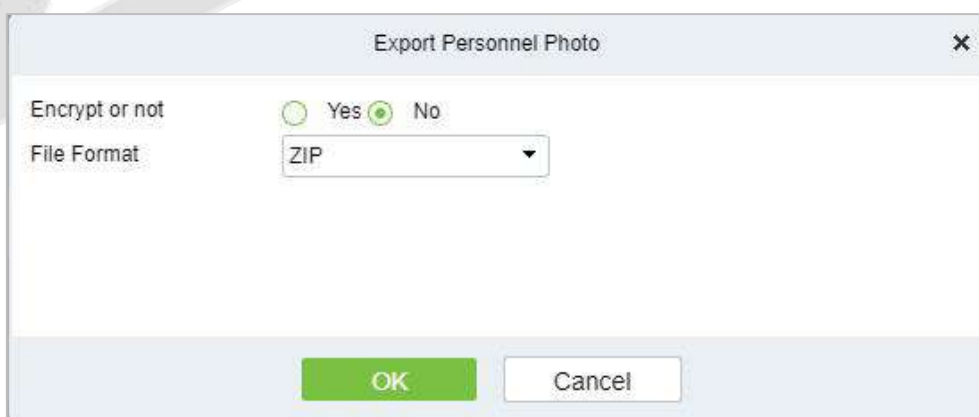Click **Personnel > Person > Export**, then select Export Personnel Photo.



Export Personnel Photo

Encrypt or not: ☐ Yes ☒ No

File Format: ZIP

OK Cancel

Figure 2- 24 Export Personnel Photo

2.1.1.5 Import

Introduce the configuration Steps of manually importing personnel in batches in ZKBio CVSecurity.

It is suitable for scenarios where a large number of personnel information is added. Compared with the manual registration method of individual personnel, the batch import and addition method is faster.

Before adding departments in batches, you need to fill in the template file as required. After filling out the template file, you can import and add departments in batches in the "Department" interface.

● Instruction:

1. The import and addition of personnel includes importing personnel information, personnel biometric template data (optional), and personnel photos (optional), which need to be imported separately.
2. Importing is to pay attention to the uniqueness of the personnel number. When the personnel number is repeated, the result of import and addition will fail.

Import Personnel Information

Before adding people in batches, you need to obtain or fill in a template file as required. After filling in the template file, you can import and add people in batches on the Personnel Management > Personnel interface.

● Steps:

Step 1: In the Personnel module, choose "**Personnel Management > Personnel**".

Step 2: On the personnel interface, select and click the "**Import > Download Personnel Import Template**" button, select the parameters to be filled in, and download the template "personnel information template.xls" locally. The parameter selection is shown in Figure 2-21.

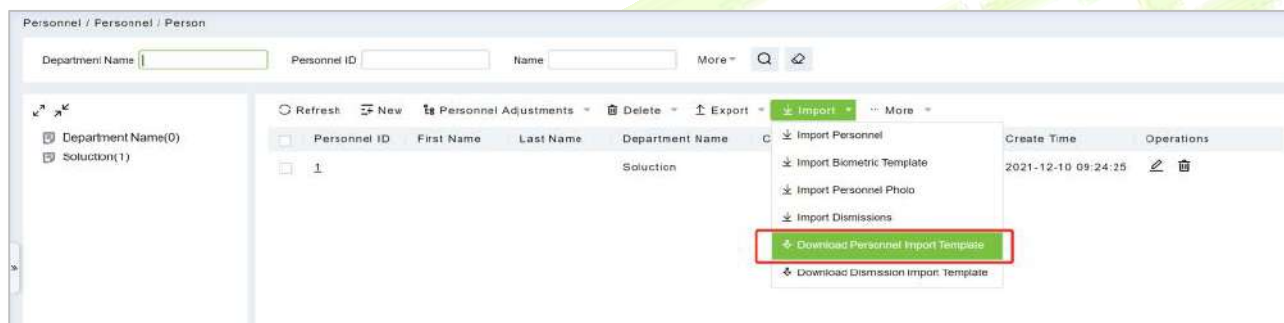


Figure 2- 25 Import Personnel Information Template

Step 3: Open the exported template file "Personnel Information Template.xls" for adding personnel information.

Step 4: In the personnel interface, select and click the "**Import > Import Personnel Information**" button; in the **Import Personnel** Interface, click the **Browse** button to import the batch import template into the system, as shown in figure below

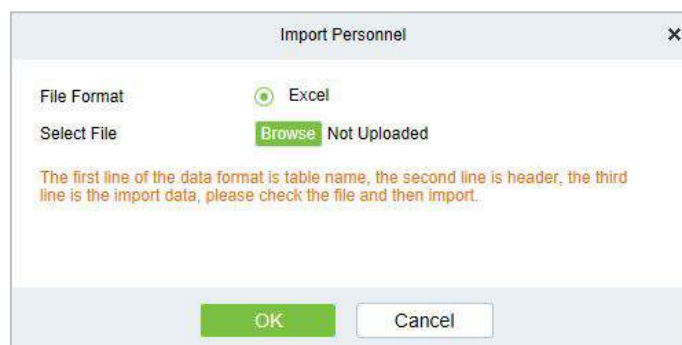


Figure 2- 26 Import Personnel

Step 5: Click **OK**, and the interface displays the result of personnel import and addition.

Step 6: Click **Close** to complete the import and addition of personnel information.

Import Biometric Template

●Preconditions:

1. The system needs to have the basic information files of the personnel in order to support the import of biometric template data.
2. The biometric template data of the current system personnel has been obtained.

●Steps:

Step 1: In the Personnel module, choose "**Personnel Management > Personnel**".

Step 2: On the personnel interface, select and click the "**Import > Import Biometric Template Data**" button; in the pop-up import personnel biometric template data interface, click the **Browse** button to import personnel biometric template data into the system in batches, as shown in Figure 2-23 is shown.

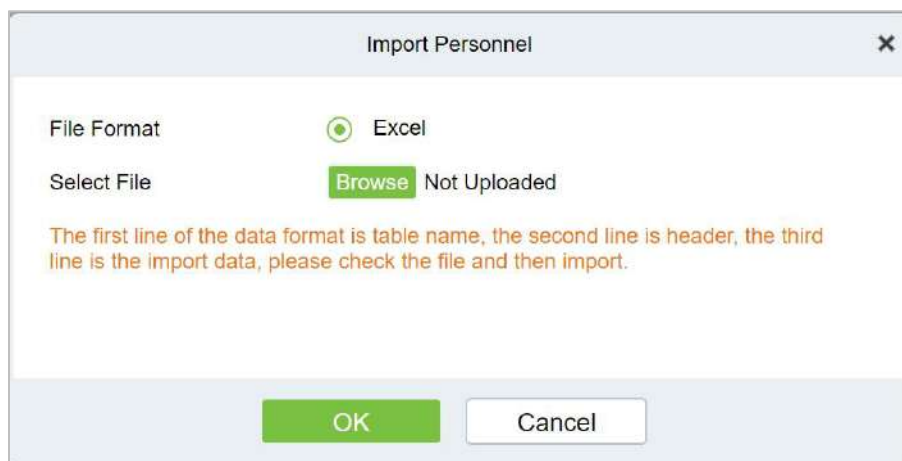


Figure 2- 27 Importing Personnel Biometric Template Data

Step 3: Click **OK**, the interface displays the import and addition results.

Step 4: Click **Close** to complete the import of personnel biometric template data.

Import Personnel Photos

●Preconditions:

1. The system needs to have the basic information files of the personnel in order to support the import of personnel photos.
2. The personnel photos of the current system personnel have been obtained and correctly named according to the personnel number.
3. The photo requirements for personnel are as follows:

Image Format: support .JPEG, .png format.

Image Size: The recommended image size is 35KB~200KB, and the maximum size of a single image is 5MB.

Image Quality: Faces in images are clear and not blurred by lens defocus or face motion. The minimum image depth is an 8-bit grayscale image.

Pixels: The recommended value of face pixels is 200*200, and the distance between the eyes should be greater than or equal to 60 pixels, preferably greater than or equal to 90 pixels.

Brightness and Contrast: The ambient illumination is not less than 300Lux, the image brightness is uniform, the contrast is moderate, and the face has no invisible, no backlight, no reflection, no overexposure, no underexposure and no yin and yang faces.

Attitude: The portrait is upright, looking straight ahead, the horizontal rotation angle of the face should be within $\pm 10^\circ$, the elevation angle should be within $\pm 10^\circ$, and the tilt angle should be within $\pm 10^\circ$.

Blocking: Eyebrows, eyes, mouth, nose and facial contours should not be blocked by bangs, masks, accessories, glasses, etc. The lenses of glasses should be colorless and non-reflective, and the frames of glasses should not be too thick to block human eyes.

Face Area: The face is complete, the outline and facial features are clear, and there is no heavy makeup. The face area of the image should not be processed by PS.

Expression: Natural expression, neutral or smiling (no missing teeth), eyes open naturally, mouth closed naturally, no obvious expressions such as laughter or frown.

● Steps:

Step 1: In the Personnel module, choose "Personnel Management > Personnel".

Step 2: On the Personnel interface, select and click the "Import > Import Personnel Photo" button, as shown in figure below.



Figure 2- 28 Import Personnel Photos

Note: If you have selected Face Picture, the pixel of the face photo must be greater than 80,000 pixels, and the face should be centered and well-lit.

Step 3: Optional: upload photos and compressed packages.

Step 4: After selecting the photo method, click **OK** to enter the interface for importing personnel photos, select the photo and click **Start Uploading**.

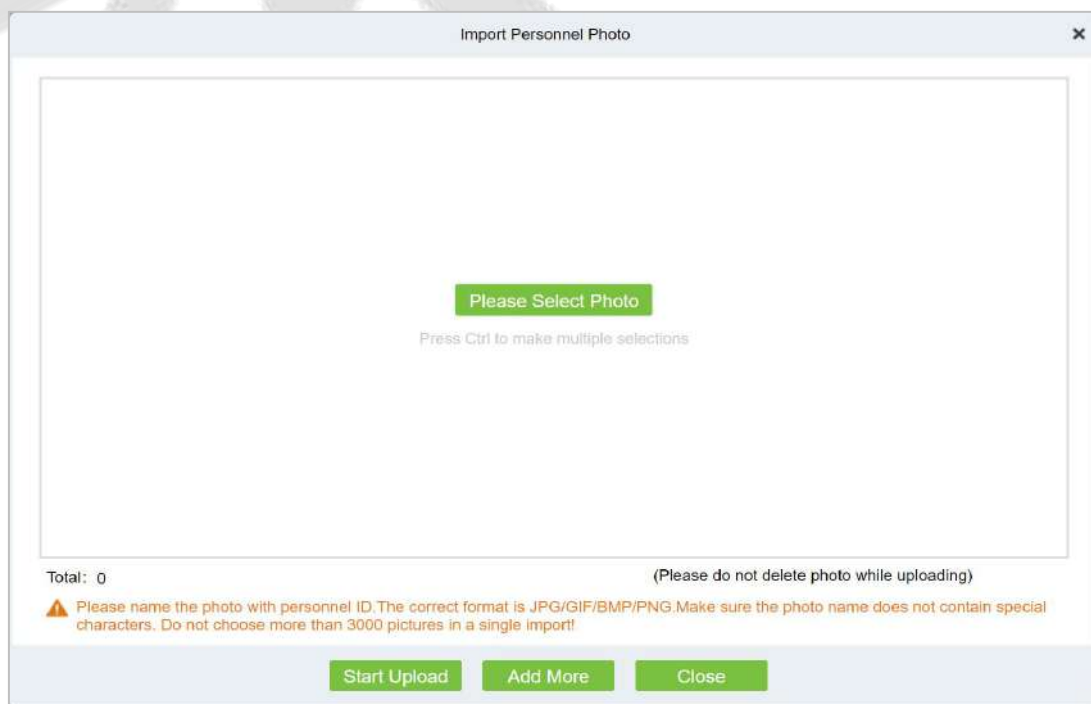


Figure 2- 29 Photos - Importing Personnel Photos

Step 5: After selecting the compression package method, click **OK** to enter the interface of importing personnel photos, click **Browse** to select the file and then click "**Start Uploading**".



Figure 2- 30 Compressed Package - Importing Personnel Photos

Step 6: After the upload is complete, the interface displays the results of the imported personnel photos.

Step 7: Click **Close** to complete the import and addition of personnel photos.

2.1.1.6 More


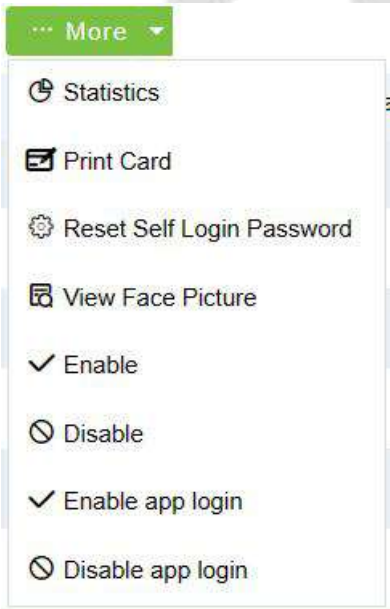


Figure 2- 31 More

Statistics

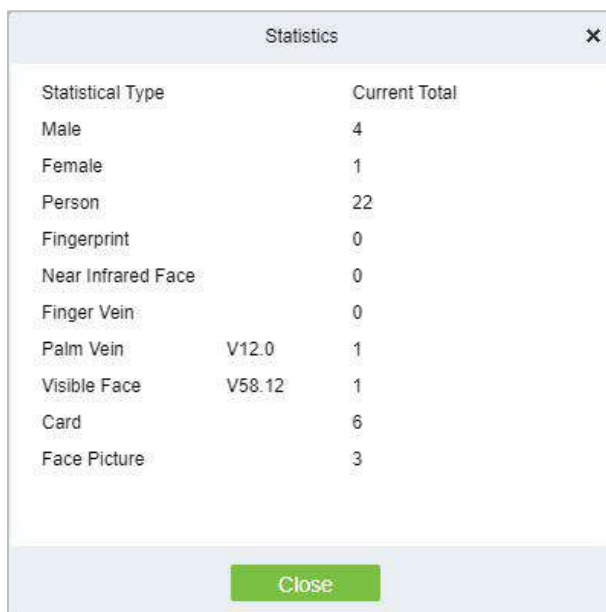Click **Personnel > Person > More**, then select Statistics.



Statistical Type	Current Total
Male	4
Female	1
Person	22
Fingerprint	0
Near Infrared Face	0
Finger Vein	0
Palm Vein V12.0	1
Visible Face V58.12	1
Card	6
Face Picture	3

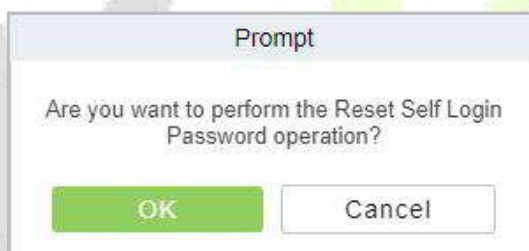
Close

Figure 2- 32 Statistics

View the number of Person, Male, Female, and the number of Fingerprints, Near Infrared Face, Finger Vein, Palm Vein, Visible Face, Card, and Face Picture.

Reset Self Login Password

Click **Personnel > Person > More**, then select Reset Self Login Password.

**Figure 2- 33 Statistics**

View Face Picture (V6.0.0 or above supported)

Click **Personnel > Person > More**, then select View Face Picture.

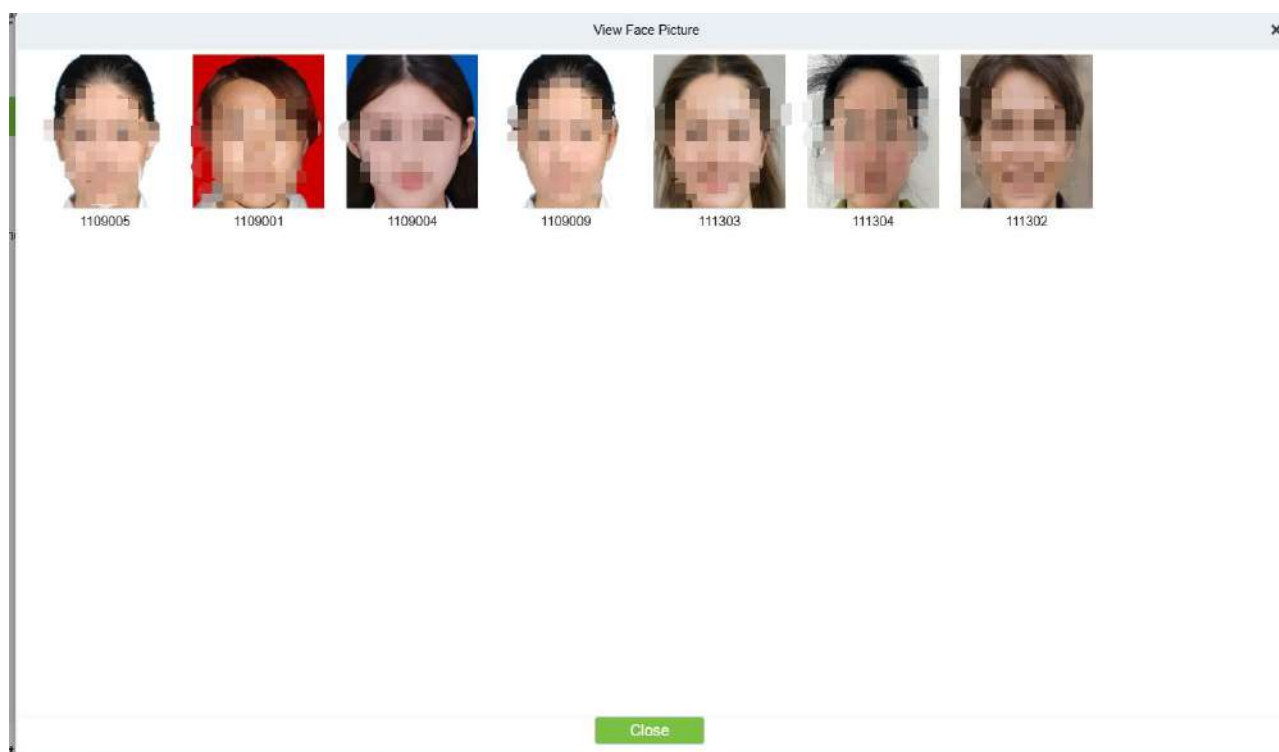


Figure 2-34

Enable (V6.1.0 or above supported)

Click **Personnel** > **Person** > **More**, then select **Enable**. **Selected** persons will be enabled.

Disable (V6.1.0 or above supported)

Click **Personnel** > **Person** > **More**, then select **Disable**. **The** credentials of the selected personnel will be disabled; all the access rights of the selected personnel such as access control, gate barrier, elevator control, locker, etc. will be unavailable, and at the same time will not be able to take attendance, consumption and so on until enabled.

<input type="checkbox"/>	Personnel ID	First Name	Last Name	Card Number	Verification Mode	Enable	App login enabl...	Create Time
<input type="checkbox"/>	111303	kad	Iai		☒	⊖	⊖	2023-11-1
<input type="checkbox"/>	1109001	kara	1109001	86***33	☒☒	⊕	⊖	2023-11-1
<input type="checkbox"/>	1109004				☒☒	⊕	⊖	2023-11-1
<input type="checkbox"/>	11568	Popy				⊖		2023-11-1
<input type="checkbox"/>	1109006			58***52	☒☒	⊕		2023-11-1
<input type="checkbox"/>	1109003	kara	1109003	61***85	☒☒	⊕		2023-11-1
<input type="checkbox"/>	4143	sansan	周三	46*****33	☒	⊕		2023-11-1
<input type="checkbox"/>	11567	Ning	Qin			⊕		2023-11-1
<input type="checkbox"/>	111304	111304		86*****75	☒☒	⊕		2023-11-1
<input type="checkbox"/>	111302	karaa	adaki		☒	⊕		2023-11-1

Figure 2-35

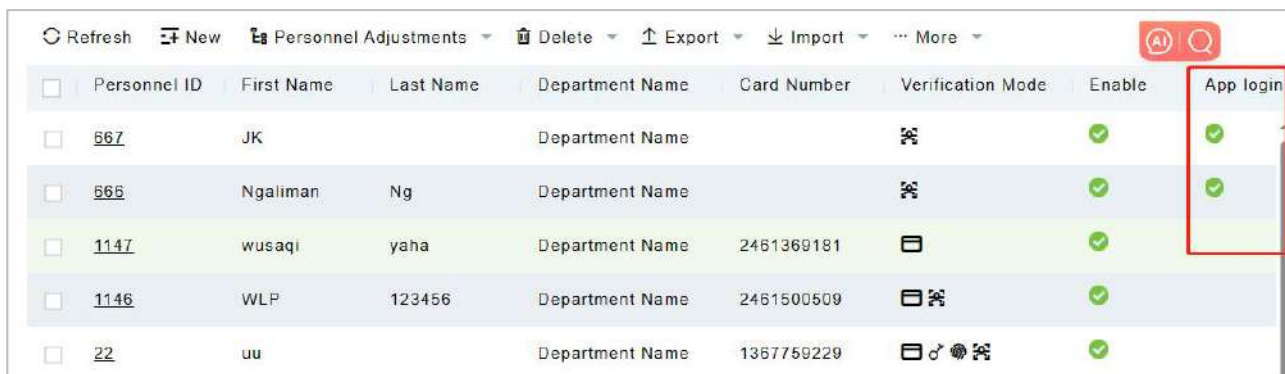
Enable APP Login (V6.1.0 or above supported)

Click **Personnel** > **Person** > **More**, then select **Enable app login**. **Selected** persons will be enabled

ZKBio CVSecurity Mobile APP login.

Disable APP Login (V6.1.0 or above supported)

Click **Personnel** > **Person** > **More**, then select **Disable app login**. Selected persons will be disabled ZKBio CVSecurity Mobile APP login.



<input type="checkbox"/>	Personnel ID	First Name	Last Name	Department Name	Card Number	Verification Mode	Enable	App login
<input type="checkbox"/>	667	JK		Department Name			✓	✓
<input type="checkbox"/>	666	Ngaliman	Ng	Department Name			✓	✓
<input type="checkbox"/>	1147	wusaqi	yaha	Department Name	2461369181		✓	
<input type="checkbox"/>	1146	WLP	123456	Department Name	2461500509		✓	
<input type="checkbox"/>	22	uu		Department Name	1367759229		✓	

Figure 2- 36

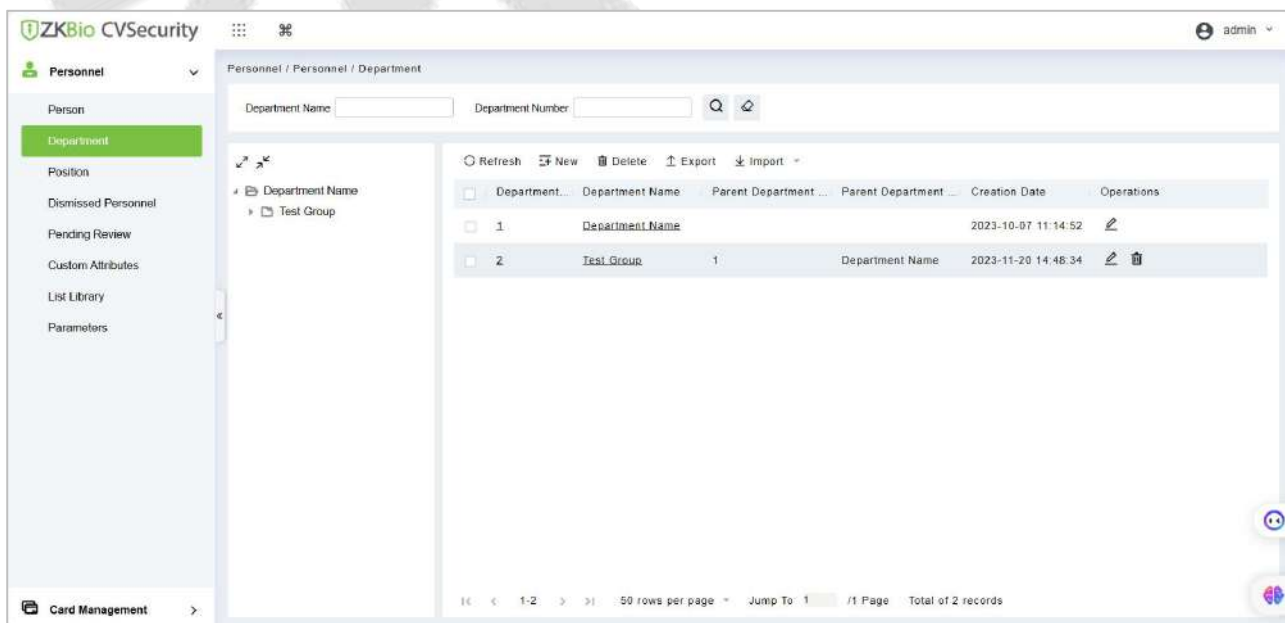
Note: If you need to know how to use the ZKBio CVSecurity APP, please refer to the [ZKBio CVSecurity APP](#).

2.1.2 Department

Click **Personnel**, then select Department.

Before managing company personnel, it is required to set a departmental organization chart of the company. Upon the first use of the system, by default it has a primary department named General and numbered 1. This department can be modified but can't be deleted.

Main functions of Department Management include **Add (New)**, **Delete**, **Export** and **Import Department**.



<input type="checkbox"/>	Department...	Department Name	Parent Department ...	Parent Department ...	Creation Date	Operations
<input type="checkbox"/>	1	Department Name			2023-10-07 11:14:52	
<input type="checkbox"/>	2	Test Group	1	Department Name	2023-11-20 14:48:34	

Figure 2- 37

2.1.2.1 Add a Department (New)

Introduce the configuration Steps for manually adding a single department in ZKBio CVSecurity.

It is suitable for scenarios where a small number of departmental organizations are added. After most departmental organizations have been created, individual departments can be added individually.

●Steps:

Step 1: In the Personnel module, choose “Personnel Management > Department”.

Step 2: Click **Add** with the mouse, and the interface for adding a department will pop up.

Step 3: In the interface of adding a department, fill in the corresponding parameters according to the adding requirements, as shown in figure below. Please refer to Table 2-10 for the description of parameter filling.

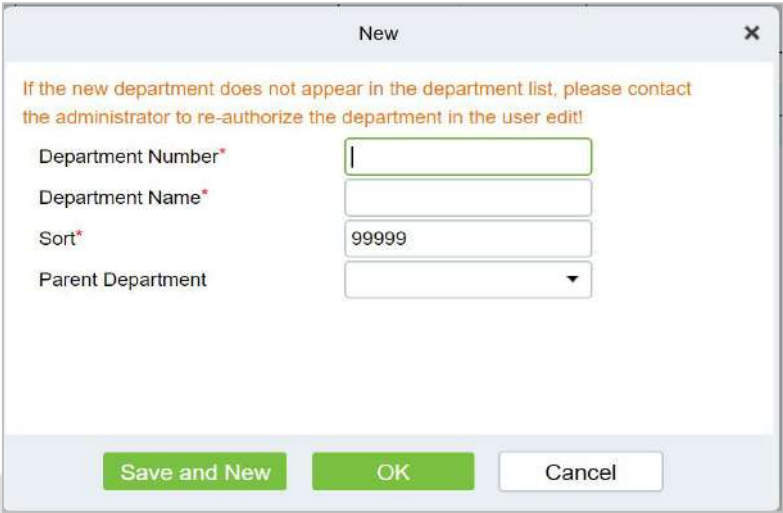


Figure 2- 38 Add Department (New)

●Fields are as follows:

Parameter	Instructions
Department Number	Customize the department number, support letters and numbers.
Department name	Customize the department name.
Sort	Fill in the number of the superior department.
Parent Department	The department name corresponding to the superior department number.

Table 2- 12 Add Department

2.1.2.2 Delete

Click **Personnel > Department**, then select Delete.

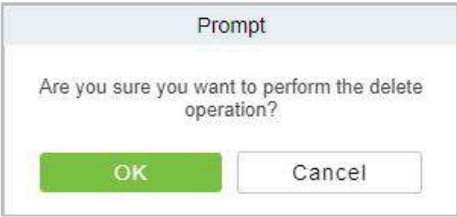


Figure 2- 39 Delete Department

2.1.2.3 Export

Click **Personnel > Department**, then select **Export**.

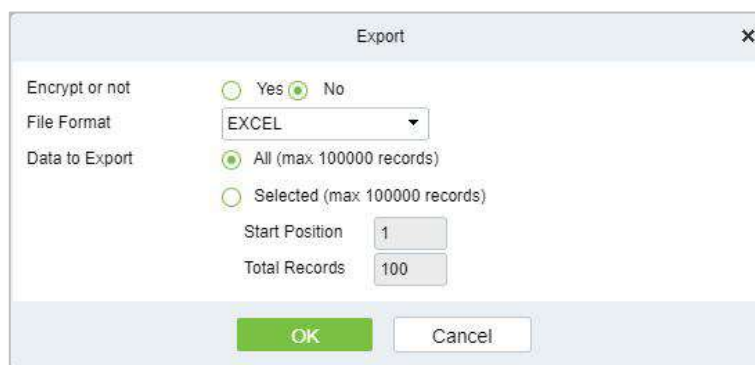
The 'Export' dialog box has a title bar with a close button. It contains three sections: 'Encrypt or not' with radio buttons for 'Yes' and 'No' (where 'No' is selected); 'File Format' with a dropdown menu set to 'EXCEL'; and 'Data to Export' with radio buttons for 'All (max 100000 records)' (selected) and 'Selected (max 100000 records)'. Below these are input fields for 'Start Position' (value 1) and 'Total Records' (value 100). At the bottom are 'OK' and 'Cancel' buttons.

Figure 2- 40 Export Department

2.1.2.4 Import

● Import:

Click **Personnel > Department > Import**, then select **Import**.

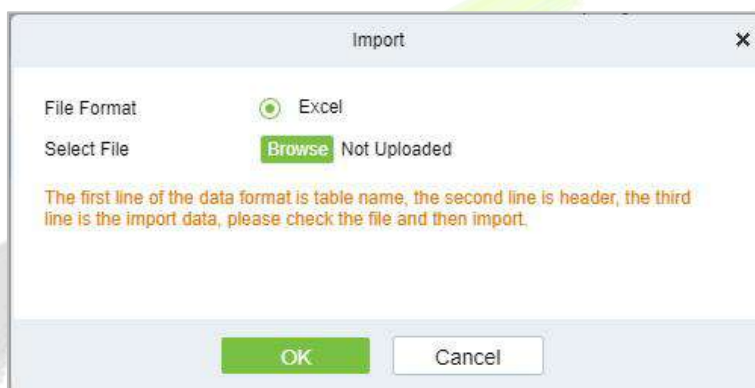
The 'Import' dialog box has a title bar with a close button. It contains 'File Format' with a radio button for 'Excel' (selected) and 'Select File' with a 'Browse' button and the text 'Not Uploaded'. A note in orange text states: 'The first line of the data format is table name, the second line is header, the third line is the import data, please check the file and then import.' At the bottom are 'OK' and 'Cancel' buttons.

Figure 2- 41 Import Department.

● Download Import Template Department:

Click **Personnel > Department > Import**, then select **Download Import Template Department**.

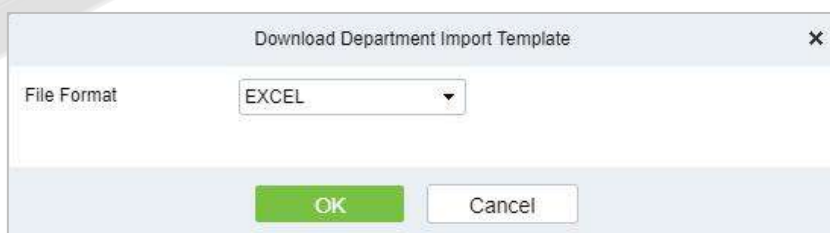
The 'Download Department Import Template' dialog box has a title bar with a close button. It contains 'File Format' with a dropdown menu set to 'EXCEL'. At the bottom are 'OK' and 'Cancel' buttons.

Figure 2- 42 Download Import Template Department

2.1.3 Position

Introduces the configuration Steps of manually adding a job in ZKBio CVSecurity, and adding a job is used to define the job information of a person.

Click **Personnel**, then select **Position**.

2.1.3.1 Add Position

●Steps:

Step 1: In the Personnel >Personnel Management > Position.

Step 2: Click **New (Add Position)**, and the new job interface will pop up.

Step 3: On the new job interface, fill in the corresponding parameters according to the adding requirements, as shown in figure below; please refer to Table 2-11 for parameter filling instructions.

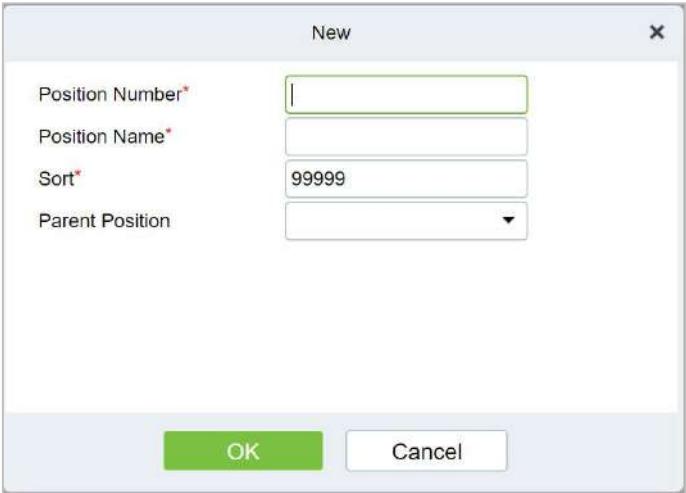


Figure 2- 43 Add Position (New)

●Fields are as follows:

Parameter	Instructions
Job number	Customize the job number for easy memory.
Job Title	Customize job title.
Sort	Sort job listings, only numbers are supported.
Parent position	Select the corresponding parent position from the drop-down radio box. If you need to cancel, click Selected again.

Table 2- 13 Adding New Position

2.1.3.2 Export

Step 1: Click **Personnel > Position**, then select Export.

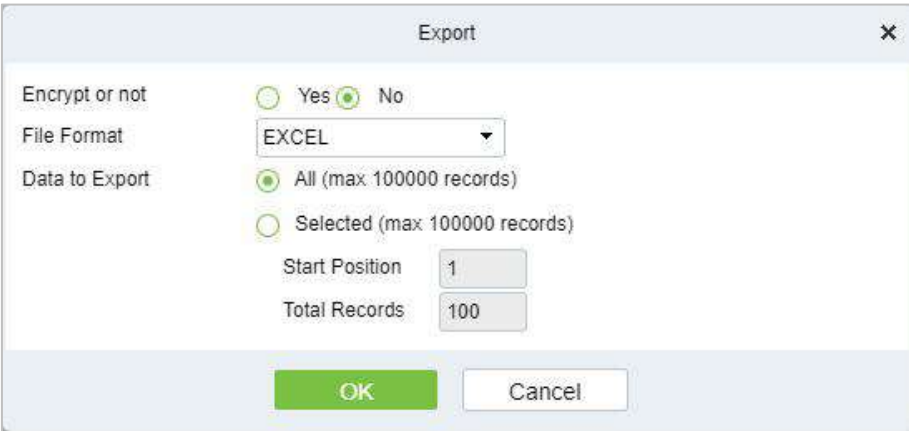


Figure 2- 44 Export Position

Step 2: Click **OK** to save to exit.

2.1.3.3 Import

Step 1: Click **Personnel > Position > Import**, then select Import.

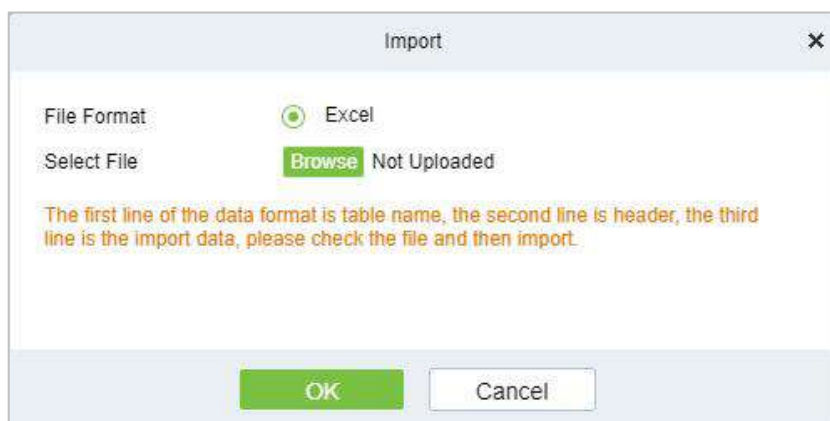


Figure 2- 45 Import Position.

Step 2: Click **OK** to save and exit.

2.1.3.4 Delete

Click **Personnel > Position**, then click Delete.

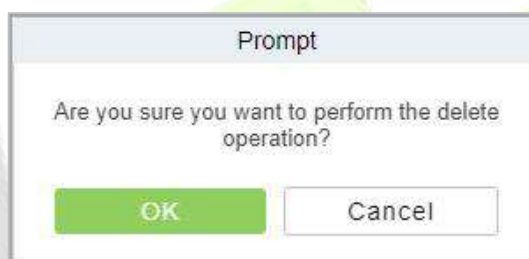


Figure 2- 46 Delete Position

2.1.4 Dismissed Personnel

This parameter will display the personnel who are not working in company anymore. Once the person is dismissed, it will be listed.

Click **Personnel**, then select Dismissed Personnel.

2.1.4.1 Delete

Step 1: Click **Personnel > Dismissed Personnel**, then select Delete.

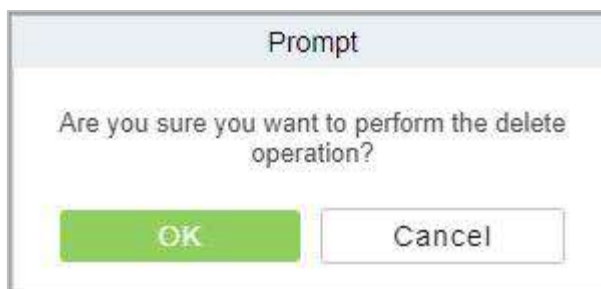


Figure 2- 47 Delete

Step 2: Click **OK** to save and exit.

2.1.4.2 Export

Step 1: Click **Personnel** > **Dismissed Personnel**, then select Export.

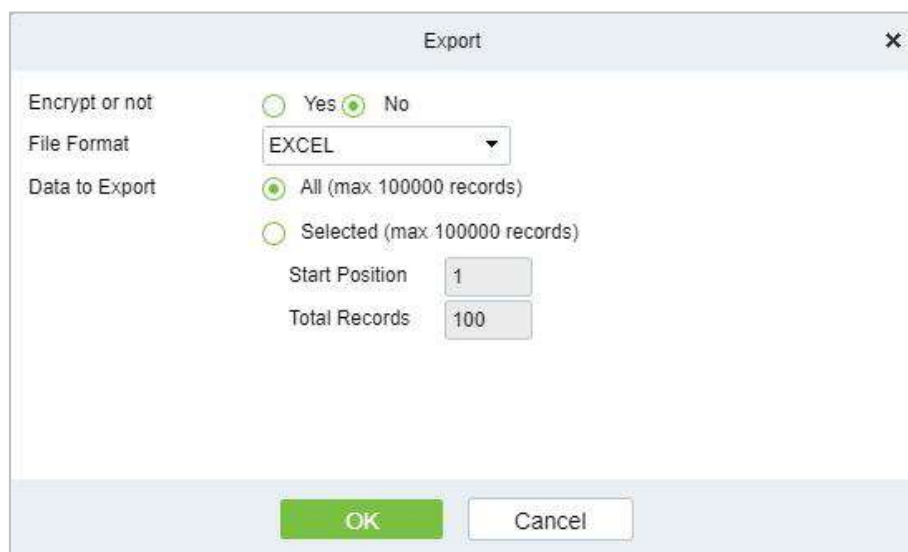


Figure 2- 48 Export

Step 2: Click **OK** to save and exit.

2.1.5 Pending Review

2.1.5.1 Delete

Step 1: Click **Personnel** > **Pending Review**, then select Delete.

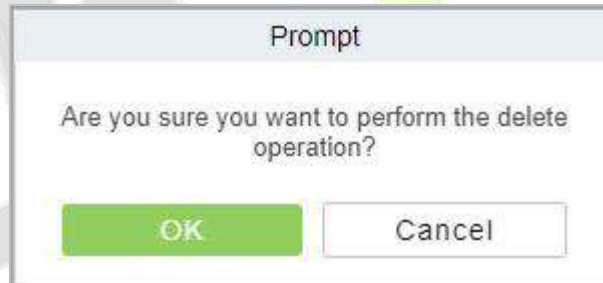


Figure 2- 49 Delete Pending Review

Step 2: Click **OK** to save and exit.

2.1.6 Custom Attributes

Some personal attributes can be customized or deleted to meet different customers' requirements. When the system is used for the first time, the system will initialize some personal attributes by default. Customized personal attributes can be set for different projects according to requirements.

Click **Personnel**, then select Custom Attributes.

2.1.6.1 Add Custom Attributes (New)

Step 1: Click **Personnel** > **Custom Attributes**, then select **New** (Custom Attributes).

New

Display Name*

Input Type*

Pull-down List

Attribute Value*

Using a " ; " delimiter

Row*

10

Column*

1

Display in Person List

☐ Yes

☒ No

OK

Cancel

Figure 2- 50 Add Customer Attribute (New)

Fields are as follows:

Parameter	Description
Display Name	Must be filled and should not be repeated. Max length is 30.
Input Type	Select the display type from "Pull-down List"," Multiple Choice", "Single Choice" and "Text".
Attribute Value	Suitable for lists displaying as "Pull-down List","Multiple Choice" and "Single Choice" lists. Use a ";" to distinguish the multiple values. If the input type is "Text", the attribute value is not suitable.
Row/Column	The column and row of a field are used together to control the display position of the field. Numerals are supported. The column number cannot exceed 99, and the row number can only be 1 or 2. The combination of the column and row must not be duplicated. As shown in the following figure, Employee Type, is in the first column and first row, and Hire Type is in the first column and second row.

Table 2- 14 Add Customer Attribute (New)

Step 2: Click **OK** to save and exit.

2.1.6.2 Delete

Step 1: Click **Personnel > Custom Attributes**, then select Delete.

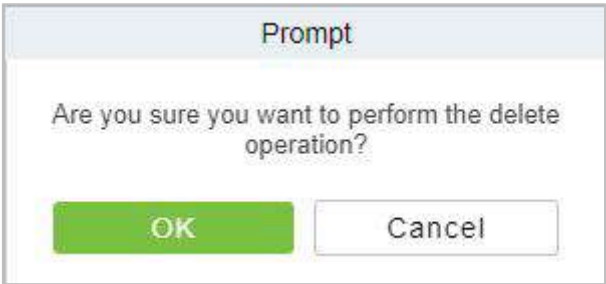


Figure 2- 51 Delete Custom attributes

Step 2: Click **OK** to save and exit.

2.1.7 List Library

The list library is mainly used for face matching with face cameras or ZKIVA-Edge.

2.1.7.1 Add a List Library (New)

Step 1: Click **Personnel > List Library**, then select **New** (List Library).

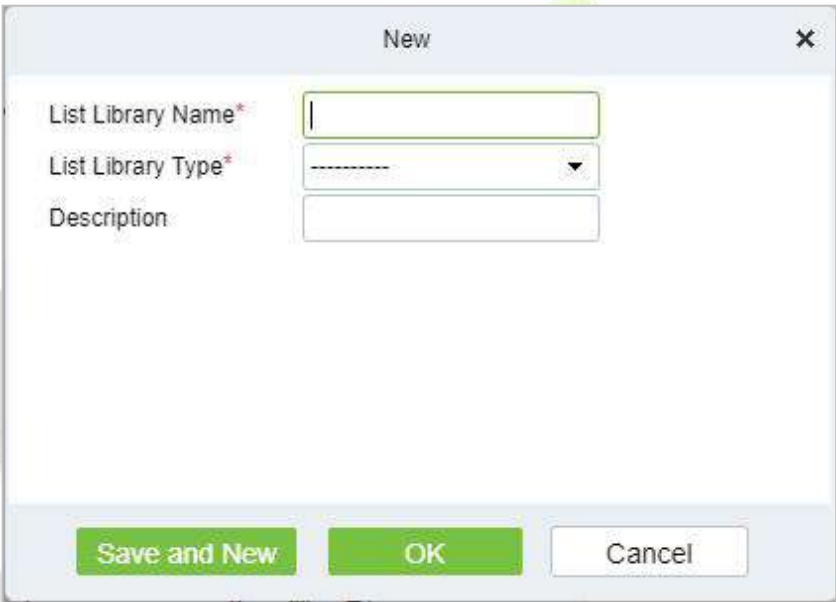


Figure 2- 52 Add List Library (New)

Parameter	Description
List Library Name	The name of list library.
List Library Type	Select type of list library.
Description	Fill Description as required.

Table 2- 15 Add List Library

Step 2: Click **OK** to save and exit.

2.1.7.2 Delete

Step 1: Click **Personnel > List Library**, then select Delete.

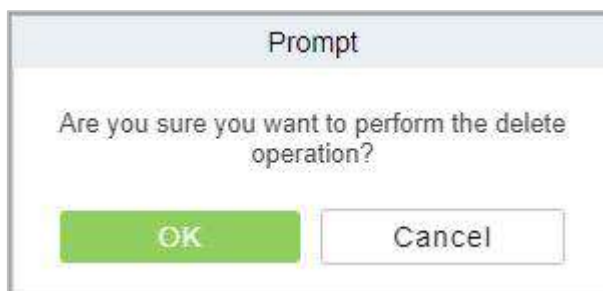


Figure 2- 53 Delete List Library

Step 2: Click **OK** to save and exit.

2.1.8 Parameters

In Parameters you can do few settings for options like Personnel ID Setting, Card setting, Pending Personnel Selling, Self-Service registration, Facial Template Extraction Server, and Registration Client.

Click **Personnel > Personnel Management**, then select Parameters.

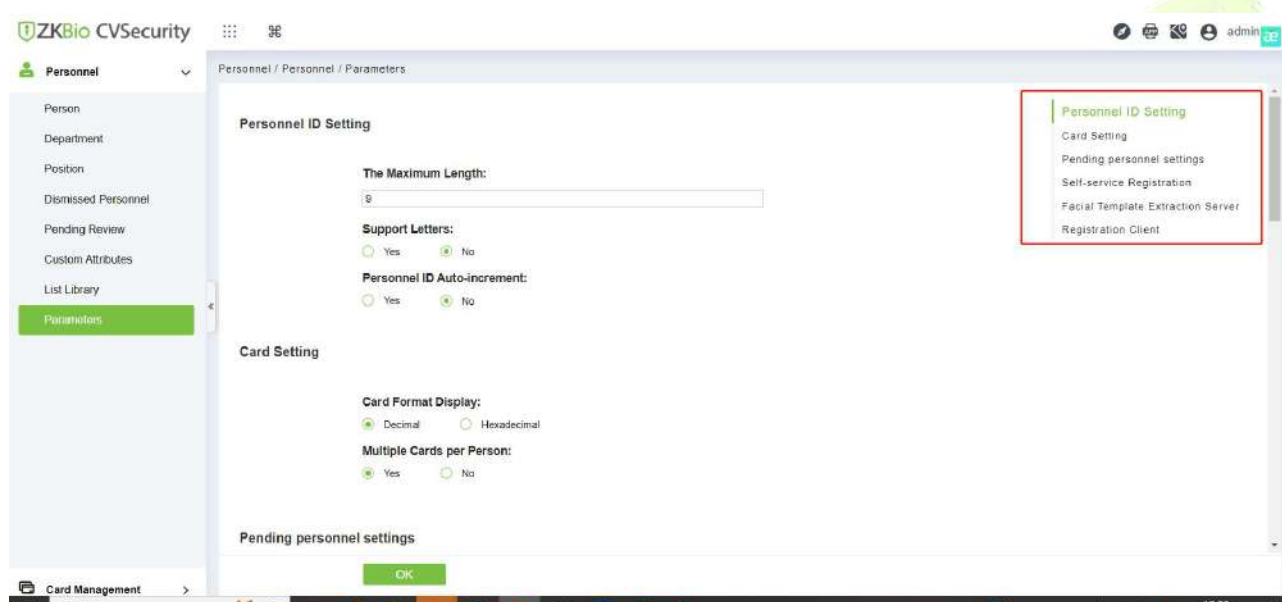


Figure 2- 54 Parameters

2.1.8.1 Personnel ID Setting

The maximum length: The Personnel ID supports a maximum length of 23 characters.

Support Letters: When "Yes" is selected, the Personnel ID can include letters.

Personnel ID Auto-increment: When "Yes" is selected, the Personnel ID will automatically increment by 1.

Personnel ID Setting

The Maximum Length:

Support Letters:

☐ Yes ☒ No

Personnel ID Auto-increment:

☐ Yes ☒ No

Figure 2- 55 Personnel ID Setting.

2.1.8.2 Card Setting

Set **Card Format Display** Select either Decimal or Hexadecimal as the display option.

Multiple Cards per Person: After selecting "Yes," you can register multiple cards for each

Card Setting

Card Format Display:

☒ Decimal ☐ Hexadecimal

Multiple Cards per Person:

☒ Yes ☐ No

personnel.

Figure 2- 56 Card Setting

2.1.8.3 Pending Personnel Setting

Enable Auto-audit : After selecting **Yes**, the system will automatically approve self-registered personnel.

Pending personnel settings

Enable Auto-audit:

☒ Yes ☐ No

Figure 2- 57 Pending Personnel Selling

2.1.8.4 Self Service Registration

Enable Self Registration: After selecting "Yes", personnel can scan to self-register their personal information.

Self-service Registration

Enable Self Registration:

☒ Yes ☐ No

QR Code URL:

[Download QR code image](#)



Figure 2- 58 Self Service Registration

2.1.8.5 Personal Sensitive Information Protection

After checking these fields, the corresponding fields under the Personnel menu will be hidden from view.

Note: In ZKBio CVSecurity version V6.4.0 and later, this feature is adjusted to be configured under the Role menu, allowing for different privacy protections for different user roles.

Personal sensitive information protection

<input type="checkbox"/> Personnel ID	<input type="checkbox"/> First Name
<input type="checkbox"/> Last Name	<input type="checkbox"/> Gender
<input type="checkbox"/> Certificate Number	<input checked="" type="checkbox"/> Mobile Phone
<input checked="" type="checkbox"/> Email	<input checked="" type="checkbox"/> License Plate
<input checked="" type="checkbox"/> Birthday	<input checked="" type="checkbox"/> Photo
<input checked="" type="checkbox"/> Face Picture	<input type="checkbox"/> Card Number

⚠ After enabling the personal sensitive information security protection option, the sensitive personal data involved in this module will be desensitized or obscured, including but not limited to names, card numbers, ID numbers, photos, etc.

Figure 2- 59 Sensitive Information Protection

2.1.8.6 Facial Template Extraction Server

This feature is applicable to the KF1000 Pro Series. A single KF1000 Pro Reader can be used as an enrollment device. After the enrollment is completed, the facial template can be uploaded to ZKBio CVSecurity and then synchronized for use with the Inbio Pro Plus.

Facial Template Extraction Server

Enable Facial Template Extraction:

☒ Yes ☐ No

Facial template extraction server address:


Username:

Password:



Test Connection **Offline**

 When enabling facial template extraction, a device that supports facial template extraction needs to be connected!

 When facial template extraction is enabled, when the facial template extraction server is online and the user verification is passed, personnel will default to extracting facial templates when comparing photos; When the facial template extraction server is in offline mode, do not extract facial templates!

Facial template extraction server address: Enter the server address, the default port number is 8809.

Username: Enter the Webserver user name for the KF1000 Pro series reader.

Password: Enter the Webserver password for the KF1000 Pro series reader.

2.1.8.7 Registration Client

● Fields are as follows:

Registration Client

Device Driver

Certificate Recognition Driver Installation Status: Detected Certificate Recognition Driver is not installed

Card Printer Driver Installation Status: Detected Card Printer Driver is not installed

Certificate Recognition

☒ OCR ☐ IDReader

Registration Code*

Register

☐ Download OCR V1.0 Driver ☒ Download OCR V2.0 Driver

Certificate No. Automatic Backfill Type

☒ Document No. ☐ Personal No.

Card Printing

Registration Code*

Register

Download Driver

Figure 2- 60 Registration Client

Note:

Registration Code: Please make sure you have activated the corresponding license.and then go to **System > Authority Management > Client Register** to got the registration code.

ZKBio CVSecurity

System / Authority Management / Client Register

Registration Code

Client Type

Activation

Refresh

New

Reset

Delete

Registratio...	Client name	Registration Key	Activ...	Activated D...	Creation Date	Client Type	Oper
<input type="checkbox"/>	BBABAF						
<input type="checkbox"/>	369D77						
<input type="checkbox"/>	61FF4A	18-bc-11					
<input type="checkbox"/>	8A0A9D	1c-1b-0					
<input type="checkbox"/>	12A25F	1c-1b-0					
<input type="checkbox"/>	CC771E	18-31-b					
<input type="checkbox"/>	7201D0	18-31-b					
<input type="checkbox"/>	E1FC74	Fanya	A43A85				

New

Client Type*

Registration Code*

APP Client-Administrator

APP Client-Staff

OCR-Personnel

OCR-Visitor

ID Reader-Personnel

ID Reader-Visitor

OK

Cancel

Figure 2- 61 Registration Code

2.2 Card Management

There are three modules in Card Management: Card, Wiegand Format, and Issue Card Record.




Card Number	Personnel ID	First Name	Last Name	Department Number	Department Name	Issue Card Date	Card State
1139274691	9527			1	Department Name	2022-07-26 02:38:20	Effective
123123232	1	teng	DP1	1	Department Name	2022-07-26 02:38:20	Effective
145632	1111	Esha Test		2	Development	2022-05-10 08:27:37	Effective
123456	1114	Md. Jalal		2	Development	2022-05-10 08:10:52	Effective

Figure 2- 62 Card Management

2.2.1 Card

2.2.1.1 Batch Issue Card

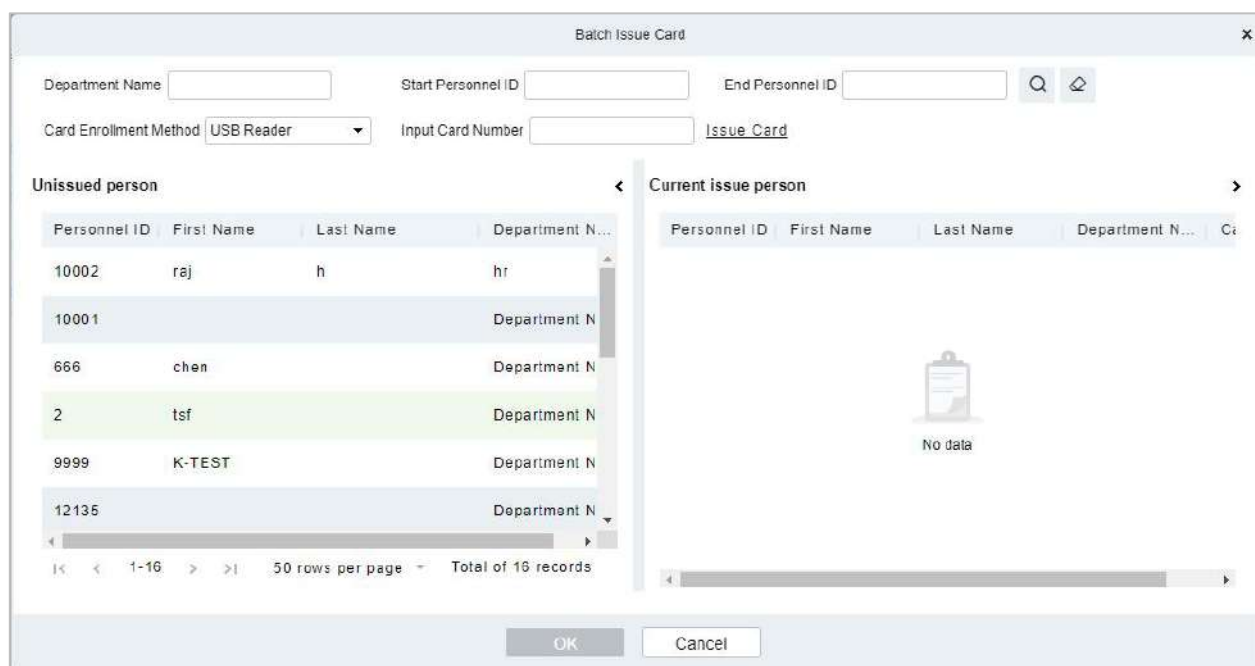1. Click **Personnel** > **Card Management** > **Card**, then click Batch Issue Card.



Batch Issue Card

Department Name: Start Personnel ID: End Personnel ID:

Card Enrollment Method: Input Card Number:

Unissued person				Current issue person			
Personnel ID	First Name	Last Name	Department N...	Personnel ID	First Name	Last Name	Department N...
10002	raj	h	hr				
10001			Department N				
666	chen		Department N				
2	tsf		Department N				
9999	K-TEST		Department N				
12135			Department N				

1-16 50 rows per page Total of 16 records

Figure 2- 63 Batch Issue card

2. Fill the fields for Department Name, Start Personnel ID, End Personnel ID, Card Enrollment Method, and Input Card Number.

3. Enter Start and End Personnel No. and click Generate List to generate personnel list and show all personnel without cards within this number series.

Note: The Start and End Personnel No. only support numbers.

4. Select Card Enrollment Method: Register with a USB Reader or device.

If you want to enroll a card with a USB Reader, you may place the card over the "issue machine" directly. The System will get the card number and issue it to the user in the list on the left.

For the use of device, you need to select the position of punching, click to read, the system will read the card number automatically, and issue it to the user in the list on the left one by one. After that, click to read.

Note: During the Batch Issue Card, system will check whether the card issuer issues card or not, if card has been issued before, the system will prompt "The Card Number has already been issued".

5. Click **OK** to complete card issue and exit.

2.2.1.2 Reported Lost Card

Click **Personnel > Card Management > Card**, then select Reported Lost Card.



Figure 2- 64 Reported Lost Card

✎ **Note:** Report Lost Card is applicable to all functional modules, not to the offline elevator module. After the report of loss, the status of the card becomes invalid but not written into the management card. Need to write management card in the appropriate module, such as offline elevator control module **Write management card (Elevator Device > Card > Write management card)**.

2.2.1.3 Reactive Lost Card

Click **Personnel > Card Management > Card**, then select Reactive Lost Card.

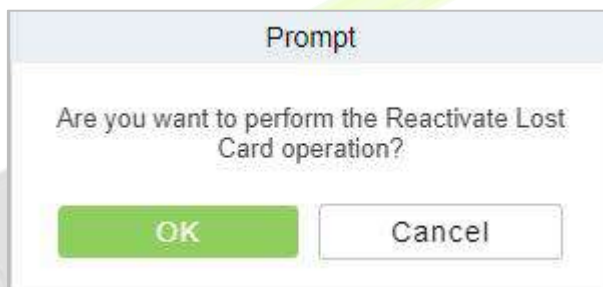


Figure 2- 65 Reactive Lost Card

✎ **Note:** Reactivate Lost Card is applicable to all functional modules, not to the offline elevator module. After reactivating lost card, the status of the card becomes valid but not written into the management card. Need to write management card in the appropriate module, such as offline elevator control module **Write management card (Elevator Device > Card > Write management card)**.

2.2.1.4 Export

Step 1: Click **Personnel > Personnel Management > Card Management > Card**, then select Export.

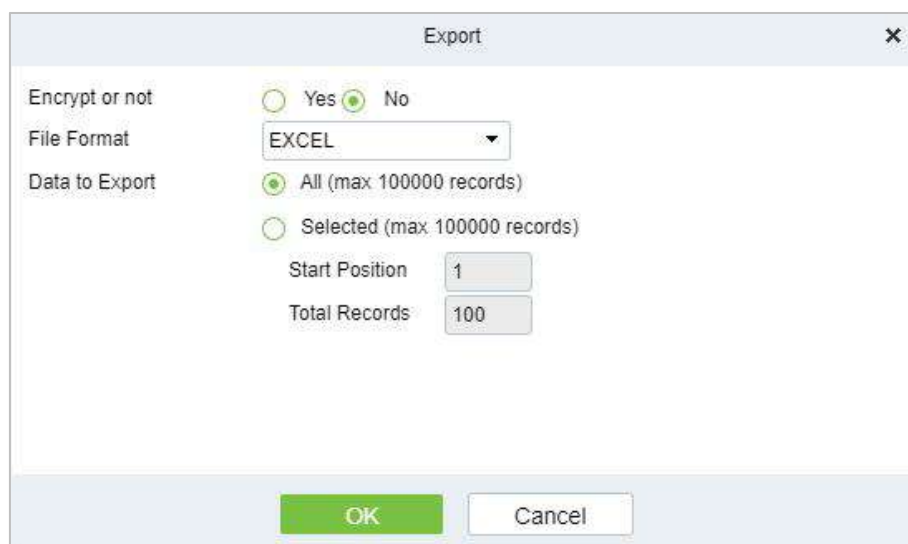


Figure 2- 66 Export

Step 2: Click **OK** to save and exit.

2.2.2 Wiegand Format

Wiegand Format is the card format that can be identified by the Wiegand reader. The software is embedded with 9 Wiegand formats. You may set the Wiegand card format as you needed.

Click **Personnel > Personnel Management > Card Management**, then select Wiegand Format.

2.2.2.1 Add Wiegand Format (New)

Click **Personnel > Personnel Management > Card Management > Wiegand format**, then select New (Add Wiegand format).

The 'New' dialog box for adding a Wiegand format contains the following fields and sections:

- Name***: Text input field.
- Total Bit***: Text input field.
- Site Code**: Text input field with value '0'.
- Auto**: Check box.
- Mode One**: Radio button (selected).
- First Parity Check(p)**: Text input field.
- Second Parity Check(p)**: Text input field.
- Mode One Table**:

Odd Parity Check(o)		Even Parity Check(e)		CID(c)		Site Code(s)		Manufacturer Code(m)	
Start Bit	The Maximum Length	Start Bit	The Maximum Length	Start Bit	The Maximum Length	Start Bit	The Maximum Length	Start Bit	The Maximum Length
- Mode Two**: Radio button.
- Card Check Format***: Text input field.
- Parity Check Format***: Text input field.
- Buttons**: Save and New, OK, Cancel.

Figure 2- 67 Add Wiegand format (New)

Fields are as follows:

Parameter	Instructions
Name	Enter the Name.
Total Bit	Enter the total bit.
Site Code	Enter the Site code.
Auto	Click if Auto is required.
Mode One	In Mode One Odd Parity Check, Even Parity Check, CID, Site Code, and Manufacturer Code should be set as Start Bit and The Maximum Length.
Mode Two	In Mode Two Card Check format and Parity check Format must be entered.

Table 2- 16 Wiegand Format

This software supports two modes for adding the Wiegand Format: If mode 1 does not meet your setting requirements, you may switch it to mode 2. Take Wiegand Format 37 as an example:

● Format Specifying:

"P" indicates Parity Position; "s" indicates Site Code; "c" indicates Cardholder ID; "m" indicates Manufactory Code; "e" indicates Even Parity; "O" indicates Odd Parity; "b" indicates both odd check and even check; "x" indicates parity bits no check.

The previous Wiegand Format 37: the first parity bits (p) check "eeeeeeeeeeeeeeee"; the second parity bits check "oooooooooooooooooooo". Card Check Format can only be set "p, x, m, c, s"; Parity Check Format can only be set "x, b, o, e".

🔗 Note:

You can go to **Access > Device > Door**, select the device and configure the **Wiegand Input Format**.

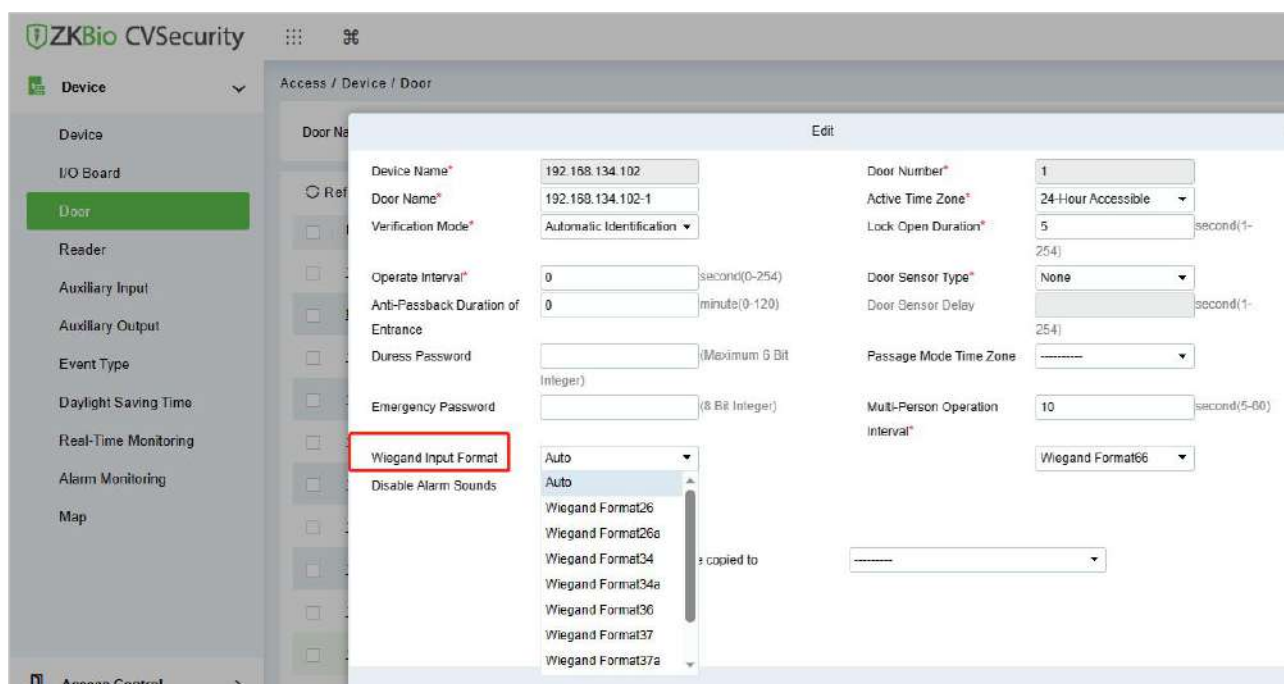


Figure 2- 68 Wiegand Format

2.2.2.2 Delete

Click **Personnel > Personnel Management > Card Management > Wiegand Format**, then select Delete.

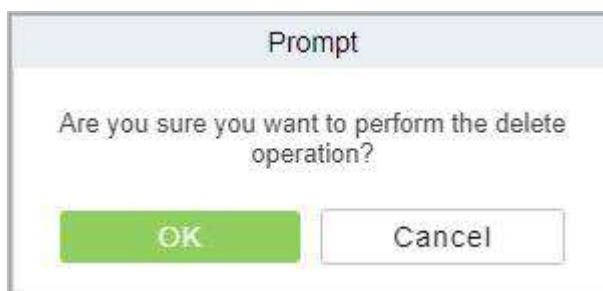


Figure 2- 69 Delete Wiegand Format

2.2.2.3 Card Formats Testing

Click **Personnel > Personnel Management > Card Management > Wiegand Format**, then select Card format Testing.

Figure 2- 70 Card Formats Testing

When the card number does not match with the one which is displayed on the system, the user can use the **Card Formats Testing function** to calibrate the Wiegand format. The page is explained as follows:

Select the device that supports the card format test function, and fill the card number and the site code (optional):

●Steps:

Click **Read Card** and swipe the card on the reader. The original card number will be displayed on the **Original Card Number** text box.

Click **Recommended Card Format** and the recommended Wiegand card format will be displayed below.

Click **Auto calculate site code while the site code is left bank** and the software will calculate the site code according to the card format and card number.

Click **OK** and the page will jump to the Wiegand format page to save the new Wiegand format.

Note: The card format testing function is only supported by few devices.

2.2.3 Issue Card Record

Click **Personnel > Personnel Management > Card Management**, then select Issue Card Record.

2.2.3.1 Export

Step 1: Click **Personnel > Personnel Management > Card Management > Issue Card Record**, then select Export.

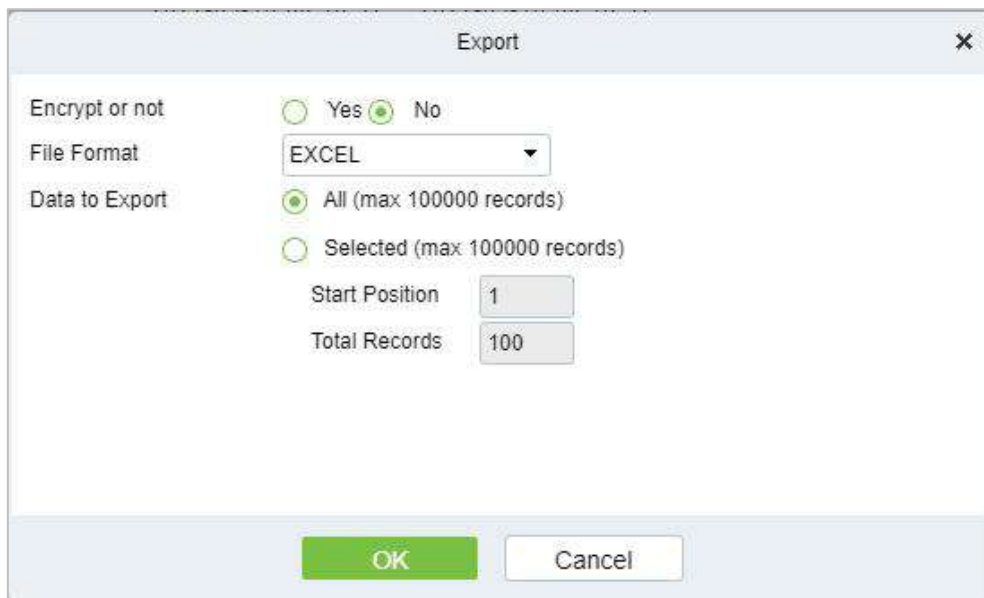


Figure 2- 71 Issue Card Record

Step 2: Click **OK** to save and exit.

3 Access Control

3.1 Operation Scenario

The **Access Control** module is used as the entry and exit management of pedestrians. Through the configuration of access control equipment and permission groups, unified management of entry and exit of people is realized. The most fundamental problem to solve is to control who uses what media to enter and exit which door at what time.

3.2 Operation Process

This section describes the configuration process of the **Access Control** module service.

The **Access Control** module service configuration process is shown in Figure 3-1.

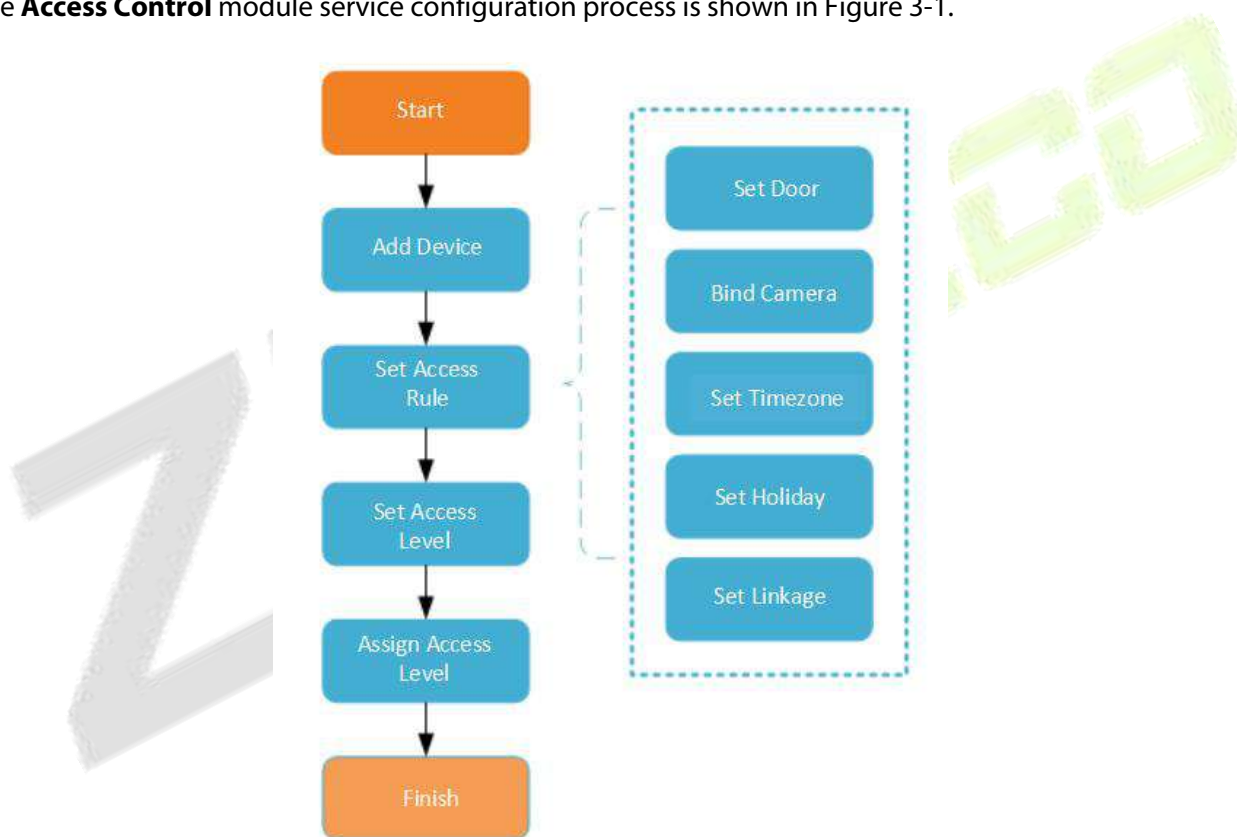


Figure 3- 1 Access Control Configuration Process

3.3 Access Device

3.3.1 Device

Introduce the configuration Steps of searching and adding access control devices in ZKBio CVSecurity.

Through the search method, the access control devices that have been set to point to the server can be found, and the access control devices that have been searched can be added directly, which is convenient to operate.

●Preconditions:

1. Before adding the **Access Control** device, perform IP allocation settings.
2. The device needs to set the server address in advance before searching and adding. The configuration Steps for the server are as follows:
 - a. In the access control device that has been connected to the power supply and the network, set it directly on the device screen.
 - b. Select and click "Main Menu > Communication Equipment > Network Management Platform or Cloud Server Settings"
 - c. Set the IP address and port of the current server, that is, the IP address and port of the current ZKBio CVSecurity server and complete the configuration to the server.

3.3.1.1 Add Devices (New)

●Steps:

Step 1: In the Access Control module, select "Device > Access Control Device".

Step 2: On the device interface, click the "search" button to pop up a search box.

Step 3: Click "start **Search**" in the search box to display the **access control devices** that can be added, as shown in Figure 3-2.

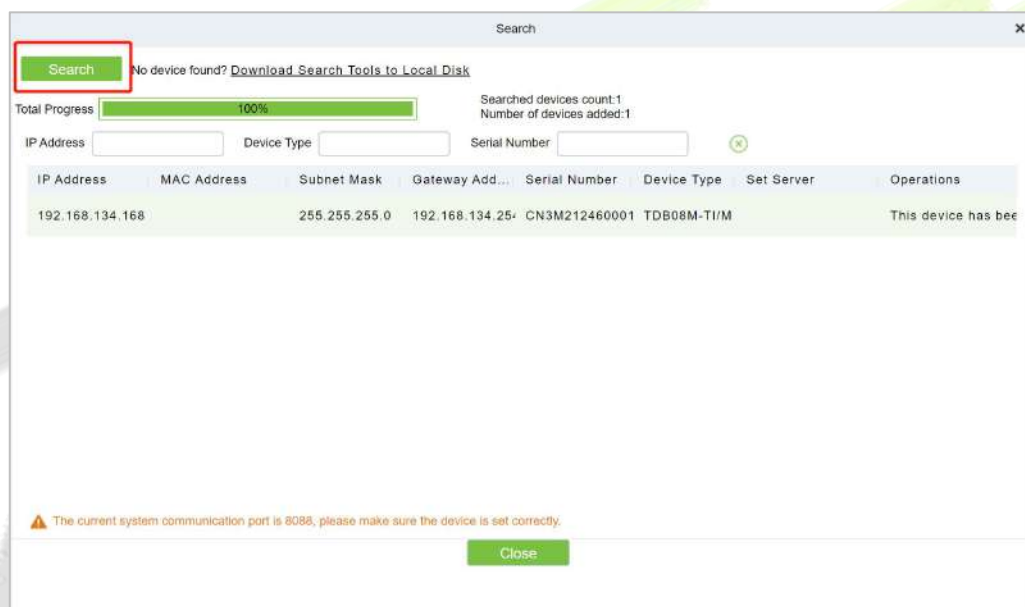


Figure 3- 2 Device Search and Add Interface

Step 4: Optional: Modify the IP address of the **Access Control** device, click "**Modify IP Address**", the device will be restarted after modifying the IP address, and the IP address modification will be completed after the restart.

Step 5: For the searched access control devices, click the **Add** button in the operation bar to add the device; the device addition settings are shown in Figure 3-3, and the parameter settings are described in Table 3-3.

New

Device Name*

Communication Type*

IP Address*

Communication port*

Communication Password

Icon Type*

Control Panel Type

Area*

Add to Level

Clear Data in the Device when Adding

TCP/IP

RS485

4370

Door

One-Door Access C...

Area Name

☐

[Clear Data in the Device when Adding] will delete data in the device (except event record), please use with caution!

OK

Cancel

Figure 3- 3 Device Add Interface

Parameter	How to set
Device Name	Customize the name of the device.
New Server Address/Port	Set the IP address and communication port of the system to be used (the default communication port is 8088).
Communication Password	<p>Fill in the communication password of the device. If there is no password, you do not need to fill in it. You can add it only after the verification is successful.</p> <p>For new factory equipment and initialized equipment, the communication password is empty.</p> <p>In order to ensure that the device is not used by others, users can enter the device IP address through the web page to enter the background to customize the device verification password.</p>
Icon Type	Select the icon display type of the real-time monitoring interface: Door,Parking Barrier,Flap Barrier.
Area	Divide the device into regions and select the region to which the device belongs.
Add To Permission Group	The device is automatically added to the selected permission group.
Delete Data From Device When Adding	Set whether the original Access Control data in the device will be automatically cleared after the device is added.

Table 3- 1 Parameter setting

Step 6: Click **OK** to complete the operation of adding access control devices. After the operation is completed, the device will restart, and the device will be added after the restart is complete.

Step 7: Click **Close** to close the device search and add interface.

3.3.1.2 Delete

Select device, click **Delete**, and click **OK** to delete the device.

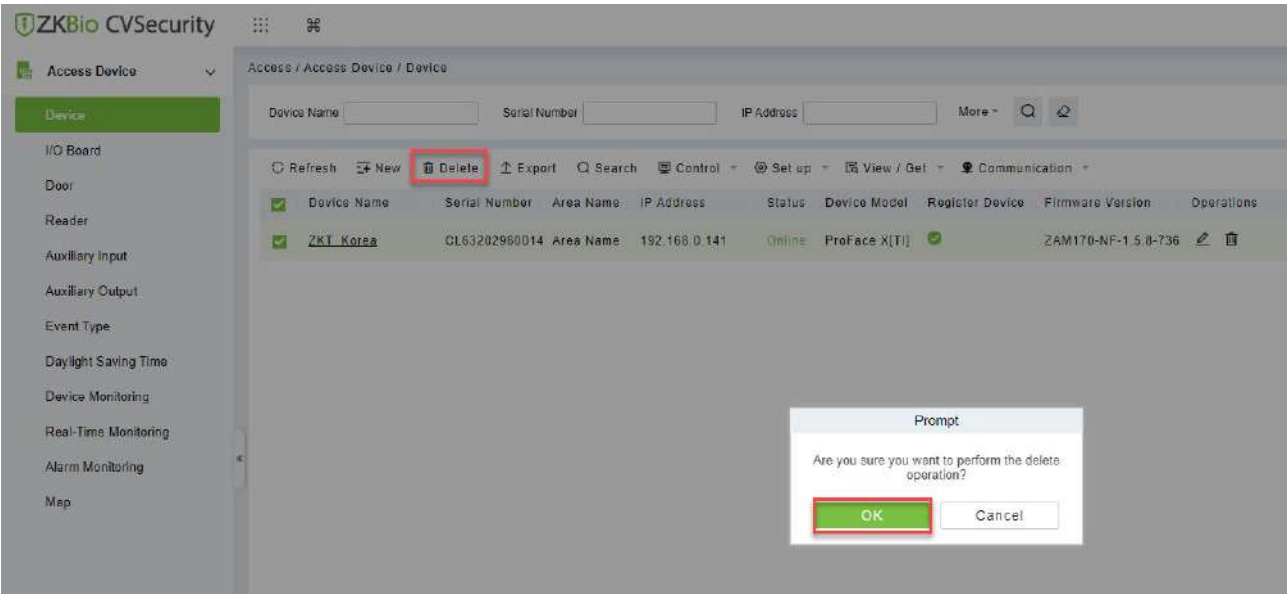


Figure 3- 4 Device Add Interface

3.3.1.3 Export

Device information can be exported in EXCEL, PDF, CSV file format.

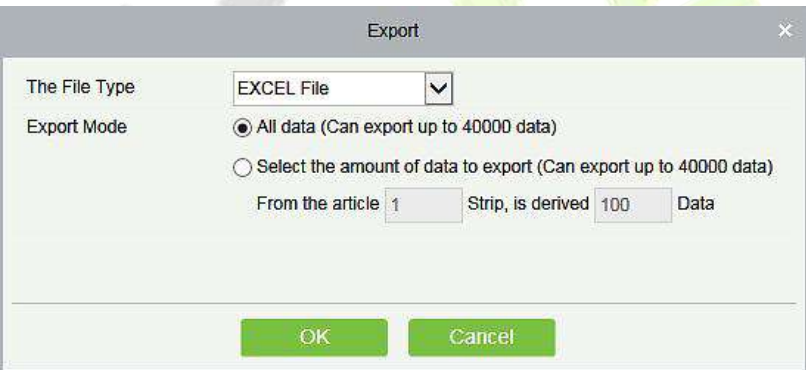


Figure 3- 5 Export

ZKTECO										
Device										
Device Name	Serial Number	Area Name	Communication Type	Network Connection Mode	IP Address	RS485 Parameter	Enable	Device Model	Register device	Firmware Version
192.168.218.60	20100501996	Area Name	HTTP	Wired	192.168.218.60		Enable	C3-490Pro		AC Ver 4.7.7.3033 Jun 16 2017

Figure 3- 6 Export

3.3.1.4 Control

●Clear Administration Permission

Administration has permission to clear the administration permission from device.

Upgrade Firmware

Tick the device that needs to be upgraded, click **Upgrade firmware** to enter edit interface, then click **Browse** to select firmware upgrade file (named emfw.cfg) provided by Access software, and click **OK** to start upgrading.

⚠ **Note:** The user shall not upgrade firmware without authorization. Contact the distributor before

upgrading firmware or upgrade it following the instructions of the distributor. Unauthorized upgrade may affect normal operations.

Reboot Device

It will reboot the selected device.

Synchronize Time

It will synchronize device time with server's current time.

Disable/Enable

Select device, click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

Synchronize All Data to Devices

Synchronize data of the system to the device. Select device, click **Synchronize All Data to Devices** and click **OK** to complete synchronization.

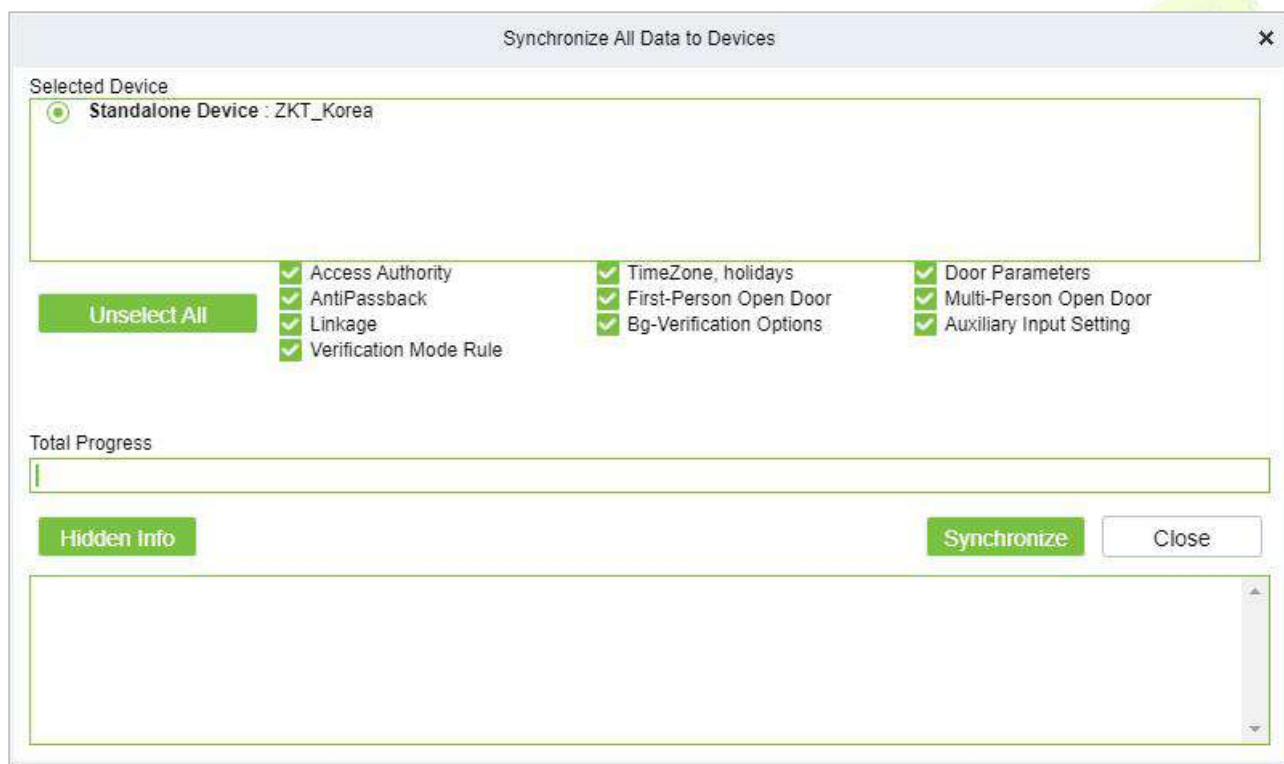


Figure 3- 7 Synchronize All Data to Devices

Note: **Synchronize All Data to Devices** will delete all data in the device first (except transactions), and thus download all settings again. Please keep the internet connection stable and avoid power down situations. If the device is working normally, please use this function with caution. Execute it in rare user situations to avoid impact on normal use of the device.

3.3.1.5 Set Up

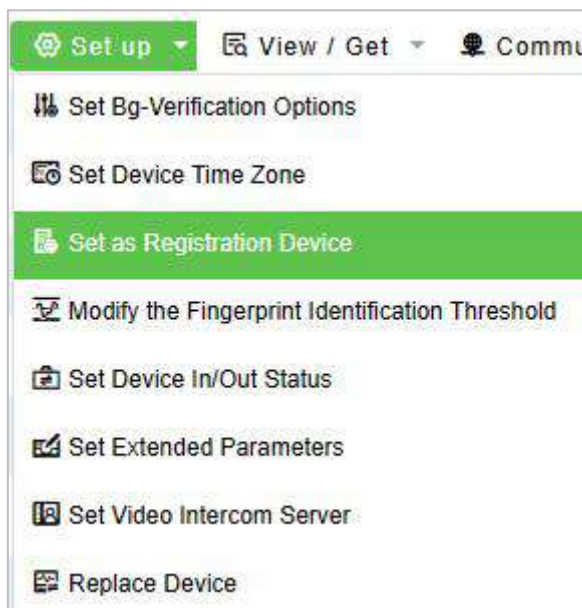


Figure 3- 8 Setup

Set Background Verification Parameters:

Select the required online device; click **More** > **Set Bg-verification parameters**.

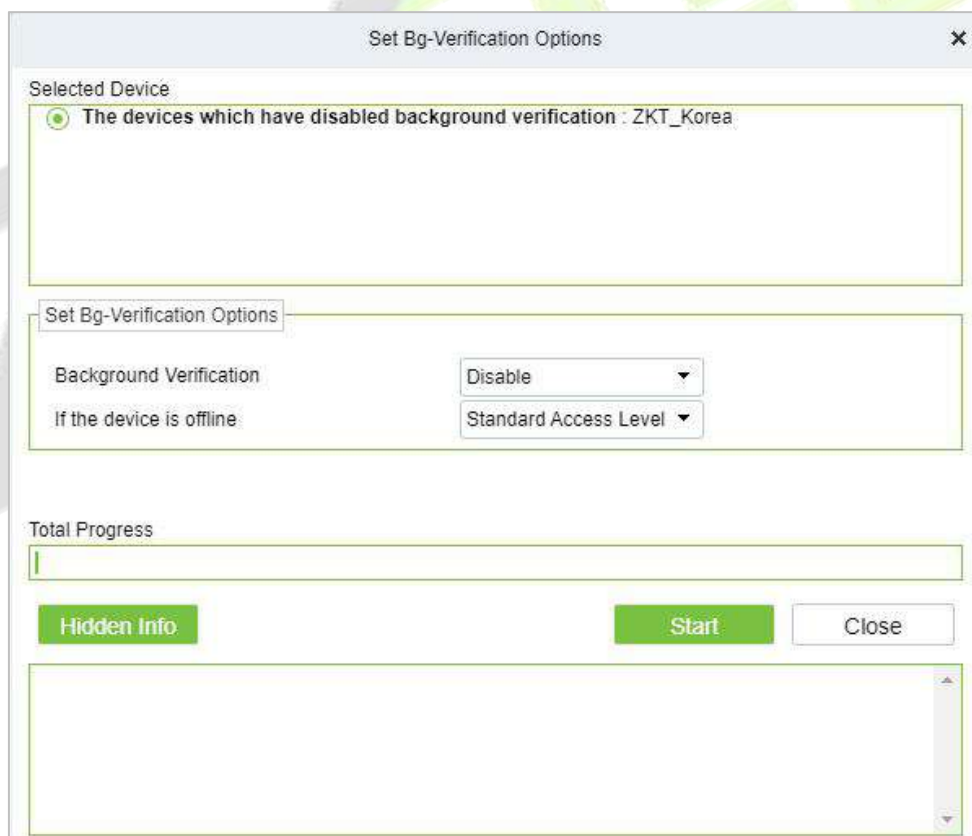


Figure 3- 9 Set Bg-Verification Parameters

Background verification: Enable or Disable Background verification function.

If the device is offline: If the controller is offline, the device has levels of Standard Access Level or Access Denied.

After setting parameters, click **Start** button to issue command to the device setting.

Note: If you need advanced access control functions, please enable Background verification, and issue the background verification parameters to the device.

Set the Registration device

Set the registration device only when the standalone device's data such as personnel can automatically upload.

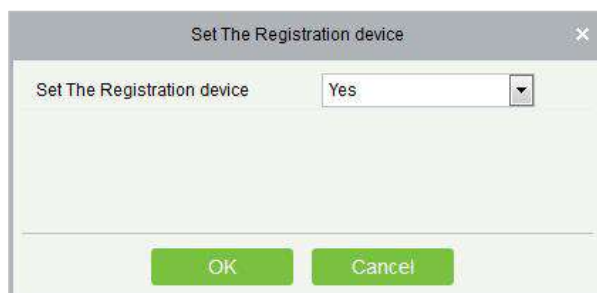


Figure 3- 10 Set the Registration device

Set Device Time Zone

If the device supports the time zone settings and is not in the same time zone with the server, you need to set the time zone of the device. After setting the time zone, the device will automatically synchronize the time according to the time zone and server time.

Modify the Fingerprint Identification Threshold (Ensure that the access controller supports fingerprint function)

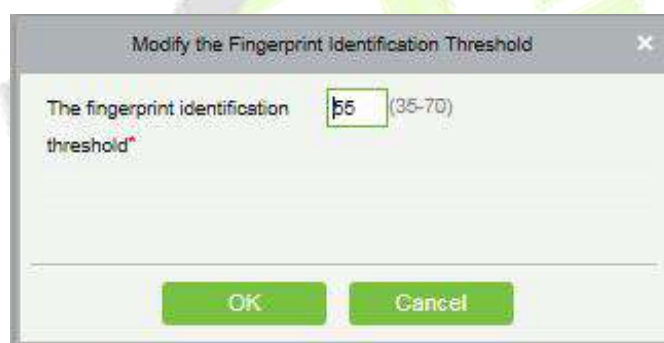


Figure 3- 11 Modify the Fingerprint Identification Threshold

Users can modify the fingerprint identification thresholds in the devices; it ranges from 35 to 70 and it is 55 by default. The system will read the thresholds from the device. Users can view the thresholds devices list. More than one device can be changed by using Batch operation function.

Set Device In/Out Status: We can set the status of device In/Out

Set Extended Parameters: We can set the extended parameters of device like temperature detection and mask detection

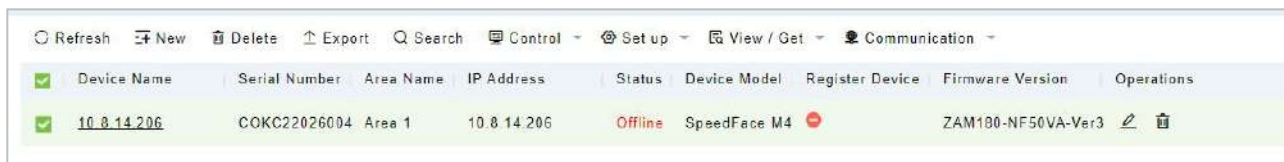
Set Video Intercom Server: We can set the video intercom server of device

3.3.1.6 Device Replacement

Introduce the configuration Steps for replacing access control devices in ZKBio CVSecurity.

When a device is unavailable, we can quickly add a new device and synchronize all configurations from faulty device to the new device by simply entering the serial number of the replaced device.

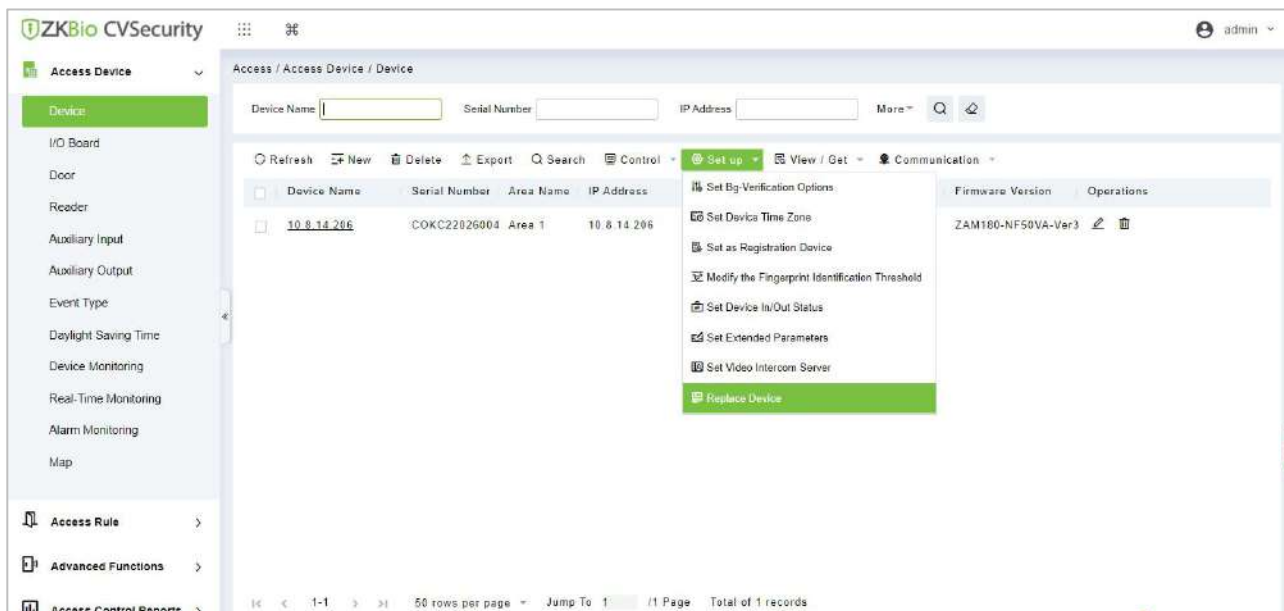
Step 1: Go to the **Access > Access Device**, select the unavailable device.



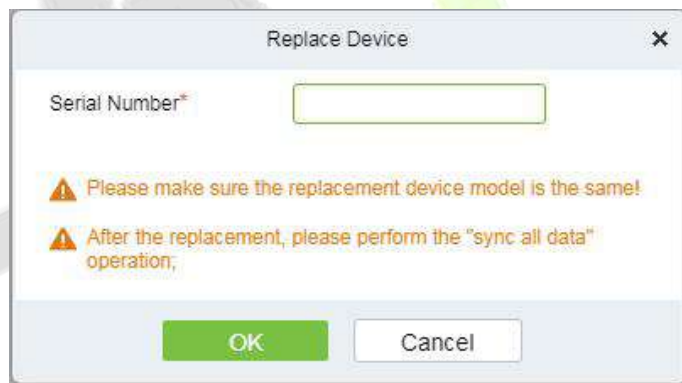
Device Name	Serial Number	Area Name	IP Address	Status	Device Model	Register Device	Firmware Version	Operations
10.8.14.206	COKC22026004	Area 1	10.8.14.206	Offline	SpeedFace M4		ZAM180-NF50VA-Ver3	

Figure 3- 12 Select the Unavailable Device

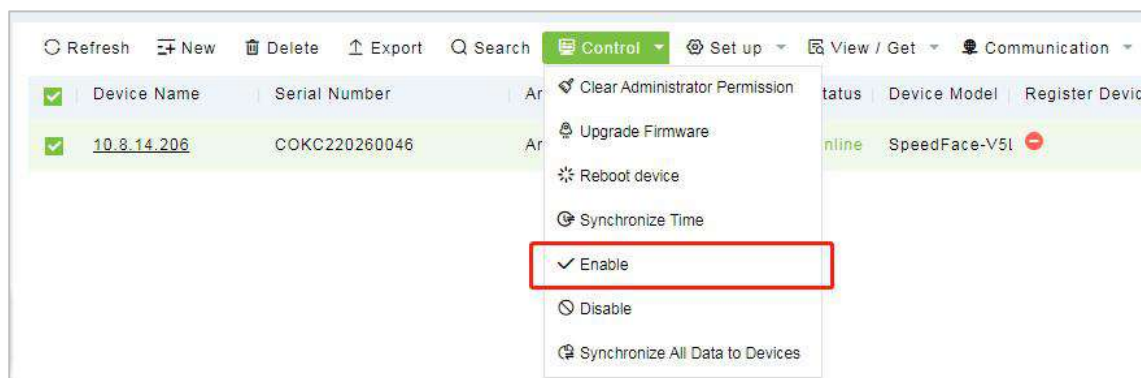
Step2: Click **Set up > Replace Device**.

**Figure 3- 13 Replace Device**

Step 3: Enter the serial number of the new device, then click **OK**.

**Figure 3- 14 Input the Serial Number**

Step 4: Select the new device, then click **Control > Enable**.

**Figure 3- 15 Enable Device**

Step 5: Select the new device, then click **Control > Synchronize All Data to Device**.

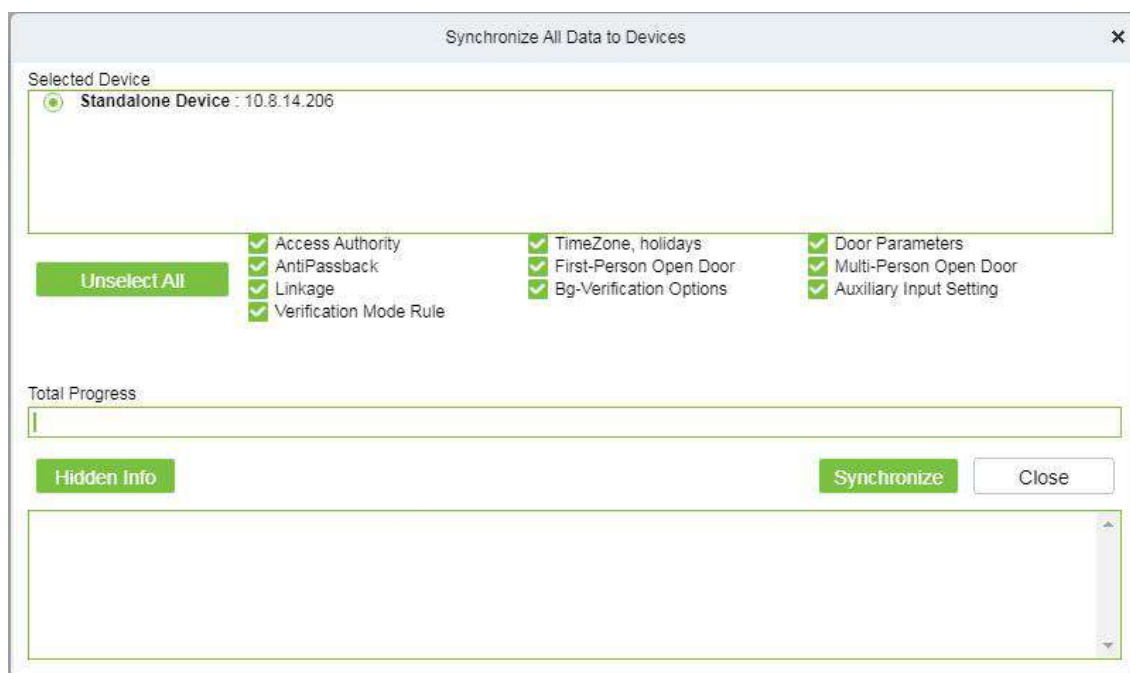


Figure 3- 16 Synchronize Device Data

Note:

1. Before replacement, the device needs to configure the server address and IP allocation.
2. Make sure that the replacement device model is the same.
3. After the replacement, please perform the "sync all data" operation.

3.3.1.7 View/ Get



Figure 3- 17 View/Get

Get Device Option

It gets the common parameters of the device. For example, get the firmware version after the device is updated.

Get Personnel Information

Renew the current number of personnel, fingerprints, finger vein and face templates in the device. The final value will be displayed in the device list.

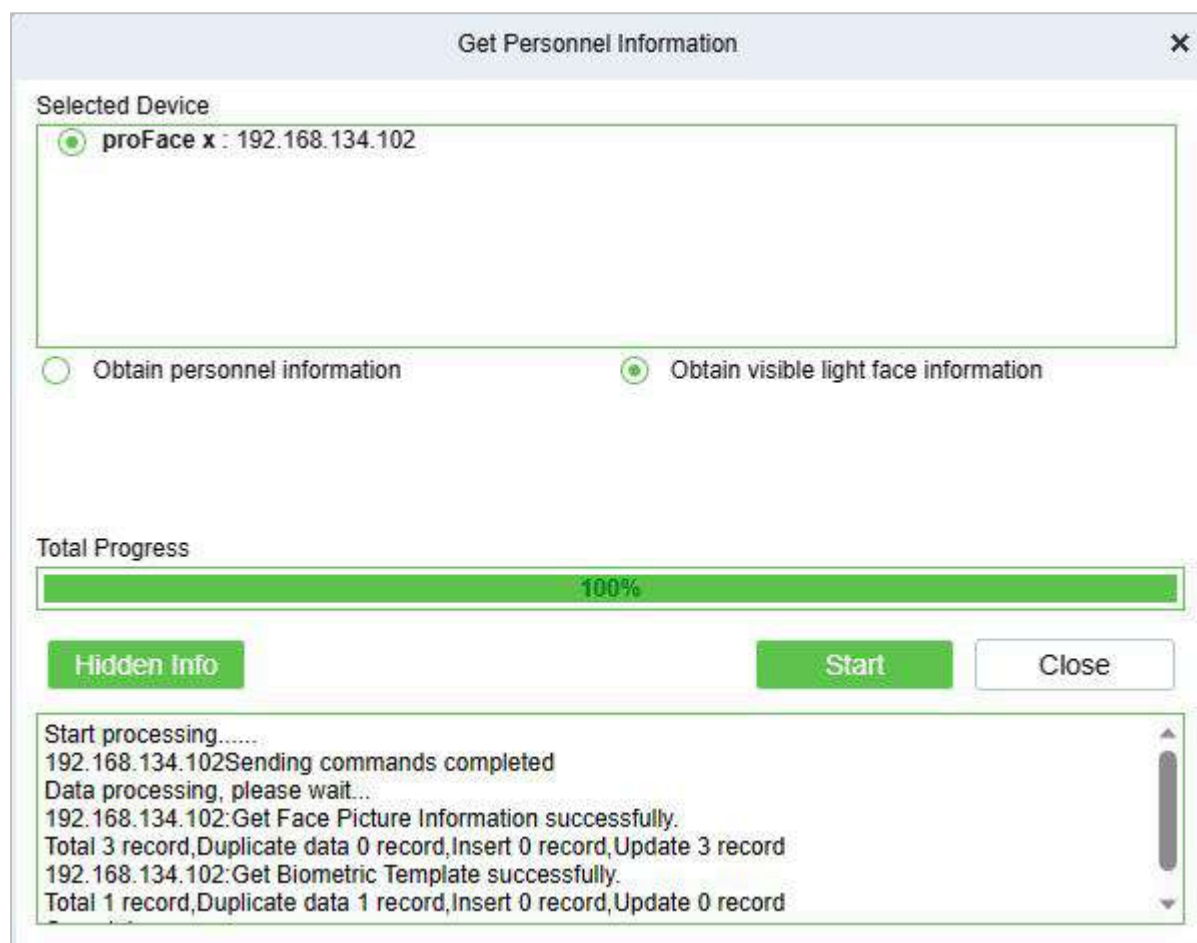


Figure 3- 18 Get Personnel Information

Get Transactions

Get transactions from the device into the system. Two options are provided for this operation: Get New Transactions and Get All Transactions.

Get New Transactions

The system only gets new transactions since the last collected and recorded transaction. Repeated transactions will not be rewritten.

Get All Transactions

The system will get transactions again. Repeated entries will not be shown twice.

When the network status is healthy and the communication between the system and device is normal, the system will acquire transactions of the device in real-time and save them into the system database. However, when the network is interrupted or communication is interrupted for any reasons, and the transactions of the device have not been uploaded into the system in real-time, Get Transactions can be used to manually acquire transactions of the device. In addition, the system, by default, will automatically acquire transactions of the device at 00:00 on each day.

Note: Access controller can store up to 100 thousand of transactions. When transactions exceed this number, the device will automatically delete the oldest stored transactions (deletes 10 thousand transactions by default).

View Rules of Devices

Shows the Access rules in the device.

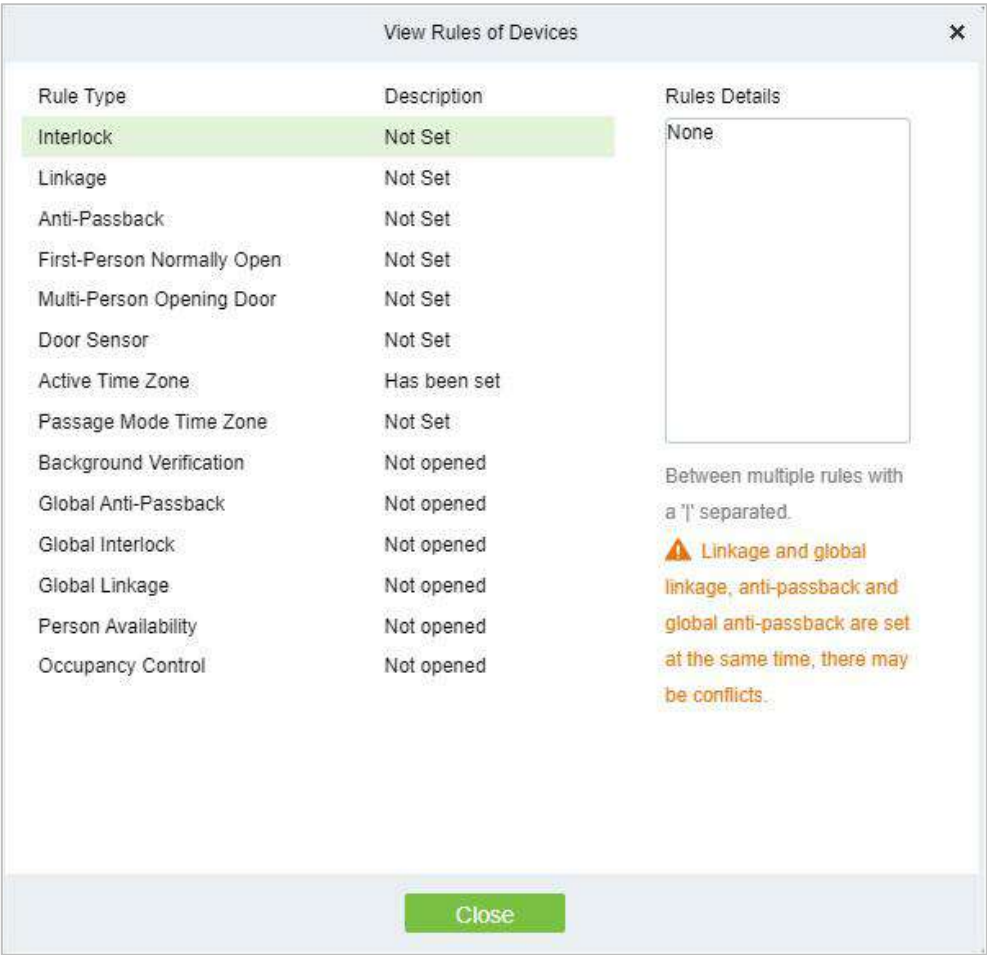


Figure 3- 19 View rules of device

View Device Capacity

It checks the capacity of personnel’s biometric details in the device.

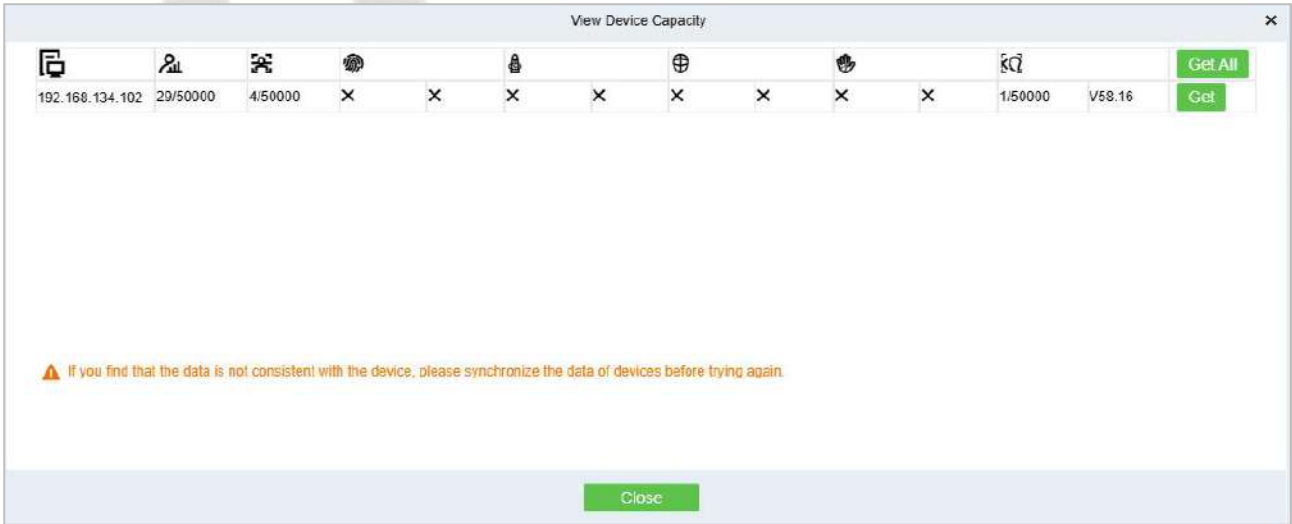


Figure 3- 20 View device capacity

3.3.1.8 Communication

Modify Ip Address

Select a device and click **Modify IP address** to open the modification interface. It will obtain a real-time network gateway and subnet mask from the device. (Failed to do so, you cannot modify the IP address). Then enter a new IP address, gateway, and subnet mask. Click **OK** to save and quit. This function is the

similar as Modify IP Address Function in Device.

Modify Communication Password

The system will ask for the old communication password before modifying it. After verification, input the new password twice, and click **OK** to modify the communication password.

Note: Communication password shouldn't contain spaces; it is recommended to use a combination of numbers and letters. Communication password setting can improve the device's security. It is recommended to set communication password for each device.

Modify Rs485 Address

Only the devices that use RS485 communication and with no DIP Switch can modify RS485 address.

Switch Network Connection



Figure 3- 21 Switch network connection

This function is applicable to InBio5 series access control panels, which is used to switch among different network connection modes of the control panel.

3.3.2 I/O Board

By connecting to the I/O expansion board(EX0808), the number of doors can be expanded, and more doors can be operated.

Preconditions for Normal Use of Function

Log in to the system with the current account and have the authority.

Function Usage Scenarios

The current area needs to be expanded with more doors.

Using Trigger Result

One device can control multiple doors.

Operation Steps:

Click **[Access Control Device] > [I/O Expansion Board] > [Add]** to display the new page.

Enter each parameter, click **[OK]** to save the expansion board.

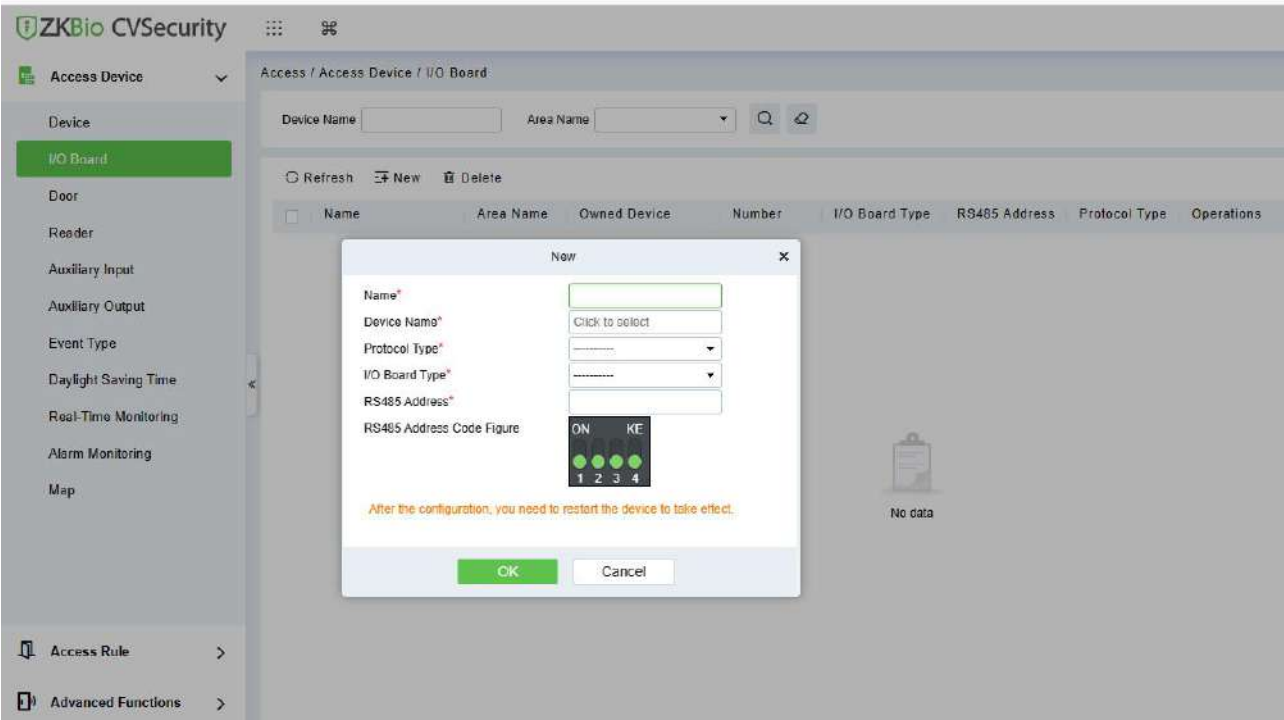


Figure 3- 22 I/O Board

Name: I/O Board Name

Device Name: Select the Device by clicking the Device Name field. The device list appears, as shown below.

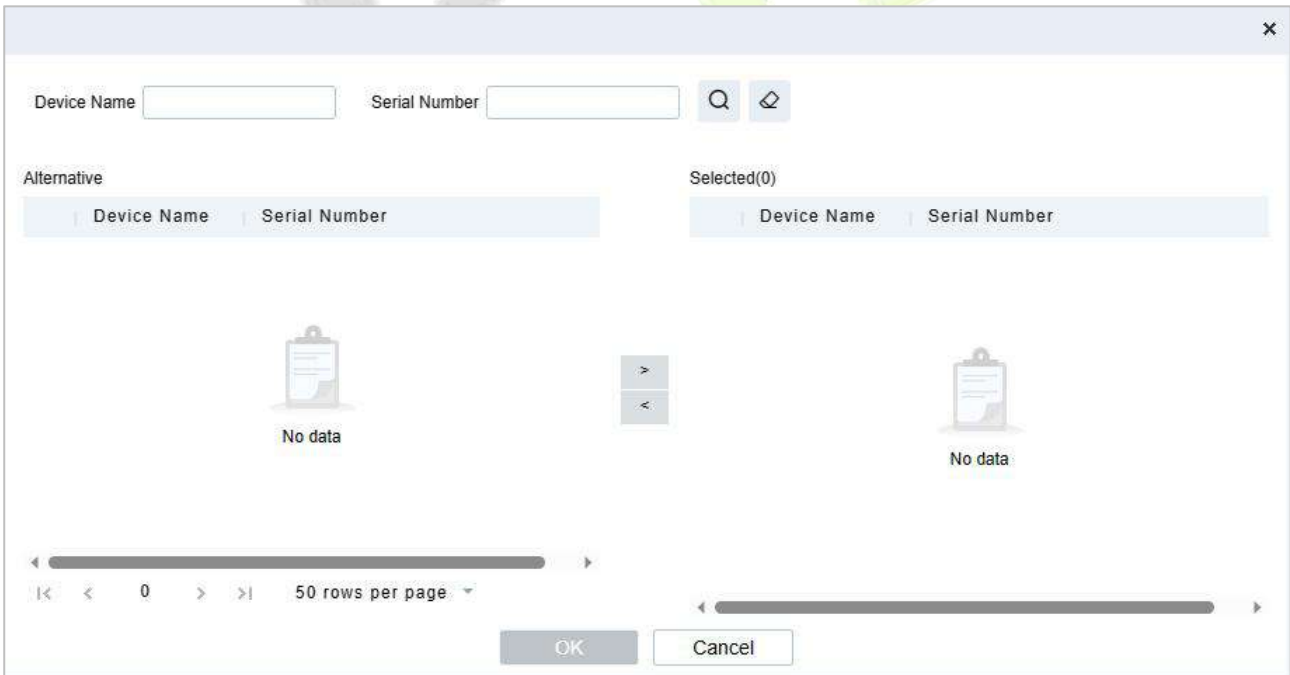


Figure 3- 23 Select Device

3.3.3 Door

The setting of door parameters affects the logic judgment of access control verification. The door parameters support different parameter settings according to the different firmware of the device. The following describes the configuration Steps of the door parameters with one of the devices.

● Operation Step:

Step 1: In the Access Control module, select “**Devices > Door**”.

Step 2: In the management interface of the door, click the **Edit** button in the door operation bar to pop up the door parameter setting box.

Step 3: In the door parameter setting interface, fill in the corresponding parameters according to the addition requirements, as shown in figure below, please refer to Table 3-2 for parameter filling instructions.

Figure 3- 24 Setting Door Parameters

● Instructions:

The firmware of different access control devices supports different door parameters. Set the parameters based on the actual door parameter page. Table 3-4 describes the parameter set for different devices.

Parameter	Setup Instructions
Device Name/Door Number	The basic information about the door is displayed. Reset is not supported.
Name of the Door	Customize the name of the door for easy memory.
Gate Validity Period	Select a period when the gate is valid. Not within the validity period of this door, even if the person has the permission of this door, can not open the door inside.
Verify The Way	Set this parameter to the authentication mode supported by the device.
Lock Drive Duration	Set the time range for unlocking a lock after authentication. For example, if the value is set to 5 seconds, the door can be opened within 5 seconds after the verification. If the door is not opened after 5 seconds, the door will be automatically locked, and the door can be opened only after the verification.
Wiegand Format	Select a Wiegand card format that can be recognized by the door's Wiegand reader. The card format and Settings are different, will not open the door. There are 9 built-in formats in the software, the default is automatic matching wiegand card format, automatic matching can identify a variety of built-in wiegand card format.

Parameter	Setup Instructions
Exit Button State	Set the status of the door exit button, locked, not locked. Lock: the door lock does not open after pressing the exit button. Not locked: the door lock is opened after pressing the exit button.
The Exit Button Is Delayed	When the exit button is set to lock, set the delay time of the exit button, that is, the delay time of the inspection door alarm after the exit button is locked.
Operation Interval	Set the interval for Access Control Operation.
Effective Time of Exit Button	Select the time period for setting the exit button.
Magnetic Door Type	Option No, normally open, normally closed, default none.
Behind Closed Doors to Lock	Set whether to lock back after the door is closed.
Magnetic Door Delay	Set the delay for checking the door status sensor after the door is opened. When the door is not "normally open", if it is open, it will start timing, alarm will start after the door magnetic delay time, and alarm will be canceled when the door is closed.
Duration Of Anti-Passback Entry	Set a limit on how long an intelligent entry can take.
Stress The Password	Set up the user to open the door when the threat password. An alarm will be generated when the coerced code opens the door.
Emergency Code	Set a password for the user to use in an emergency. The password is used by the administrator and is valid in any period and authentication mode.
The Door Is Normally Open	Select the time when this door is normally open.
Extended Time of Passage	Set on the basis of the original opening time, additional limit time. Common terms for participants, inconvenient personnel to extend the passage time.
Open Time Delay	Set the time for waiting for the delayed door opening after authentication.
Disable Alarm Reminder	If alarm event occurs on this door, whether there will be alarm sound reminder on the real-time monitoring interface.
Allow Superuser Access When the Door Is Locked	Set whether the super user can verify access when the door is locked.
The Above Settings Are Copied To	To set the door parameters above, the options are all doors of the current device, all doors of all devices.

Table 3- 2 Door Parameters

Step 4: Click **OK** to complete the setting of the door parameters

Remote Opening/Closing: It can control one door or all doors.

To control a single door, right click over it, and click **Remote Opening/ Closing** in the pop-up dialog box. To control all doors, directly click **Remote Opening/ Closing** behind Current All.

In remote opening, user can define the door opening duration (The default is 15s). You can select **Enable Intraday Passage Mode Time Zone** to enable the intraday door passage mode time zones, or set the door to Normal Open, then the door will not be limited to any time zones (open for 24 hours).

To close a door, select **Disable Intraday Passage Mode Time Zone** first, to avoid enabling other normal open time zones to open the door, and then select **Remote Closing**.

Note: If **Remote Opening /Closing** fails, check whether the devices are disconnected or not. If disconnected, check the network.

Cancel the alarm: Once an alarming door is displayed on the interface, the alarm sound will be played. Alarm cancellation can be done for single door and all doors. To control a single door, move the cursor over the door icon, a menu will pop-up, then click **Remote Opening/Closing** in the menu. To control all doors, directly click **Remote Opening/Closing** behind Current All.

Note: If **Cancel the alarm** fails, check if any devices are disconnected. If found disconnected, check the network.

Remote Normally Open: It will set the device as normal open by remote.

Activate Lockdown: It will remotely set the door status to locked status. After this, the door wouldn't receive any operations, such as card reading and remote operations. This function is supported only by certain devices.

Deactivate Lockdown: It will unlock a locked door. This function is supported only by certain devices.

3.3.4 Reader

This section describes the Step configuration of the Reader binding camera in ZKBio CVSecurity.

● Operation Scenario:


After the camera is bound, if related Settings are set during linkage, the Reader will perform video linkage (capture) once corresponding events occur. The Reader bind cameras in the same way. This section uses the Reader as an example to describe how to bind cameras.

● The Premise Conditions:

A video camera has been added in the **Smart Video Surveillance** module.

● Operation Step:

Step 1: In the access Control module, choose "**Device > Reader**".

Step 2: In the Operation column of the corresponding Reader, click . The bind/unbind camera page is displayed.

Step 3: On the Select Reader screen, set the Reader as required, as shown in figure below

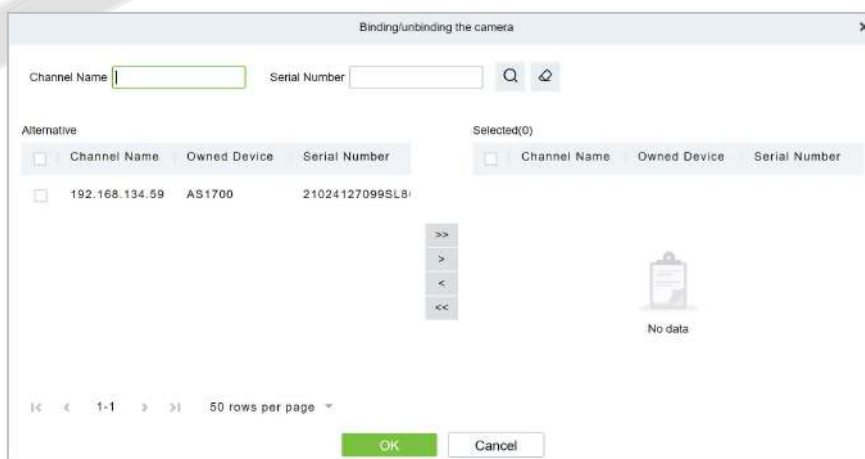


Figure 3- 25 Binding A Camera

Step 4: Click **OK** to bind the camera.

Parameter	How to set
-----------	------------

Device Name	Customize the name of the device.
Reader Name	Display the reader's name of the device
Communication Type	Wiegand/RS485, Wiegand, RS485, and Disabled are available. When a communication type is selected, the reader interface on the device will receive data (including card and fingerprint data) for the specified type only
In/Out	Display the in/out of the device.
Bound Camera	connecting the camera with the reader.
Owning Camera	The device is automatically added to the selected permission group.

Table 3- 3 Reader Parameters

3.3.5 Auxiliary Input

It is mainly used to connect to the devices, such as the infrared sensors or smog sensors.

● Operation Step:

Step 1: Click **Access Device > Auxiliary Input** on the Action Menu, to access below shown interface.

Step 2: Click on Name or **Edit** to modify the parameters as shown below:

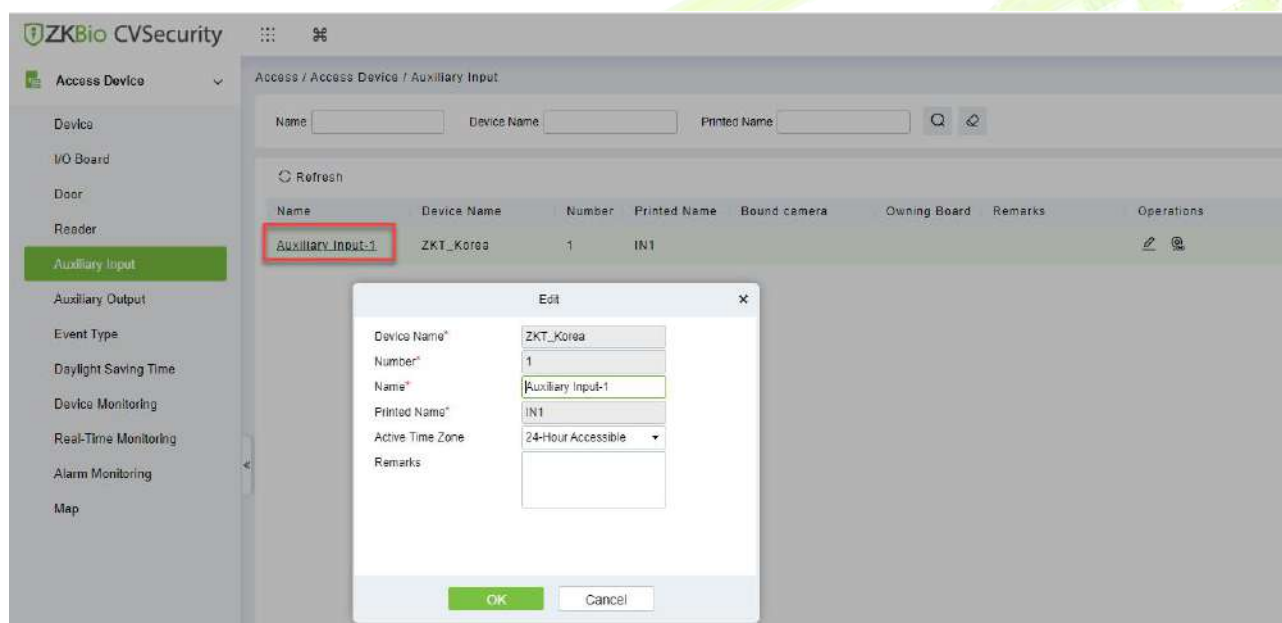


Figure 3- 26 Auxiliary input

Step 3: Click **OK** to save the name and remark and exit.

● Bind/Unbind Camera:



Through this option, the reader can be connected to the cameras, and the system will make a video linkage (pop-up videos, videos or screenshots) once there is a corresponding event occurs. For this, the interaction setting in Linkage or in Global Linkage should be done before. For details, please refer to Reader: Bind/Unbind Camera.

Note: An auxiliary input point can bind more than one channel.

Parameter	How to set
Device Name	Customize the name of the device.
Name	Display the name of the device

Number	Customize the name of the device
Printed Name	Display the input number of the device.
Bound Camera	connecting the camera with the reader.
Owning Camera	The device is automatically added to the selected permission group.

Table 3- 4 Auxiliary Input Parameters

3.3.6 Auxiliary Output

It is mainly related to alarm and is used when linkage is working.

● Operation Step:

Step 1: Click **Access Device > Auxiliary Output** on the Action Menu to access the following interface:

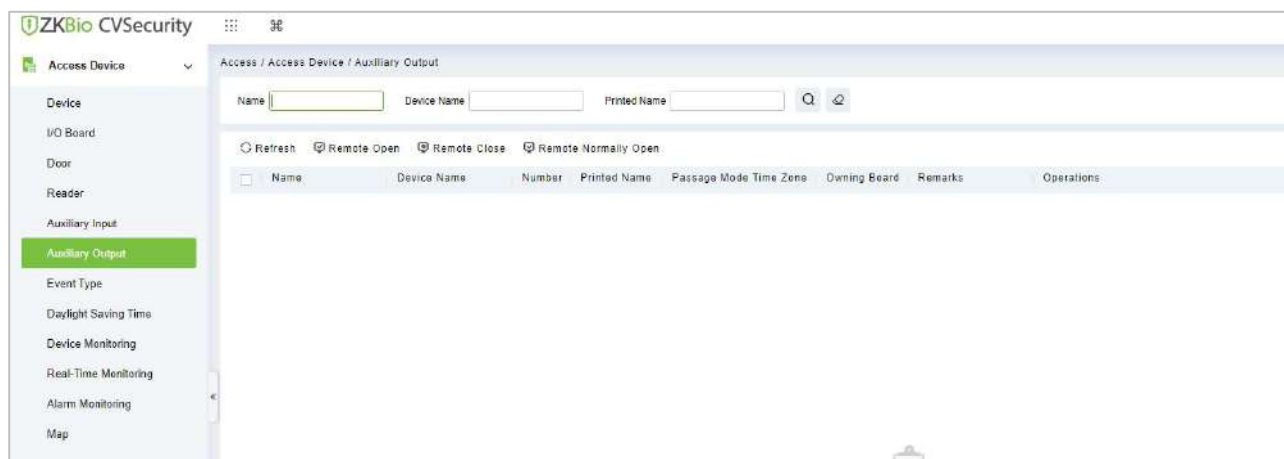


Figure 3- 27 Auxiliary Output

Step 2: Click **Edit** to modify the parameters.

Figure 3- 28 Auxiliary Output Edit

Step 3: Click **OK** to save the name and remark and exit.

3.3.6.1 Remote Opening/Closing

It can control one door or all doors.

To control a single door, right click over it, and click **Remote Opening/ Closing** in the pop-up dialog box. To control all doors, directly click **Remote Opening/ Closing** behind Current All.

3.3.6.2 Remote Normally Open

It will set the device as normal open by remote.

Parameter	How to set
Device Name	Customize the name of the device.
Name	Display the name of the device
Number	Customize the name of the device
Printed Name	Display the input number of the device.
Bound Camera	connecting the camera with the reader.
Owning Camera	The device is automatically added to the selected permission group.

Table 3- 5 Remote Normally Open Parameter

3.3.7 Event Type

It will display the event types of the access devices.

● Operation Step:

Step 1: Click **Access Device** > **Event** to access the following page:



Figure 3- 29 Event Type

Step 2: Click **Edit** or click the event type name to edit.

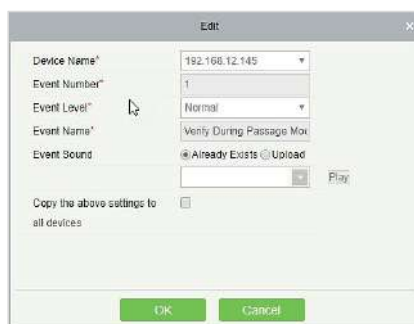


Figure 3- 30 Event Type Edit

3.3.7.1 Set Audio

Same as the event sound. Click **Set Audio**:

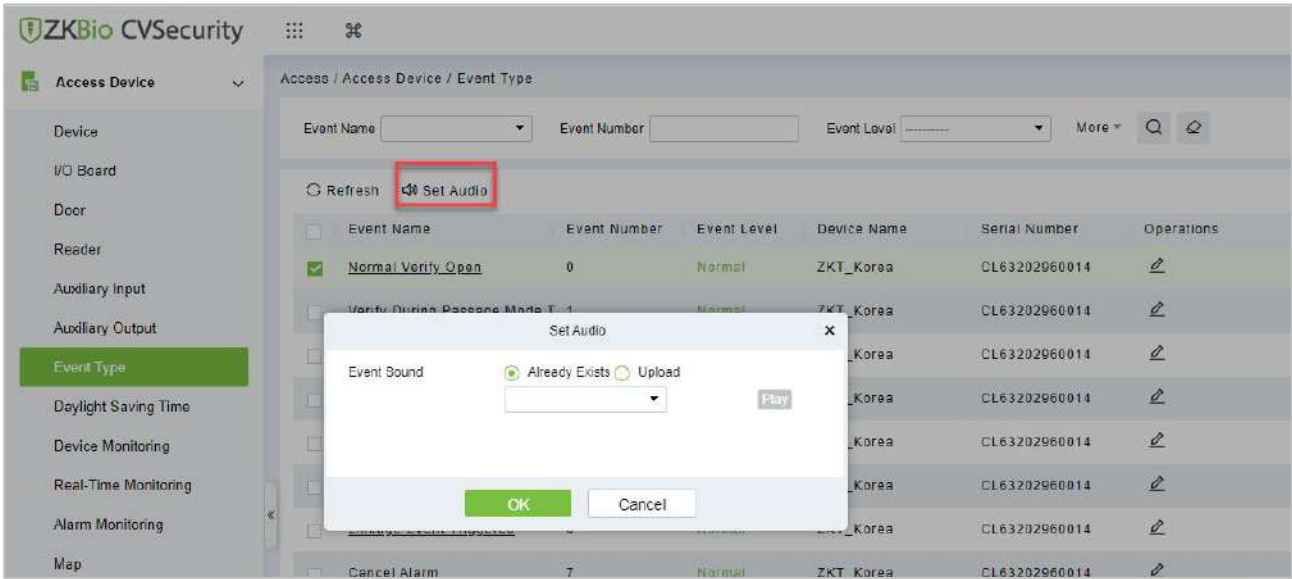


Figure 3- 31 Event Type Set Audio

You can upload an audio from your local PC. The file must be in wav or mp3 format, and it must not exceed 10MB.

Parameter	How to Set
Event Level	Normal, Exception, and Alarm are available
Event Name	Display the name of the device and it can't be modified.
Device Name	Display the name of the device
Event Number	Display the event number of the device.
Serial Number	Display the serial number of the device

Table 3- 6 Event Parameters

3.3.8 Daylight Saving Time

DST, also called the Daylight-Saving Time, is a system to adjusting the official prescribe local time to save energy. The unified time adopted during the implementation of known as the "DST". Usually, the clocks are adjusted forward one hour in the summer to make people sleep early and get up early. It can also help to save energy. In autumn, clocks are adjusted backwards. The regulations are different in different countries. At present, nearly 70 countries adopt DST.

To meet the DST requirement, a special function can be customized. You may adjust the clock one hour forward at XX (hour) XX (day) XX (month) and one hour backward at XX (hour) XX (day) XX (month) if necessary.

3.3.8.1 Add DST (New)

Step 1: Click **Access Device > Daylight Saving Time > New**.

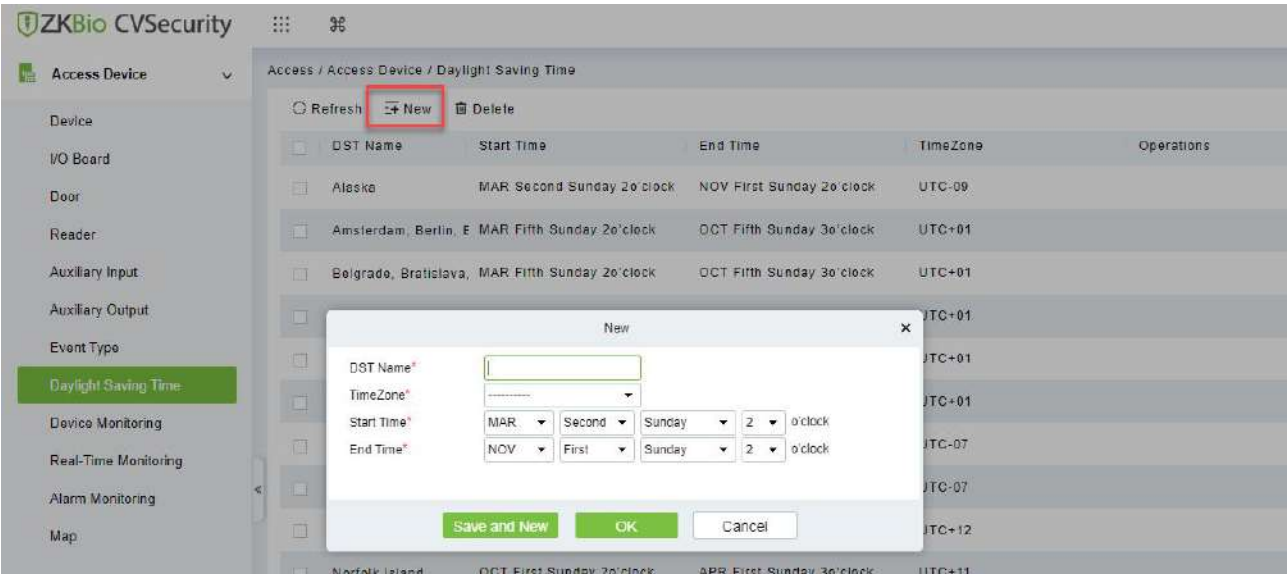


Figure 3- 32 Daylight Saving Mode

Set as "Month-Weeks-week hour: minute" format. The start time and end time is needed. For example, the start time can be set as "second Monday in March, 02:00". The system will be advanced one hour at the start time. The system will go back to the original time at the end time.

Parameter	How to set
DST Name	Display the DST name
Start Time	Display the start time of the device
End Time	Display the end time of the device
Time Zone	Display the timezone of the device.

Table 3- 7 Daylight Saving Mode Parameters

3.3.8.2 Delete

Select device, click **Delete**, and click **OK** to delete the device.

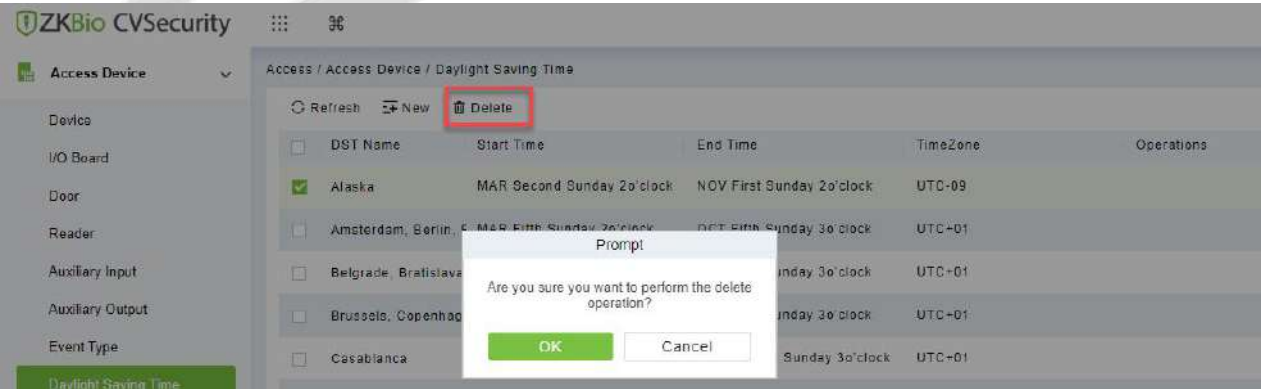


Figure 3- 33 Daylight Saving Mode Delete

3.3.9 Real-Time Monitoring

On the real-time management screen, the status of the added device is displayed and the device can be opened or closed. At the same time, the dynamic of real-time events is monitored. If the door opening can be verified and corresponding access control events can be generated, the access control management service configuration is complete.

● Operation Step:

Step 1: Check whether the device is online.

In the Access Control module, choose “Access Control Device > Real-time Monitoring”.

Check whether the icon status of the added device is online. For details about the icon status, see Table 3-8.

Note: The icons support 3 types, which are: **Door, Parking Barrier, Flap Barrier**. You can go to **Access Module -> Access Device -> Device** to select the device, **Edit** for switching.

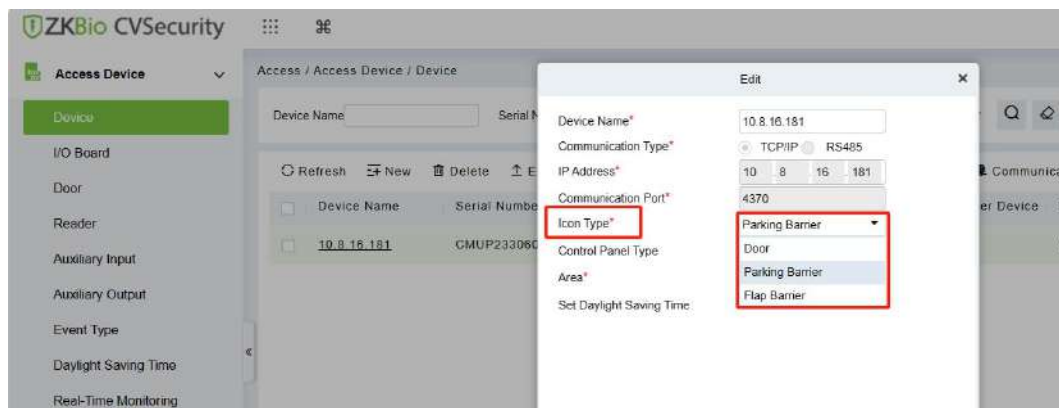







Figure 3- 34 Icon Type

The following table takes Door Icon as an example; the other 2 types(Flap Barrier & Parking Barrier) are only different graphics, but the meaning is the same, you can refer to the following table:

Icon	State	Icon	State
	The device is disabled.		Door offline status
	No door status sensor, relay off/no relay status		Door status sensor not set, relay open/no relay state
	The door is closed and the relay is off/no relay is in online state		The door is closed and the relay is on/no relay
	On line door open, relay closed/no relay		On line door open, relay open/no relay state
	Door opens alarm, relay closes		The door opens to alarm and the relay opens
	Door opening timeout alarm, relay closed/no relay, door magnetic open		Door opening timeout alarm, relay open/no relay, door magnetic open
	Door opening timeout alarm, relay closed/door magnetic closed		Door opening timeout alarm, relay open/door magnetic close
	Door close alarm, relay off/no relay status		Door close alarm, relay open/no relay status

Icon	State	Icon	State
	No door magnetic setting, door alarm, relay closed		No door magnetic setting, door alarm, relay open
	Door opening timeout alarm, no relay/door magnetic closing		The door was locked
	Abnormal communication between the door and the device		

Note: If there is no relay status, the current firmware does not support the "Check relay Status" function.

Table 3- 8 Description of Door Types

Step 2: Remote opening/closing verification, taking remote opening as an example.

Select the online door device, click "**Remote door opening**", enter the user password in the pop-up security verification, and click **OK**.

On the remote door opening screen, enter the time to open the door and tap **OK**, as shown in figure below.

If "Operation succeeded" is displayed, the remote door opening Operation is complete.

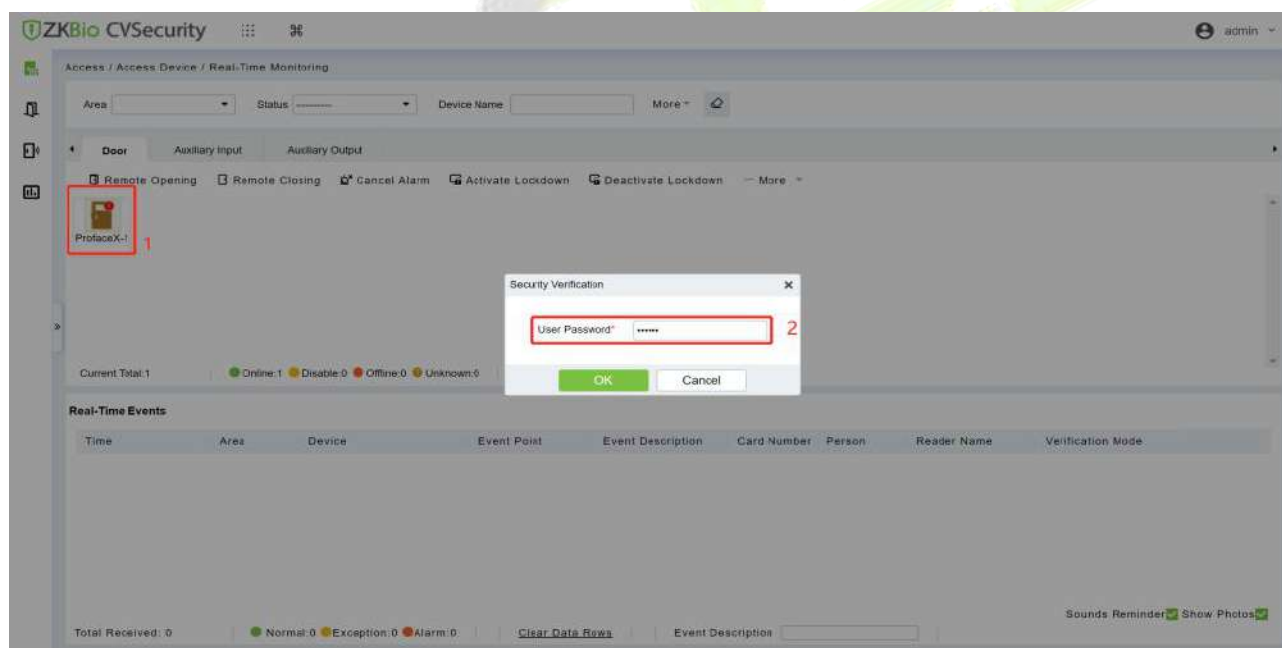


Figure 3- 35 Remote Door Opening

Step 3: Permission to verify.

Verify personnel permissions on added devices.

In the real-time monitoring window, judge whether the personnel permissions are correctly configured according to the event status; If the user has been granted access rights, the real-time access event is a normal verification event, as shown in Figure 3-38, indicating that the access level service is configured.

Real-Time Events								
Time	Area	Device	Event Point	Event Description	Card Number	Person	Reader Name	Verification Mode
2021-12-16 11:15:29	Area Name	ProfaceX(CN3M212469001)	ProfaceX-1	Remote Opening			Other	Other

Figure 3- 36 Real-Time Events

3.3.9.1 Door

Remote Opening/Closing

It can control one door or all doors.

To control a single door, right click over it, and click **Remote Opening/ Closing** in the pop-up dialog box. To control all doors, directly click **Remote Opening/ Closing** behind Current All.

In remote opening, user can define the door opening duration (The default is 15s). You can select **Enable Intraday Passage Mode Time Zone** to enable the intraday door passage mode time zones, or set the door to Normal Open, then the door will not be limited to any time zones (open for 24 hours).

To close a door, select **Disable Intraday Passage Mode Time Zone** first, to avoid enabling other normal open time zones to open the door, and then select **Remote Closing**.

Note: If **Remote Opening /Closing** fails, check whether the devices are disconnected or not. If disconnected, check the network.

Cancel the Alarm

Once an alarming door is displayed on the interface, the alarm sound will be played. Alarm cancellation can be done for single door and all doors. To control a single door, move the cursor over the door icon, a menu will pop-up, then click **Remote Opening/Closing** in the menu. To control all doors, directly click **Remote Opening/Closing** behind Current All.

Note: If **Cancel the alarm** fails, check if any devices are disconnected. If found disconnected, check the network.

Remote Normally Open

It will set the device as normal open by remote.

Activate Lockdown

It will remotely set the door status to locked status. After this, the door wouldn't receive any operations, such as card reading and remote operations. This function is supported only by certain devices. Super User Swipe to Initiate Lockdown after 3 swipes

Deactivate Lockdown

It will unlock a locked door. This function is supported only by certain devices. Super User Swipe to Initiate disable after 3 swipes

Quick Management of Doors

If you move the cursor to a door's icon; you can perform the above operations in a quick way. In addition, you can query the latest events from the door.

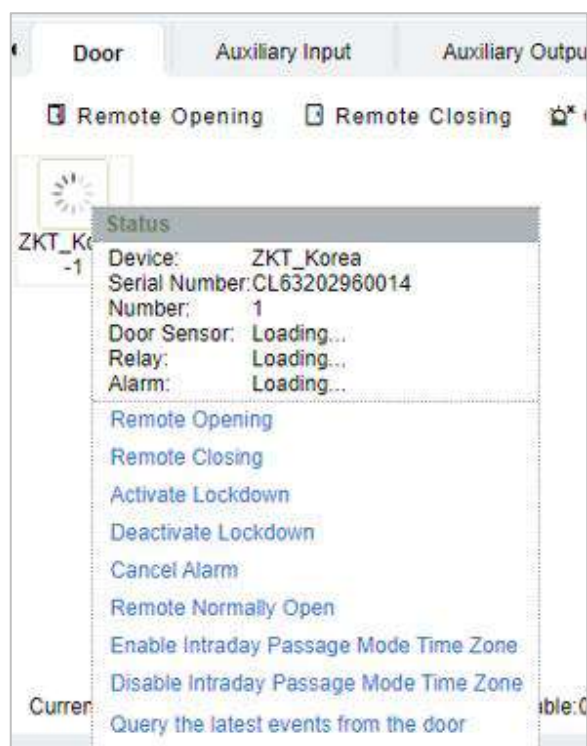


Figure 3- 37 Quick management of doors

Personnel Photo Display

If a Real-Time Monitoring event contains personnel activity, the monitor will display the person photo (if no photo is registered, the monitor will display default photo). The event name, time and date are displayed.

Play Audio

If this option is selected, it plays an audio after an alarming event occurs.

Query the Latest Events from The Door

Click to quickly view the latest events happened on the door.

Issue Card to Person

If you swap an unregistered card, a record with a card number will pop-up in real-time monitoring interface. Right click that card number, and a menu will pop-out. Click "Issue card to person", to assign that card to one person.

●Event Monitoring:

The system will automatically acquire records of devices being monitored (by default, display 200 records), including normal and abnormal access control events (including alarm events). Normal events will appear in green; alarm events will appear in red; other abnormal events will appear in orange.

The Superuser can initiate lockdown after 3 swipes and deactivate the same after 3 swipes.

3.3.9.2 Auxiliary Input

It monitors current auxiliary input events in real-time.

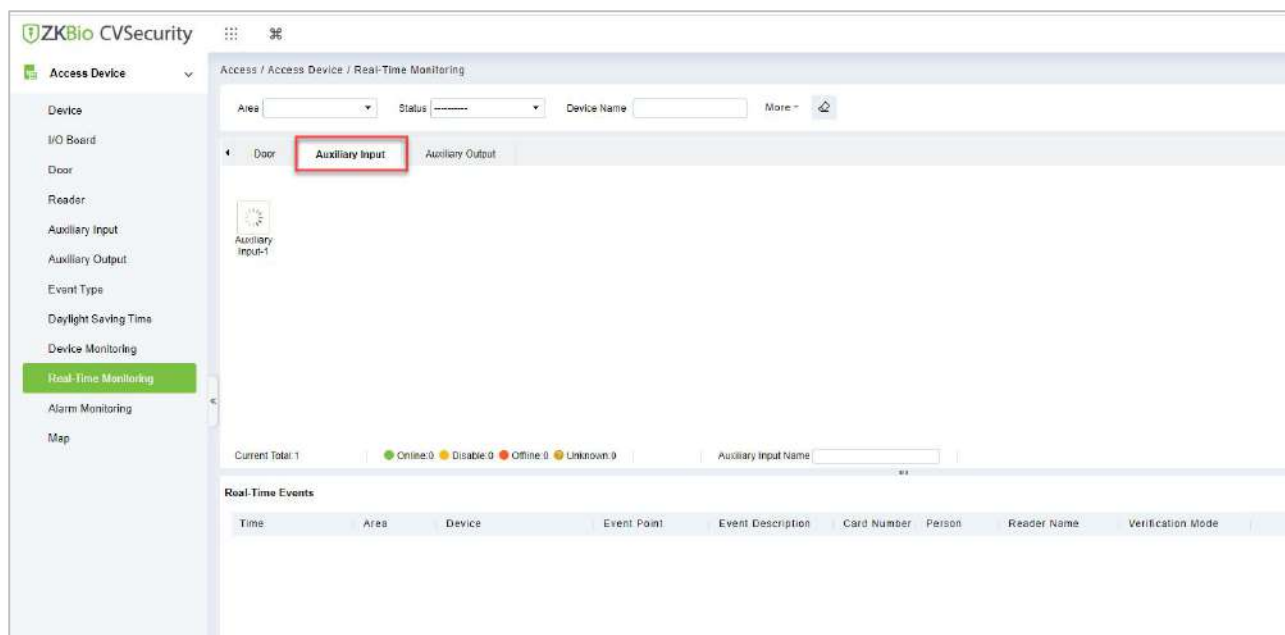


Figure 3- 38 Real Time Monitoring Auxiliary Input

3.3.9.3 Auxiliary Output

Here you can perform Remote open, Remote Close, Remote Normally Open.

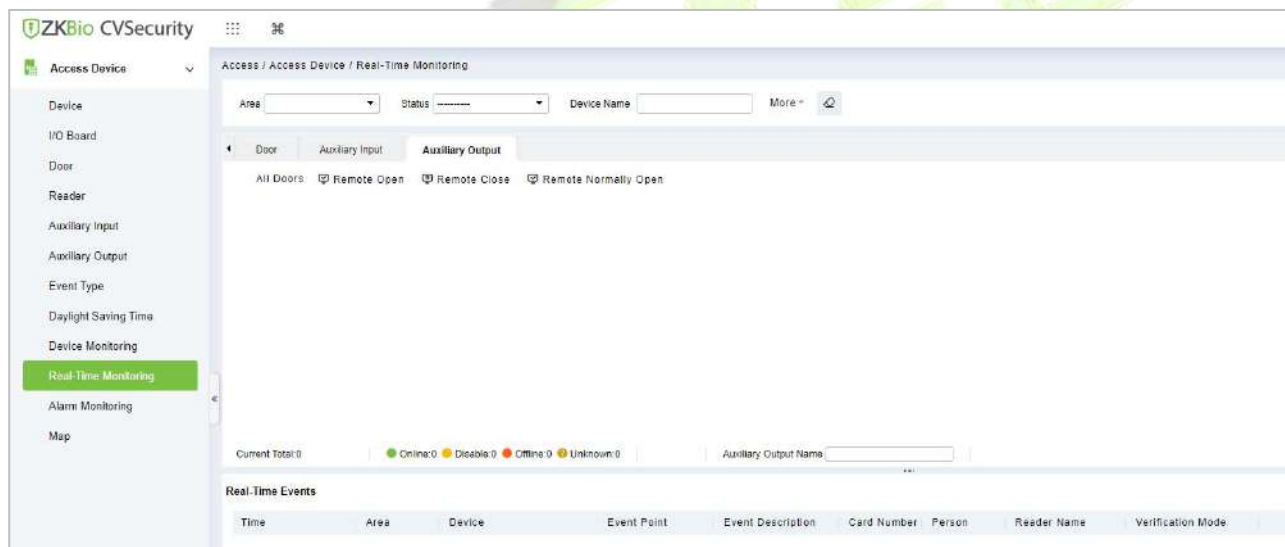


Figure 3- 39 Real Time Monitoring Auxiliary Output

Monitoring All

By default, the home page displays all doors of the panels within the user's level. User may monitor door(s) by setting the Area, Access Control or Door.

3.3.10 Alarm Monitoring

It will monitor the status and real-time events of doors under the access control panels in the system in real-time, including normal events and abnormal events

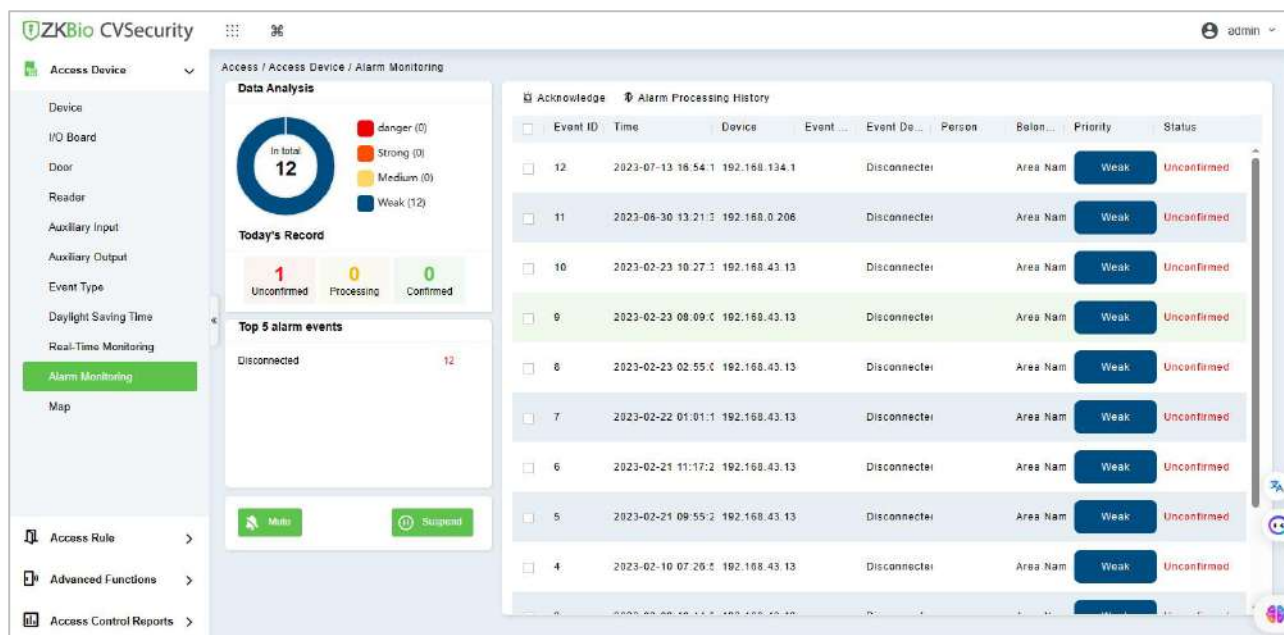


Figure 3- 40 Alarm Monitoring

3.3.11 Map

Click **Access Device > Map > New** to add a map.

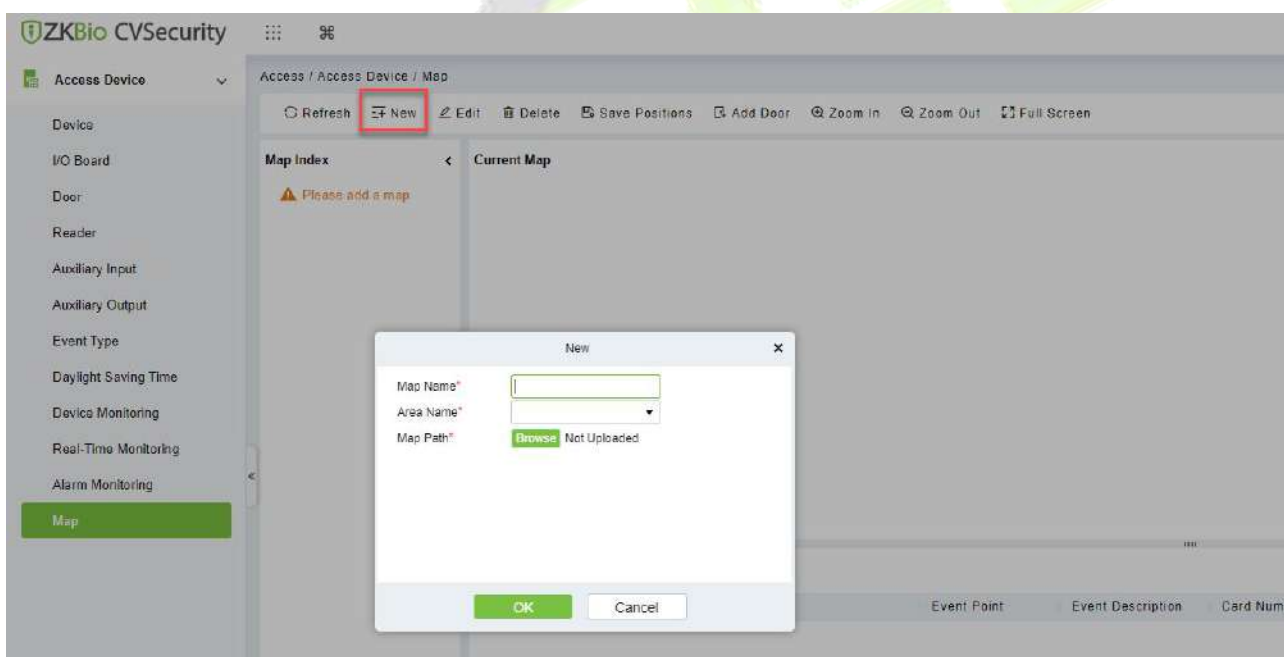


Figure 3- 41 Map

After adding, users can add door on the map, perform zoom-in, zoom-out, etc. If users relocated or modified the map, click **Save Positions** to save. The user can view the new setting at next visit.

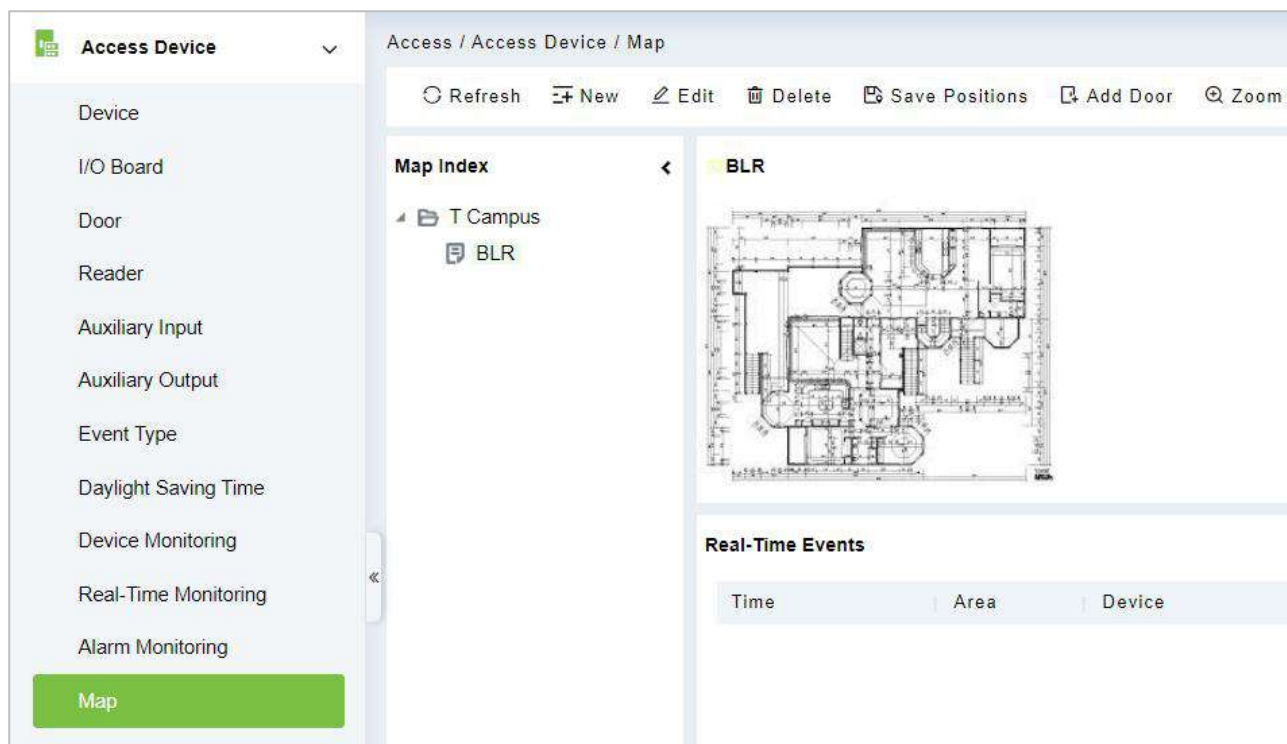


Figure 3- 42 Map Position

3.3.11.1 Add/Delete Map

Users can add or delete a map as needed.

3.3.11.2 Edit Map

Users can edit map name, change map or the area it belongs to.

Adjust Map (includes door)

Users can add a door on the map or delete an existing one (right click the door icon, and select **Delete Door**), or adjust the map or position(s) of the door or camera icons (by dragging the door or camera icons), adjust the size of the map (click **Zoom in** or **Zoom out** or click **Full Screen**).

Add Doors & Cameras

After adding the map, click on "Add doors" and "Add cams" in the toolbar on the right to select devices to add to the map.

Door Operation

If you move the cursor to a door, the system will automatically filter and displays the operation according to the door status. Users can do remotely open/close doors, cancel alarms, etc.

Levels Control

Users need to select the relevant area for the map when adding levels. The area will be relevant to the user access levels, users can only view or manage the map within levels. If the relevant area of a map is modified, all doors on the map will be cleared. Users need to add the doors manually again.

When an administrator is adding a new user, he can set the user operation rights in role setting, such as Save positions, Add Door, Add Camera, etc.

Note:

In map modification, users can choose to modify the map name but not the path. Users only need to check the box to activate the modification option.

The system supports adding multi doors at the same time. After adding the doors, users need to set the door position on the map and click **Save**.

When modifying door icon, especially when users zoomed out the map, the margin for top and left shall not be smaller than 5 pixels, or system will prompt error.

Users are recommended to add a map size under 1120 * 380 pixels. If several clients access the same server, the display effect will be different according to resolutions of screen and the settings of browsers.

3.4 Access Rule

Access control rules are the core logic control part of access control, including time period settings, linkage settings, etc.

3.4.1 Timezone

In **Access Control** Module, time period is a very important basic concept, which is used to set the use time of the door and specify that **Access Control** is available in the valid time period.

This section describes how to configure Step to manually add a time range in ZKBio CVSecurity.

3.4.1.1 Add (New)

● Operation Step:

Step 1: In the access Control module, choose "Access Rule > Time zone".

Step 2: Click **New**, the interface for adding time segments is displayed.

Step 3: The time segment page is added. Set the content based on the new requirements, as shown in figure below. For parameter Settings, see Table 3-9.

Date	Time	Interval 1		Interval 2		Interval 3	
		Start Time	End Time	Start Time	End Time	Start Time	End Time
Monday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Tuesday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Wednesday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Thursday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Friday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Saturday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Sunday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Holiday Type 1		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Holiday Type 2		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Holiday Type 3		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00

Figure 3- 43 Adding A Time Range

Parameter	How to set up
Schedule Name	You can set a time range name for easy memory.
Note	Remarks Description of user-defined Settings.

Time interval	Set the start time and end time for each time range. The time period includes one week and three holiday-type time periods.
Copy Monday's time to other weekdays	You can quickly copy your Monday Settings to other weekdays.

Table 3- 9 Parameters to Be Added in The Time Range

Step 4: Click **OK** to finish adding the time range.

3.4.1.2 Delete

Select time zone name, click **Delete**, and click **OK** to delete the time zone.

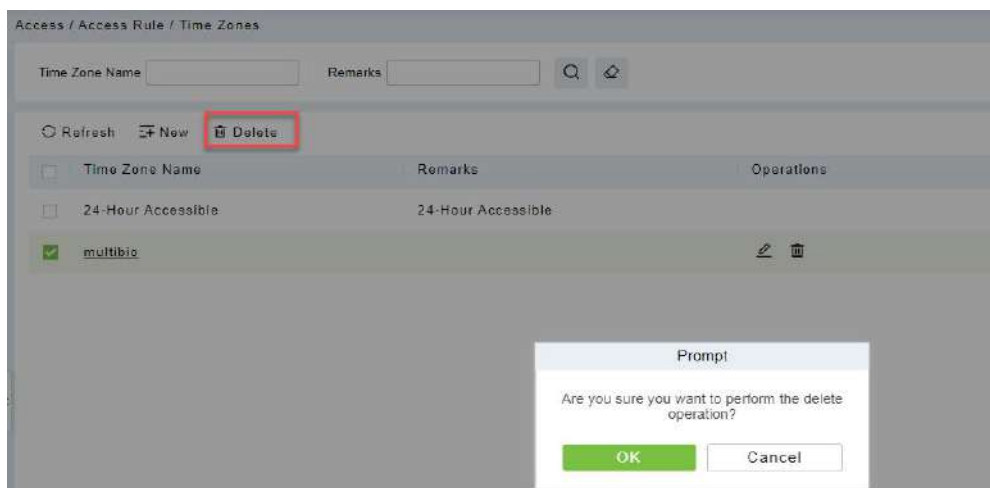


Figure 3- 44 Time Zone Delete

3.4.2 Holiday

The access control time on holidays may be different from that on weekdays. To facilitate Operation, the system supports separate access control time on holidays.

This section describes how to manually add a holiday Step in ZKBio CVSecurity.

3.4.2.1 Add (New)

● Operation Step:

Step 1: In the Access Control module, choose "**Access Rule > Holidays**".

Step 2: Click **New**, the page for adding holidays is displayed.

Step 3: When a page is added during holidays, set the content as required, as shown in figure below. For parameter Settings, see Table 3-10.

The 'New' dialog box for adding a holiday includes the following fields:

- Holiday Name***: Text input field.
- Holiday Type***: Dropdown menu showing 'Holiday Type 1'.
- Start Date***: Date input field showing '2021-12-16'.
- End Date***: Date input field showing '2021-12-16'.
- Recurring**: Dropdown menu showing 'No'.
- Remarks**: Text input field.

Buttons: **OK** (green), **Cancel** (white).

Figure 3- 45 Adding Holidays

Parameter	How to set up
Holiday Name	You can set holiday names for easy memory.
Type of Holidays	The holiday type can be: Holiday type 1, Holiday type 2, holiday type 3. Set holiday type to time Range.
Start time/End time	Set the holiday time range.
According to the annual circulation	Set whether this holiday cycle by year: yes, no. For example, if New Year's Day is January 1, set this parameter to Yes. Mother's Day falls on the second Sunday in May. If the date is uncertain, set it to No.
Note	Custom Settings description.

Table 3- 10 Parameters for Adding Holidays

Step 4: Click **OK** to finish adding the holiday.

3.4.2.2 Delete

Select holiday, click **Delete**, and click **OK** to delete the holiday.

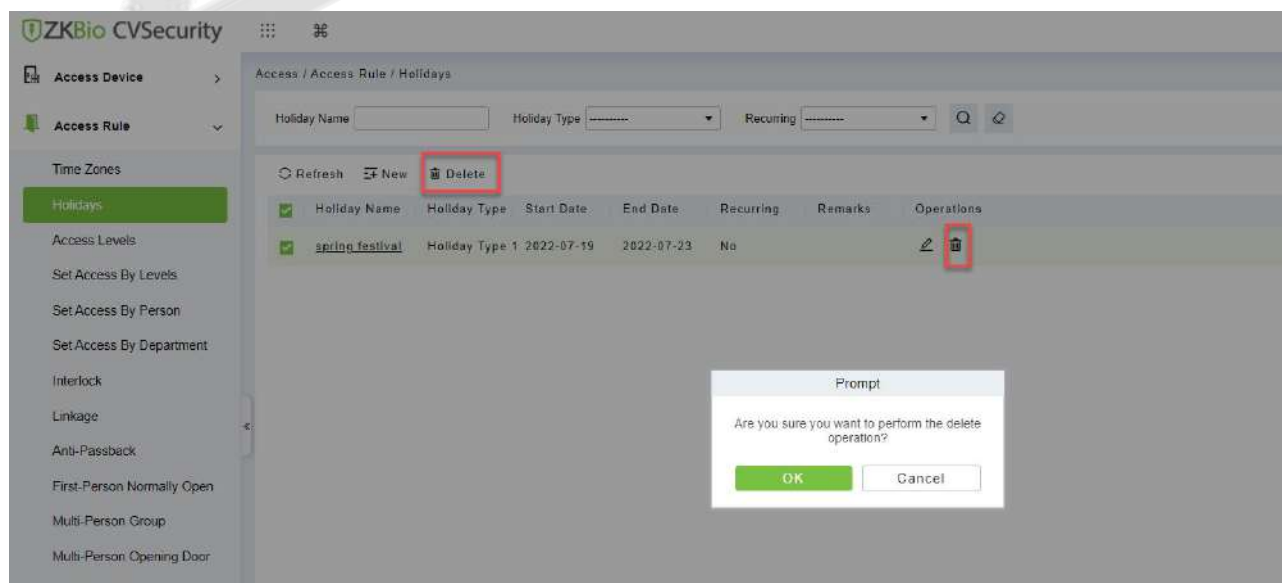


Figure 3- 46 Holiday Delete

3.4.3 Access Level

Access level groups define groups and categories of internal doors to facilitate subsequent permission assignment operations.

Setting operations include creating access level groups and adding doors to access level groups.

3.4.3.1 Add (New)

This section describes how to create Step for Access Control groups in ZKBio CVSecurity.

●Operation Step:

Step 1: In the Access Control module, choose “**Access Rule > Access Level**”.

Step 2: Click **New** in the left column, and the page for adding access level groups is displayed.

Step 3: On the page for adding access level groups, set parameters based on the new requirements, as shown in figure below. For parameter Settings, see Table 3-11.

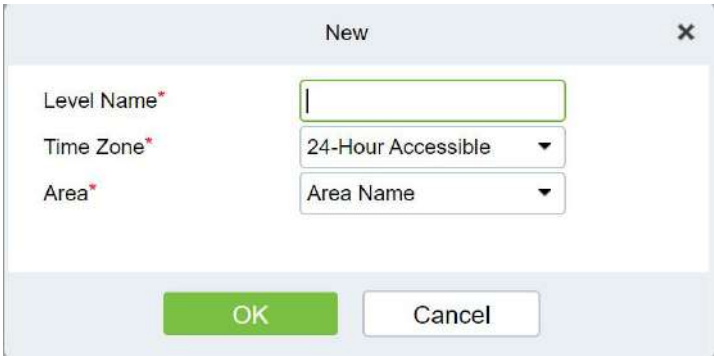


Figure 3- 47 Adding Access Level Groups

Parameter	How to set up
Permission Group Name	You can customize the name of the access level group for easy query.
Access Control Period	Select the configured access time range to define the valid access time range for this permission group.
Area	Select the configured area from System > System Management > Area Settings and define the area to which the Access Control group belongs.

Table 3- 11 Description of Access Control Right Groups

Step 4: Click **OK** to finish configuring the access control right group.

3.4.3.2 Add Door

This topic describes how to add Operation Step to the door of the created access level group in ZKBio CVSecurity.

●Operation Step:

Step 1: In the Access Control module, choose “**Access Rule > Access level>Add Door**”.

Step 2: Click “**Add Door**”, and the page for selecting a door is displayed. add a door as required, as shown in figure below.

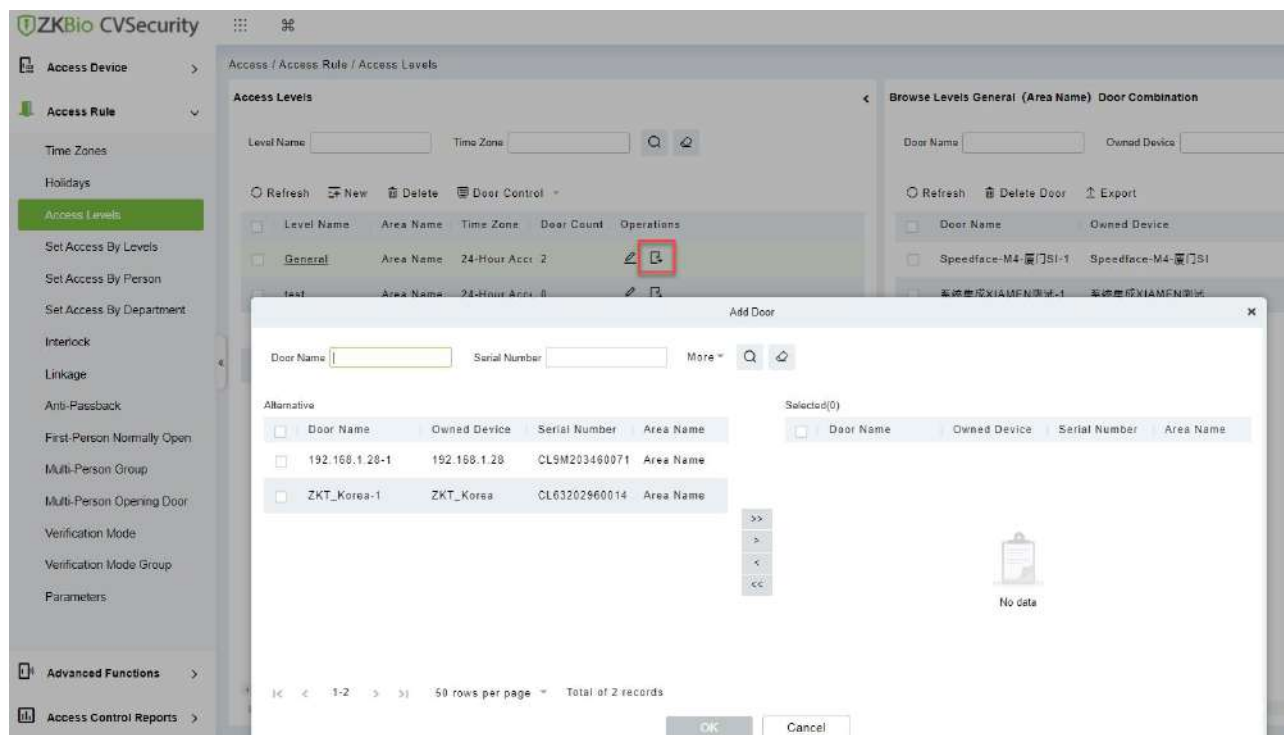


Figure 3- 48 Adding Access Level Groups Add Doors

Step 3: Click **OK** to finish configuring the door for the access control right group.

3.4.3.3 Door Control

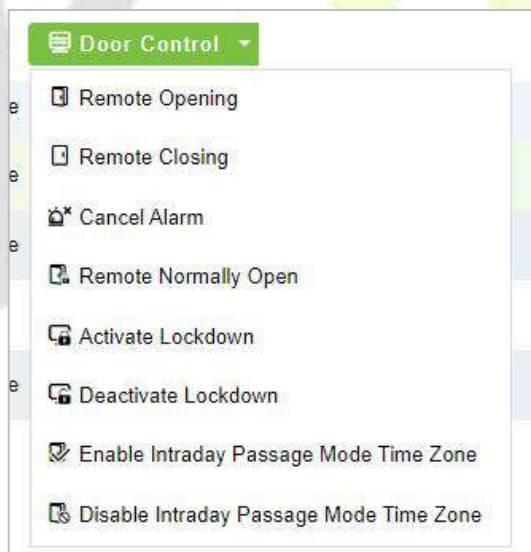


Figure 3- 49 Door Control

Remote Opening/Closing

It can control one door or all doors.

To control a single door, right click over it, and click **Remote Opening/ Closing** in the pop-up dialog box. To control all doors, directly click **Remote Opening/Closing** behind Current All.

In remote opening, user can define the door opening duration (The default is 15s). You can select **Enable Intraday Passage Mode Time Zone** to enable the intraday door passage mode time zones, or set the door to Normal Open, then the door will not be limited to any time zones (open for 24 hours).

To close a door, select **Disable Intraday Passage Mode Time Zone** first, to avoid enabling other normal open time zones to open the door, and then select **Remote Closing**.

Note: If **Remote Opening/Closing** fails, check whether the devices are disconnected or not. If disconnected, check the network.

Cancel the Alarm

Once an alarming door is displayed on the interface, the alarm sound will be played. Alarm cancellation can be done for single door and all doors. To control a single door, move the cursor over the door icon, a menu will pop-up, then click **Remote Opening/Closing** in the menu. To control all doors, directly click **Remote Opening/Closing** behind Current All.

Note: If **cancel the alarm** fails, check if any devices are disconnected. If found disconnected, check the network.

Remote Normally Open

It will set the device as normal open by remote.

Activate Lockdown

It will remotely set the door status to locked status. After this, the door wouldn't receive any operations, such as card reading and remote operations. This function is supported only by certain devices. Super User Swipe to Initiate Lockdown after 3 swipes

Deactivate Lockdown

It will unlock a locked door. This function is supported only by certain devices. Super User Swipe to Initiate disable after 3 swipes.

3.4.3.4 Import or Export Access Level

Step 1: Export and fill in Access Level Template:

In the **Access Module**, click **Access Rule > Access Levels > Export > Export Access Level**, then fill in the Access levels information.

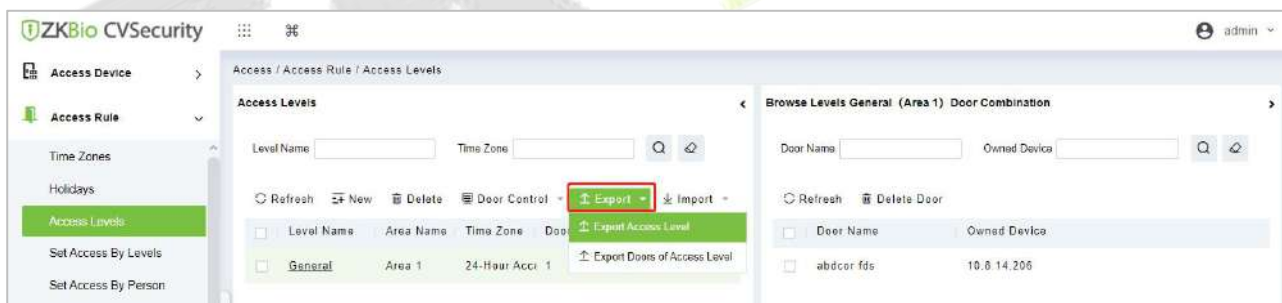


Figure 3- 50 Export Access Level Template

Access Levels			
Level Name	Area Name	Time Zone	
Level 1	Area 1	Time Zone 1	
Level 2	Area 2	Time Zone 1	
Level 3	Area 3	Time Zone 1	
Level 4	Area 4	Time Zone 1	
Level 5	Area 5	Time Zone 1	

Figure 3- 51 Fill in Access Level Template

Note: The Level name can be customized. The Area Name can be set from **System > System Management > Area Settings**, the Time Zone can be set from **Access > Access Rule > Time Zones**.

Step 2: Export the Doors of Access Level Template:

In the **Access Module**, click **Access Rule > Access Levels > Export > Export Doors of Access Level**,

then You can export doors of access level in Excel file format.

Enter the user password in the displayed security verification dialog box, and Click **OK**. Select whether to encrypt the file and the file format to export, and Click **OK**.

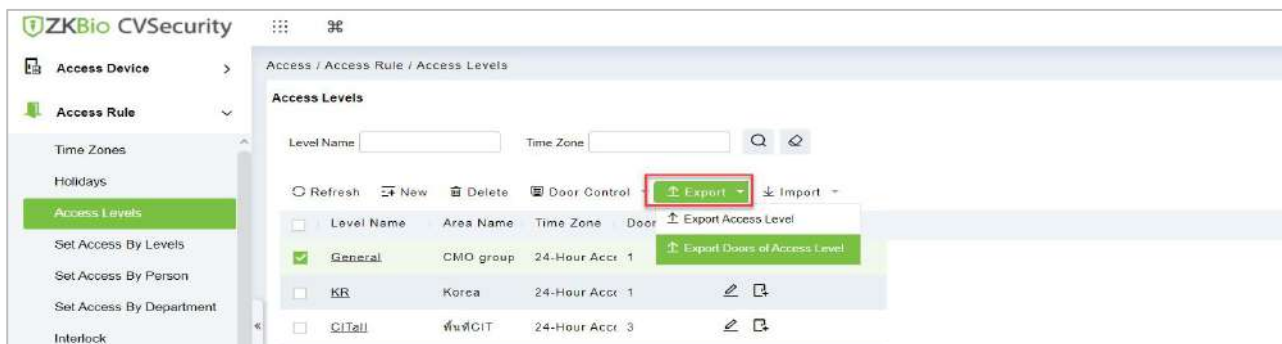


Figure 3- 52 Export the Access Level Template 1

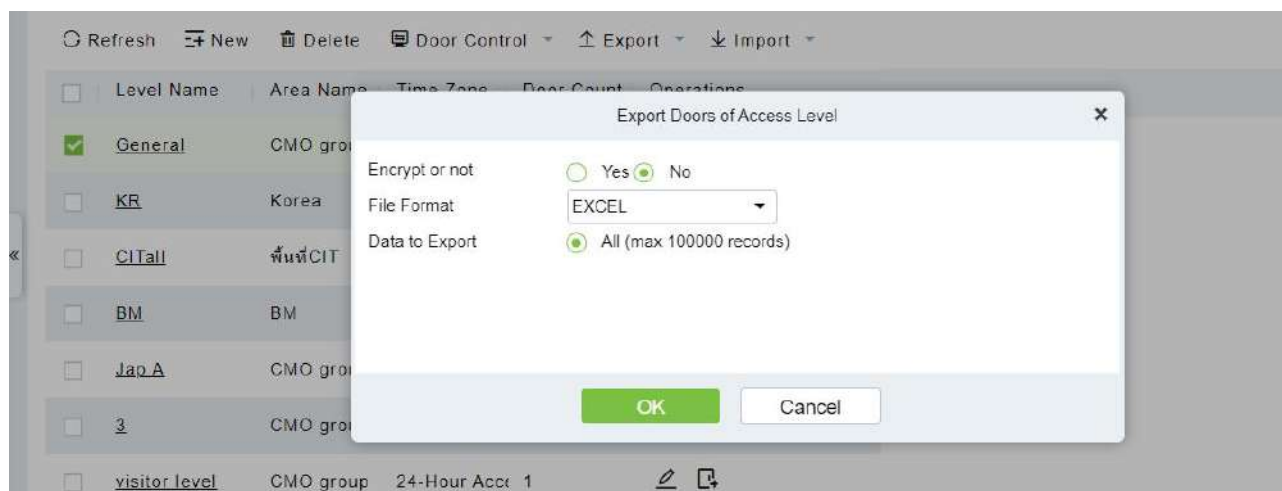


Figure 3- 53 Export the Access Level Template 2

Step 3: Import the Access Level Template:

In the **Access** module, click **Access Rule > Access Levels > Import > Import Access Level**, and click **Browser** to upload the Access Level Template.

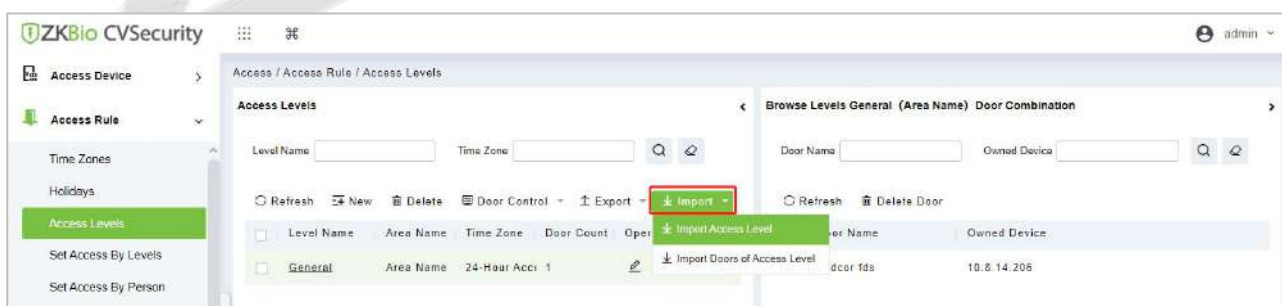


Figure 3- 54 Import the Access Level Template 1

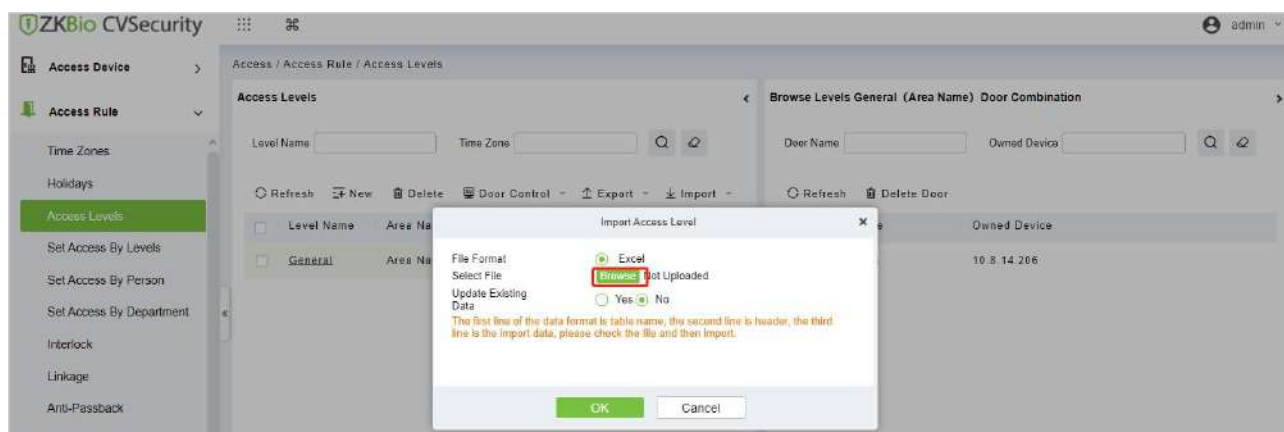


Figure 3-55 Import the Access Level Template 2

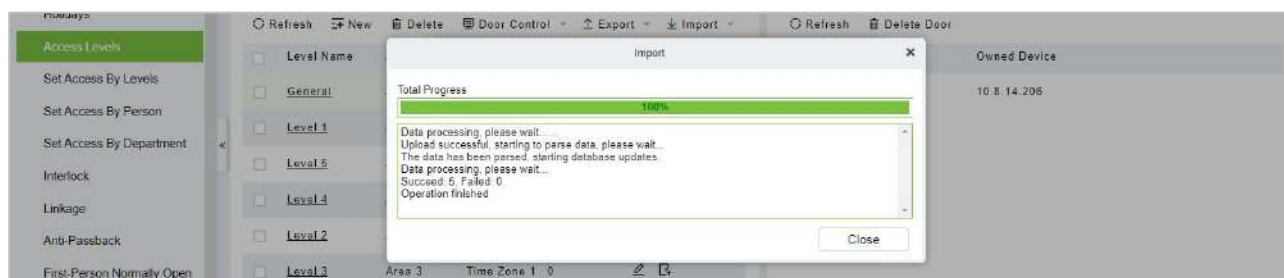


Figure 3-56 Import the Access Level Template 3

Step 4: After the upload is successful, we can view the uploaded level as the following figure.

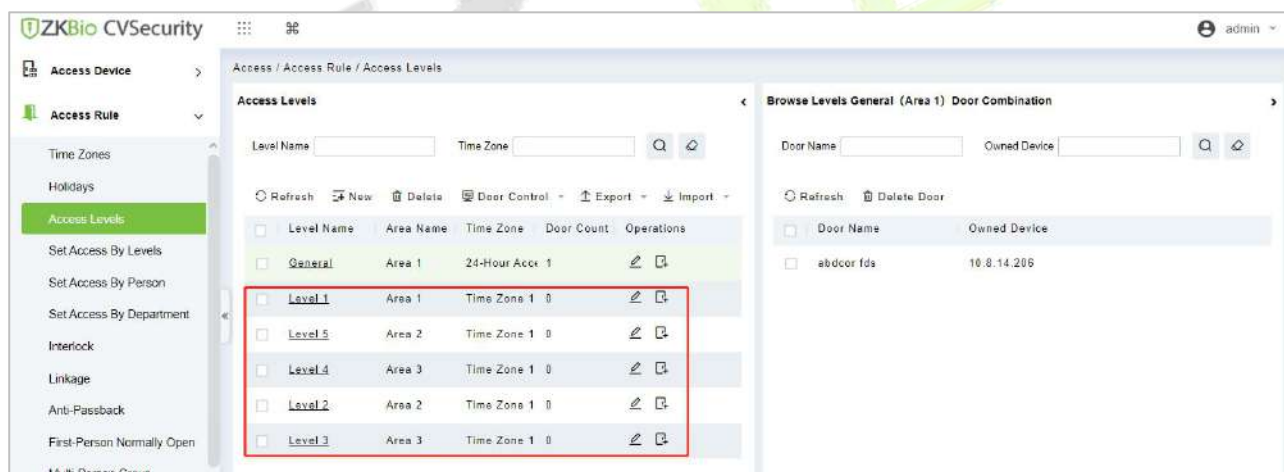


Figure 3-57 Import the Access Level Template 4

Step 5: Import the Doors of Access Level Template:

In the Access module, click **Access Rule** > Access Levels > **Import** > **Import Doors of Access Level**, and click Browser to upload the Access Level Template.

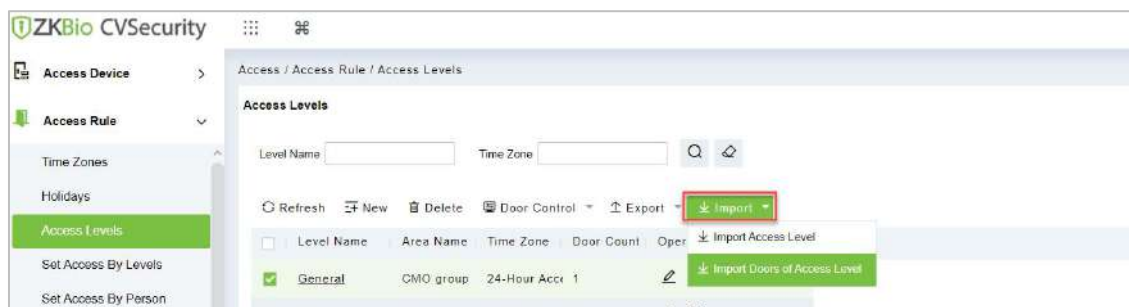


Figure 3-58 Import the Doors of Access Level Template 1

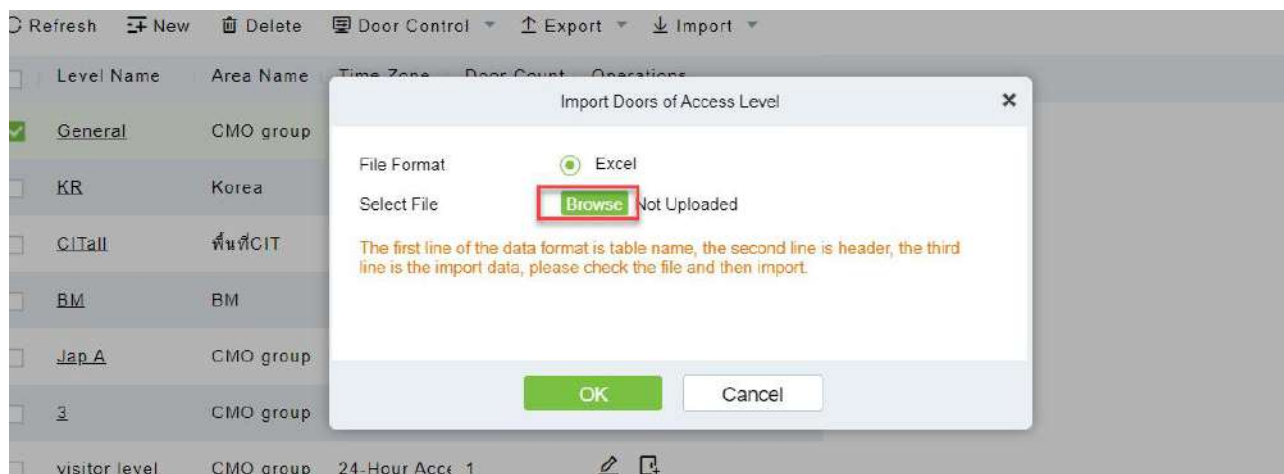


Figure 3- 59 Import the Doors of Access Level Template 2

Step 6: After the upload is successful, we can view the uploaded level as the following figure.

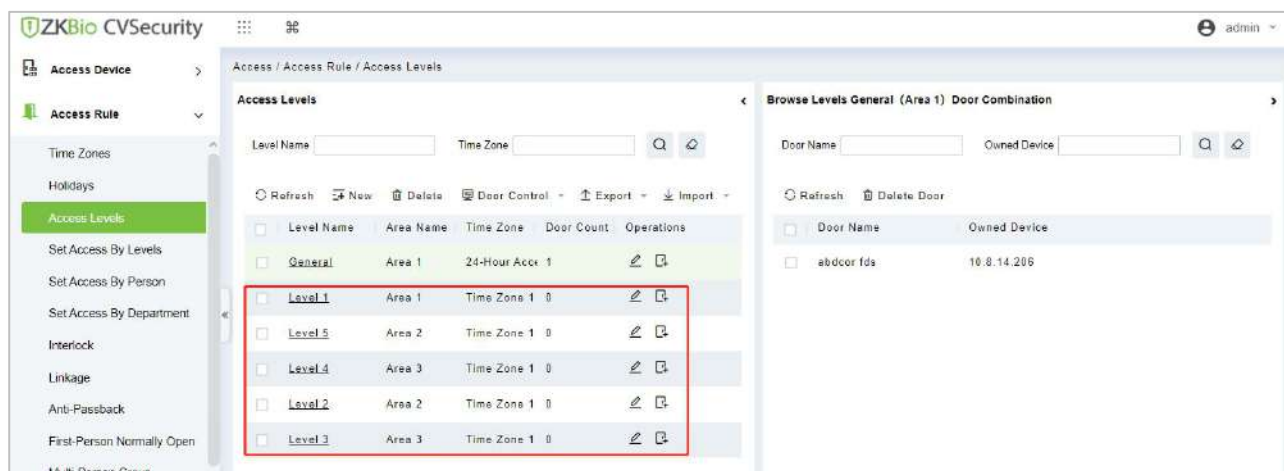


Figure 3- 60 Import the Doors of Access Level Template 3

3.4.4 Set Access Level Allocation

Permission assignment Manages the access level of personnel. After permission assignment, personnel can verify the door opening Operation.

You can assign user rights by user group or assign user rights by user group.

3.4.4.1 Assign Personnel Rights by Permission Group

Assigning personnel permissions by permission group is used to define a set of open-door personnel for a permission group.

Describes Operation Step that assigns staff permissions by permission group in ZKBio CVSecurity.

● Operation Step:

Step 1: In the Access Control module, choose “**Access Rule>Set Access by Levels**”.

Step 2: In the Operation column of the corresponding permission group, tap “**Add Personnel**”. The Add personnel page is displayed. Select personnel as required, as shown in figure below.

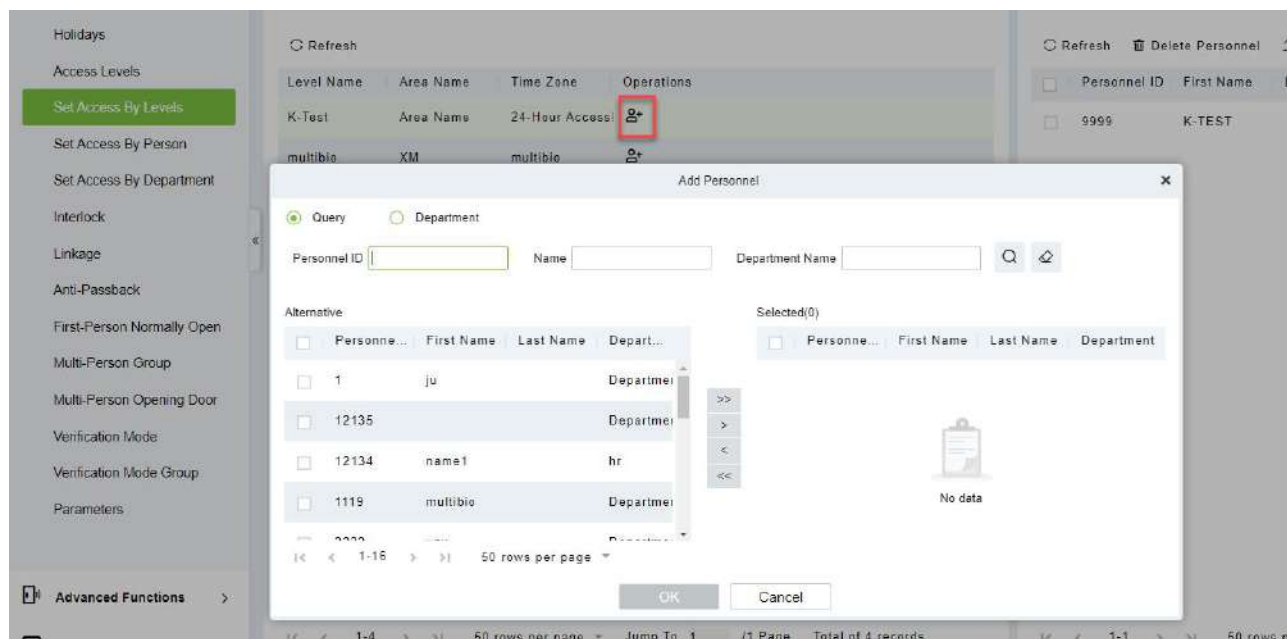


Figure 3- 61 Assigning Rights to Users by Rights Group

Step 3: Click **OK** to complete the assignment of personnel permissions.

3.4.4.2 Delete Personnel

Select personnel ID, click **Delete**, and click **OK** to delete the personnel ID.

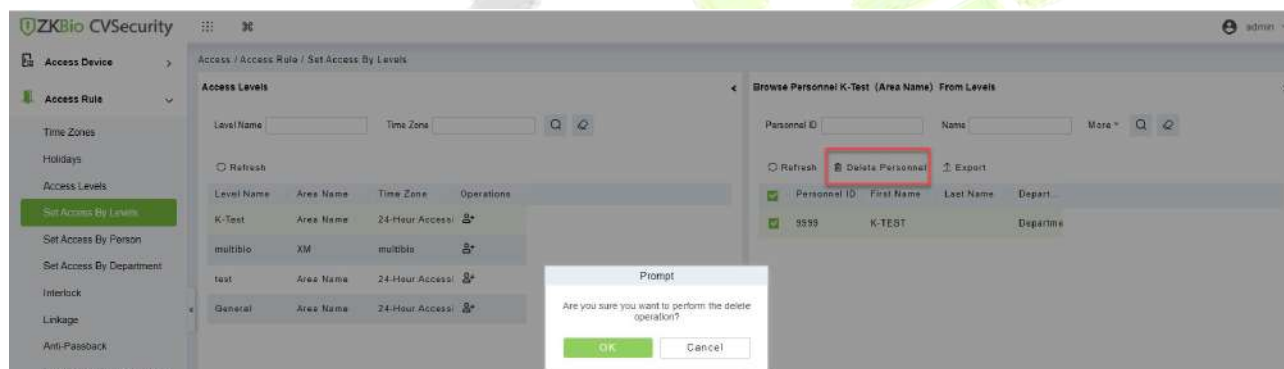


Figure 3- 62 Delete Personnel

3.4.4.3 Export

Device information can be exported in EXCEL, PDF, CSV file format.

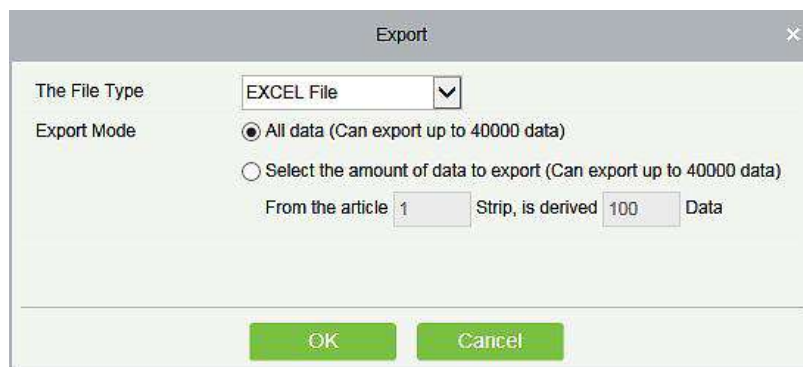


Figure 3- 63 Export

ZKTECO Device										
Device Name	Serial Number	Area Name	Communication Type	Network Connection Mode	IP Address	RS485 Parameter	Enable	Device Model	Register device	Firmware Version
192.168.218.80	20100501996	Area Name	HTTP	Wired	192.168.218.80		Enable	C3-400Pro		AC Ver 4.7.7.3033 Jun 18 2017

Figure 3- 64 Set Access level Allocation Export

3.4.5 Set Access Level Groups by Person

Assigning access level groups by person A permission set is used to define the access level set of a person.

This section describes Operation Step that assigns access control group permissions by person in ZKBio CVSecurity.

3.4.5.1 Access Control Setting

● Operation Step:

Step 1: In the Access Control module, choose "**Access Control > Settings by Personnel**".

Step 2: In the Operation column of the Access Control group, click "**Add Access Control Group**". The page for adding access control groups is displayed. Select the Access Control group as required.

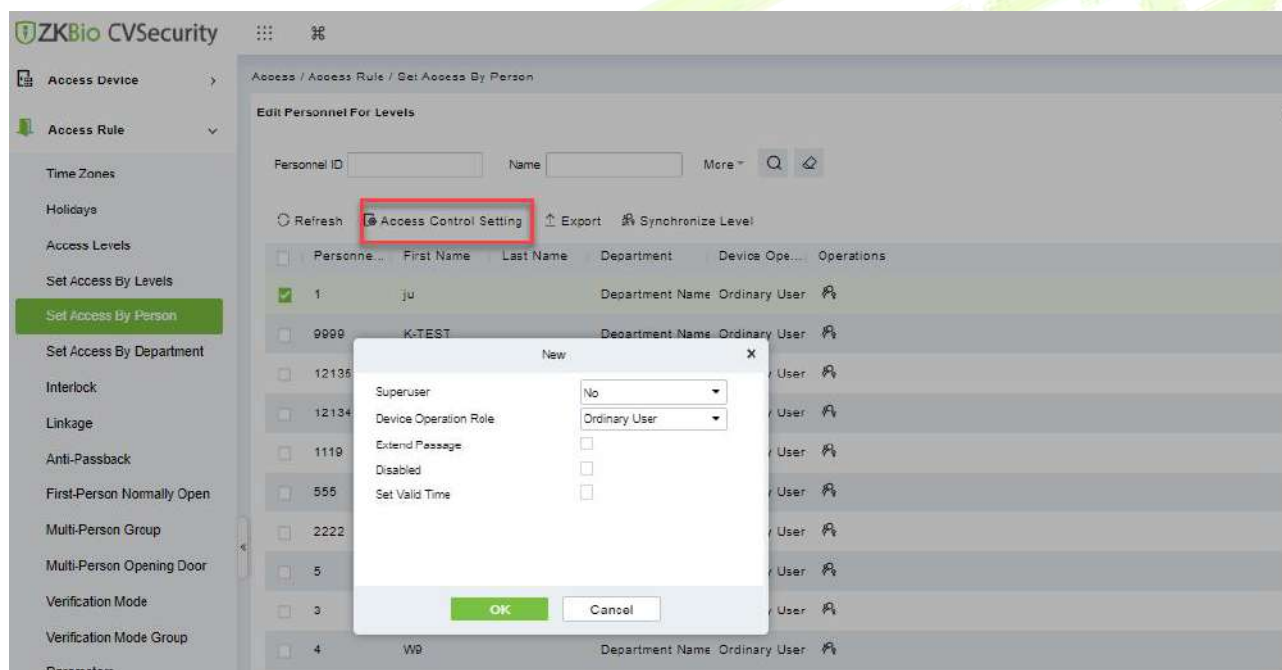


Figure 3- 65 Assigning Rights Groups by User

Step 3: Click **OK** to complete the assignment of personnel permissions.

3.4.5.2 Add Level

Permission assignment Manages the access level of personnel. After permission assignment, personnel can verify the door opening Operation.

You can assign user rights by user group or assign user rights by user group.

Assign Personnel Rights by Permission Level

Assigning personnel permissions by permission group is used to define a set of open-door personnel for a permission group.

Describes Operation Step that assigns staff permissions by permission group in ZKBio CVSecurity.

● Operation Step:

Step 1: In the Access Control module, choose “**Access Rule>Set Access by Levels**”.

Step 2: In the Operation column of the corresponding permission group, tap “**Add Levels**”. The Add level page is displayed. Select personnel as required.

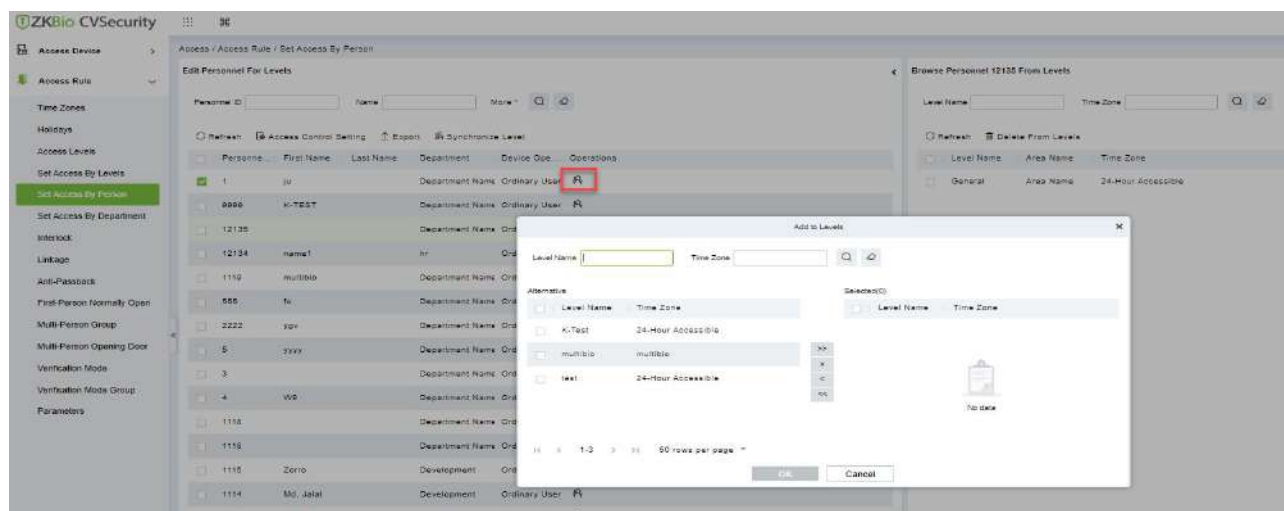


Figure 3- 66 Assigning Rights to Users by Rights Group

Step 3: Click **OK** to complete the assignment of level permissions.

3.4.5.3 Delete from Level

Select level name, click **Delete**, and click **OK** to delete the level name.

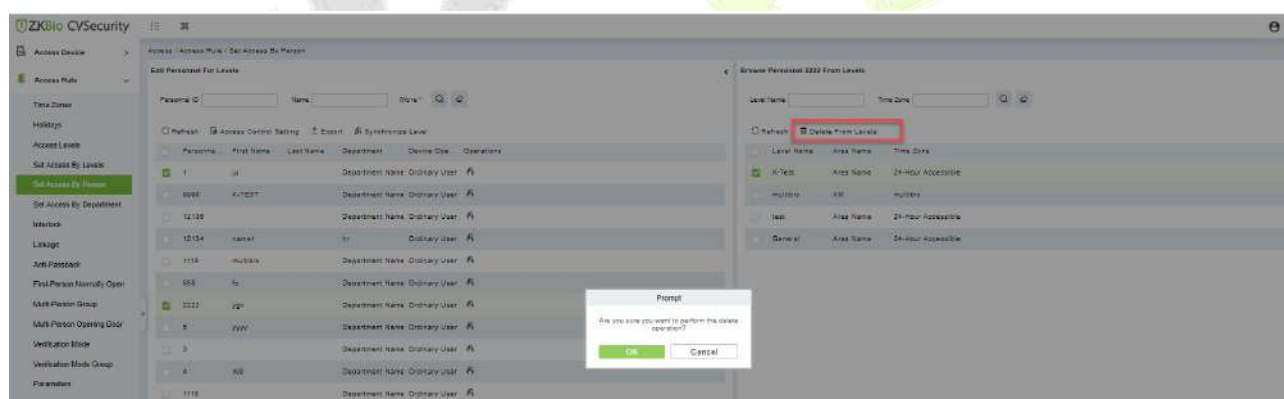


Figure 3- 67 Access Level Group by Person Delete

3.4.5.4 Export

Device information can be exported in EXCEL, PDF, CSV file format.

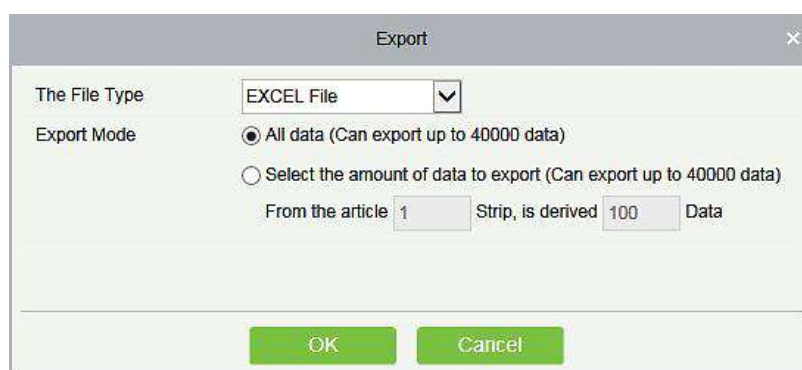


Figure 3- 68 Export

ZKTECO										
Device										
Device Name	Serial Number	Area Name	Communication Type	Network Connection Mode	IP Address	RS485 Parameter	Enable	Device Model	Register device	Firmware Version
192.168.218.80	20100501998	Area Name	HTTP	Wired	192.168.218.80		Enable	C3-400Pro		AC Ver 4.7.7.3033 Jun 18 2017

Figure 3- 69 Access Level Group by person Export

3.4.5.5 Synchronize Level

Select the level to be synchronized and send the corresponding device area data in the software to the device.

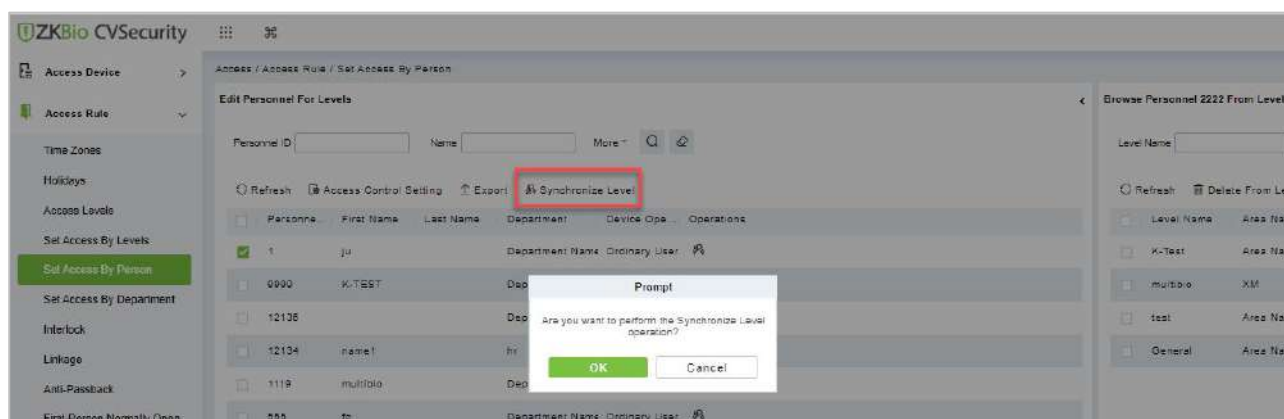


Figure 3- 70 Synchronize Level

3.4.6 Set Access Level Groups by Department

The access level group assigned by department defines the set of access levels for the personnel in the department.

This section describes Operation Step that assigns Access Control group permissions by person in ZKBio CVSecurity.

● Operation Step:

Step 1: In the Access Control module, choose “**Access Control > Set by department**”.

Step 2: In the Operation column of the Access Control group, click “**Add Access Control Group**”. The page for adding Access Control groups is displayed. Select the Access Control group as required.

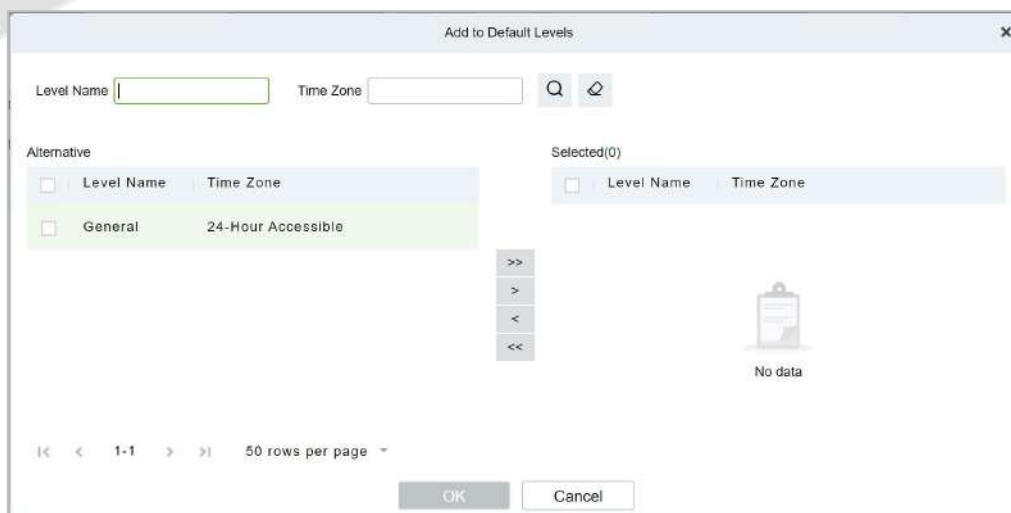


Figure 3- 71 Assigning Rights Groups by Department

Step 3: Click **OK** to complete the assignment of department permissions.

3.4.6.1 Add Default Level

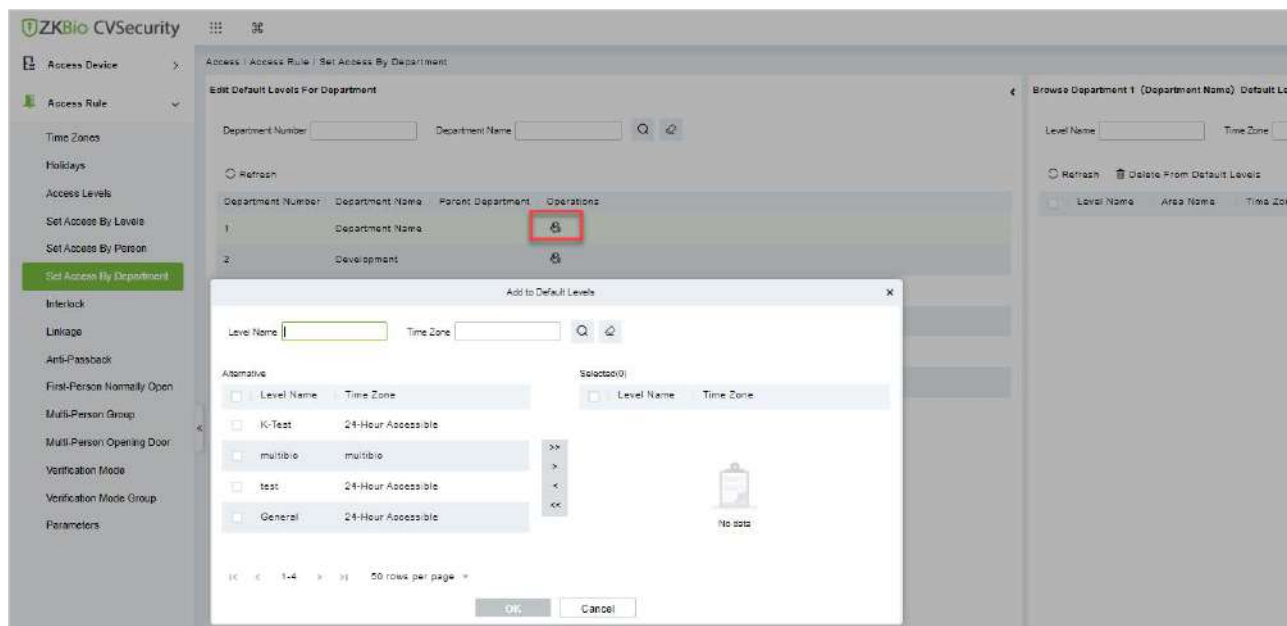


Figure 3- 72 Add Default Level Groups by Department

3.4.6.2 Delete Default Level

Select delete default level name, click **Delete**, and click **OK** to delete the default level name.

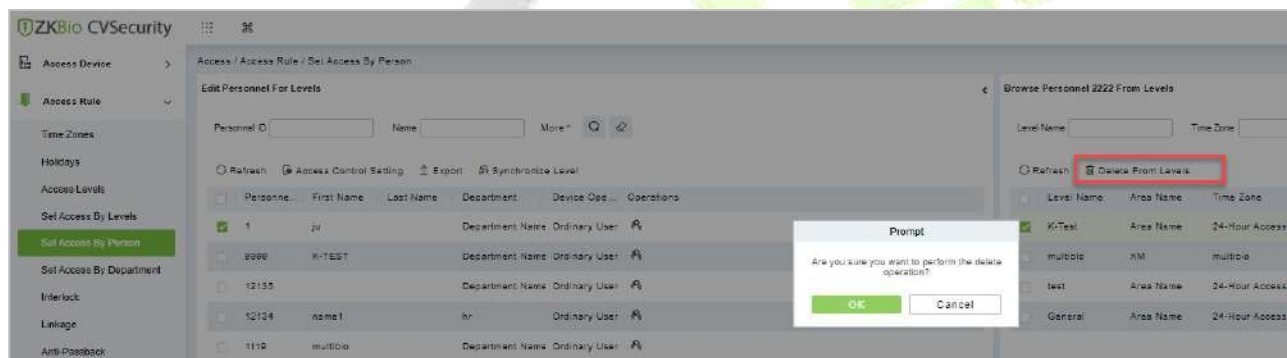


Figure 3- 73 Delete Rights Groups by Department

3.4.7 Interlock

Set interlock control between two or more doors on the access controller device: To verify the opening of a door, ensure that all other doors interlocked with the door are closed; otherwise, the door cannot be opened.

This section describes the Step of adding interlock effect in ZKBio CVSecurity.

● The Premise Conditions:

The door opening/closing state monitoring is realized by detecting the door magnetic state. Therefore, interlock function requirements:

1. The door status sensor at the device end must be correctly installed
2. In door setting on the software side, the status of the door status sensor must be set to normally open or normally closed (based on the actual installation).

3.4.7.1 Add (New)

●Operation Step:

Step 1: In the Access Control module, choose "**Access Control > Interlock**" and click New.

Step 2: Select the specified device.

Instructions:

When you add a device for which interlock has been configured, the device cannot be found in the drop-down list. After the configured interlock information is deleted, the device is returned to the drop-down list.

Interlock Settings vary with the number of doors controlled by the device:

Single-door controller: no interlock setting

Dual door controller: 1-2 two door interlock Settings

Four-door controller: 1-2 two-door interlock, 3-4 two-door interlock, 1-2-3 three-door interlock, 1-2-3-4 four-door interlock, 1-2 and 3-4 door interlock

Step 3: Select the interlock rule, and click **OK** to complete the settings, as shown in figure below. The new interlock Settings are displayed in the list.



Figure 3- 74 Adding Interlock Configuration

Parameter	How to set up
Device Name	You can customize the name of the Device
Interlock Rule	Select the configured interlock rule.

Table 3- 12 Description of interlock

3.4.7.2 Delete

Select interlock, click **Delete**, and click **OK** to delete the interlock.

3.4.8 Linkage

The use method and scenario of linkage are flexible. After a specific event is triggered by an input point in the **Access Control** system, a linkage action will be generated at the specified output point to control events such as verification opening, alarm and abnormality in the system.

This section describes how to add Step to the linkage effect in ZKBio CVSecurity.

Add (New)

●The Premise Conditions:

Before adding a linkage configuration, perform the following operations:

Step 1: Add Settings for binding cameras to access control devices, input points, output points, and read heads.

Step 2: Optional: In the **System Management** module, choose “**System Management > Mail Management**” to set the sender server. The Step of setting the sender server is as follows:

In the System Management module, choose ‘system Management > Mail Management”.

Click “**Sender Server Settings**” to pop up the sender server Settings interface.

On the Sender server Settings screen, set parameters as required, as shown in figure below. For parameter Settings, see Table 3-13.

After setting, click “**Test connection**” to receive the email, indicating that the test has passed.

Step 3: Click **OK** to finish setting email parameters.

Figure 3- 75 Mailbox Parameters

Parameter	How to set up
Email server address/port	You can customize the email server address and port. The email products that provide the SMTP server can be used.
Email username and password	Enter the user’s name and password for the mailbox.
Name of sender	Sets the name of the sender on the received message.

Table 3- 13 Mailbox Management Parameters

● Operation Step:

Step 1: In the Access Control module, choose “**Access Control > Linkage**”.

Step 2: On the linkage setting screen, click **Add**, as shown in figure below. Table 3-14 and Table 3-15 refer to the linkage parameters.

New

Linkage Name*

Device*

Click to select

Linkage Trigger Conditions*

Add

Input Point*

Output Point

Video Linkage

E-mail

Intrusion

Send SMS

Door

Auxiliary Output

Action type

Close

Action type

Close

Save and New

OK

Cancel

Figure 3- 76 New Linkage Configuration

Parameter	How to set up
Linkage Name	You can customize the linkage name for easy query.
Device	Custom Select an added access control device.
Linkage Departure Condition	Select the condition triggered by the linkage Operation, that is, the event type generated by the selected device.
Input Point	Select the input point to set device input.
Output Point	Select the output point to set device output.
Linkage Action Setting	You can set the linkage action, including Operation, video linkage, and email. Table 3-3 describes the configurations of the three modes.

Table 3- 14 New Linkage Parameters

Parameter	How to set up
The Output Point of Operation	Set the output action type: close, open, normally open. Sets the delay time if the output action is on.
Video Linkage	Pop-up video and display duration: Select pop-up video on the real-time monitoring screen and set the pop-up duration. Video recording and Video Duration: Select Video recording to set the video duration. Capture: Set linkage action whether to take a photo: If a photo is taken, you also

Parameter	How to set up
	need to set whether to pop up on the real-time monitoring interface and the display duration.
E-Mail	Set the email address that receives the linkage content when a linkage event occurs.
Intrusion	Configure the action of arming an area after an event is triggered
Send SMS	Configure the recipient of the SMS when the event is triggered
Line	Configure the recipient of the Line when the event is triggered
WhatsApp	Configure the recipient of the WhatsApp when the event is triggered

Table 3- 15 Setting Linkage Actions

Step 3: Click **OK** to complete the linkage configuration.

3.4.8.1 Delete

Select linkage, click **Delete**, and click **OK** to delete the linkage.

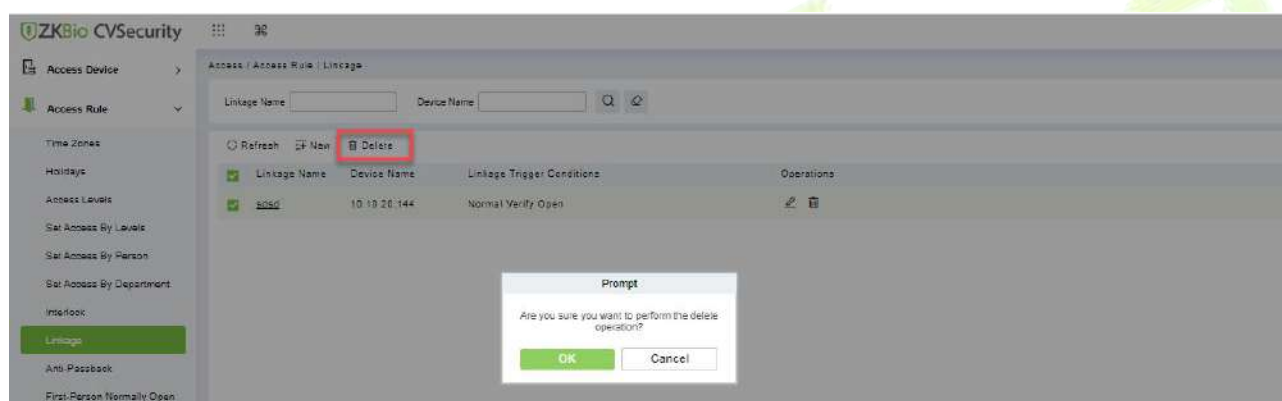


Figure 3- 77 Adding Interlock Configuration

3.4.9 Anti-Passback

Some occasions require the personnel that brush card to verify, brush card to come in from a door must brush card to go out from another door, brush card record must enter a strict correspondence. This function can be used when users enable it in the settings. It is generally used in special units, scientific research, bank vaults and other occasions.

This section describes the Step of adding the Anti-Passback effect in ZKBio CVSecurity.

3.4.9.1 Add (New)

● Operation Step:

Step 1: In the Access Control module, choose "**Access Control > Anti-Passback**" and click New.

Step 2: Select the specified device.

Instructions:

When you add an Anti-Passback device, the configured Anti-Passback device is not displayed in the device list. After the antisubmarine information is deleted, the device returns to the device list.

The Anti-Passback setting varies with the number of gates controlled by the equipment:

Anti-Passback setting of single door controller: Anti-Passback between readers

Two controllers: door 1 Anti-Passback between readers, door 2 Anti-Passback between readers, door 1

and door 2 Anti-Passback

Four door controllers: door 1 and door 2 Anti-Passback, door 3 and door 4 Anti-Passback, door 1/ door 2 and door 3/ door 4 Anti-Passback, door 1 and door 2/ door 3/ door 4 Anti-Passback, door 1 and door 2/ door 3/ door 4 Anti-Passback, door 1/ door 2/ door 3/ door 4 Anti-Passback reader

Step 3: Select the Anti-Passback rule and click **OK** to complete the settings. The new Anti-Passback Settings are displayed in the list.

Figure 3- 78 Adding the Anti-Passback Configuration

3.4.9.2 Delete

Select device, click **Delete**, and click **OK** to delete the device.

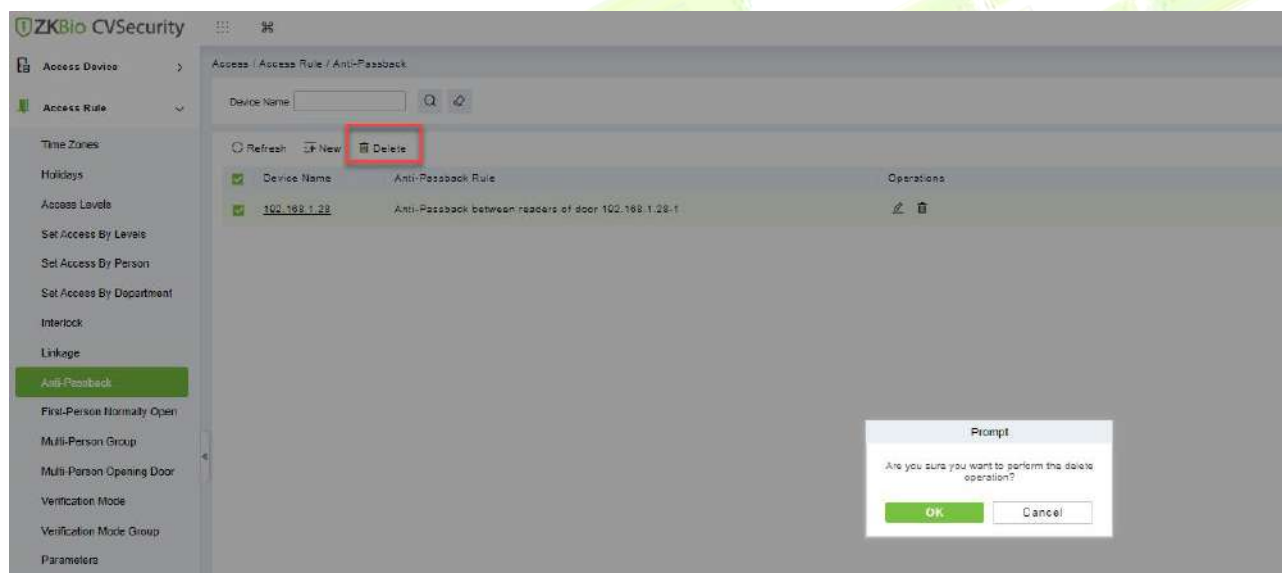


Figure 3- 79 Anti-Passback Delete

3.4.10 The First-Person Normally Open

In the specified period, after the verification of the first person with normally open permission, the door normally open, the end of the valid period of the door automatically closed.

This section describes how to add Step in ZKBio CVSecurity.

●The Premise Conditions:

The time range has been set for the Access Control module.

3.4.10.1 Add (New)

●Operation Step:

Step 1: In the Access Control module, choose "**Access Control > First person normally Open**" and click New.

Step 2: Select the specified device, add Settings for the specified door, and select the normally open time period, and click **OK**, as shown in figure below.

Figure 3- 80 Configuring the First Person to Open the Door

Step 3: Click "Add People" on the interface of "Opening of the first person". After adding people, click **OK** to complete the setting of "opening of the first person".

Figure 3- 81 Adding A First Person Normally Open Person Configuration

3.4.10.2 Delete

Select personnel ID, click **Delete**, and click **OK** to delete the personnel ID.

Figure 3- 82 Delete Person Normally Open Person Configuration

3.4.11 Multi-Person Group

The door will open only after the consecutive verification of multiple people. Any person verifying outside of this combination (even if the person belongs to other valid combination) will interrupt the procedure and you need to wait 10 seconds to restart verification. It will not open by verification by only one of the combinations.

3.4.11.1 Add (New)

Step 1: Click **Access Rule > Multi-Person Group > New** to access the following edit interface:

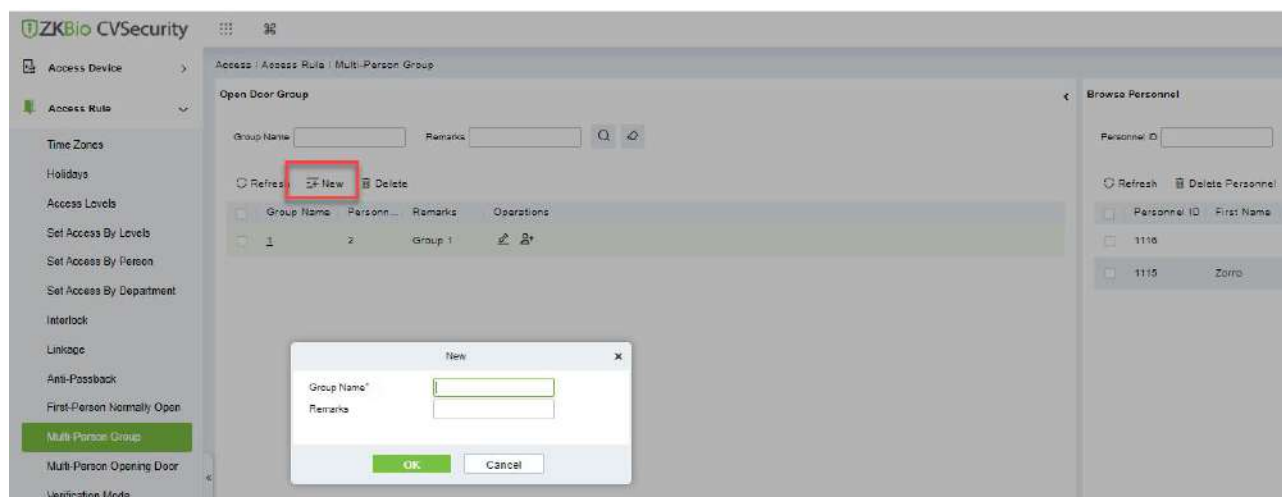


Figure 3- 83 Adding A Multi-Person Group

Group Name: Any combination of up to 30 characters that cannot be identical to an existing group name.

After editing, click **OK** to save and return. The added Multi-Person Personnel Group will appear in the list.

Step 2: Click **Add personnel** under Related Operations to add personnel to the group.

Step 3: After selecting and adding personnel, click **OK** to save and return.

Note: A person can only be grouped into one group.

3.4.11.2 Edit

Click **Access Rule > Multi-Person Group > Edit** after selecting the required section in the interface.

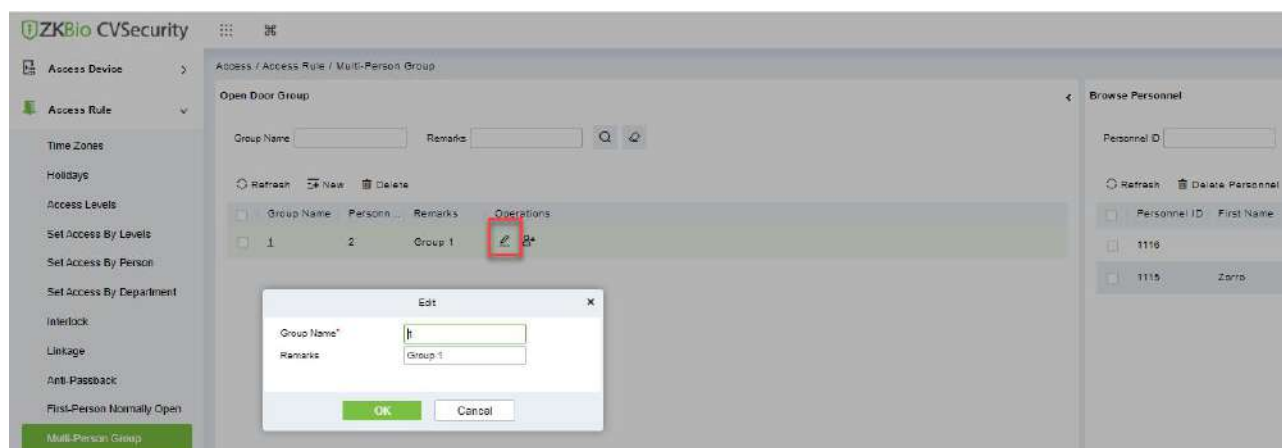


Figure 3- 84 Edit Multi-Person Group

3.4.11.3 Add Personnel

Click **Access Rule > Multi-Person Group > Add Personnel** after selecting the required section in the interface.

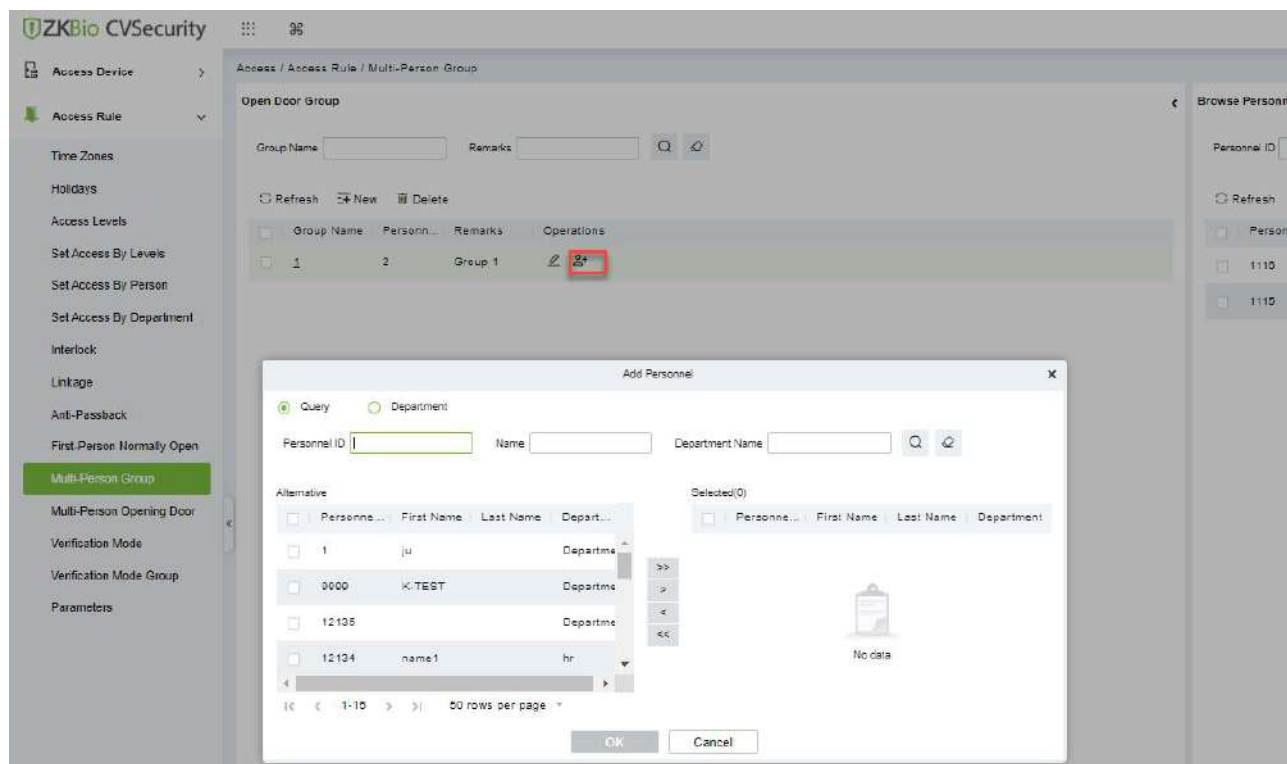


Figure 3- 85 Adding A personnel for Multi-Person Group

3.4.11.4 Delete

Click **Access Rule > Multi-person group > Delete** after selecting the required section in the interface.

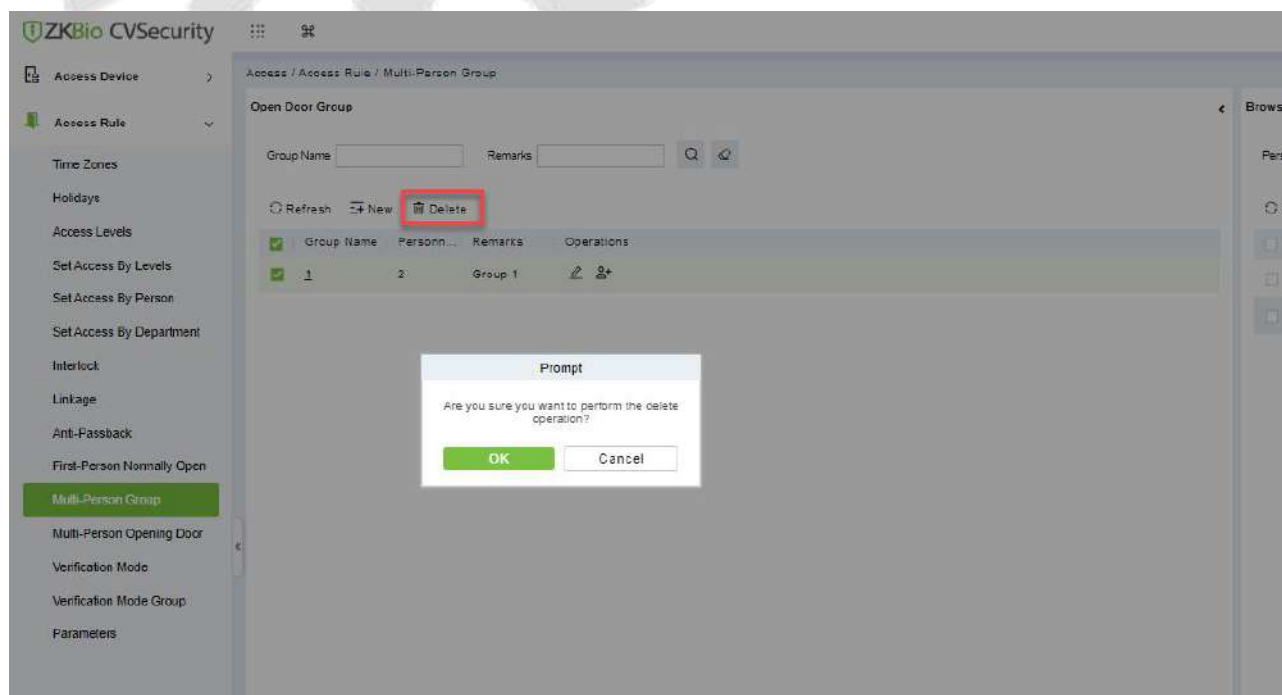


Figure 3- 86 Delete A Multi-Person Group

3.4.12 Multi-People Open the Door

In a specific scenario, it is necessary for more than one person to be present at the same time to verify their identity before they can open the door through permission verification.

● Instructions:

1. In an application scenario where, multiple users are required to verify their identities before opening the door, the authentication process is limited to N (no more than 5) by grouping people into groups.
2. In practice, if all the personnel to be verified are of the same type or level, it can be verified by multiple people in a single group. If there are different categories or levels of personnel, you can set a certain number of personnel in each group to achieve verification.
3. Before the multi-party door verification rule is reached, if the verification fails during the process, wait 10 seconds for the verification again.

3.4.12.1 Add (New)

Step 1: In the **Access Control** module, choose "**Access Rule > Multiple Door Opening Personnel Group**" and click **New**. After filling in the corresponding parameters, click **OK** to save the settings.

Step 2: Click "**Add Personnel**" on the right of the list of created multi-person door opening personnel, select the personnel to be added to the group in the pop-up function, and click **OK** to save the settings.

Figure 3- 87 Adding Multiple Door Openers

Step 3: In the multi-person door opening interface, click **Add**, set permissions for multi-person door opening personnel group.

Step 4: On the page for adding multiple door users, select the specified door, group information for multiple door users, and the number of verification personnel for each group, and click **OK** to save the settings.

New

Door Name*

Click to select

Combination Name*

Number of opening personnel in each group

Group1

0

(0)

Group2

0

(0)

Group3

0

(0)

Group4

0

(0)

Group5

0

(0)

OK

Cancel

Figure 3- 88 Adding Multiple Door Openers

Step 5: In the **Access Control** module, choose **"Access Rule > Authentication Mode Rule"** and click **Add** to set the access control authentication rule for the corresponding period.

New

Rule Name*

Time Zones*

Date	Time	Interval 1				Interval 2				Interval 3			
		Start Time	End Time	Door Verification	Personnel Verification	Start Time	End Time	Door Verification	Personnel Verification	Start Time	End Time	Door Verification	Personnel Verification
Monday		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Tuesday		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Wednesday		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Thursday		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Friday		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Saturday		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Sunday		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Holiday Type-1		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Holiday Type-2		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		
Holiday Type-3		00 : 00	00 : 00			00 : 00	00 : 00			00 : 00	00 : 00		

Copy Monday's Setting to Others Weekdays:

⚠️ RS485 reader can only follow the door verification mode, does not support the personnel verification mode.

Save and New

OK

Cancel

Figure 3- 89 Delete A Multi-Person Group

Step 6: Click **Add Door** on the right of the created authentication mode rule, select a door, and set the authentication mode rule for the door.

Add Door

Door Name

Serial Number

Alternative

Door Name

Owned Device

Serial Number

ProfaceX-1

ProfaceX

CN3M2124600

Selected(0)

Door Name

Owned Device

Serial Number

>>

>

<

<<

No data

<

<<

1-1

>

>>

50 rows per page

OK

Cancel

Figure 3- 90 Verification Rule Configuration for Adding Multiple Door Openers

Step 7: click **OK** to save the settings.

3.4.12.2 Delete

Click **Access Rule > Multi-person opening door > Delete** after selecting the required section in the interface.

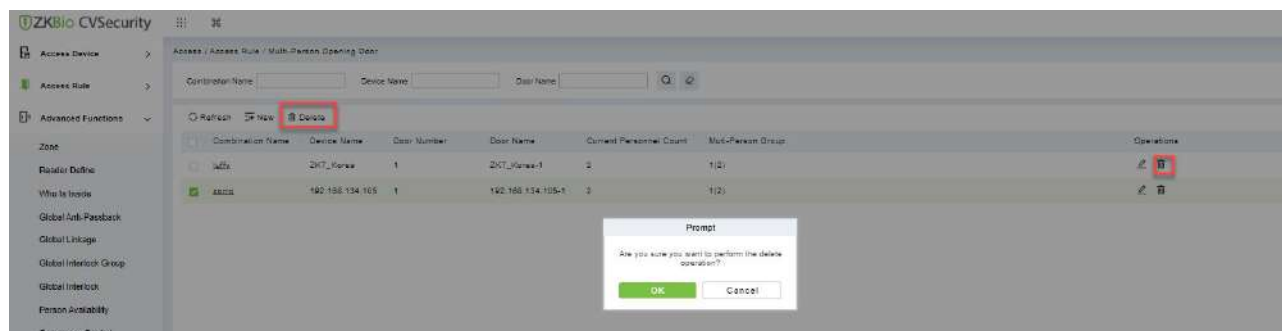


Figure 3- 91 Delete A Multi-Person Group

3.4.13 Verification Mode

You can set verification modes for doors and personnel separately in a specified time segment.

3.4.13.1 New

Step 1: Click **Access Rule > Verification Mode > New** to go to the page for adding a verification mode rule.

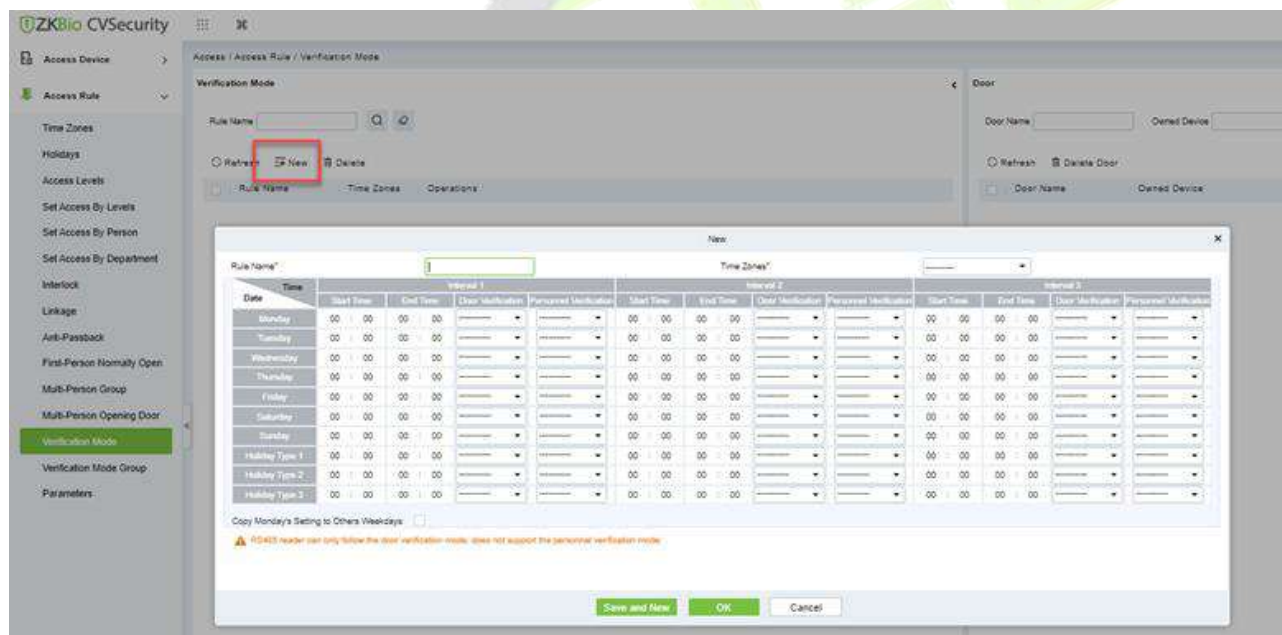


Figure 3- 92 Add Verification mode

Step 2: Set the following parameters: Select a rule name (not repeatable), the time segment, and verification mode for a door or person in each time segment.

Step 3: Click **OK** to finish the setting.

On the list page, you can add or delete doors in the verification mode rule.

3.4.13.2 Verification Mode Group

You can set verification modes for doors and personnel separately in a specified time segment.

● Steps:

Step 1: Click **Access Rule > Verification Mode > New** to go to the page for adding a verification mode

rule.

Figure 3- 93 Add Verification mode Group

Step 2: Set the following parameters: Select a rule name (not repeatable), the time segment, and verification mode for a door or person in each time segment.

Step 3: Click OK to finish the setting.

On the list page, you can add or delete doors in the verification mode rule.

Note: If a rule includes the verification mode for personnel, you cannot select doors with the RS485 readers when adding doors. You can modify only the configuration on the reader setting page before adding doors.

● Verification Mode Group:

Set appropriate personnel for configured verification mode rule.

3.4.14 Parameters

Click **Access Rule > Parameters** to enter the parameter setting interface:

Figure 3- 94 Add Parameters

● Type of Getting Transactions:

Periodically

Start from the setting and efficient time, the system attempts to download new transactions every time interval.

Set the Time for Obtaining New Transactions

The selected Time is up, the system will attempt to download new transactions automatically.

Transaction Auto-Export

The user can choose the export frequency and the data to be exported each time. If the export frequency is selected as **"By day"**, you must set the time to export the data. You must also select the mode of export. It can be daily transactions or all the system data (30000 data units can be sent at a time. We can customize the data that we need to export from custom report 1 and custom report 2.

If the export frequency is selected as **"By Month"**, you must select the day to export the data. It can be the first day of the month or you can specify any particular date. Then select the export frequency as Daily Data or all System data. Finally, add the recipient's mail address to send the transaction data.



Figure 3- 95 Transaction Auto Export

The Real Time Monitoring Page Pop-up Staff Photo Size

When an access control event occurs, the personnel photo will pop up. The size of pop photos shall be between 80 to 500 pixels.

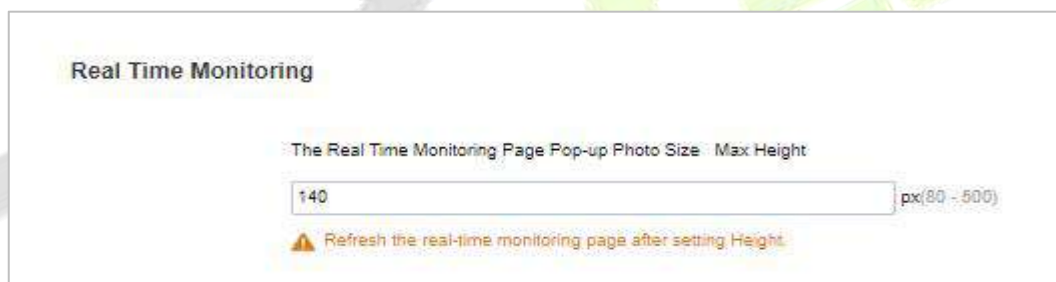


Figure 3- 96 Real Time Monitoring

Alarm Monitoring Recipient Mailbox

The system will send email to alarm monitoring recipient's mailbox if there is any event.



Figure 3- 97 Alarm Monitoring Recipient Mailbox

Alarm Monitoring Recipient Mobile Number

The system will send alarm monitoring recipients to mobile, if there is any event.



Figure 3- 98 Alarm Monitoring Recipient Mobile Number

3.5 Advanced Function

Advanced access control is optional. You must obtain permission to activate the advanced access control.

In addition to the global linkage function, enable the background authentication function first.

The access control area must be defined when advanced functions such as global Anti-Passback are used.

3.5.1 Zone

Divide areas and define access control areas. The access control area is reserved for advanced access control but not for system management.

This section describes Step in ZKBio CVSecurity to add an access control area.

3.5.1.1 Add (New)

● Operation Step:

Step 1: In the Access Control module, choose "**Advanced function > zone**" and click New.

Step 2: On the page that is displayed, set related parameters, and click **OK**.

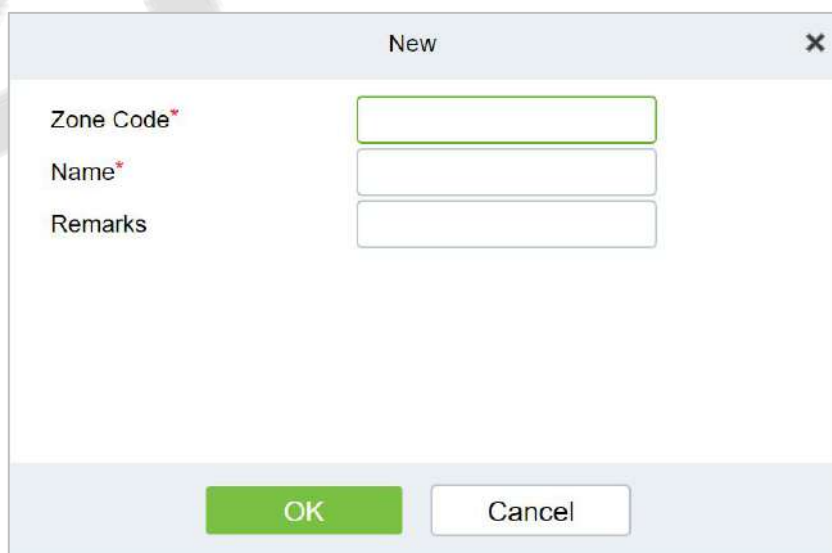


Figure 3- 99 Page for Adding Access Control Areas

3.5.1.2 Delete

Click **Advanced function > Zone > Delete** after selecting the required section in the interface.

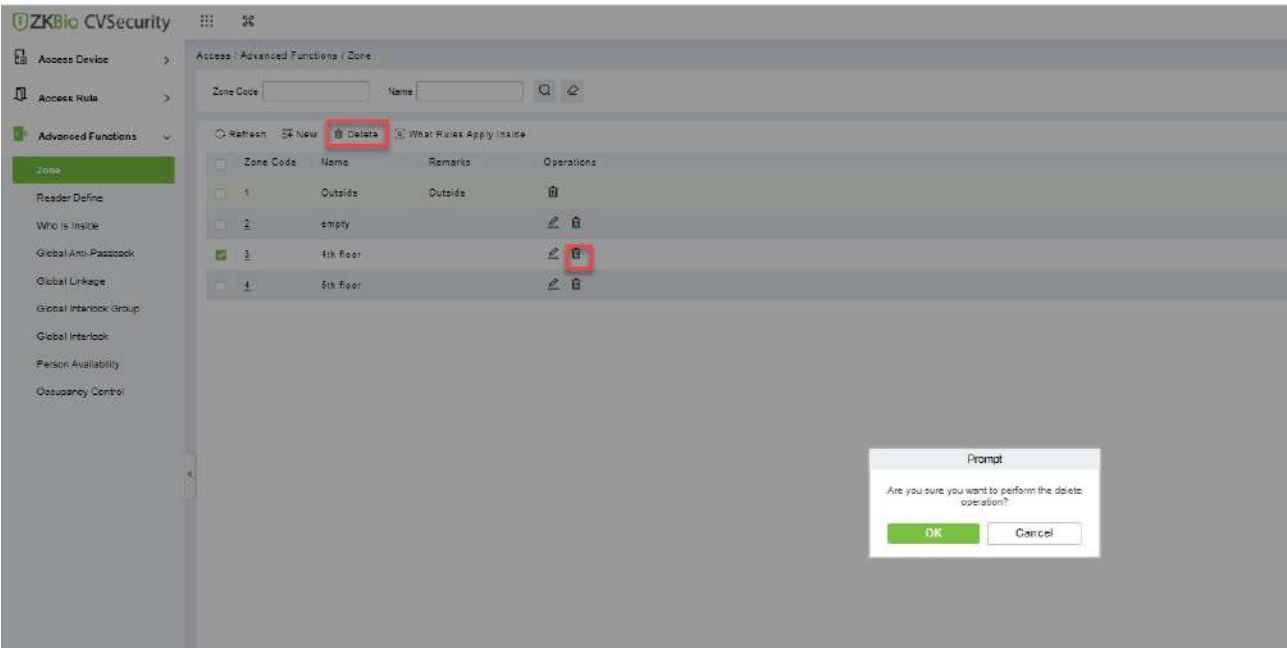


Figure 3- 100 Delete Access Control Areas

3.5.1.3 What Rules Apply Inside

Click **What rules inside** after selecting the required section in the interface we can check the rules are applied for the particular zone.

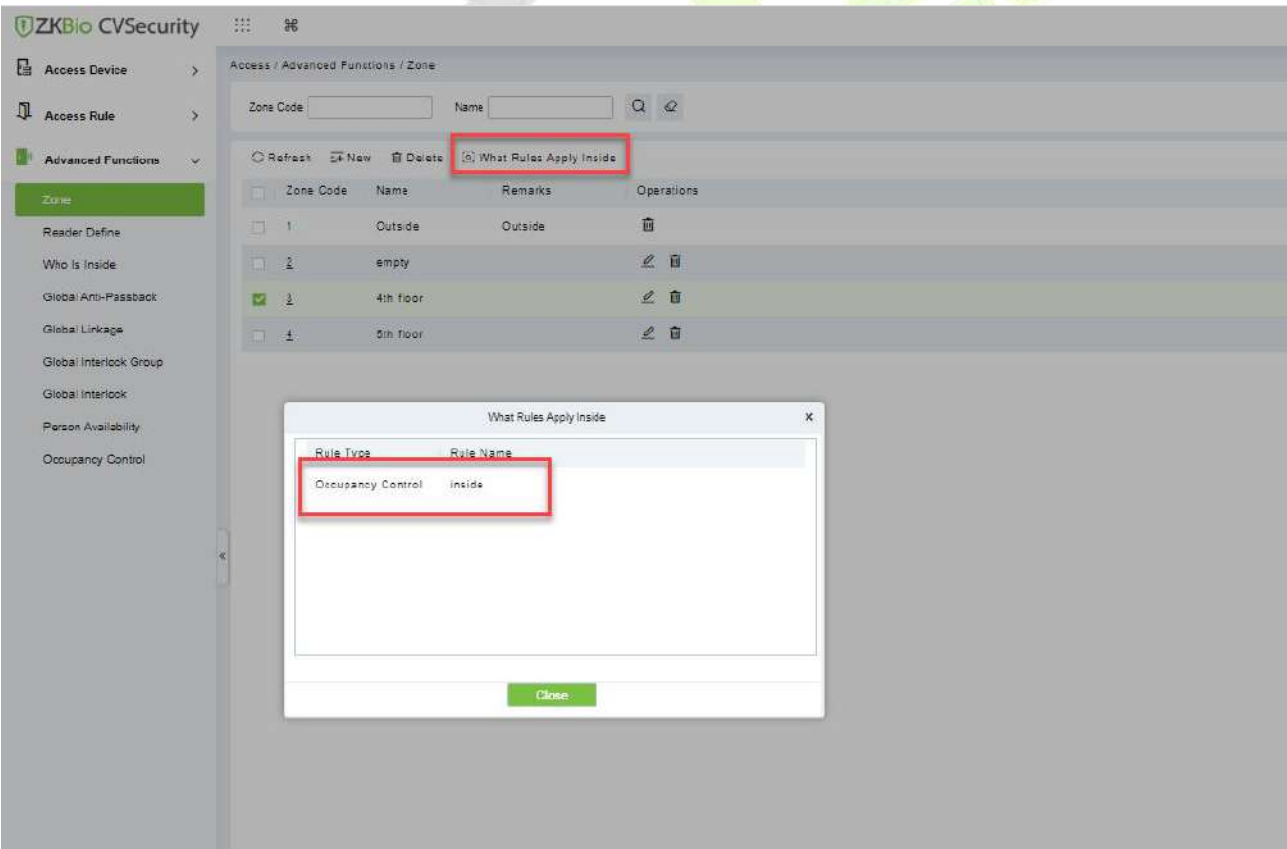


Figure 3- 101 What Rules Apply Inside

3.5.2 Reader Definition

This function is configured based on the access control area. To use the global Anti-Passback function, you must define the read head.

This section describes the Step of adding a Reader definition in ZKBio CVSecurity.

3.5.2.1 Add (New)

● Operation Step:

Step 1: In the Access Control module, choose " **Advanced function > Reader Define**" and click New.

Step 2: On the page that is displayed, set related parameters and click **OK**.




The image shows a 'New' dialog box for adding a reader. It contains three dropdown menus: 'Reader Name*', 'Goes From*', and 'Goes To*'. At the bottom, there are 'OK' and 'Cancel' buttons.

Figure 3- 102 Page for Adding a Reader

3.5.2.2 Batch New

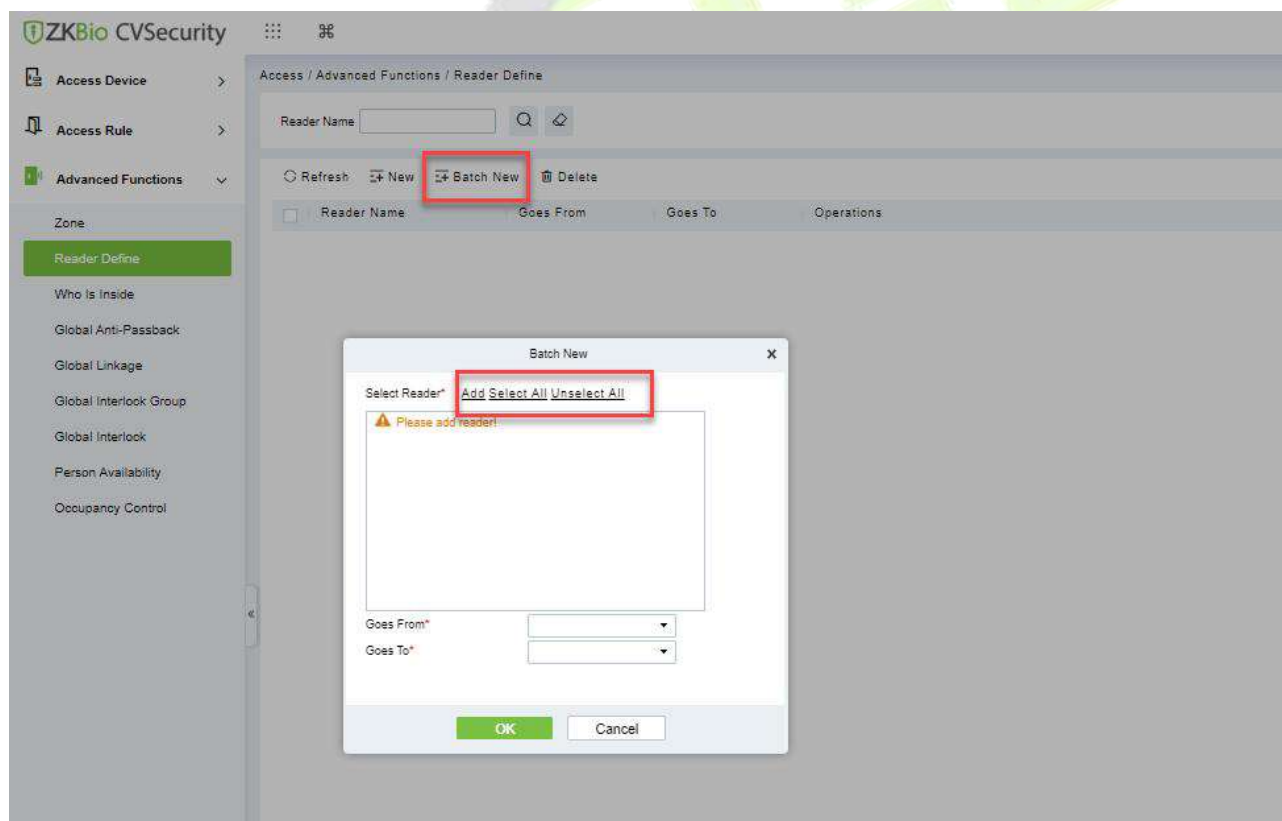Step 1: Click **Advanced Functions > Reader Define > Batch New** to enter the batch add interface:



The image shows the ZKBio CVSecurity interface. On the left, the 'Advanced Functions' menu is expanded, and 'Reader Define' is selected. In the main area, the 'Batch New' button is highlighted with a red box. Below it, a 'Batch New' dialog box is open, showing a 'Select Reader*' section with 'Add', 'Select All', and 'Unselect All' buttons. A warning message 'Please add reader!' is displayed. At the bottom of the dialog, there are 'Goes From*' and 'Goes To*' dropdown menus, and 'OK' and 'Cancel' buttons.

Figure 3- 103 Batch New

Step 2: Click **Add**, select Reader(s) and move towards right and click **OK**.

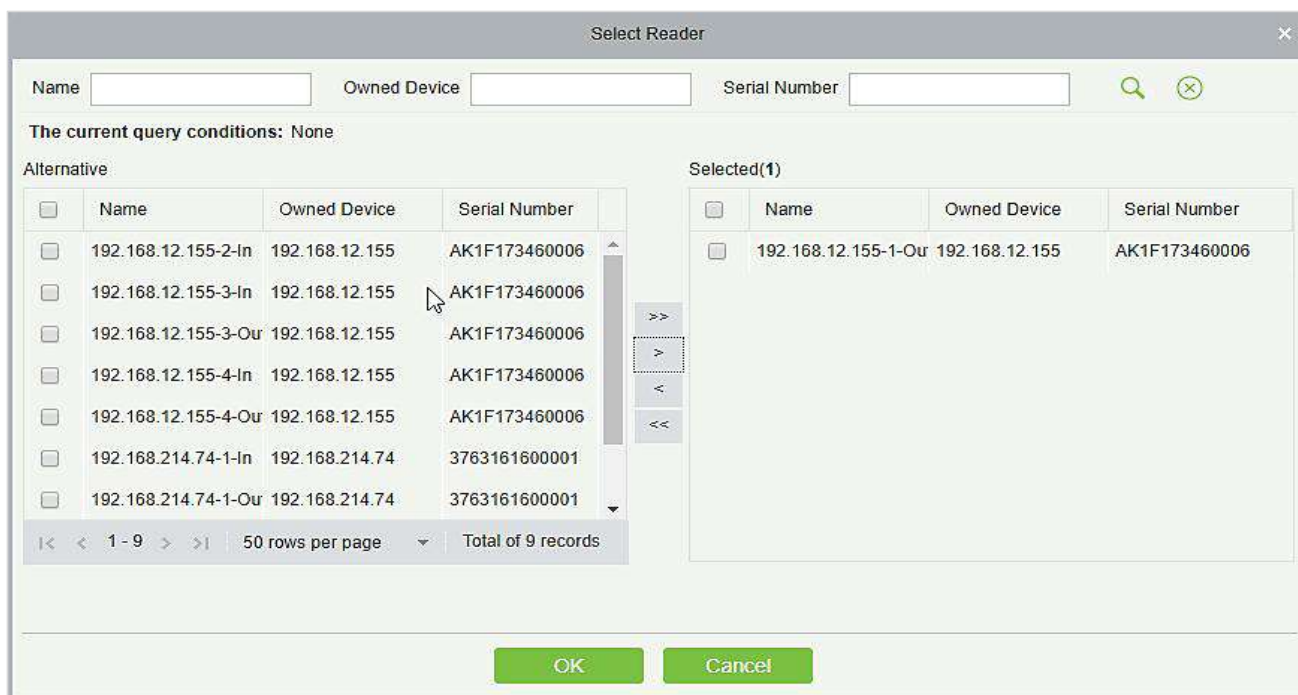


Figure 3- 104 Add Reader Define

Step 3: Set Goes from and Goes to as required and press **OK**.

3.5.2.3 Delete

In the **Access > Advanced Functions > Reader Define**, click **Delete** button under Operations. Click **OK** to delete.

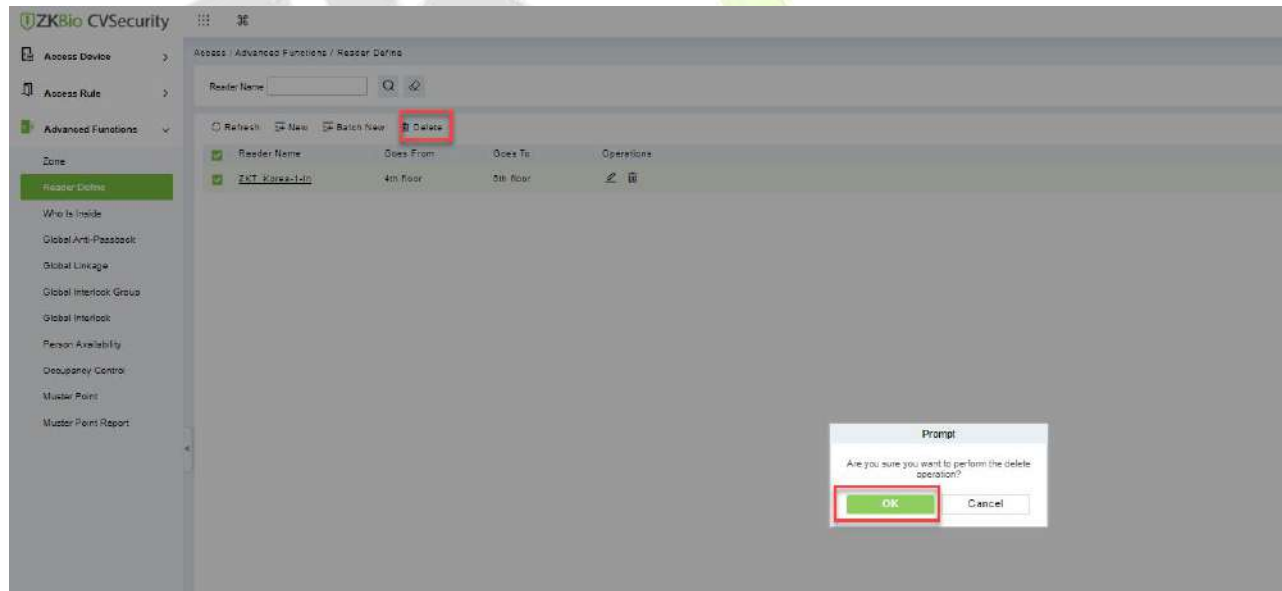


Figure 3- 105 Delete Reader Define

3.5.3 Who Is Inside?

After entering the access control area, users can use this function to view the personnel in the access control area. You can choose the access control area tree to view the personnel in the corresponding access control area.

This section describes how to view the Steps of people in a region in ZKBio CVSecurity.

● Operation Step:

Step 1: In the Access Control module, choose "**Advanced Function > View Personnel in the Area**".

Step 2: On the page for viewing personnel in a region, you can select the area on the left to view and delete personnel in the area, as shown in figure below.

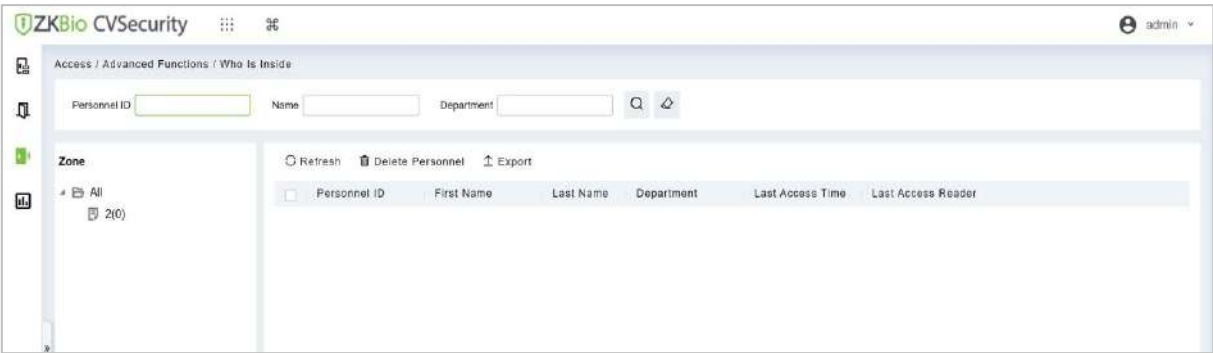


Figure 3- 106 View Area Personnel Page

3.5.3.1 Delete Personnel

Select personnel ID, click **Delete**, and click **OK** to delete the level name.

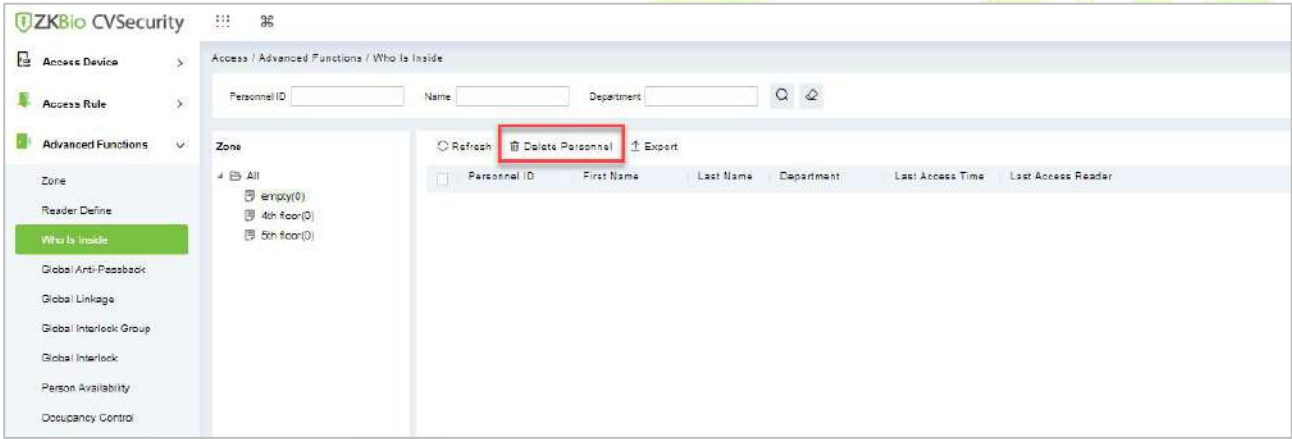


Figure 3- 107 Delete Who Is Inside

3.5.3.2 Export

Device information can be exported in EXCEL, PDF, CSV file format.

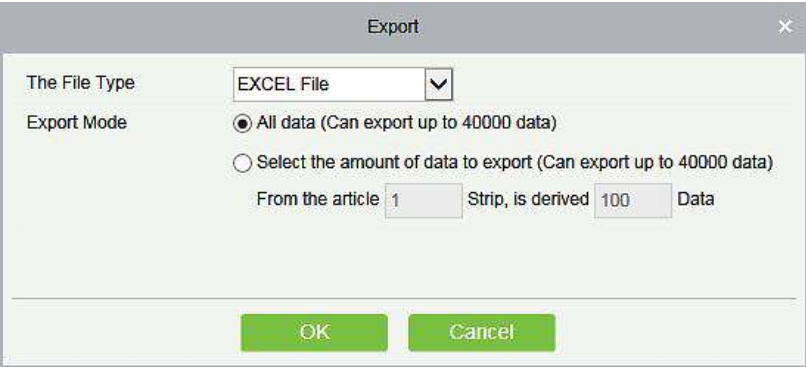


Figure 3- 108 Export

ZKTECO										
Device										
Device Name	Serial Number	Area Name	Communication Type	Network Connection Mode	IP Address	RS485 Parameter	Enable	Device Model	Register device	Firmware Version
192.168.218.60	20100501996	Area Name	HTTP	Wired	192.168.218.60		Enable	C3-400Pro		AC Ver 4.7.7.3033 Jun 16 2017

Figure 3- 109 Export Who is Inside

3.5.4 Global Anti-Passback

Global Anti-Passback Settings can be carried out across devices, and only push devices support global Anti-Passback functions. This function supports logical Anti-Passback, timed Anti-Passback and timed logical Anti-Passback, and can be configured for specific personnel.

This section describes the Step configuration of global Anti-Passback in ZKBio CVSecurity.

●The Premise Condition:

- 1. Background authentication has been enabled on the device.
- 2. Set the access control area and read head definition.

3.5.4.1 Add (New)

●Operation Step:

Step 1: In the Access Control module, choose "**Advanced Access Control > Global Anti-Passback**" and Click New.

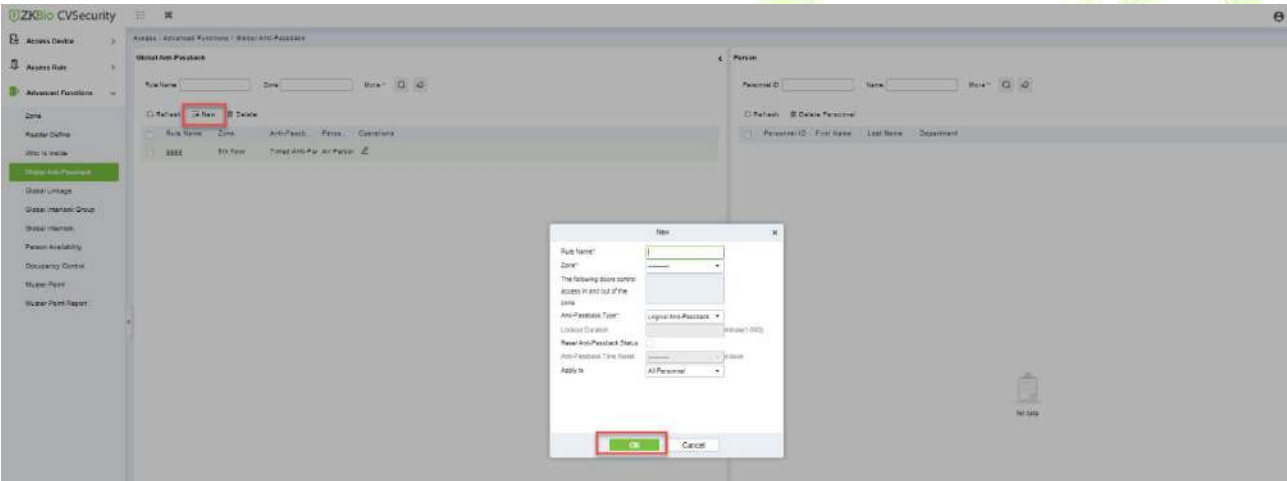


Figure 3- 110 Add Global Anti-Passback

Step 2: On the page for adding global Anti-Passback Settings, set related parameters and click **OK**, as shown in figure below. For parameter description, see Table 3-16.

Parameter	Description
Rule Name	The value can contain a maximum of 30 characters.
Entrance Guard Area	Select an option from the access control area drop-down list box.
The Door List Controls Access to The Access Control Area	The corresponding door information is displayed. The same gate shall not be used to control two independent Anti-Passback boundaries.
Anti-Passback Type	It contains three types of Anti-Passback: logic Anti-Passback, timing Anti-Passback and timing logic Anti-Passback. instructions Logical Anti-Passback: strictly follow the "one in, one out" rule in the Anti-Passback area, otherwise the verification will not open Timed Anti-Passback: A user can enter the Anti-Passback area only once within a specified period of time. After the specified period expires, the user's status will be cleared and the user can enter the Anti-Passback area again

Parameter	Description
	Timed logical Anti-Passback: the user can open the door normally only after following the exit and entry rules of logical Anti-Passback. Timing logic antisubmarine is only used in abnormal situations. For example: if the logical Anti-Passback time is set and the personnel follows others out, the personnel cannot swipe the card machine within the set locking time. The Anti-Passback state will be reset after the set locking time, and the traffic can continue.
The Locking Time	You can set the locking period only when you select timing Anti-Passback or logic Anti-Passback type.
Reset Global Anti-Passback Status	Clear the Anti-Passback status of personnel in the system and restore the initialization status.
Reset Anti-Passback Time	The reset time can be selected only when reset global Anti-Passback status is selected. When it is time to reset Anti-Passback, the system will automatically clear the Anti-Passback status of all personnel in the access control area.
Applied	All personnel, selected personnel, except selected personnel three types: instructions All personnel: This type can only be edited. Personnel selection is not supported Selected Personnel: If you select this type, you can add personnel. This Anti-Passback type takes effect only for these personnel. Personnel other than selected: Select this type, add personnel, this Anti-Passback type will only take effect for personnel other than selected.

Table 3- 16 Global Anti-Passback Settings

3.5.4.2 Delete

In the **Access > Advanced Functions > Global Anti-Pass**, click **Delete** button under Operations. Click **OK** to delete.

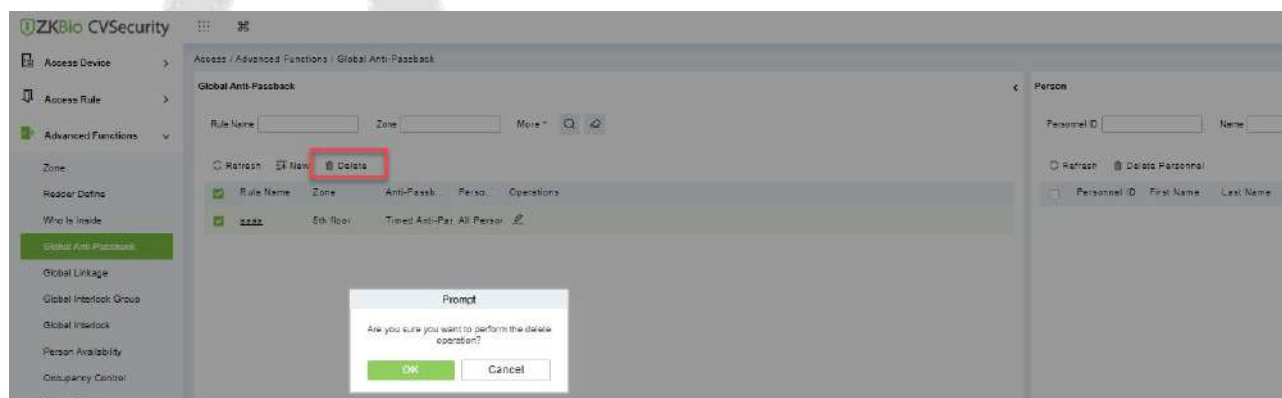


Figure 3- 111 Delete Global Anti-Passback

3.5.5 Global Linkage

The global linkage function can be set across devices. Only the push device supports the global linkage function

This section describes how to configure Step for global linkage in ZKBio CVSecurity.

3.5.5.1 Add (New)

● Operation Step:

Step 1: In the Access Control module, choose “**Advanced Function > Global Linkage**” and Click New.

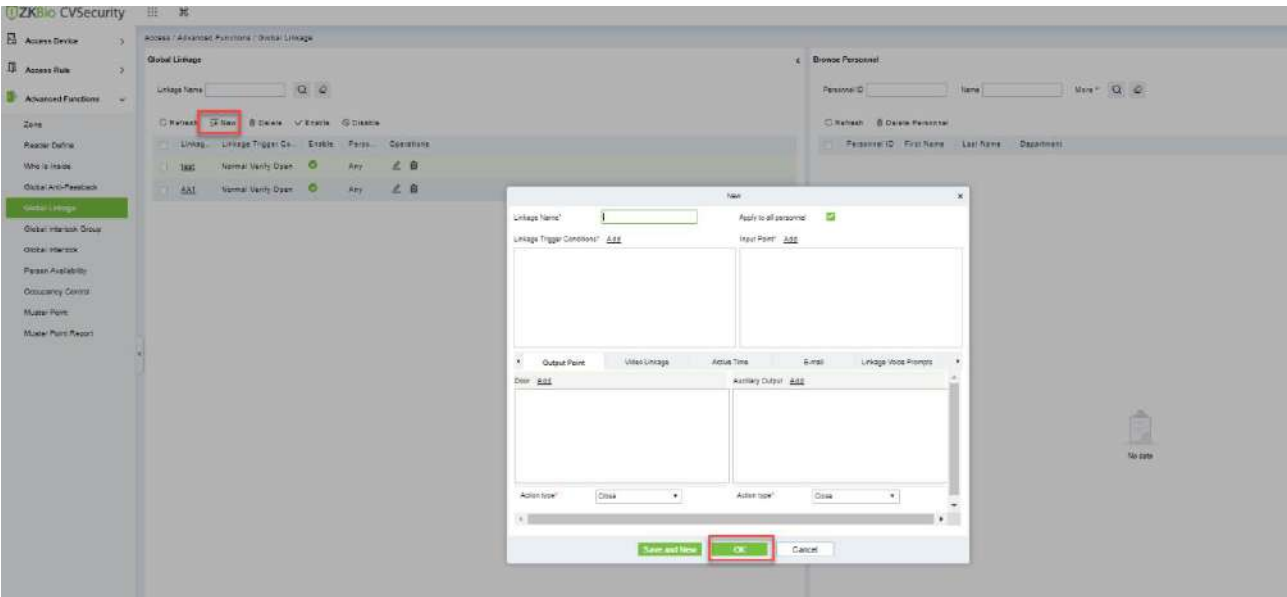


Figure 3- 112 Add Global Linkage

Step 2: On the page for adding global linkage, set related parameters and tap **OK**, as shown in figure below. Table 3-17 describes the parameter description to complete global linkage Settings.

Parameter	Operation Instructions
Linkage Name	You can customize the linkage name for easy query.
It Works for Everyone	After this parameter is selected, the linkage Settings take effect on all personnel.
Linkage Trigger Condition	Select the condition triggered by the linkage Operation, that is, the event type generated by the selected device.
Input Point	Select the input point to set device input.
Dots	Select the output point to set device output. Set the output action type: close, open, normally open. Sets the delay time if the output action is on.
Video Linkage	Pop-up video and display duration: Select pop-up video on the real-time monitoring screen and set the pop-up duration. Video recording and Video Duration: Select Video recording to set the video duration. Capture: Set linkage action whether to take a photo: If a photo is taken, you also need to set whether to pop up on the real-time monitoring interface and the display duration.
Valid Time	The reset time can be selected only when reset global Anti-Passback status is selected When it is time to reset Anti-Passback, the system will automatically clear the Anti-Passback status of all personnel in the access control area.
Mail	Set the email address that receives the linkage content when a linkage event occurs

Table 3- 17 lobal Linkage Parameters

Apply to all personnel: If this option is selected, this linkage setting is effective for all personnel.

Active Time: Set the active time of the linkage setting.

Step 3: Choose Global Linkage trigger conditions, the input point (System will filter devices according to the choice in first step) and the output point, Set up linkage action. For more details about these parameters, please refer to Linkage Setting.

Note: You can select multiple Door Events, but “Fail to connect server”, “Recover connection” and “Device connection off” will be filtered automatically from Door Event.

Step 4: Click **OK** to save and quit. The added Global Linkage will display in the list.

3.5.5.2 Delete

In the **Access > Advanced Functions > Global Linkage**, click **Delete** button under Operations. Click **OK** to delete.

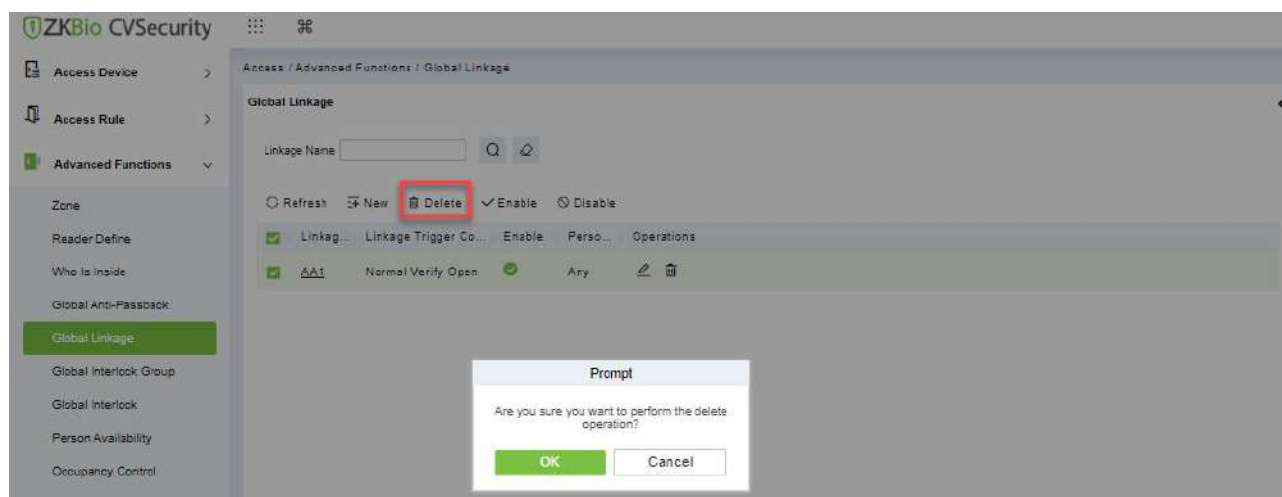


Figure 3- 113 Delete Global Linkage

3.5.5.3 Enable

After the device is enabled, the upload and download of data are enabled normally. (When the device is enabled, users can choose whether it is a registration device or not).

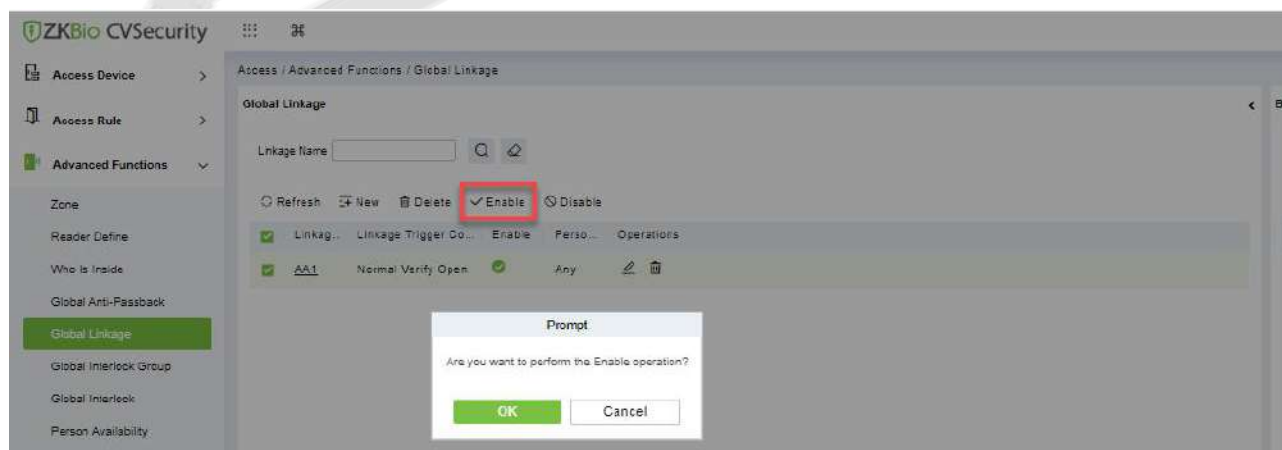


Figure 3- 114 Enable Global Linkage

3.5.5.4 Disable

After the device is disabled, the device is not allowed to upload and send data.

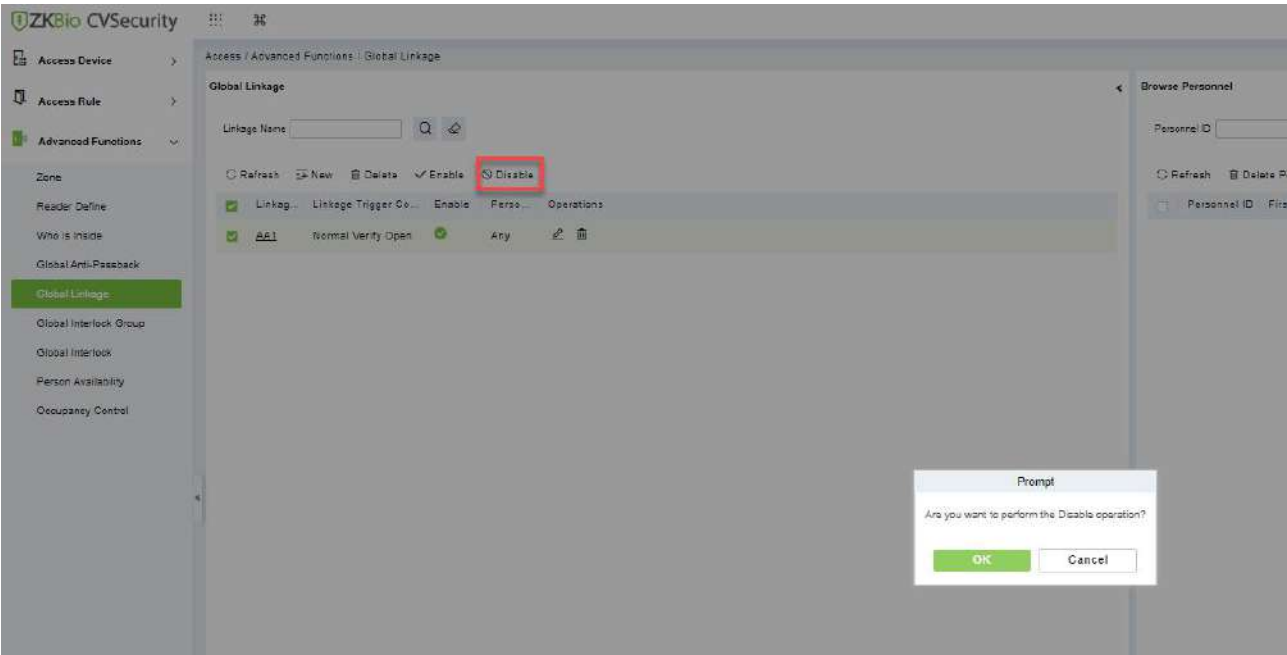


Figure 3- 115 Disable Global Linkage

3.5.6 The Global Interlock Group

Global interlocking the global interlocking function can be set across devices. Only the push device supports global interlocking. By setting the global interlock group to group doors, you can set global interlock.

This section describes the Step configuration of global interlock in ZKBio CVSecurity.

●The Premise Condition:

Background authentication has been enabled on the device.

3.5.6.1 Add (New)

●Operation Step:

Step 1: In the Access Control module, choose “**Advanced Access Control > Global Interlock Group**” and Click New.

Step 2: On the page for adding a global interlock group, set related parameters and Click **OK**, as shown in figure below.

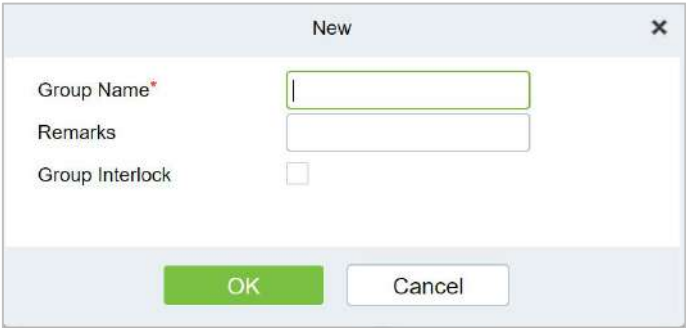


Figure 3- 116 Global Interlock Group Settings Screen

Parameter	How to set up
Group Name	Any combination of up to 30 characters that cannot be identical to an existing group name

Group Interlock	Select the configured interlock rule.
-----------------	---------------------------------------

Table 3-18 Description of Advance Global Interlock

Step 3: On the global interlock group page, tap Add Door next to the configured group name on the left, as shown in figure below.

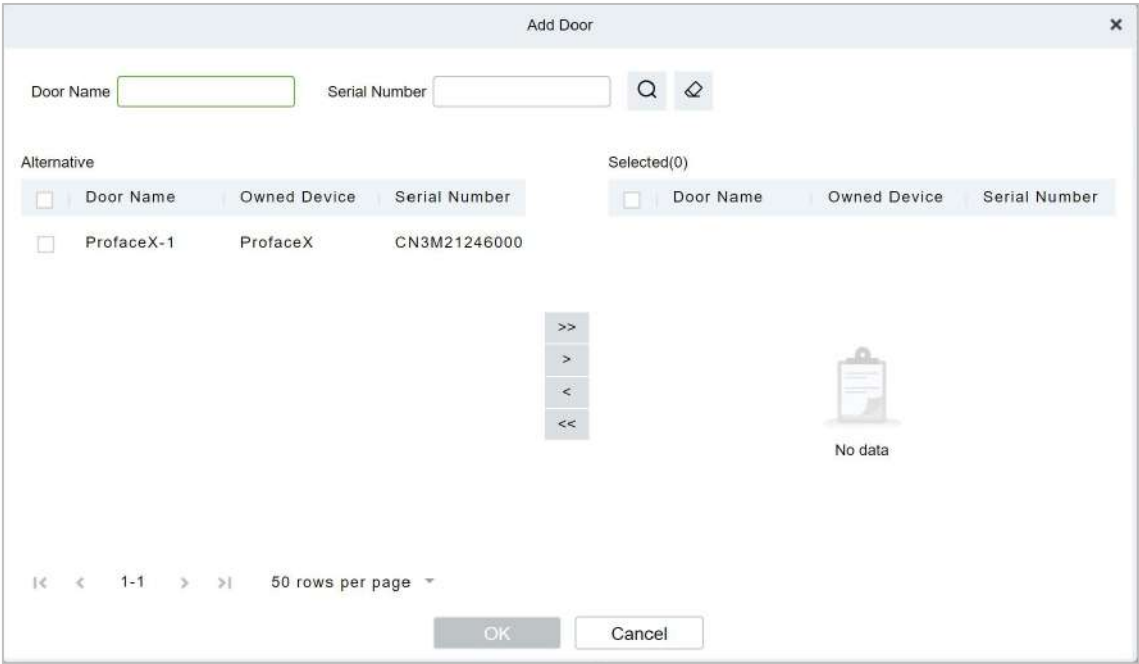


Figure 3- 117 Adding A Door to A Global Interlock Group

3.5.6.2 Delete

In the **Access > Advanced Functions > Global Interlock Group**, click **Delete** button under Operations. Click **OK** to delete.

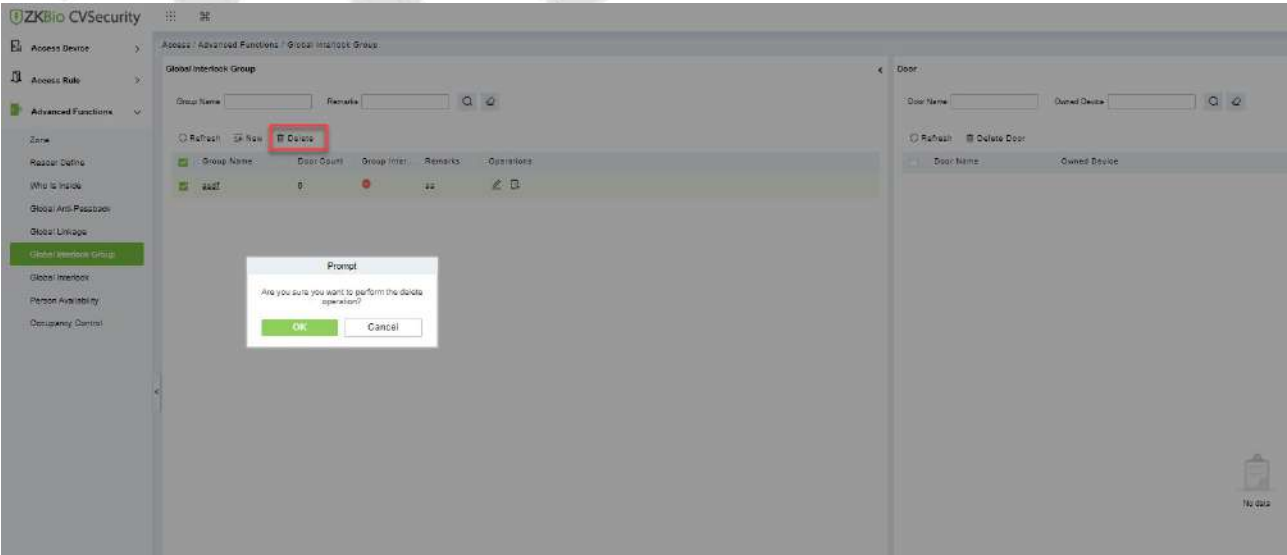


Figure 3- 118 Delete A Door to A Global Interlock Group

3.5.7 The Global Interlock

3.5.7.1 Add (New)

Step 1: In the Access Control module, choose **“Advanced Access Control > Global Interlock”** and Click New.

On the page for adding global interlock, set related parameters and Click **OK**, for example

Step 2: The global interlock name is set.

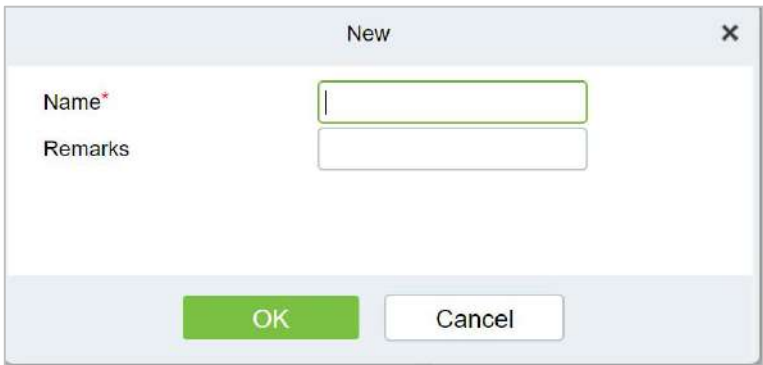


Figure 3- 119 Global Interlock Settings Screen

Parameter	How to set up
Name	Any combination of up to 30 characters that cannot be identical to an existing name
Remark	Select the configured interlock rule.

Table 3- 18 Description of Access Control Right Groups

Step 3: On the global interlock screen, click **Add** Group next to the configured global interlock on the left, as shown in figure below.

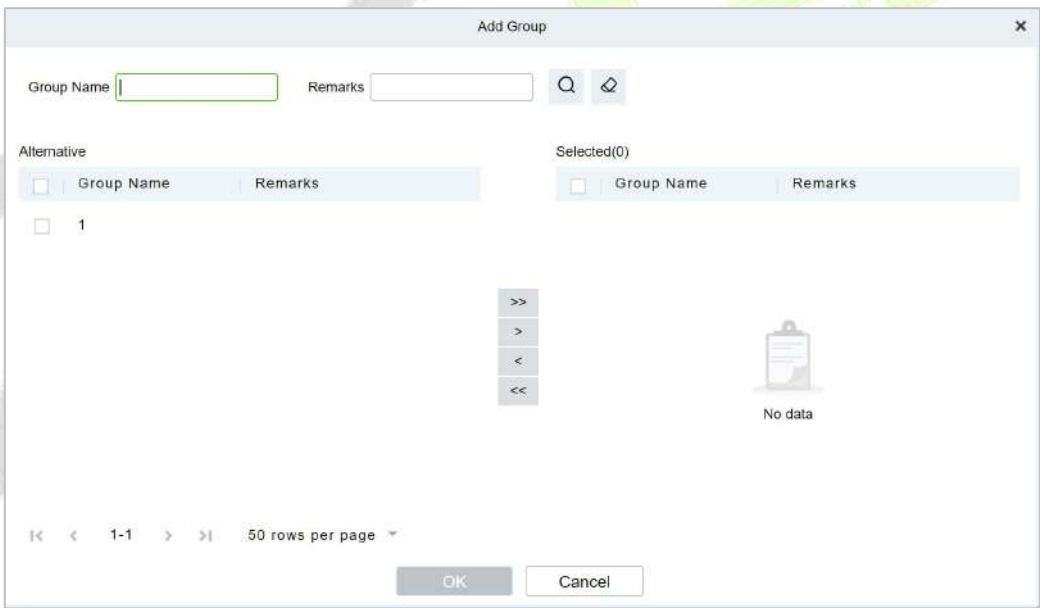


Figure 3- 120 Page for Adding Global Interlock Groups

3.5.7.2 Delete

In the **Access > Advanced Functions > Global Interlock**, click **Delete** button under Operations. Click **OK** to delete.

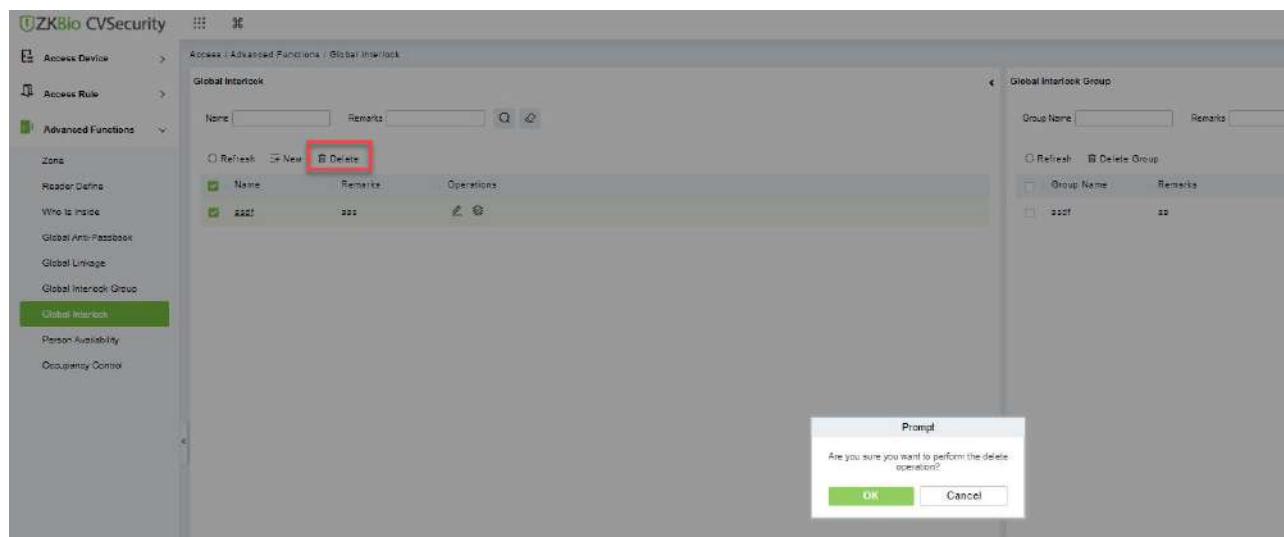


Figure 3- 121 Page for Adding Global Interlock Groups

3.5.8 Personnel Availability

It is used to restrict the expiration date, the number of days after the first use, and the number of times the user passes the specified advanced access control area.

● The Premise Condition:

1. Background authentication has been enabled on the device
2. Set the access control area and read head definition.

3.5.8.1 Add (New)

● Operation Step:

Step 1: In the Access Control module, choose “**Advanced Access Control > Personnel Availability > Set Access Control Area Properties**”, and Click New.

Step 2: On the **Access Control Area Properties** page, set related parameters and Click **OK**.

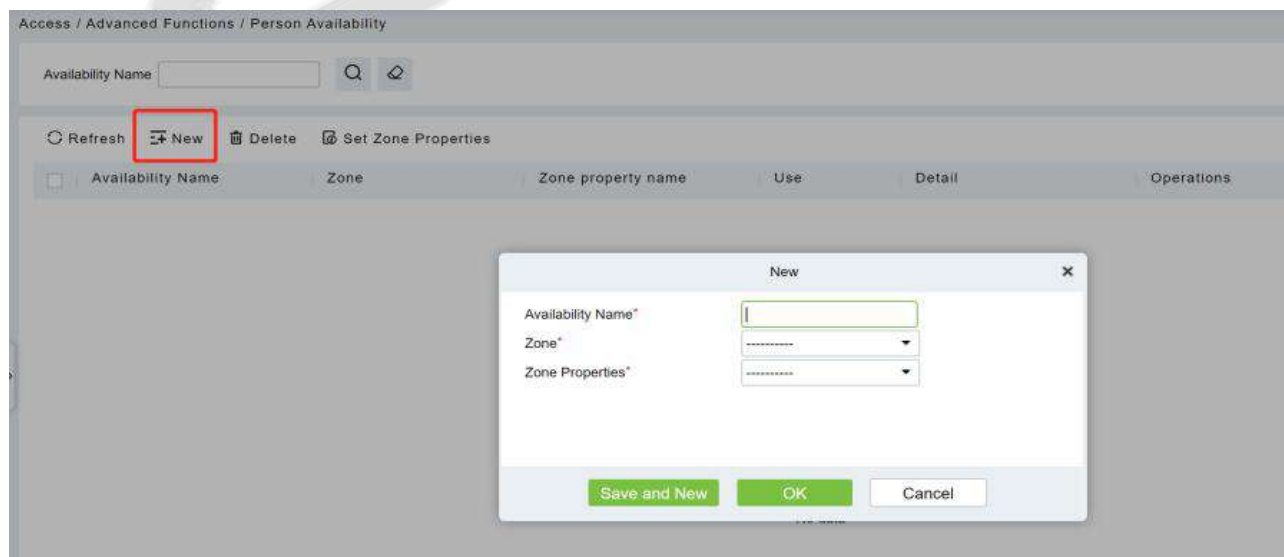


Figure 3- 122 Page for Setting Access Area Properties

Step 3: In the properties of the **access control area** that has been set, click **Add Personnel** on the left to add the corresponding personnel, and Click **OK**.

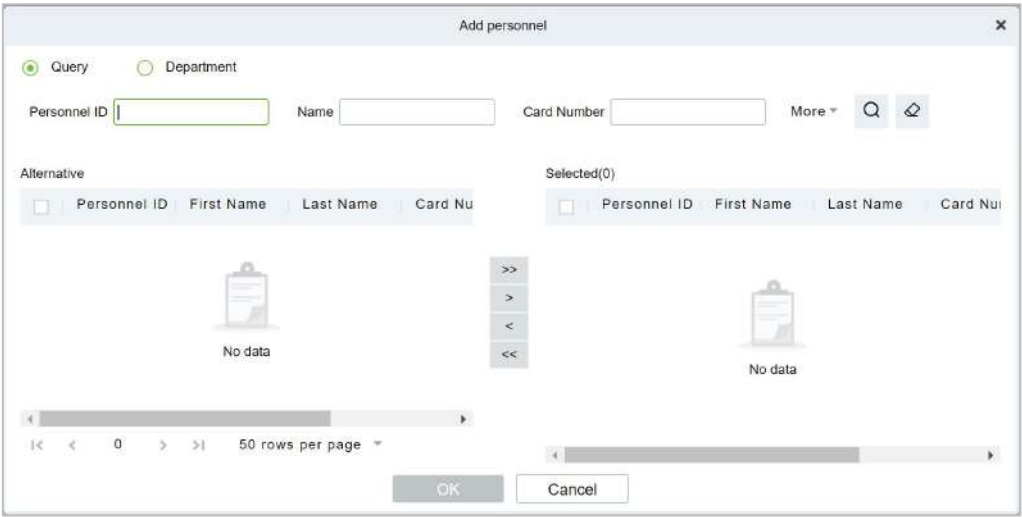


Figure 3- 123 Personnel Availability Add Personnel Settings Screen

Step 4: On the personnel validity screen, tap **Add**, set related parameters, and tap **OK**.

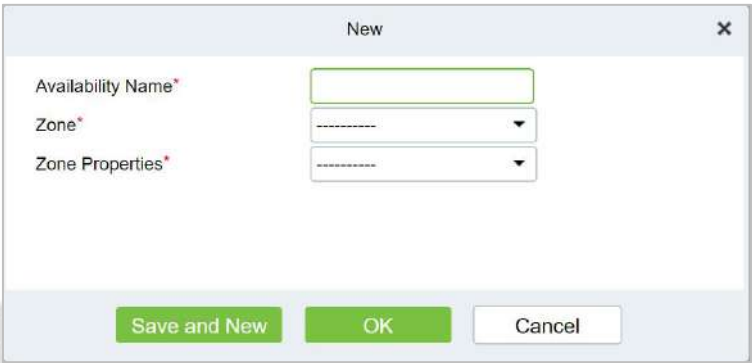


Figure 3- 124 Personnel Validity Setting Screen

3.5.8.2 Delete

In the **Access > Advanced Functions > Personnel Availability**, click **Delete** button under Operations. Click **OK** to delete.

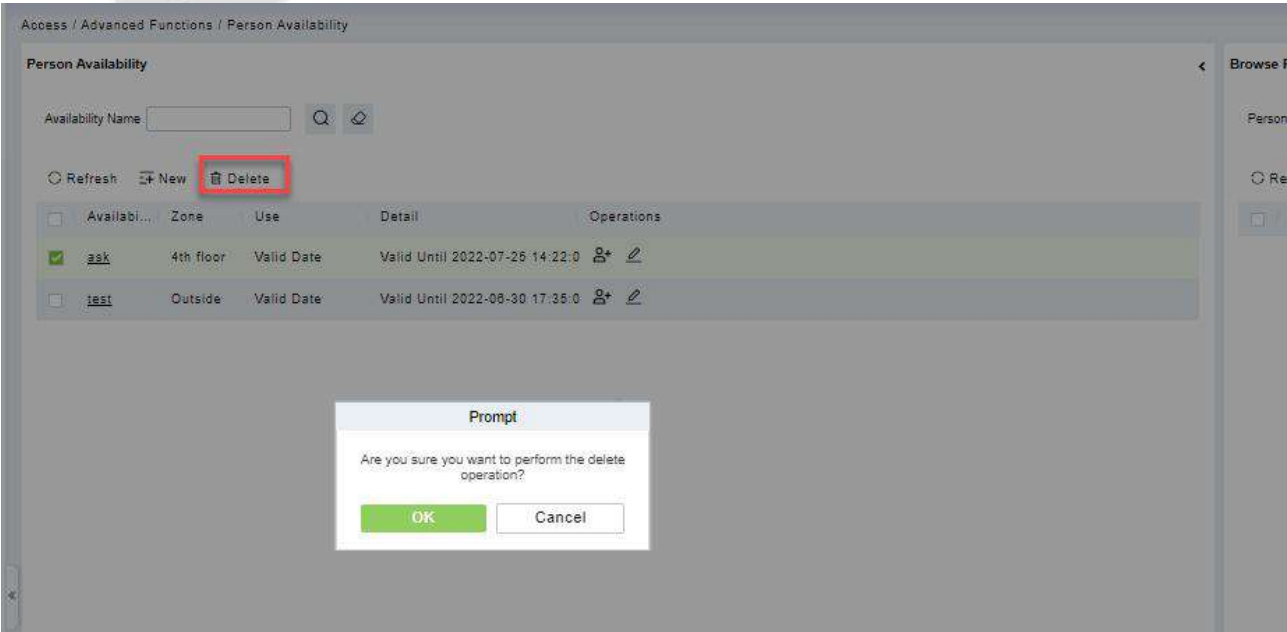


Figure 3- 125 Delete Personnel Validity Setting

3.5.9 Occupancy Control

Control the maximum/minimum capacity of the area in the Advanced Access Control.

This section describes the Step configuration for population control in ZKBio CVSecurity.

●The Premise Condition


1. Background authentication has been enabled on the device.
2. Set the access control area and read head definition.

3.5.9.1 Add (New)

●Operation Step

Step 1: In the Access Control module, choose "**Advanced Function> Occupancy**" and Click New.

Step 2: On the Add Person control screen, set related parameters and click **OK**.

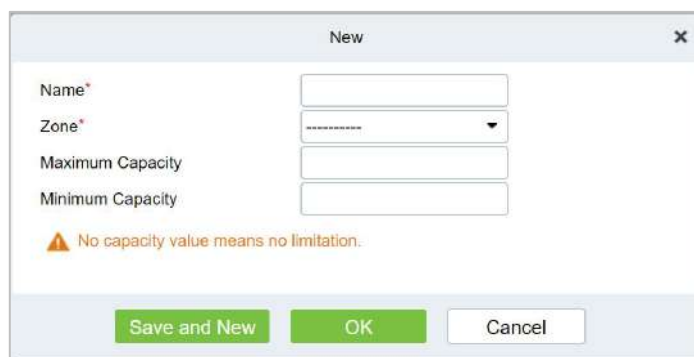**Figure 3- 126 Configuring the People Counting Function**

3.5.9.2 Delete

In the **Access > Advanced Functions > Occupancy Control**, click **Delete** button under Operations. Click **OK** to delete.

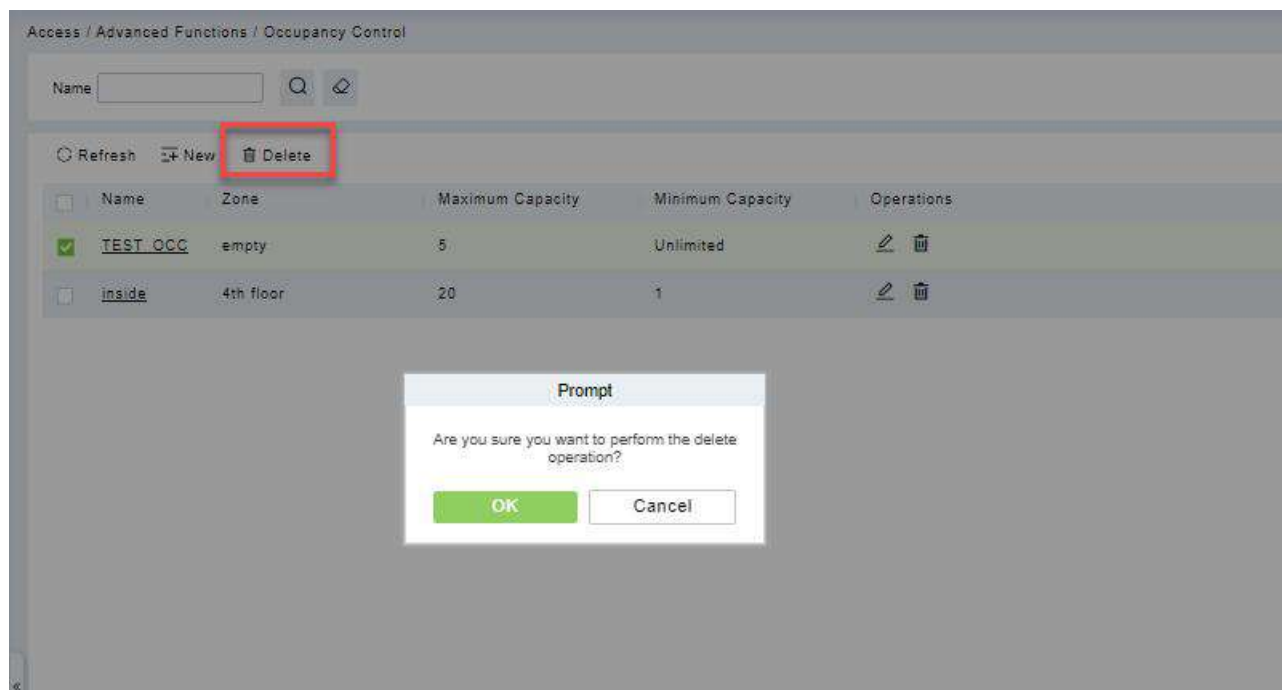


Figure 3- 127 Delete Configuring the People Counting Function

3.5.10 Muster Point

Designate the access control device of a certain place as the Muster Point. When an emergency event (such as a fire alarm) occurs, the linkage triggers the activation of the Muster Point to open the door, and the AC Device is used to count the escape of personnel, and quickly identify the escaped personnel and dangerous personnel.

3.5.10.1 Add (New)

Select the access control devices as the equipment of Muster Point, and assign the corresponding department. Note: The equipment selected is equipped with safe house conditions to facilitate evacuation of personnel in the department.

● Operation Steps:

Step 1: Set device as Muster Point, go to “**Access Control > Advanced Functions > Muster Point > New**”.

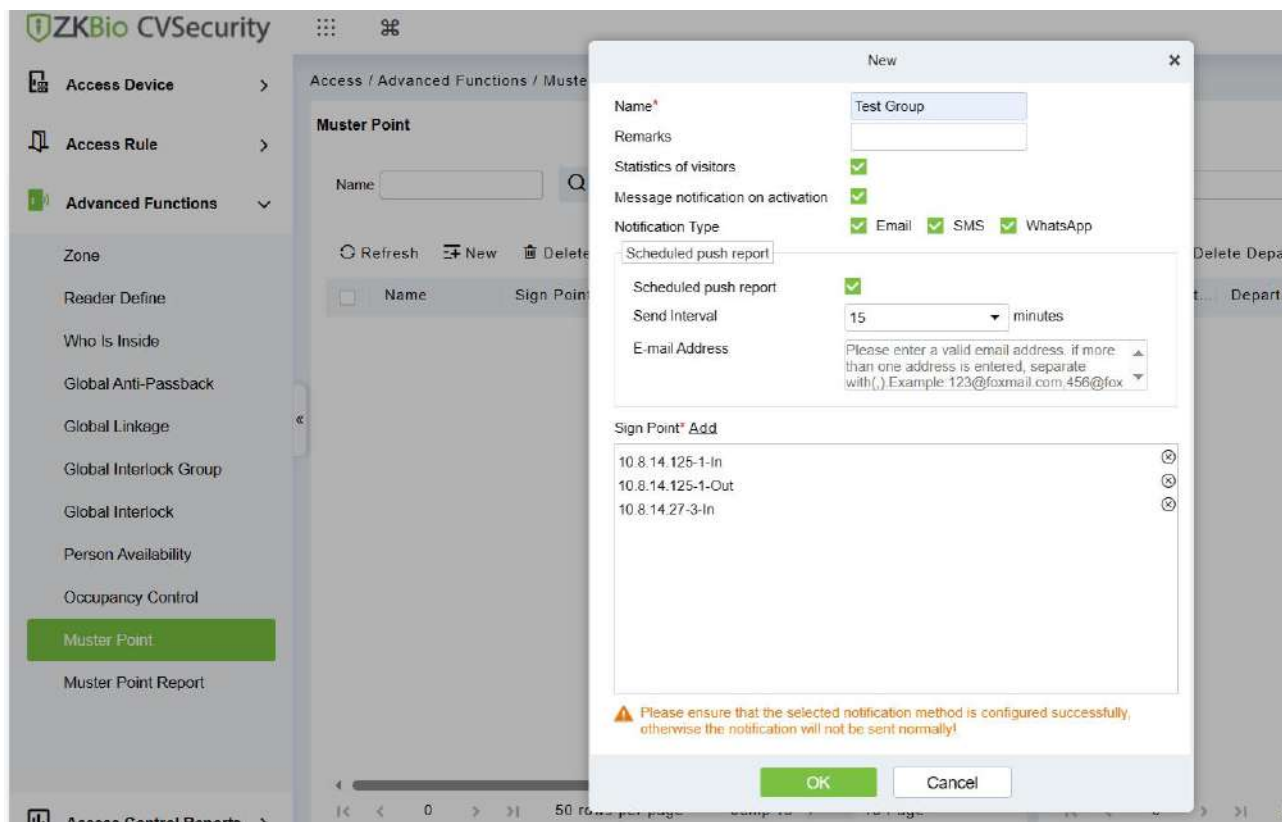


Figure 3- 128 Sign Point

Name: the name of Muster Point.

Remarks: Description of Muster Point.

Statistics of visitors: Enabling visitor statistics will notify visitors when a muster point is activated and count all visitors who have not checked out. (V6.1.0_R or above supported)

Message Notification on Activation: When enabled, the system will automatically send a muster notification to personnel when Muster Point is activated.

Notification Type: When enabled message notification, you can choose the sending method, there are 3 method: Email, SMS, Whatsapp.

Scheduled Push Report: Once enabled, the system will send mustering reports to the administrator at regular intervals (within a set period) when muster point is activated.

Email Address: Administrator email address for receiving mustering reports.

Step 2: Click  add department to the point.

Department Name

Alternative

<input type="checkbox"/>	Department...	Department Name	Parent Department
<input type="checkbox"/>	1	Department Name	

Selected(0)

<input type="checkbox"/>	Department...	Department Name	Parent Department
--------------------------	---------------	-----------------	-------------------

>> > < <<

No data

OK Cancel

50 rows per page Total of 1 records

Figure 3- 129 Add Department

Step 3: Set Global Linkage: set Linkage Trigger Conditions and Input Point, Select Muster Point as an output action.

Access / Advanced Functions / Global Linkage

Global Linkage

Linkage Name

Refresh New Delete ✓ Edit

<input type="checkbox"/>	Linkag...	Linkage Trigger Co...	En
<input type="checkbox"/>	test	Emergency Password	✓

New

Linkage Name* Muster Point

Apply to all personnel ☒

Linkage Trigger Conditions* Add

- ☒ Emergency Password Open

Input Point* Add

- ☒ 192.168.134.23-1

Linkage Voice Prompts Send SMS Digifort Line **Muster Point**

Muster Point


- ☒ Outside1
- ☒ Test

Save and New OK Cancel

10 Page



Figure 3- 130 Global Linkage

Note: Before you use global linkage, you must confirm that your device has enable background authentication.

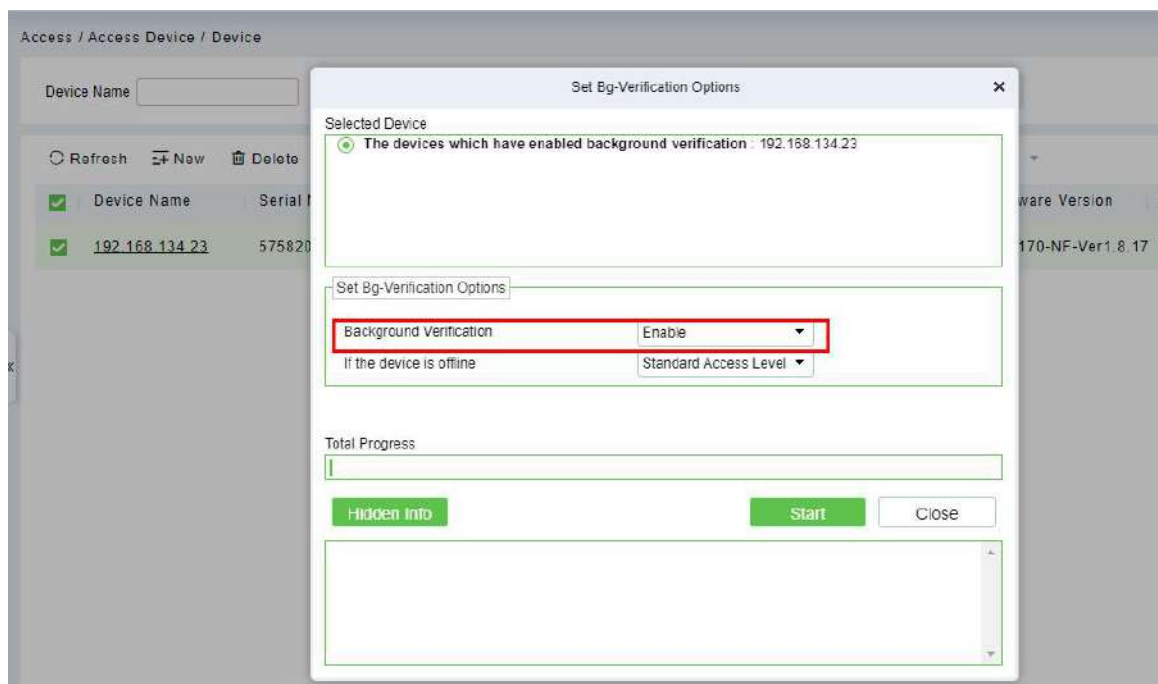**Figure 3- 131 Enable Bg-Verification Options.**

3.5.10.2 Activated

When the linkage event is triggered, the door is opened remotely, and the Muster Point would be activated.

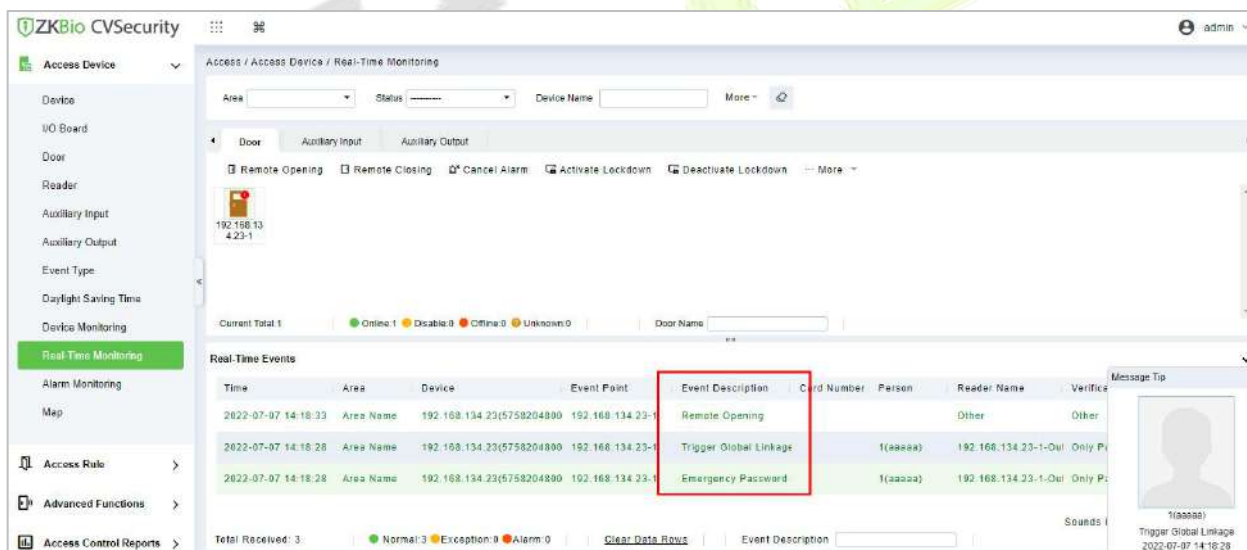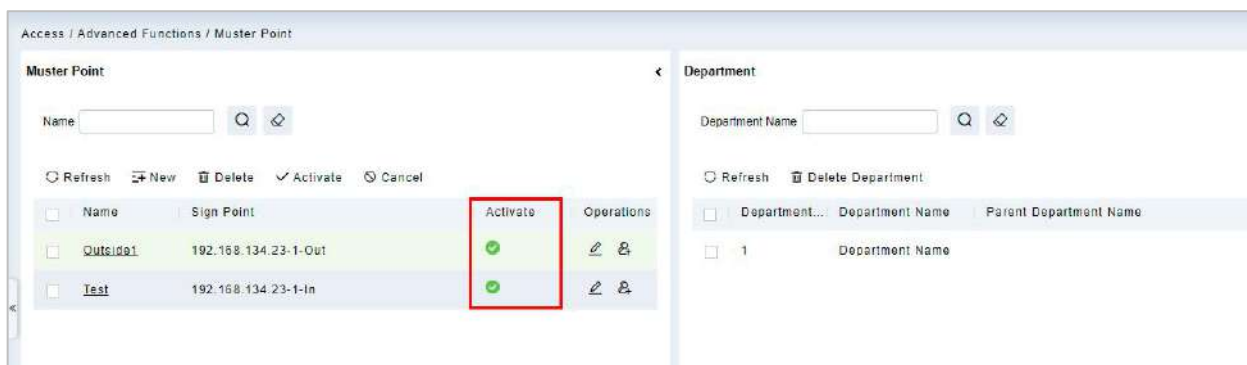**Figure 3- 132 Real-Time Monitoring****Figure 3- 133 Muster Point**

3.5.10.3 Delete

In the **Access > Advanced Functions > Muster Point**, click **Delete** button under Operations. Click **OK** to delete.

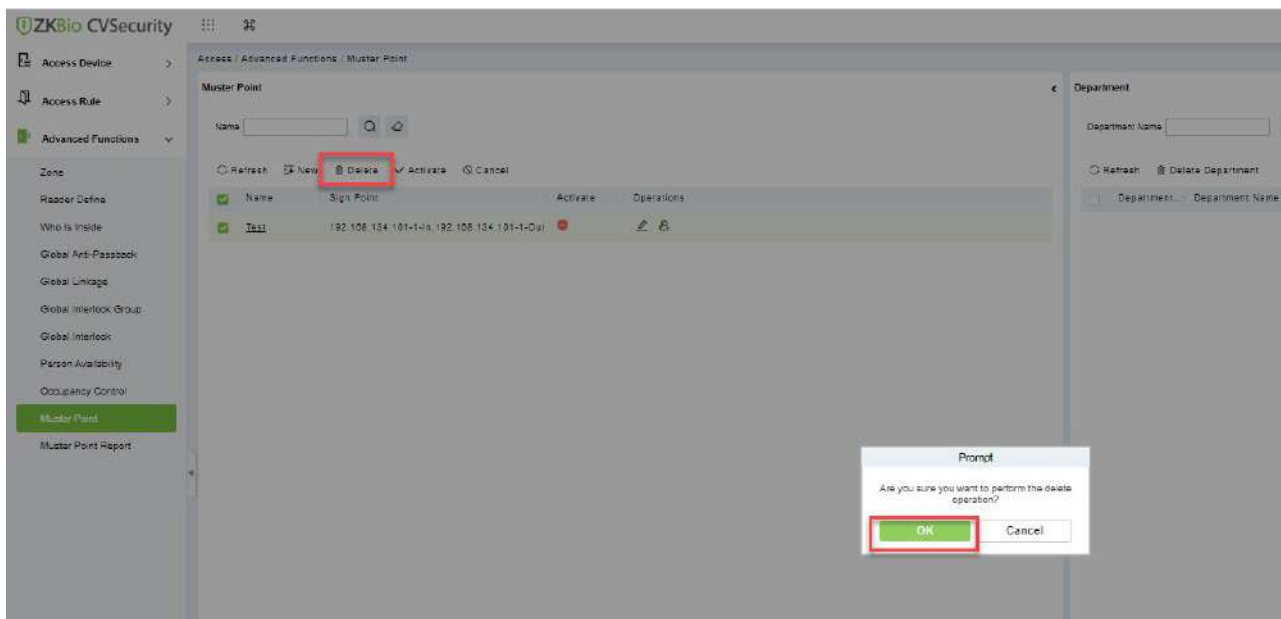


Figure 3- 134 Delete Muster Point

3.5.10.4 Cancel

In the **Access > Advanced Functions > Muster Point**, click **Cancel** button under Operations. Click **OK** to cancel.

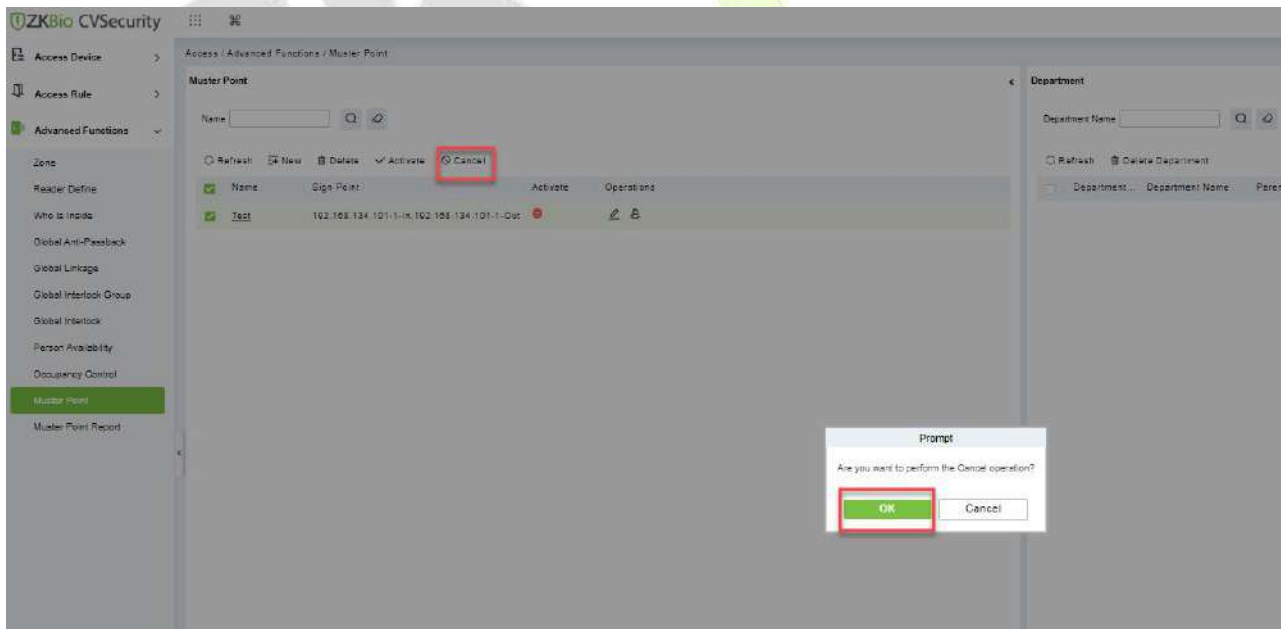



Figure 3- 135 Cancel Muster Point

3.5.11 Muster Point Report

Select the access control devices as the equipment of Muster Point and assign the corresponding department. Note: The equipment selected is equipped with safe house conditions to facilitate evacuation of personnel in the department.

● Operation Steps:

Step 1: Go to **"Access Control > Advanced Functions > Muster Point Report"**.

You can select a muster point, and click  to generate the report

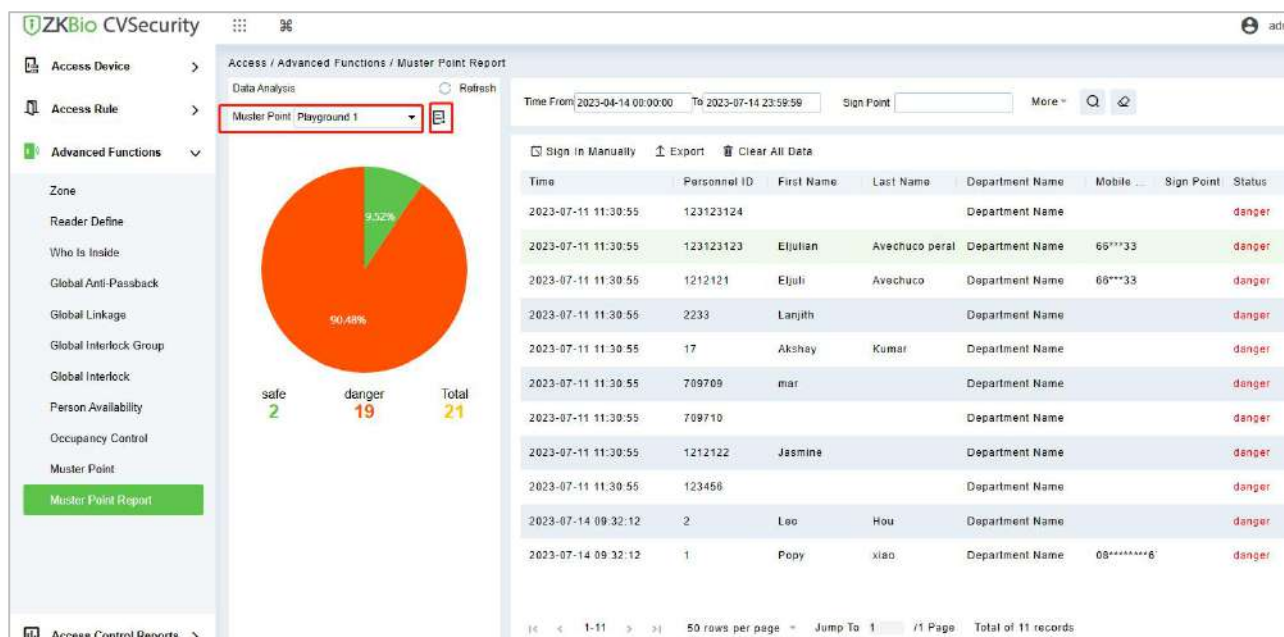


Figure 3- 136 Check the Report

3.5.11.1 Sign In Manually

If someone is not verified on the device, the administrator can manually sign in: Select **Sign in Manually**, see the picture below.

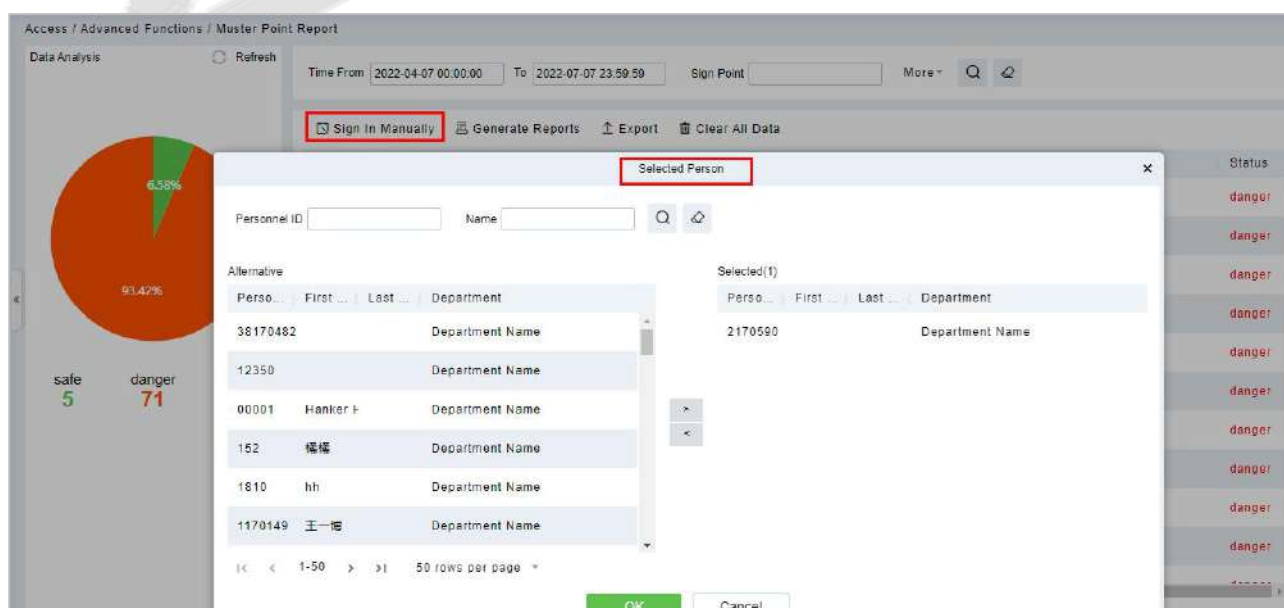


Figure 3- 137 Sign in Manually

Check the statues will change to “safe”.

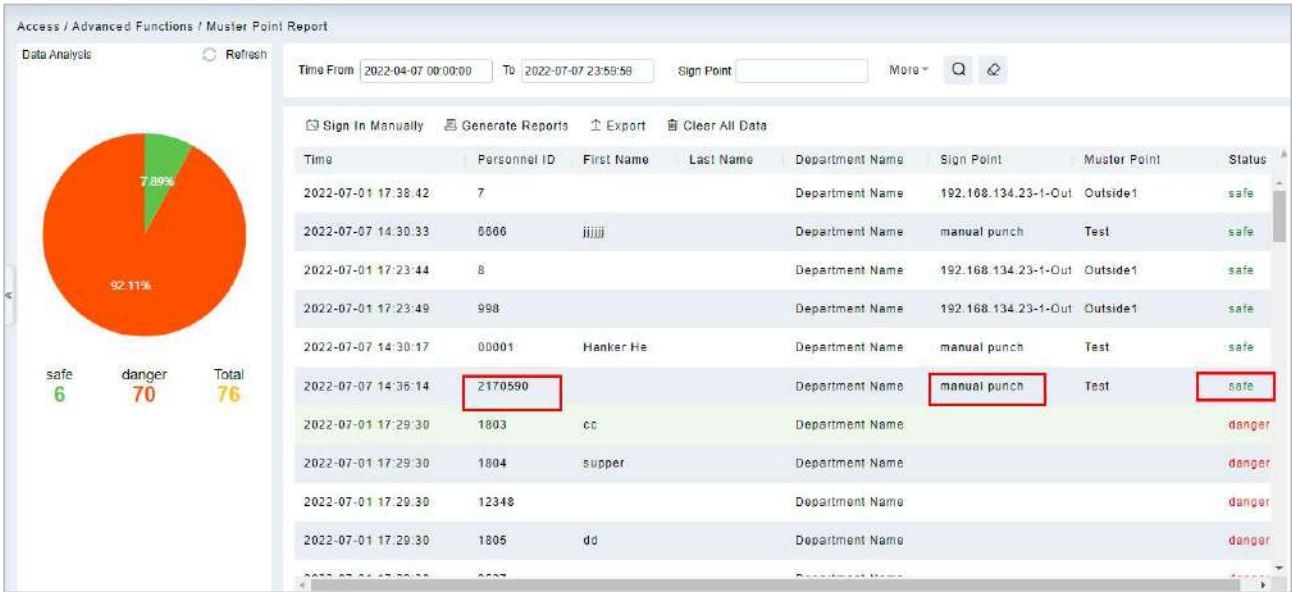


Figure 3- 138 Sign in Manually

3.5.11.2 Export

Click Export, enter the user password in the displayed security verification dialog box, and Click **OK**. Select whether to encrypt the file and the file format to export, and click **OK**.

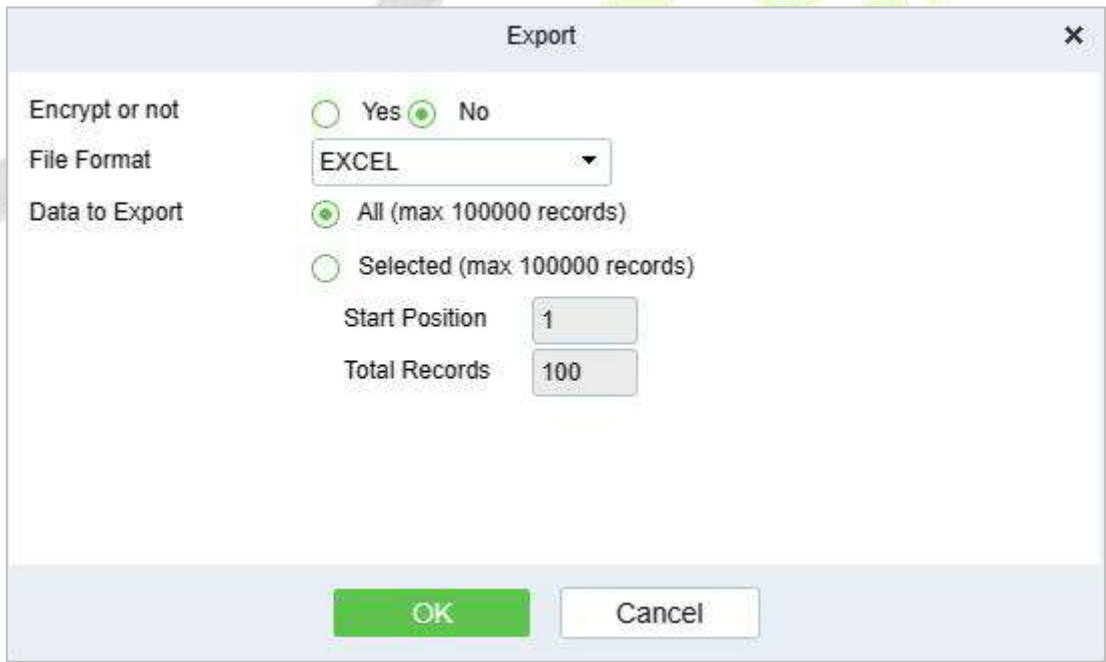


Figure 3- 139 Export

Muster Point Report							
Time	Personnel ID	First Name	Last Name	Department Name	Mobile Phone	Sign Point	Status
2023-07-11 11:30:55	123123124			Department Name			danger
2023-07-11 11:30:55	123123123	El Julian	Avechuco peral	Department Name	6622333		danger
2023-07-11 11:30:55	1212121	El Juli	Avechuco	Department Name	6622333		danger
2023-07-11 11:30:55	2233	Larilita		Department Name			danger
2023-07-11 11:30:55	17	Akshay	Kumar	Department Name			danger
2023-07-11 11:30:55	709709	nar		Department Name			danger
2023-07-11 11:30:55	709710			Department Name			danger
2023-07-11 11:30:55	1212122	Jasmine		Department Name			danger
2023-07-11 11:30:55	123456			Department Name			danger
2023-07-14 09:32:12	2	Leo	Hou	Department Name			danger
2023-07-14 09:32:12	1	Popy	xiao	Department Name	080134342507		danger

Figure 3- 140 Report

3.5.11.3 Clear All Data

In the **Access > Advanced Functions > Muster Point Setting**, click **Clear All Data** button under Operations. Click **OK** to clear all data.

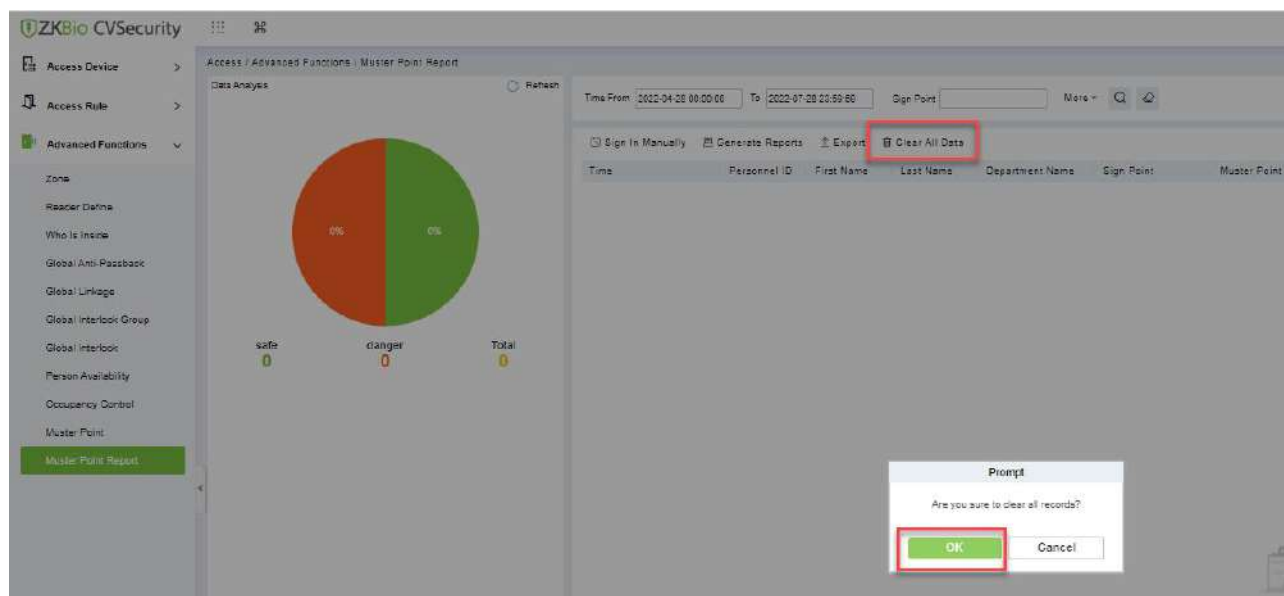


Figure 3- 141 Clear All Data

3.6 Access Control Reports

In the access control report, you can query all access control records, including All records, Today's Access records, All abnormal records, door query, personnel query and Personnel access records reports. You can export all records or query records.

This section describes the Step for querying and exporting reports in ZKBio CVSecurity.

3.6.1 All Transactions

● Operation Step

Step 1: In the Access Control module, choose "**Access Control Report > All Records**".

Step 2: On the All Records interface, fill in the corresponding query information and click the "search" symbol to complete the query of all records, as shown in figure below.



Figure 3- 142 Report Query Page

3.6.1.1 Export

Click Export, enter the user password in the displayed security verification dialog box, and Click **OK**. Select whether to encrypt the file and the file format to export, and click **OK**.

Export

Encrypt or not ☐ Yes ☒ No

File Format

Data to Export ☒ All (max 100000 records)
☐ Selected (max 100000 records)

Start Position

Total Records

OK **Cancel**

Figure 3- 143 Report Export

All Transactions										
Time	Area Name	Device Name	Event Point	Event Description	Event Level	Personnel ID	First Name	Last Name	Card Number	Department Name
2023-07-13 16:54:19	Area Name	192.168.134.102	192.168.134.102-1	Disconnected	Alarm					
2023-07-12 11:39:36	Area Name	192.168.134.102	192.168.134.102-1	Device Started	Normal					
2023-07-12 11:39:35	Area Name	192.168.134.102	192.168.134.102-1	Tamper Alarm	Alarm					
2023-07-12 11:33:48	Area Name	192.168.134.102	192.168.134.102-1	Device Started	Normal					
2023-07-12 11:33:47	Area Name	192.168.134.102	192.168.134.102-1	Tamper Alarm	Alarm					
2023-07-07 09:20:19	Area Name	192.168.134.102	192.168.134.102-1	Device Started	Normal					
2023-07-07 09:20:18	Area Name	192.168.134.102	192.168.134.102-1	Tamper Alarm	Alarm					
2023-06-20 13:21:36	Area Name	192.168.0.206		Disconnected	Alarm					
2023-06-08 13:35:20	Area Name	192.168.134.102	192.168.134.102-1	Device Started	Normal					
2023-06-08 13:35:19	Area Name	192.168.134.102	192.168.134.102-1	Tamper Alarm	Alarm					
2023-06-01 14:10:44	Area Name	192.168.134.102	192.168.134.102-1	Device Started	Normal					
2023-06-01 14:10:43	Area Name	192.168.134.102	192.168.134.102-1	Tamper Alarm	Alarm					
2023-06-01 11:37:56	Area Name	192.168.134.102	192.168.134.102-1	Tamper Alarm	Alarm					
2023-06-01 11:37:56	Area Name	192.168.134.102	192.168.134.102-1	Device Started	Normal					

Figure 3- 144 Report Export

3.6.2 Events from Today

Check out the system record today.

Click **Access Control Reports > Events from Today** to view today's records. You can export all events from today in Excel, PDF, CSV format.

ZKBio CVSecurity

Access / Access Control Reports / Events From Today

Personal ID Device Name More

Time	Area Name	Device Name	Event Point	Event Description	Media File	Personnel ID	First Name	Last Name	Card Number
2022-07-25 06:32:44	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:43	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:41	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:18	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:16	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:15	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:12	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:08	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:32:05	Area Name	192.168.134.101	192.168.134.105-1	Normal Verify Ope		4	W9		
2022-07-25 06:31:32	Area Name	192.168.134.101	192.168.134.105-1	Multi-Personnel Ai		4	W9		
2022-07-25 06:31:31	Area Name	192.168.134.101	192.168.134.105-1	Multi-Personnel Ai		4	W9		
2022-07-25 06:31:29	Area Name	192.168.134.101	192.168.134.105-1	Multi-Personnel Ai		4	W9		
2022-07-25 06:31:28	Area Name	192.168.134.101	192.168.134.105-1	Multi-Personnel Ai		4	W9		

Figure 3- 145 Event from Today

Click Export, enter the user password in the displayed security verification dialog box, and Click **OK**.

Select whether to encrypt the file and the file format to export, and Click **OK**.

ZKTECO												
Events From Today												
Time	Card Number	Personnel ID	First Name	Last Name	Department Name	Device Name	Event Point	Event Description	Reader Name	Verification Mode	Area Name	Remark
2017-12-15 18:29:02	4528035	6	Amber	Lin	Financial Department	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.00-2-In	Only Card	Area Name	
2017-12-15 18:29:45	4528036	6	Amber	Lin	Financial Department	192.168.2.18.60	192.168.2.18.60-1	Background Verify Success	162.168.218.60-1-In	Only Card	Area Name	
2017-12-15 18:29:45	12080070	6	Nicol	Ye	Marketing Department	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:41	12080070	6	Nicol	Ye	Marketing Department	192.168.2.18.60	192.168.2.18.60-1	Background Verify Success	162.168.218.60-1-In	Only Card	Area Name	
2017-12-15 18:29:38	4461253	1	Jerry	Wang	General	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:35	4461253	1	Jerry	Wang	General	192.168.2.18.60	192.168.2.18.60-1	Background Verify Success	162.168.218.60-1-In	Only Card	Area Name	
2017-12-15 18:29:23	1411237	2040	Sherry	Yang	Hotel	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:20	1411237	2040	Sherry	Yang	Hotel	192.168.2.18.60	192.168.2.18.60-1	Background Verify Success	162.168.218.60-1-In	Only Card	Area Name	
2017-12-15 18:29:17	9506030	9	Lilian	Mei	Development Department	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:13	9506030	9	Lilian	Mei	Development Department	192.168.2.18.60	192.168.2.18.60-1	Background Verify Success	162.168.218.60-1-In	Only Card	Area Name	
2017-12-15 18:29:00	13271770	3	Leo	Hou	Financial Department	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.00-2-In	Only Card	Area Name	
2017-12-15 18:29:01	13271770	3	Leo	Hou	Financial Department	192.168.2.18.60	192.168.2.18.60-1	Background Verify Success	162.168.218.00-1-In	Only Card	Area Name	
2017-12-15 18:29:52	4461253	1	Jerry	Wang	General	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:16	4461253	1	Jerry	Wang	General	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:12	4461253	1	Jerry	Wang	General	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:02	9155268	2	Lucky	Tan	Development Department	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	
2017-12-15 18:29:21	4461253	1	Jerry	Wang	General	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.00-2-In	Only Card	Area Name	
2017-12-15 18:29:24	9505930	9	Lilian	Mei	Development Department	192.168.2.18.60	192.168.2.18.60-2	Background Verify Success	162.168.218.60-2-In	Only Card	Area Name	

Created at: 2017-12-15 18:36:03
Created from ZKBioSecurity software. All rights reserved.

Figure 3- 146 Report Export Page

Clear All Data: Click **Clear All Data** to pop up prompt, and then click **OK** to clear all events from today.

The screenshot shows the ZKBio CVSecurity interface. On the left is a sidebar with navigation options: Access Device, Access Rule, Advanced Functions, and Access Control Reports. The 'Access Control Reports' section is expanded, showing 'All Transactions', 'Events From Today' (selected), 'All Exception Events', 'Access Rights By Door', 'Access Rights By Personnel', and 'First In And Last Out'. The main area displays a table of events from today. Above the table, there are search filters for 'Personnel ID' and 'Device Name', and buttons for 'Refresh', 'Clear All Data' (highlighted with a red box), and 'Export'. A 'Prompt' dialog box is open in the foreground, asking 'Are you sure to clear all records?' with 'OK' and 'Cancel' buttons.

Figure 3- 147 Events Clear All Data

3.6.3 All Exception Events

Click **Access Control Reports > All Exception Events** to view exception events in specified condition. The options are same as those of **All Transactions**.

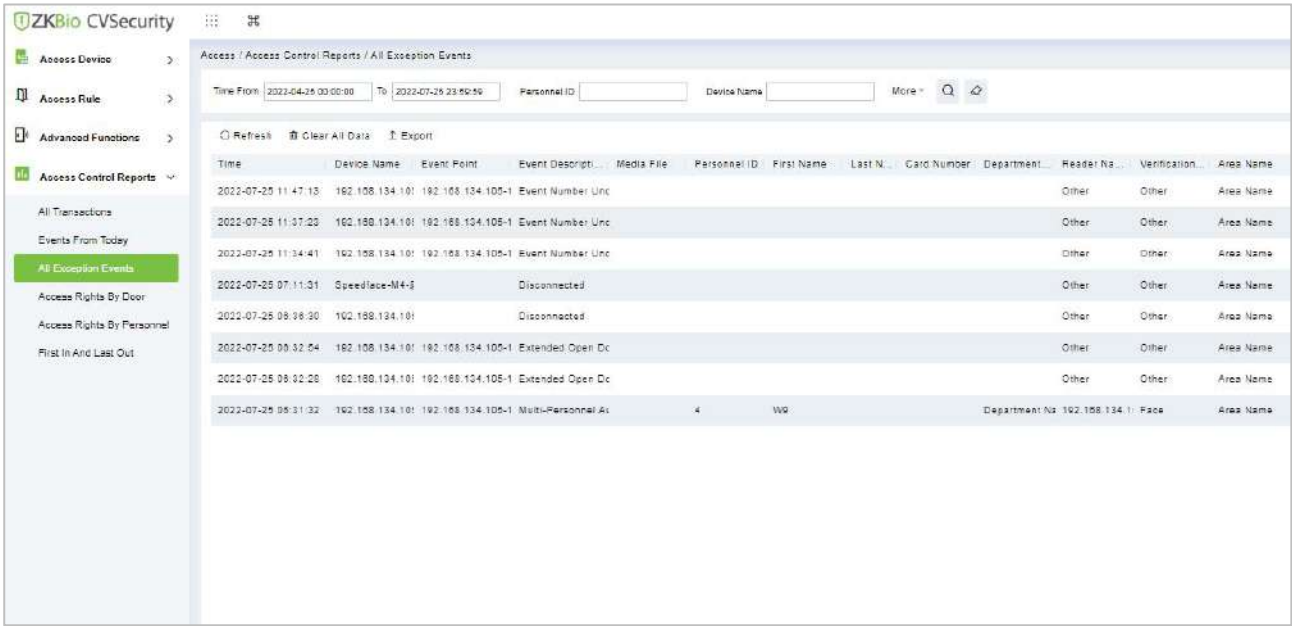


Figure 3- 148 All Exception events

Clear All Data: Click **Clear All Data** to pop up prompt, and then click **OK** to clear all exception events.

Export: You can export all exception events in Excel, PDF, CSV format.

ZKTECO All Exception Events												
Time: 2017-02-15 00:00:00 - 2017-12-15 23:59:59												
Time	Event Description	Event Point	Device Name	Card Number	Personnel ID	First Name	Last Name	Area Name	Department Name	Reader Name	Verification Mode	Remark
2017-12-15 17:43:03	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 17:42:41	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 17:35:27	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 16:35:17	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 16:35:06	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 16:34:00	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 16:33:52	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 16:33:45	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 16:33:35	Operation Interval too Short	192.168.218.60-2	192.168.218.60					Area Name		192.168.218.60-2-In	Other	
2017-12-15 16:33:14	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 16:06:54	Can not connect to server		192.168.218.60					Area Name		Other	Other	
2017-12-15 13:50:17	Disconnected		192.168.218.60					Area Name		Other	Other	
2017-12-15 11:53:45	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 11:41:04	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 11:19:45	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 11:18:27	Operation Interval too Short	192.168.218.60-1	192.168.218.60					Area Name		192.168.218.60-1-In	Other	
2017-12-15 11:05:50	Anti-Passback	192.168.218.60-1	192.168.218.60	0506030	0C0000005	Bill	Fang	Area Name	Visitor	192.168.218.60-1-In	Only Card	
2017-12-15 11:05:50	Anti-Passback	192.168.218.60-1	192.168.218.60	13260079	0C0000004	Turn	Lee	Area Name	Visitor	192.168.218.60-1-In	Only Card	

Figure 3- 149 All Exception Events Export

3.6.4 Access Rights by Door

View related access levels by door. Click **Access Control Reports > Access Rights by Door**, the data list

in the left side shows all doors in the system, select a door, the personnel having access levels to the door will be displayed on the right data list.



Figure 3- 150 Access Right by Door

You can export all the personnel having access levels to the door data in Excel, PDF, CSV format.

ZKTECO			
192.168.218.60-1(1) Opening Personnel			
Personnel ID	First Name	Last Name	Department
2940	Sherry	Yang	Hotel
1	Jerry	Wang	General
2	Lucky	Tan	Development Department
3	Leo	Hou	Financial Department
4	Berry	Cao	General
5	Necol	Ye	Marketing Department
6	Amber	Lin	Financial Department
7	Jacky	Xiang	General
8	Glori	Liu	Marketing Department
9	Lilian	Mei	Development Department

Figure 3- 151 Access Right by Door Export Page

3.6.5 Access Rights by Personnel

View related access levels by door or personnel.

Click **Access Control Reports > Access Rights by Personnel**, the data list in the left side shows all doors in the system, select personnel, the personnel having access levels to the door will display on the right data list.

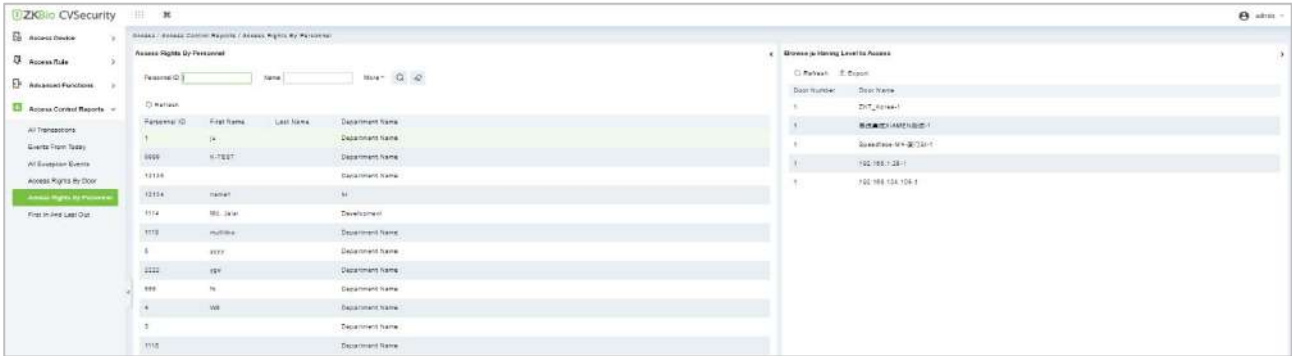


Figure 3- 152 Access Right by Personnel

You can export all the door information in Excel, PDF, CSV format.

ZKTECO	
6(Amber) Having Level to Access	
Door Number	Door Name
1	192.168.218.60-1
2	192.168.218.60-2
3	192.168.218.60-3
4	192.168.218.60-4

Figure 3- 153 Access Right by Personnel Export Page

3.6.6 First In and Last Out

Click **Access Control Reports > First in And Last Out** to view the First and the Last time interval.

Personnel ID	First Name	Last Name	First In-Reader Name	First In Time	Last Out-Reader Name	Last Out Time	Department Name
4	WV		192.168.134.105-1-Out	2022-07-26 08:20:21	192.168.134.105-1-Out	2022-07-26 08:32:41	Department Name
1	JU		192.168.134.105-1-In	2022-08-28 16:18:11	192.168.134.105-1-In	2022-08-28 16:18:11	Department Name
1	YY		192.168.128-1-Out	2022-07-22 16:24:51	192.168.128-1-Out	2022-07-22 17:32:01	Department Name
9900	K-TEST		ZKT_Korea-1-Out	2022-07-21 00:26:11	ZKT_Korea-1-Out	2022-07-21 00:29:2	Department Name
1	YY		192.168.10.221-1-Out	2022-08-18 17:41:11	192.168.10.221-1-Out	2022-08-18 17:42:11	Department Name

Figure 3- 154 Access Right by Door Export Page

3.6.6.1 Clear All Data

In the Access > Advanced Control Reports > First in and Last Out, click **Clear All Data** button under Operations. Click **OK** to clear all data.

Personnel ID	First Name	Last Name	First In-Reader Name	First In Time	Last Out-Reader Name	Last Out Time	Department Name
990009900	UUGU	SS	12.10.20.73-1-In	2022-07-27 09:42:11			
10			192.168.134.105-1-Out	2022-07-27 08:57:01	192.168.134.105-1-Out	2022-07-27 08:57:01	
10			192.168.134.105-1-Out	2022-07-28 16:38:11	192.168.134.105-1-Out	2022-07-28 17:35:11	
9900	K-TEST		ZKT_Korea-1-Out	2022-07-27 00:54:11	ZKT_Korea-1-Out	2022-07-27 00:54:11	Department Name
4	WV		192.168.134.105-1-Out	2022-07-26 08:20:21	192.168.134.105-1-Out	2022-07-26 08:32:41	Department Name
1	JU		192.168.134.105-1-In	2022-08-28 16:18:11	192.168.134.105-1-In	2022-08-28 16:18:11	Department Name
1	YY		192.168.128-1-Out	2022-07-22 16:24:51	192.168.128-1-Out	2022-07-22 17:32:01	Department Name
9900	K-TEST		ZKT_Korea-1-Out	2022-07-21 00:26:11	ZKT_Korea-1-Out	2022-07-21 00:29:2	Department Name
1	YY		192.168.10.221-1-Out	2022-08-18 17:41:11	192.168.10.221-1-Out	2022-08-18 17:42:11	Department Name

Figure 3- 155 Clear All Data

4 Video Intercom

4.1 Basic Management

This section describes how to make basic settings in ZKBio CVSecurity.

4.1.1 Building

4.1.1.1 Add Building

Operation Step:

Step 1: In the Video Intercom module, choose “**Basic Management > Building**”.

Step 2: Click **New**, the page for adding buildings will be displayed.

Step 3: On the page where buildings are added, configure the necessary content as shown in the figure below. Also, adjust the parameter settings as indicated in the same figure.

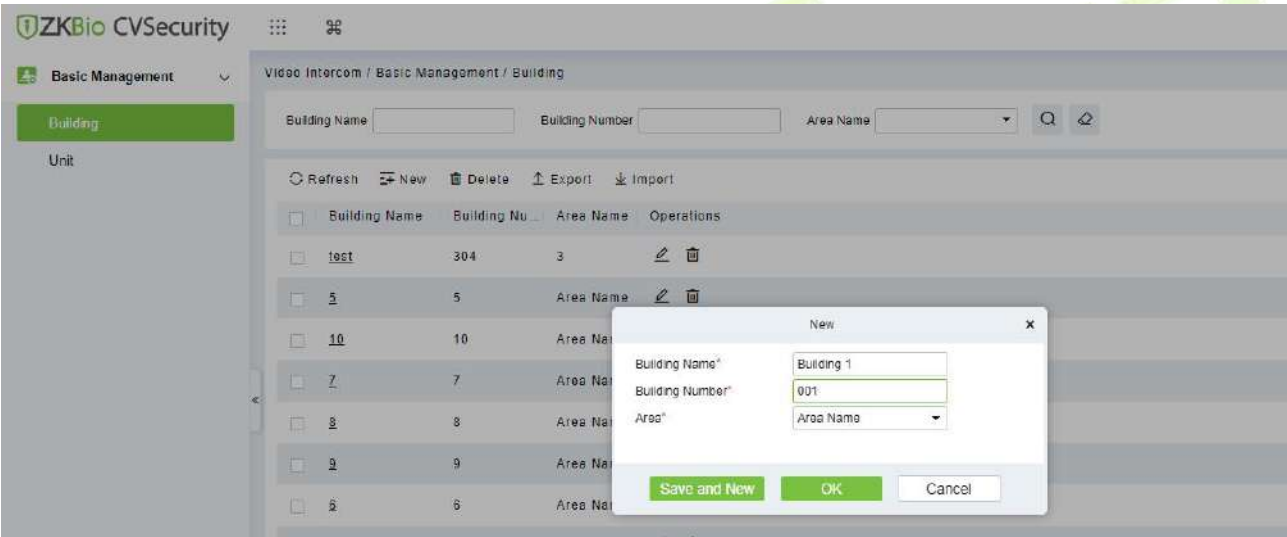
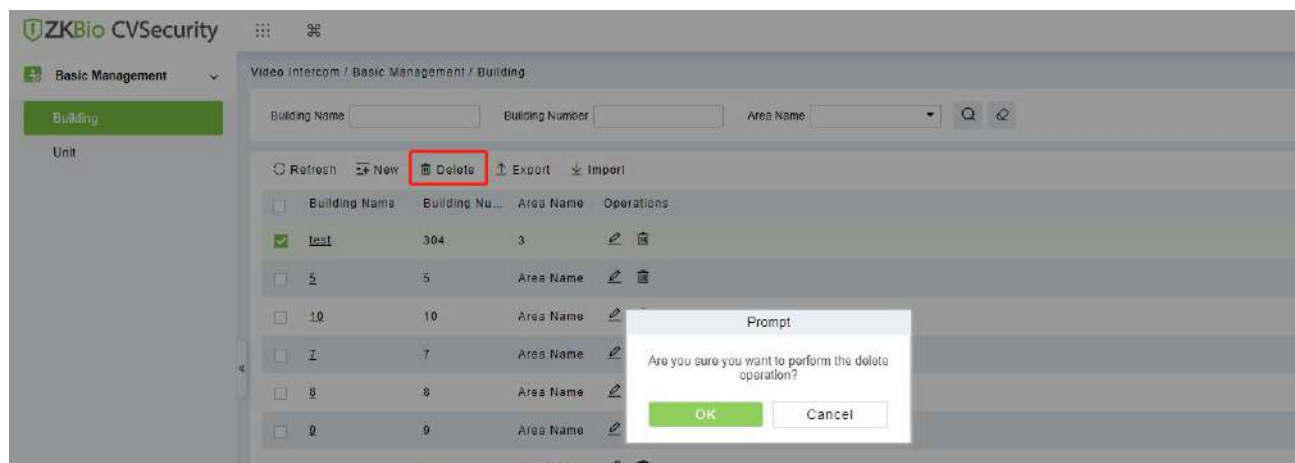


Figure 4- 1 Building Add Interface

Parameter	Description
Building Name	Enter the name of the building.
Building Number	Enter the number of the building.
Area	Select the area name.


4.1.1.2 Delete

Select the Building, click **Delete**, and then, click **OK** to delete the building.

**Figure 4- 2 Delete Building**


4.1.1.3 Edit

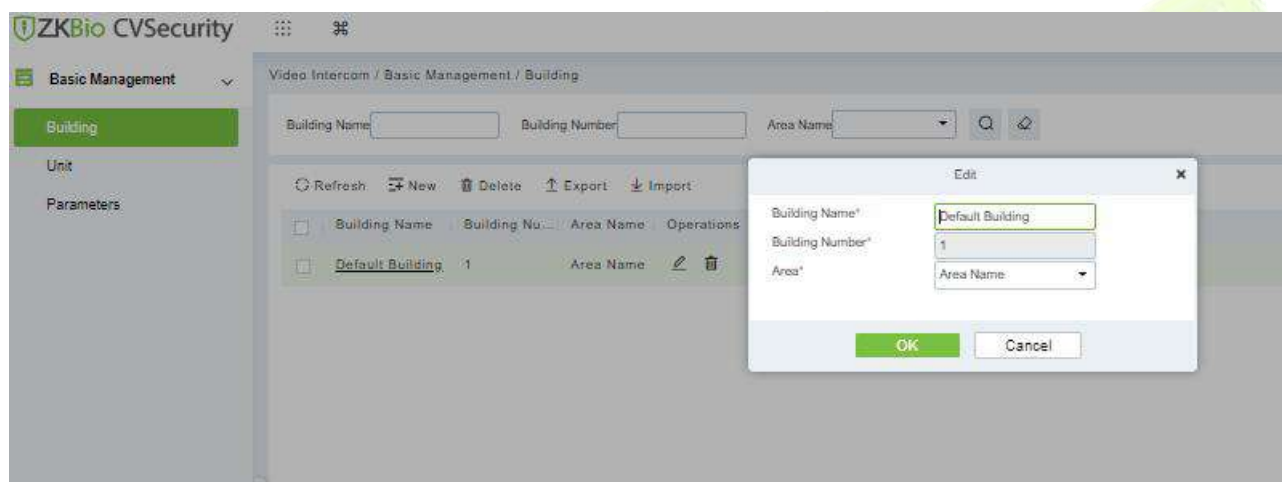Select the Building, click **Edit**, and then, click **OK** after editing the building details.



4.1.1.4 Import

Batch import floor data based on the provided template.

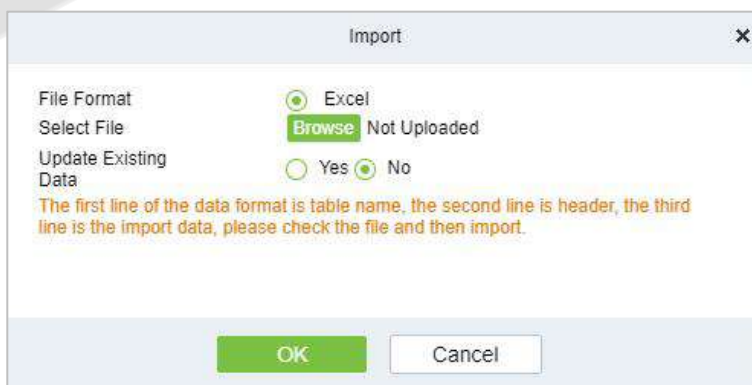**Figure 4- 3 Import**

4.1.1.5 Export

Device information can be exported in EXCEL, PDF, CSV file format.

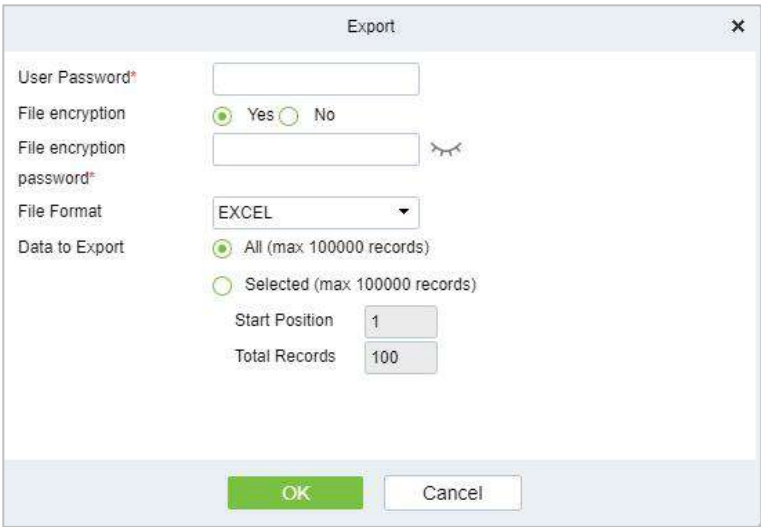


Figure 4- 4 Export

4.1.2 Unit

4.1.2.1 Add Unit

Operation Step:

Step 1: In the Video Intercom module, choose “**Basic Management > Unit**”.

Step 2: Click **New**, the page for adding units will be displayed.

Step 3: On the page for adding units, set the required content as shown in the figure below.

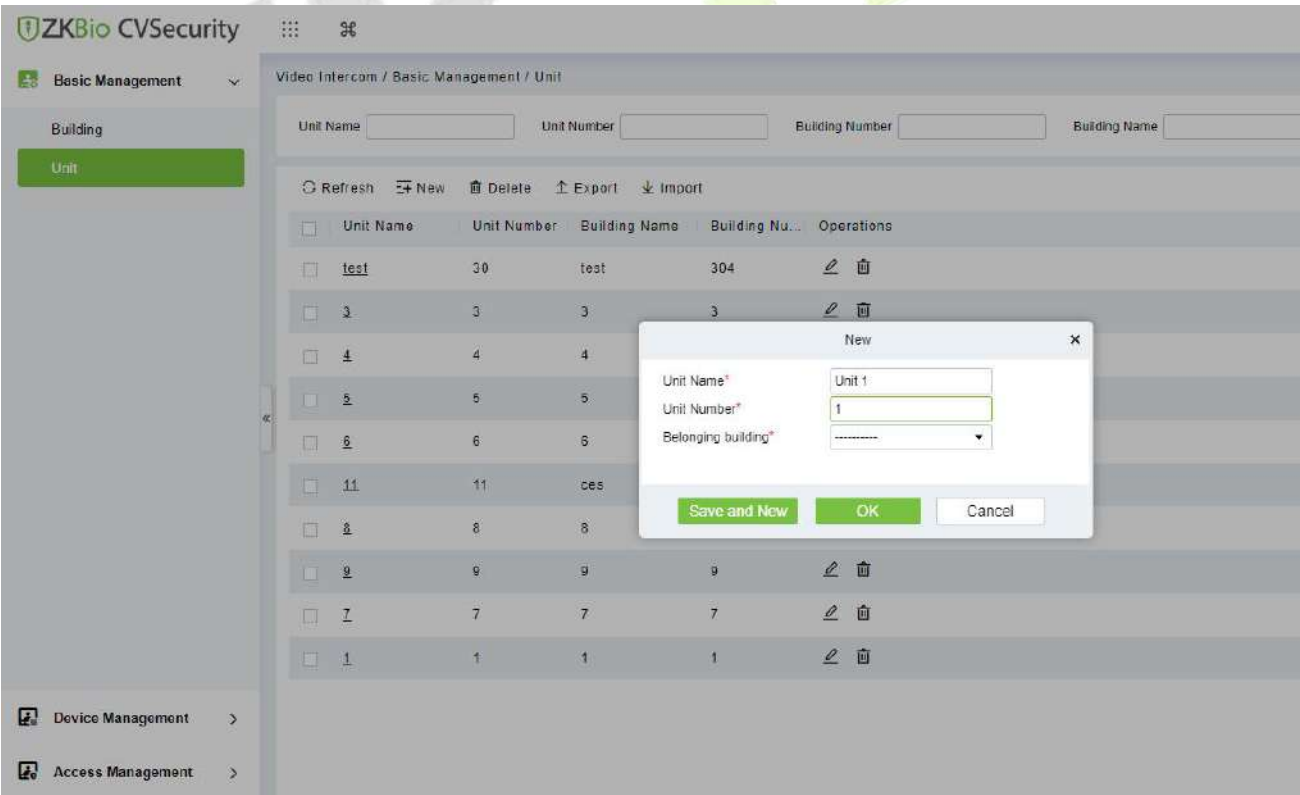


Figure 4- 5 Unit Add Interface

Parameter	Description
Unit Name	Enter the name of the unit.

Parameter	Description
Unit Number	Enter the unit number.
Belonging Building	Select the belonging building.

4.1.2.2 Delete

Select Unit, click **Delete**, and click **OK** to delete the unit.


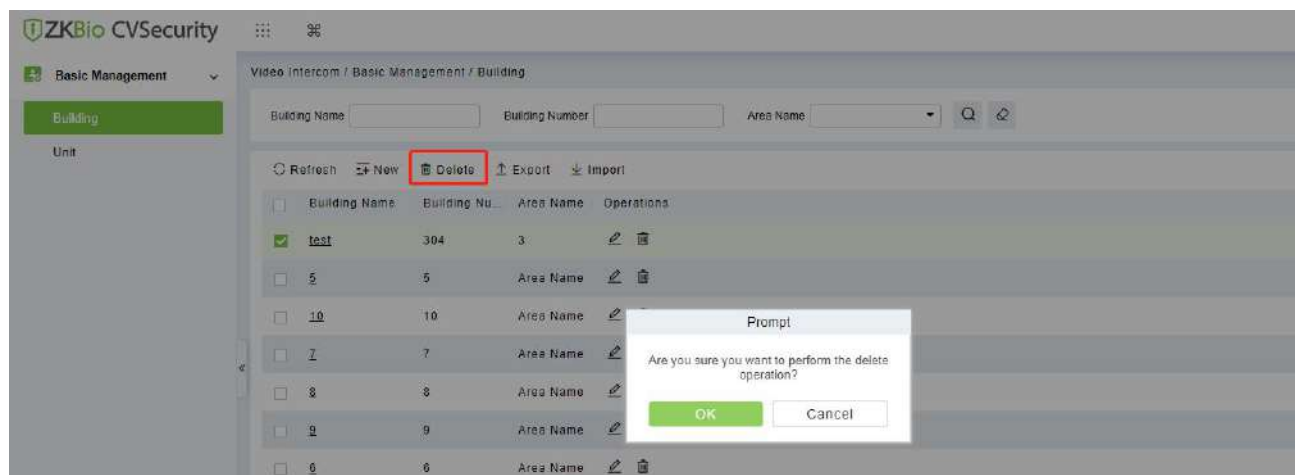


Figure 4- 6 Unit Delete


4.1.2.3 Edit

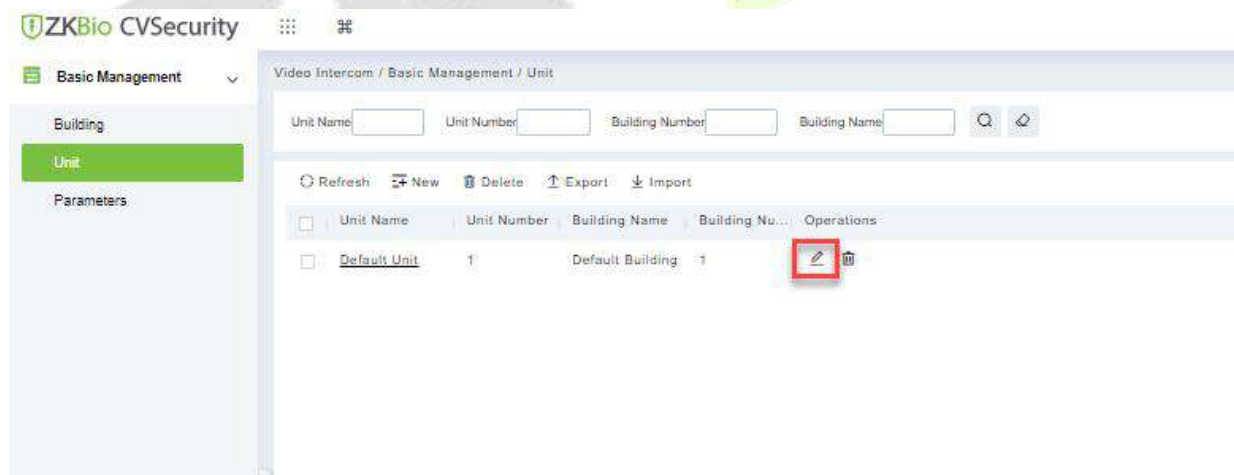Select Unit, click **Edit**, and then click **OK** after editing the unit details.



4.1.2.4 Export

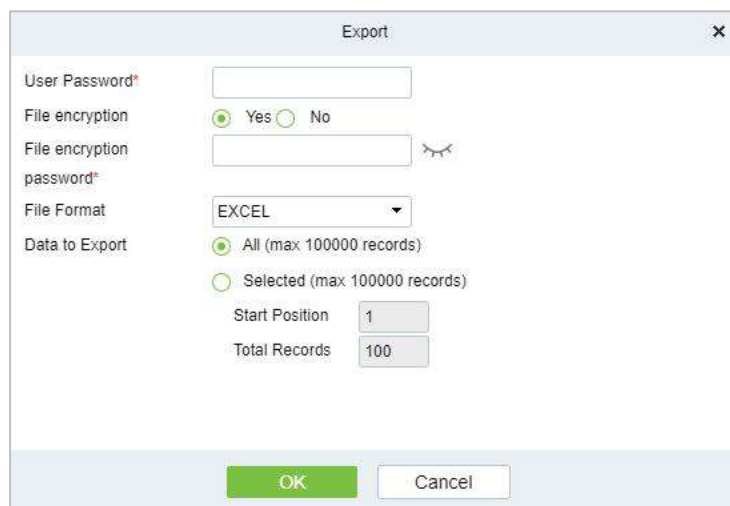Device information can be exported in EXCEL, PDF, CSV file format.


The 'Export' dialog box contains the following fields and controls:

- User Password*: A text input field.
- File encryption: Radio buttons for 'Yes' (selected) and 'No'.
- File encryption password*: A text input field with a visibility toggle icon.
- File Format: A dropdown menu set to 'EXCEL'.
- Data to Export: Radio buttons for 'All (max 100000 records)' (selected) and 'Selected (max 100000 records)'.
- Start Position: A text input field with the value '1'.
- Total Records: A text input field with the value '100'.
- Buttons: 'OK' and 'Cancel' at the bottom.

Figure 4- 7 Export

4.1.2.5 Import

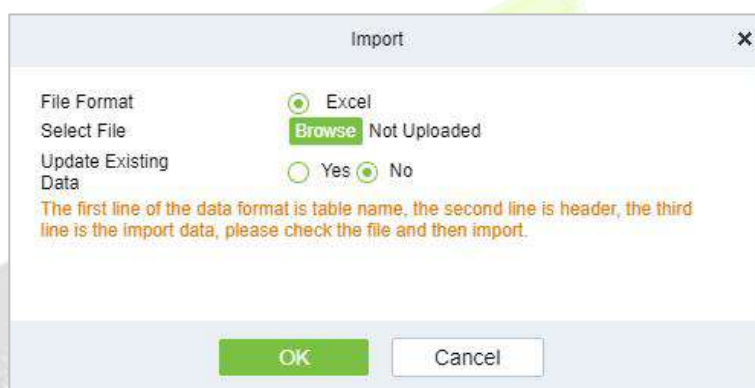Batch import floor data according to the added template.

The 'Import' dialog box contains the following fields and controls:


- File Format: Radio buttons for 'Excel' (selected) and 'CSV'.
- Select File: A 'Browse' button and the text 'Not Uploaded'.
- Update Existing Data: Radio buttons for 'Yes' and 'No' (selected).
- Instructions: A text block stating, 'The first line of the data format is table name, the second line is header, the third line is the import data, please check the file and then import.'
- Buttons: 'OK' and 'Cancel' at the bottom.

Figure 4- 8 Import

4.1.3 Parameter

This menu is used for configuring DTMF.

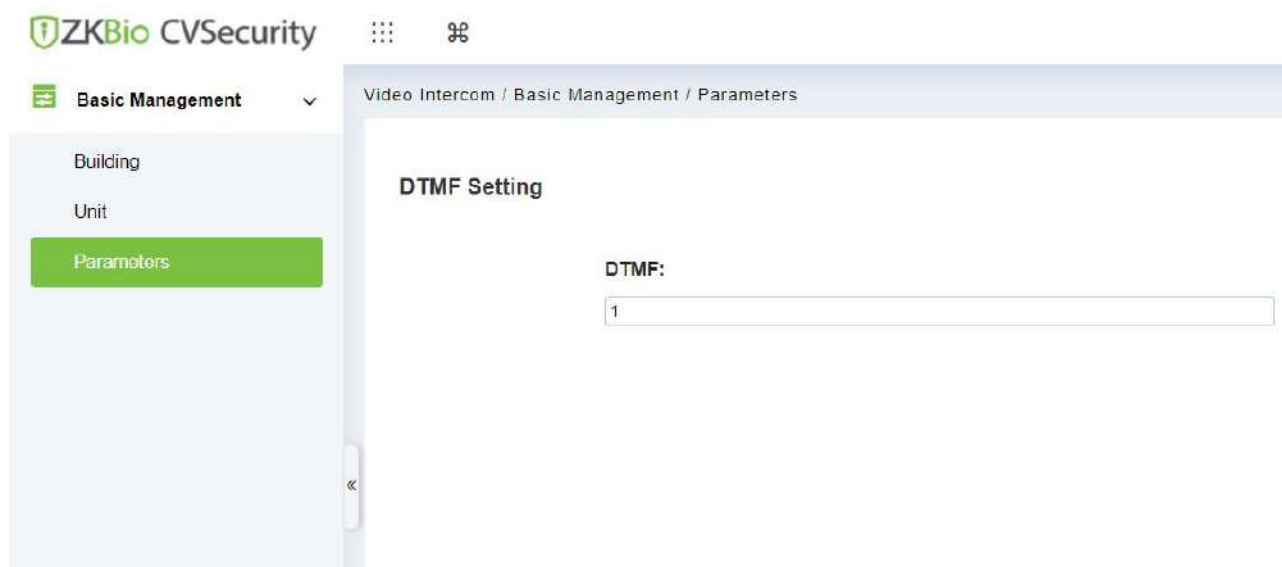DTMF (Dual-Tone Multi-Frequency) is a telephone communication technology used to send signals through telephone key presses. After configuring DTMF in this menu, the command will be synchronized with the connected devices and apps. This synchronization is used to match the door-opening command between the app and the device, facilitating direct door opening via the app..



4.2 Device Management

4.2.1 DNK Device Operation Guide

DNK Type :the devices supported by this type include:

- Outdoor unit: VEX-B21L, VEX-B21A, VEX-B24L, VEX-B24A, VEX-B25L
- Indoor unit: VT07-B22L, VT07-B26L-W, VT10-B21A, VT10-B21L

4.2.1.1 Add Devices

Step 1: Go to **Video Intercom > Device Management > Device**.

Step 2: Click **New**, the interface for adding a device will be displayed.

Figure 4- 9 Device Add Interface

Step 3:Manufacture: please select **DNK**.Please add the corresponding parameters.

Figure 4- 10 Device Add Interface

Parameter	How to set
Device Name	Customize the name of the device.
Device Code	Select the device code.
IP Address	Fill in the IP address of Video Intercom device.
Communication Port	Enter the communication port number of the device.
Username	Enter the username of the device.
Administrator Password	Fill in the administrator password.
External Network Address	Enter the external address of the device.
Transport Protocol	Select the transport protocol of the device.
Device Type	<ul style="list-style-type: none"> • Select the device type you want to add, support to select outer station, outdoor station, doorbell station and indoor Station. • If select Outer Station, you should choose the device area and choose whether to enable the unit number. • If select Door Station, you should choose device area, Building and unit. • If select Doorbell Station, you should choose area, building, unit and room. • If select Indoor Station, you should choose area, building, unit and room, and fill in the Sync Code.
Area	Divide the device into regions and select the region to which the device belongs.
Building	Please first configure the building where the device is located in the " Building " settings.

Unit	Please first configure the unit where the device is located in the "Unit" settings.
Device Number	Customize the number of the device.


Table 4-1 Parameter setting

4.2.1.2 Delete

Step 1: On the Device interface, select the required Device from the list.

Step 2: Click **Delete** or click on the  icon.to delete the selected Device.

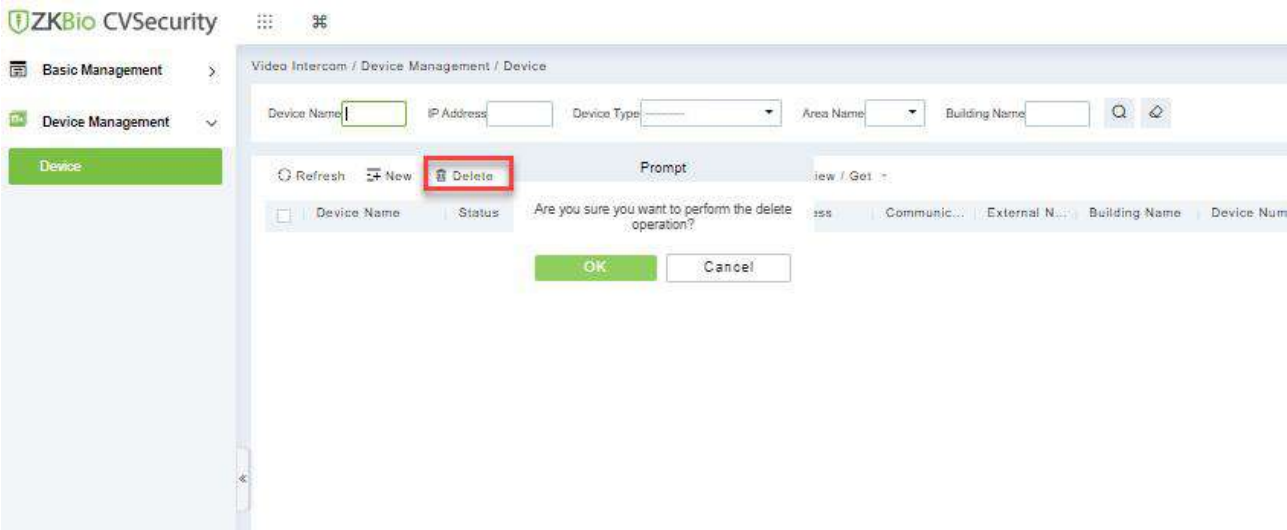Step 3: Click **Delete**, to ensure and delete the selected Device from the list.



4.2.1.3 Export

You can export all transactions in Excel, PDF, CSV format.

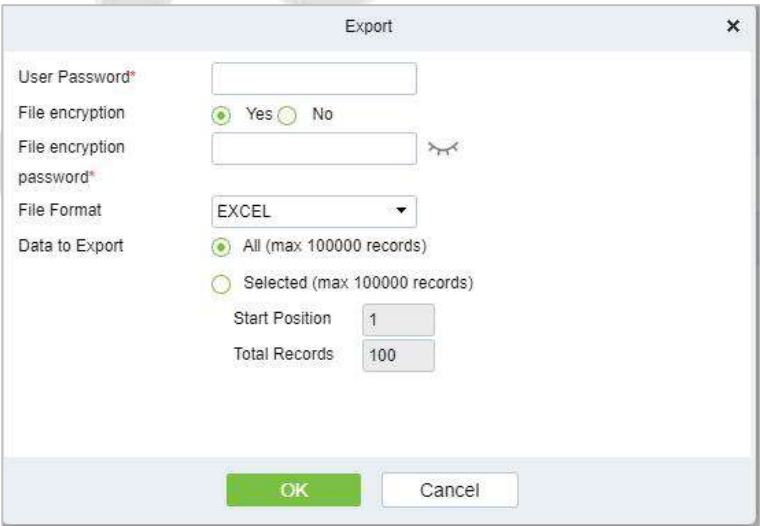


Figure 4- 11 Export video intercom Configuration Flow

4.2.1.4 Control

● Reboot Device

It will reboot the selected device.

- Synchronize Time

It will synchronize device time with server's current time.

- Synchronize People Data

Synchronize data of the system to the device. Select device, click **Synchronize People Data** and click **OK** to complete synchronization

4.2.1.5 Set up

- Add Extension

It will add the extension for the device.

- Add Address Book

It will add the address book to the device.

- Upload Media Files

Click to upload the media files for the device.

4.2.1.6 View/Get

- View Extension

Select device and click View Extension to get the device extension data.

- View Address Book

Select device and click View Address Book to get the device address details.

- Get Record

Select device and click get records to get the device data.

- Device Web Service

Select device and click Device Web Service to get the web service details of the device.

4.2.2 IPBX Device Operation Guide

This device type is used to assign SIP accounts to devices and the APP for SIP protocol-based video intercom applications. Before using this feature, you need to purchase a GDS PBX server from ZKTeco. If you do not wish to purchase IPBX server hardware, you can also subscribe to our cloud SIP. The following steps mainly illustrate the operational instructions for the GDS PBX service.

- GDS Device

Step 1: Go to **Video Intercom > Device Management > Device**.

Step 2: Click **New**, the interface for adding a device will be displayed.

The 'New' dialog box contains the following fields and values:

Field	Value
Device Name*	
Manufacturer*	MediaServer
IP Address*	
Communication Port*	58095
Administrator Password*	
External network address*	
Transport Protocol*	UDP
Device Type*	IPPBX
Area*	Area Name

Figure 4- 12 Device Add Interface

Step 3:Manufacture :please select **GDS**.Please add the corresponding parameters.

The 'New' dialog box contains the following fields and values:

Field	Value
Device Name*	Test Group
Manufacturer*	GDS
IP Address*	10.8.16.114
Communication Port*	8089
Username*	admin
Administrator Password*	*****
External network address*	10.8.16.114.5066
Transport Protocol*	UDP
Device Type*	IPPBX
Area*	Area Name

Figure 4- 13 GDS Parameter

Parameter	How to set
Device Name	Customize the name of the server.
IP Address	Fill in the IP address of PBX Server .
Communication Port	Fill in the Port of PBX Server .
User Name	The user name of PBX Server.

Administrator Password	Fill in the administrator password.
External Network Address	The address of the actual SIP communication(The port number is the default UDP port for SIP services).
Transport Protocol	Transport protocol for SIP, default is UDP.
Device Type	Device type, default is IPBX
Area	Area in which the PBX server is located

4.3 Access Management

This menu is solely used for configuring and synchronizing access permissions for personnel entering and exiting for **DNK** device types.

4.3.1 Access Control Group

Access control group define groups and categories of video intercom to facilitate subsequent permission assignment operations.

Setting operations include creating access level groups and adding doors to access level groups.

4.3.1.1 Add Group

This section describes how to create Step for Access Control groups in the module of Video Intercom.

● Operation Step:

Step 1: In the Video Intercom module, choose “**Access Management > Access Control Group**”.

Step 2: Click **New** in the left column, and the page for adding access control groups will be displayed.

Step 3: On the page for adding access control groups, set parameters based on the new requirements, as shown in figure below.

Figure 4- 14 Adding Access Control Groups

Parameter	How to set
Level name	Customize the name of the access control groups.
Description	Add description as needed.

Table 4-2 Description of Access Control Right Groups

Step 4: Click **OK** to finish configuring the access control right group.

4.3.1.2 Add Device

● Operation Step:

Step 1: In the Video Intercom module, choose “**Access Management > Access Control Group>Add**

Device”.

Step 2: Click “Add Device”, and the page for selecting a door will be displayed. add a door as required, as shown in figure below.

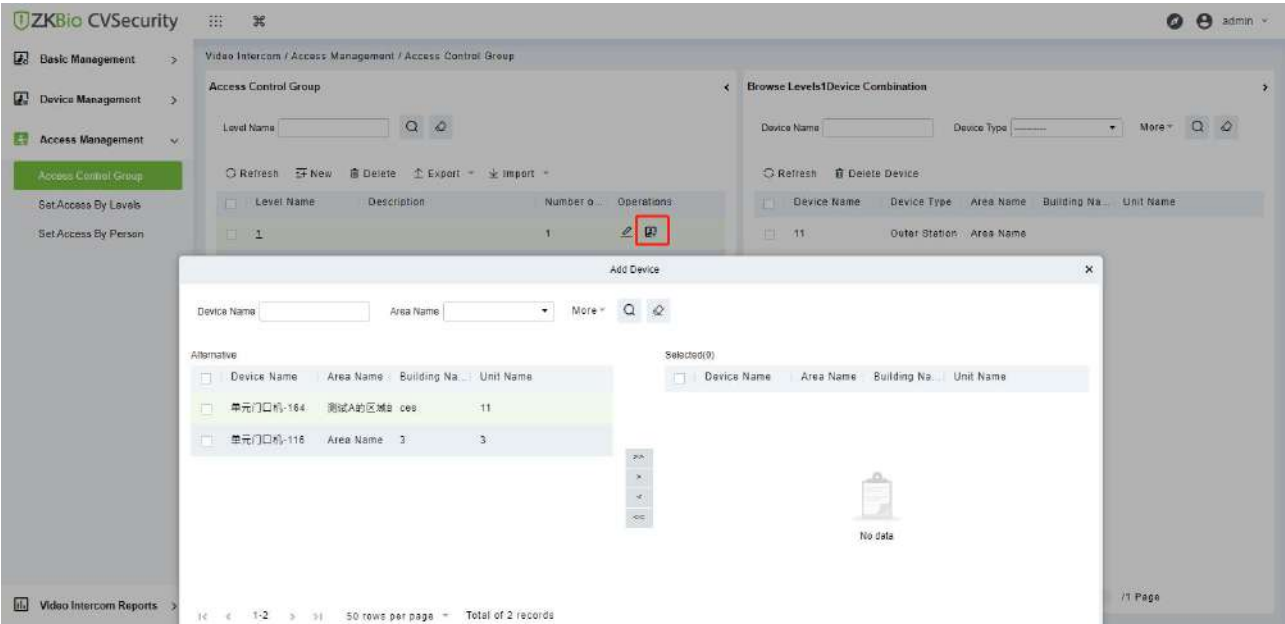


Figure 4- 15 Adding Access Control Groups Add Devices

Step 3: Click **OK** to finish configuring the device for the video intercom right group.

Parameter	How to set
Device Name	Enter the name of the device.
Area Name	Enter the name of the Area.

4.3.1.3 Delete Devices

Select delete device, click **Delete**, and click **OK** to delete device.

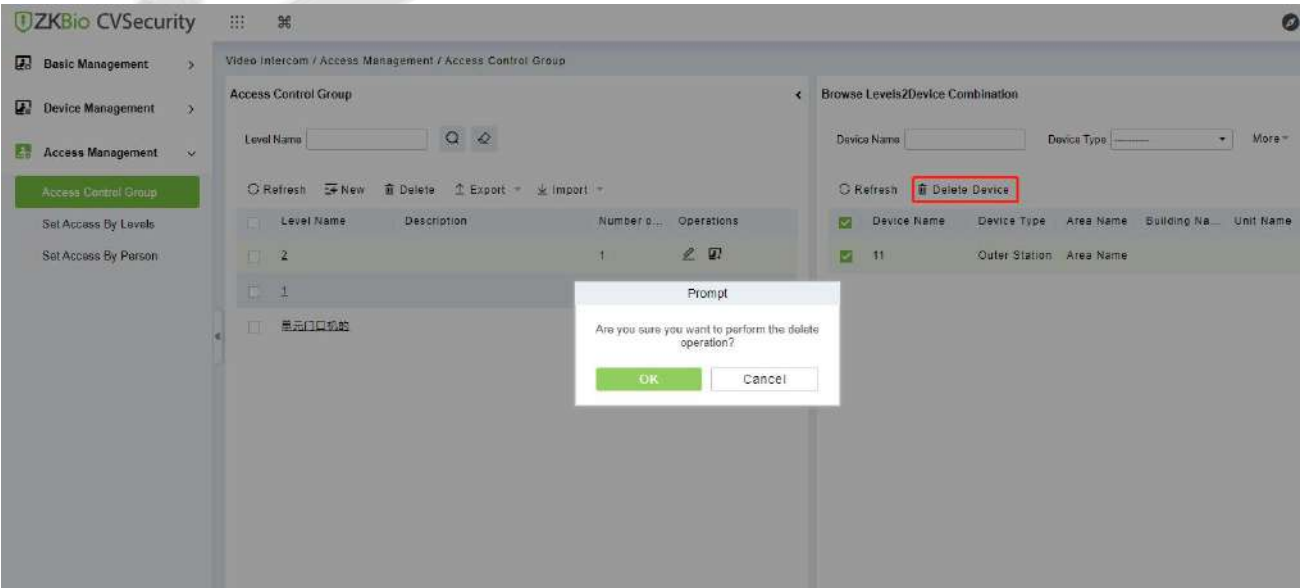


Figure 4- 16 Delete Device

4.3.1.4 Export / Import

Export the permission group information of Access Control Template:

In the Video Intercom Module, click **Access Management > Access Control Group>Export>Export Access Group**, then You can export doors of access level in Excel file format. Enter the user password in the displayed security verification dialog box, and Click OK. Select whether to encrypt the file and the file format to export, and Click **OK**.

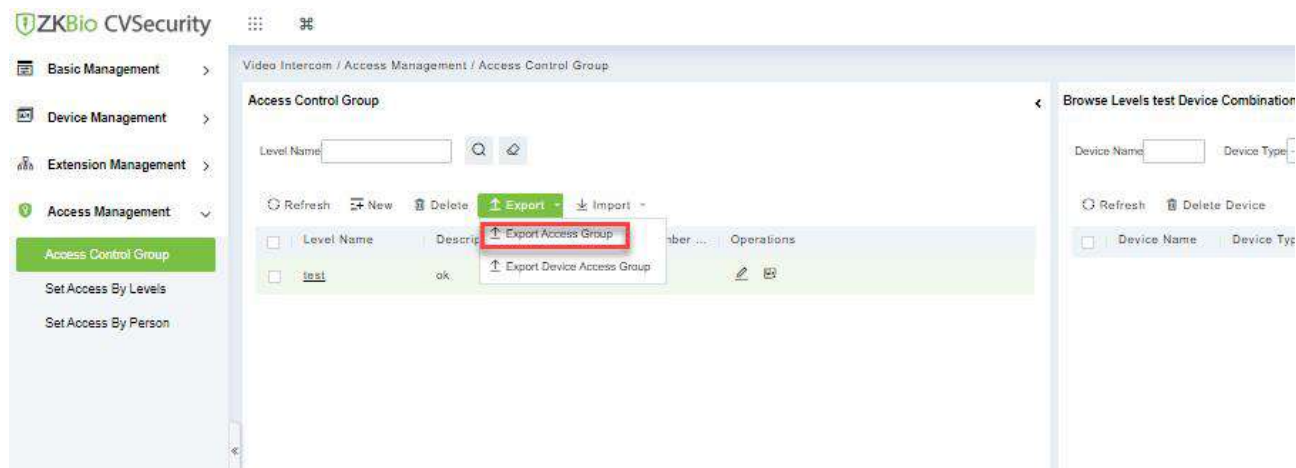


Figure 4- 17 Export Access Group 1.

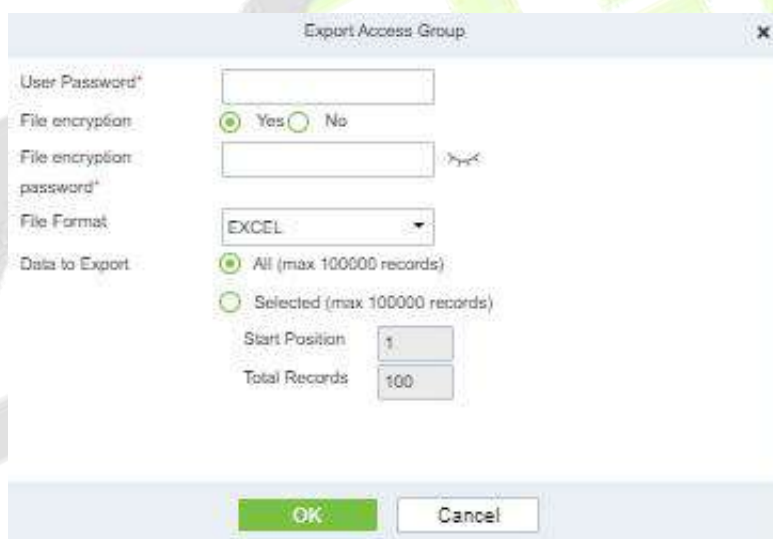


Figure 4- 18 Export the Access GroupTemplate 2

Export the device Access group of Access Control Template:

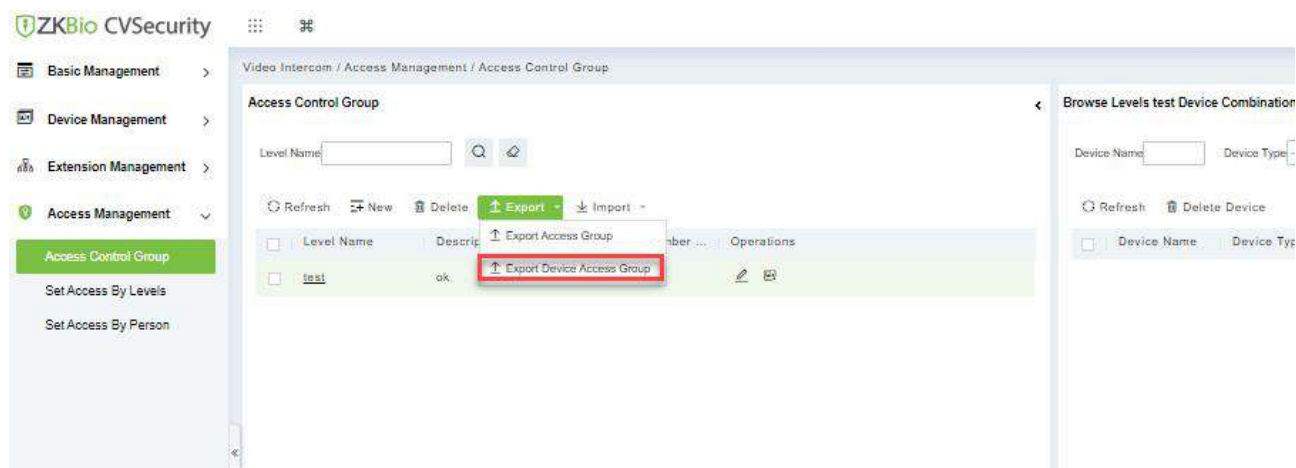


Figure 4- 19 Export the device access groupTemplate 1



Figure 4- 20 Export the device access groupTemplate2

4.3.2 Set Access by Levels

This section describes Operation Step that set access by levels in the module of video intercom in ZKBio CVSecurity.

4.3.2.1 Add Personnel

● Operation Step:

Step 1: In the Video Intercom module, choose “**Access Management>Set Access by Levels**”

Step 2: In the Operation column of the corresponding permission group, click “**Add Personnel**”. The Add

Personnel page is displayed. Select personnel as required.

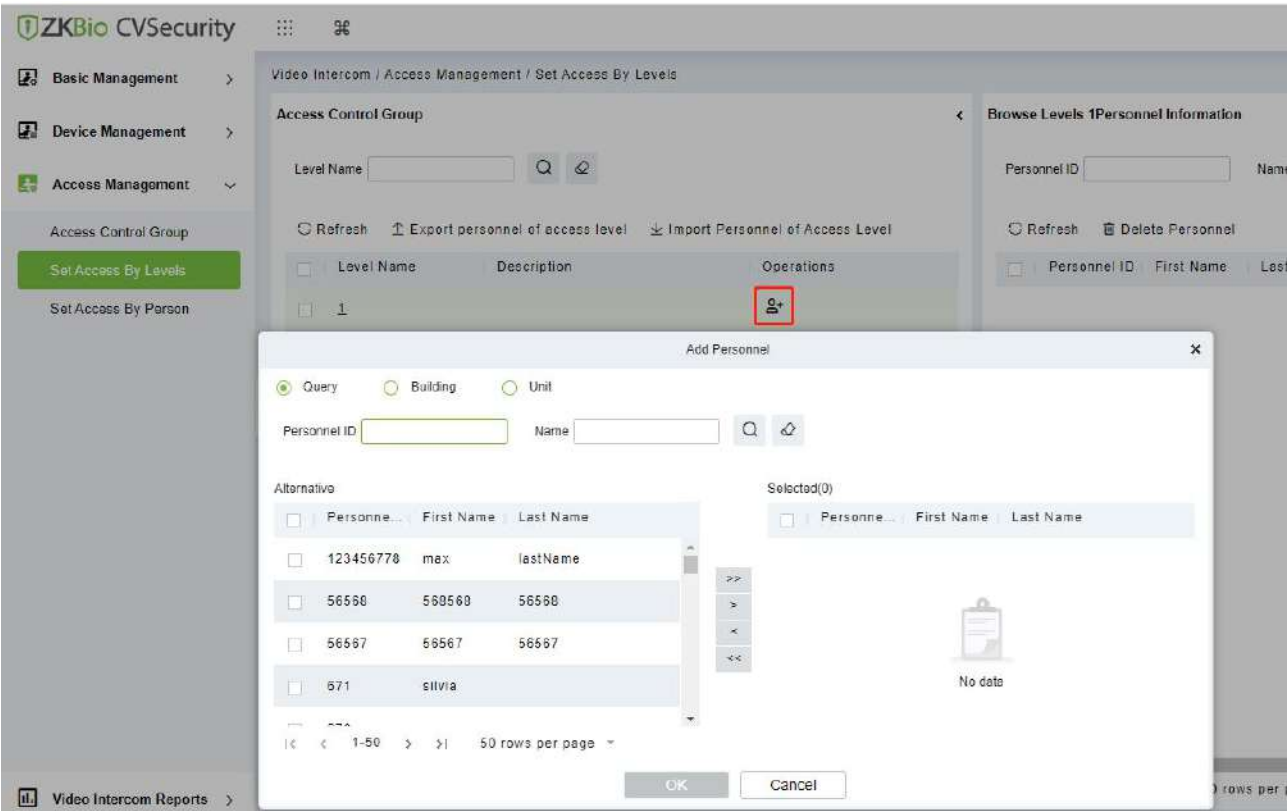


Figure 4- 21 The Interface of Add Personnel When Set Access by Level

Step 3: Click **OK** to complete the assignment of personnel add.

Parameter	How to set
Personnel ID	Enter the personnel ID..
Name	Enter the name of the person.
Building Name	Select the building name.
Unit Name	Select the unit name.

4.3.2.2 Export Personnel of Access Level

Click **Export**, enter the user password in the displayed security verification dialog box, and Click **OK**. Select whether to encrypt the file and the file format to export, and click **OK**.

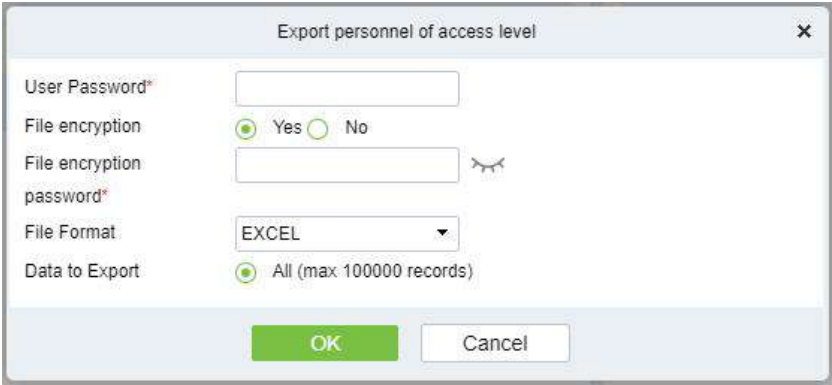


Figure 4- 22 Export the Personnel of Access Level

4.3.2.3 Import Personnel of Access Level

Click **Import** and then click **Browse** to select a file from the stored location. Finally, click **OK**.

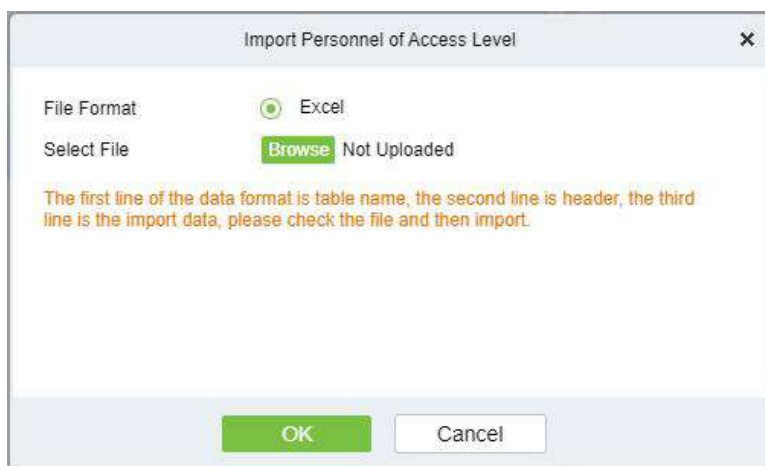


Figure 4- 23 Import the Personnel of Access Level

4.3.2.4 Delete Personnel

Select delete personnel, click **Delete**, and click **OK** to delete personnel.

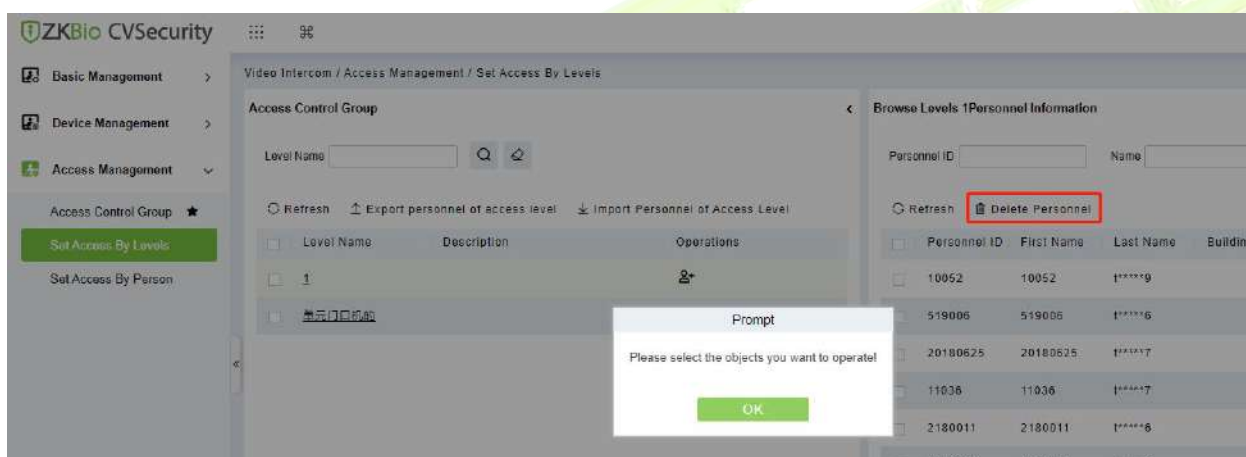


Figure 4- 24 Delete Personnel

4.3.3 Set Access by Person

This section describes Operation Step that set access by person in the module of video intercom in ZKBio CVSecurity.

4.3.3.1 Add Personnel

Operation Step:

Step 1: In the Video Intercom module, choose **Access Management>Set Access by Person**.

Step 2: In the Operation column of the corresponding permission group, click **"Add to Levels"**. The Add level page will be displayed. Select level as required.

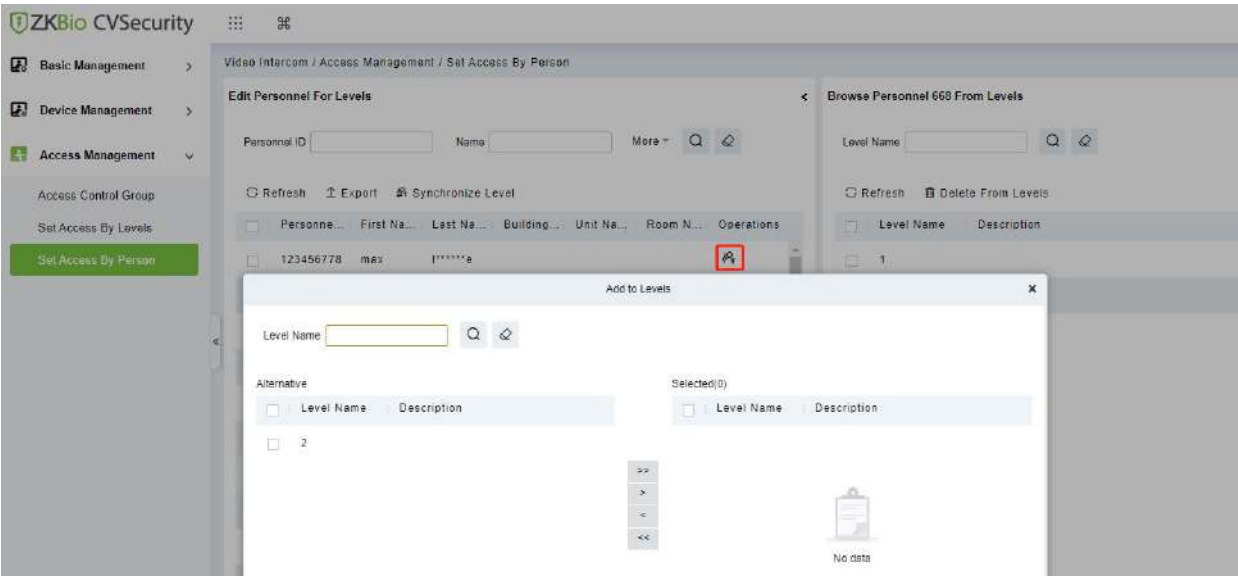


Figure 4- 25 The Interface of Add Level When Set Access by Personnel

Step 3: Click **OK** to complete the assignment of personnel add.

Parameter	How to set
Level Name	Enter the name of the level for the person.

4.3.3.2 Export

Click **Export**, enter the user password in the displayed security verification dialog box, and Click **OK**. Select whether to encrypt the file and the file format to export, and click **OK**.

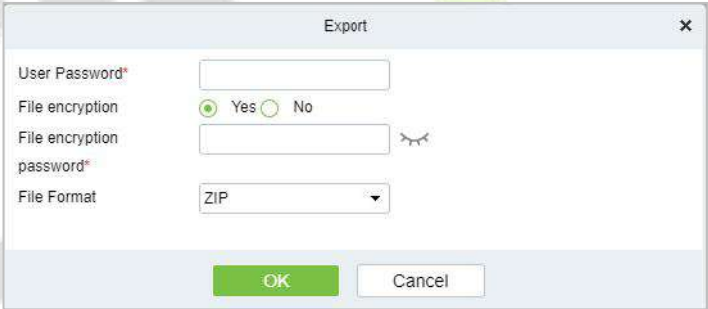


Figure 4- 26 Export the Access Level of Personnel

4.3.3.3 Synchronize Access Level

Select the level to be synchronized and send the corresponding device area data in the software to the device.

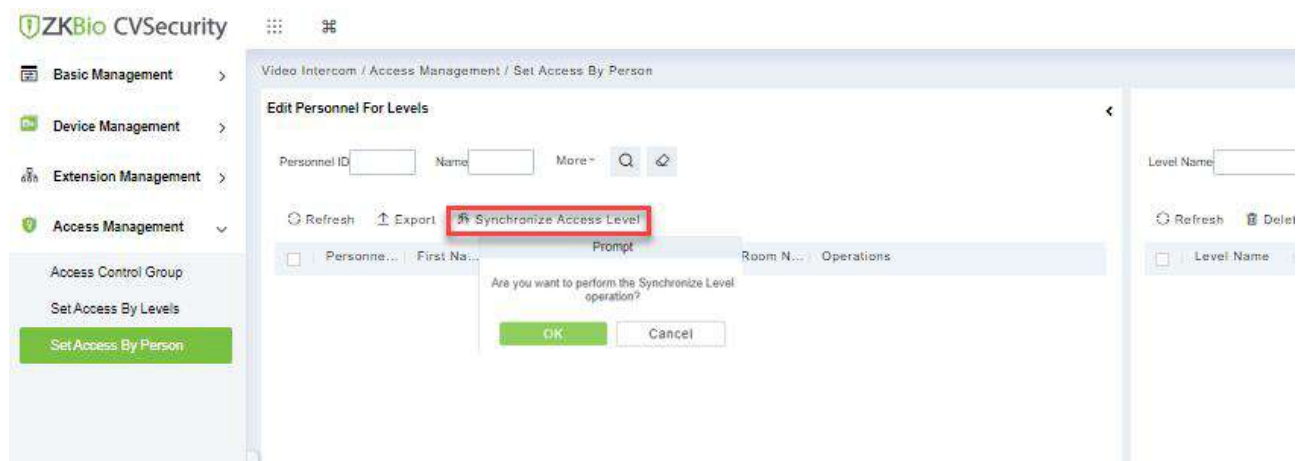


Figure 4- 27 Synchronize Access Level

4.3.3.4 Delete from Levels

Select delete level, click **Delete**, and click **OK** to delete level.

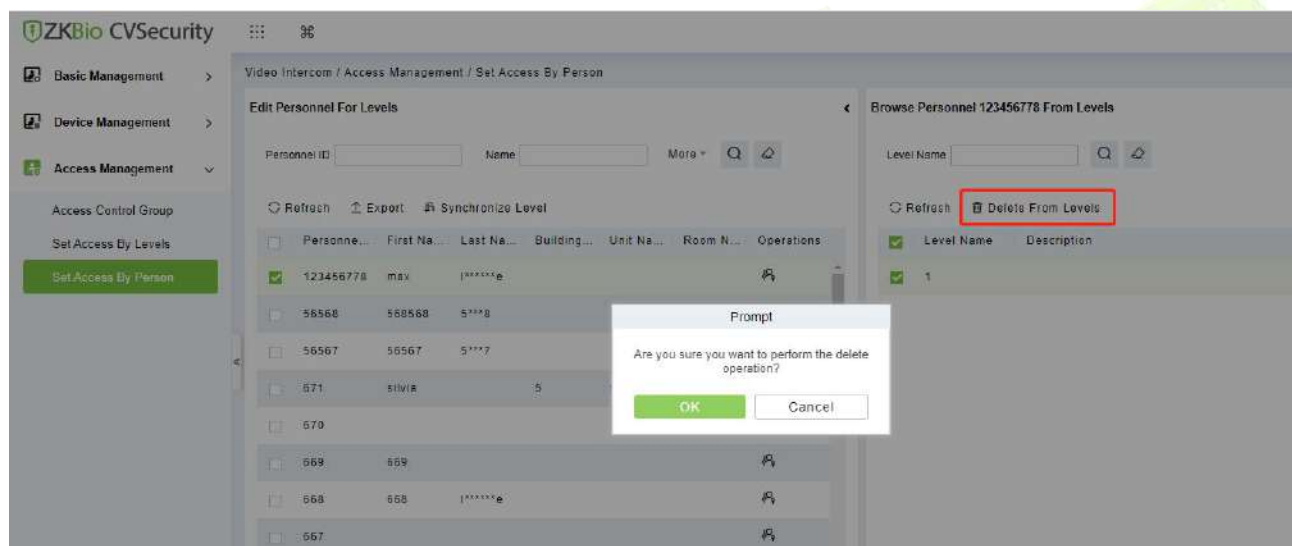


Figure 4- 28 Delete level

4.4 Extension Management

This menu is used for managing and assigning extension numbers.

Prerequisite

ZKBio CVSecurity supports two types of SIP servers:

- PBX Server: For addition and operation methods, please refer to [IPBX Device Operation Guide](#)
- Cloud SIP :Enable Cloud Sip ,please refer to [Cloud Setting](#)

4.4.1 Extension Number

Usually used for internal telephone systems, an extension number is a number or code used within a company or organization to identify different telephone sets.

4.4.1.1 New

Click on **"New"** to add a single extension number. If you need to add in bulk, please use the "Import"

function.

New

Name* | Extension Type* SIP

Extension Number* | Extension Password* |

Voice Mail | Voice Mailbox Password |

Registered Terminal Count* 1 | Enable Undisturbed Mode |

Incoming Call Number | Calling Name |

Direct Dialing Address For example: 10.8. x.x

⚠ If you need to configure extension encoding, it is recommended to set the same encoding

Save and New OK Cancel

Figure 4- 29 New Extension Number

Parameter	How to set
Name	Customize the extension name
Extension Type	Default communication type for SIP
Extension Number	Customize the extension number; for example, the number for Room 401, Unit 2, Building 1 can be defined as 12401 for easy internal recognition
Extension Password	Password for the extension
Voice Mail	Enable voicemail, this parameter is only valid for PBX servers
Voice Mailbox Password	The voicemail password for this extension, this parameter is only valid for PBX servers
Enable Undisturbed Mode	Enable the Do Not Disturb mode to ignore all incoming calls, this parameter is only valid for PBX servers
Incoming Calling Number	Caller ID number
Calling Name	Caller ID name
Direct Dialing Address	Intranet point-to-point call device IP; enter the IP here, and the call will be made to the direct dial address first; if the direct dial address is unreachable, then the call will be made through SIP; dual protection, effectively avoiding

communication issues in case of network interruption or SIP server downtime.

4.4.1.2 Delete

Select one or more extension numbers from the list, then click "**Delete**", a dialog box will appear as shown below:

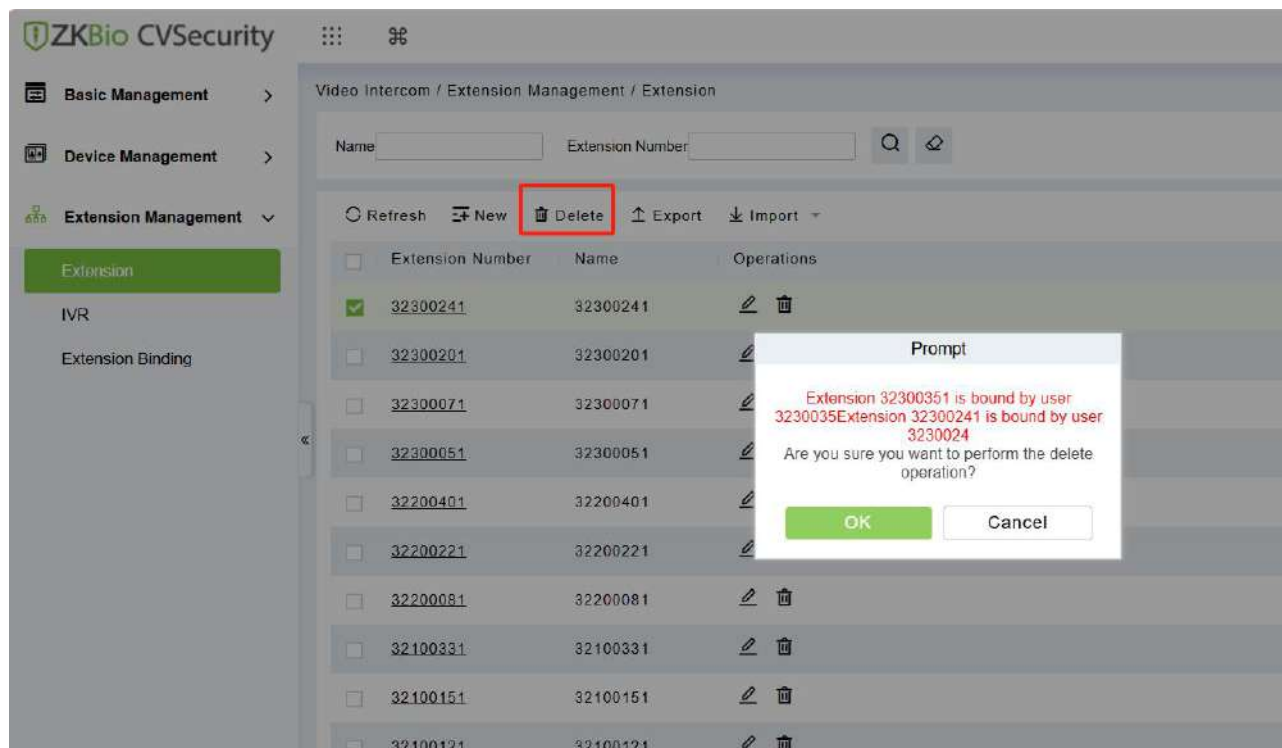


Figure 4- 30 Delete Extension Number

Clicking **OK** will result in the deletion of the selected extension number.

4.4.1.3 Import

If you need to add extension numbers in bulk, you can use the Import function.

Step 1: Download the import template by clicking **Import** -> **import template**.

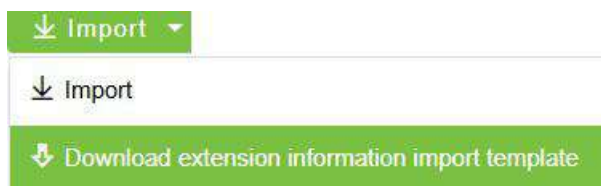


Figure 4- 31 Import Extension Number

Step 2: Fill in the information into the import template.

Extension Information Template				
Extension Number	Name	Direct Dial Address	Calling Number	Calling Name
400	Popy Xiao			Popy Xiao
401	Lambert Chen			Lambert Chen
402	Leo Hou			Leo Hou
403	sfsfd			sfsfd
404	fsfds			fsfds
405	fsfsf			fsfsf
406	fsfsf			fsfsf
407	fsfsf			fsfsf
408	fsfsdfd			fsfsdfd
409	fsfsdfs			fsfsdfs
410	fsfsdfd3w			fsfsdfd3w
411	fsfsw			fsfsw
412	fsfsf1			fsfsf1
413	afsfdsf			afsfdsf
414	wdsfsfs			wdsfsfs

Figure 4- 32 Import Extension Number

Step 3: Click on **Import -> Import**, then click Browse to select the import template, and click OK to start the bulk import process.

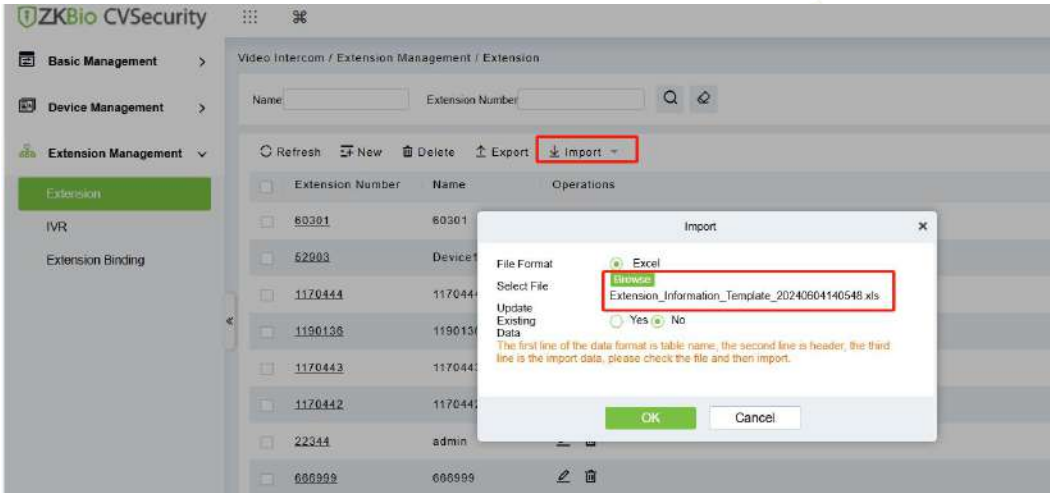


Figure 4- 33 Import Extension Number

Once the progress reaches 100%, you will be prompted with the results of the import, as shown in the figure below.

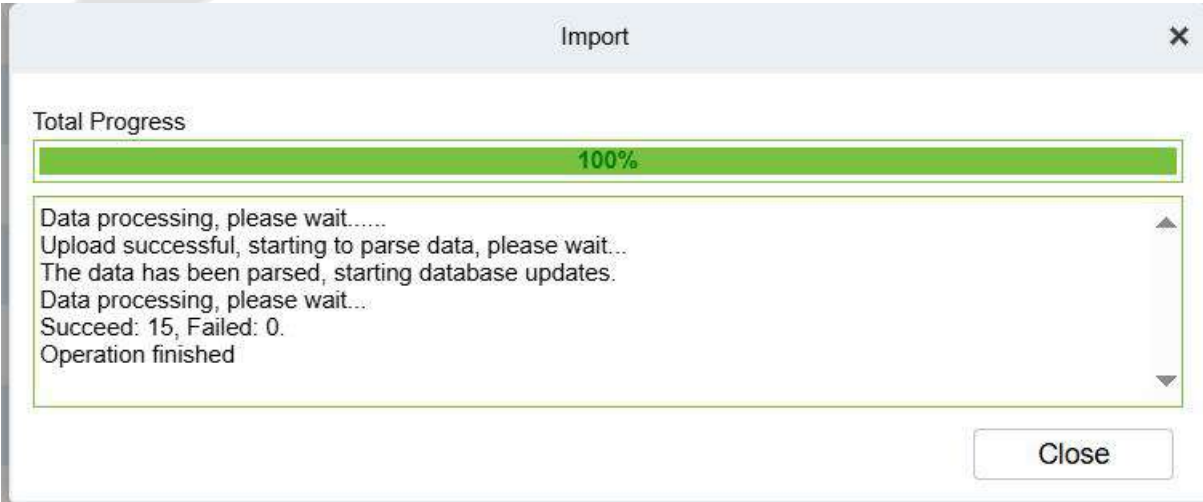


Figure 4- 34 Progress

4.4.1.4 Export

Export the relevant information of the extension numbers.

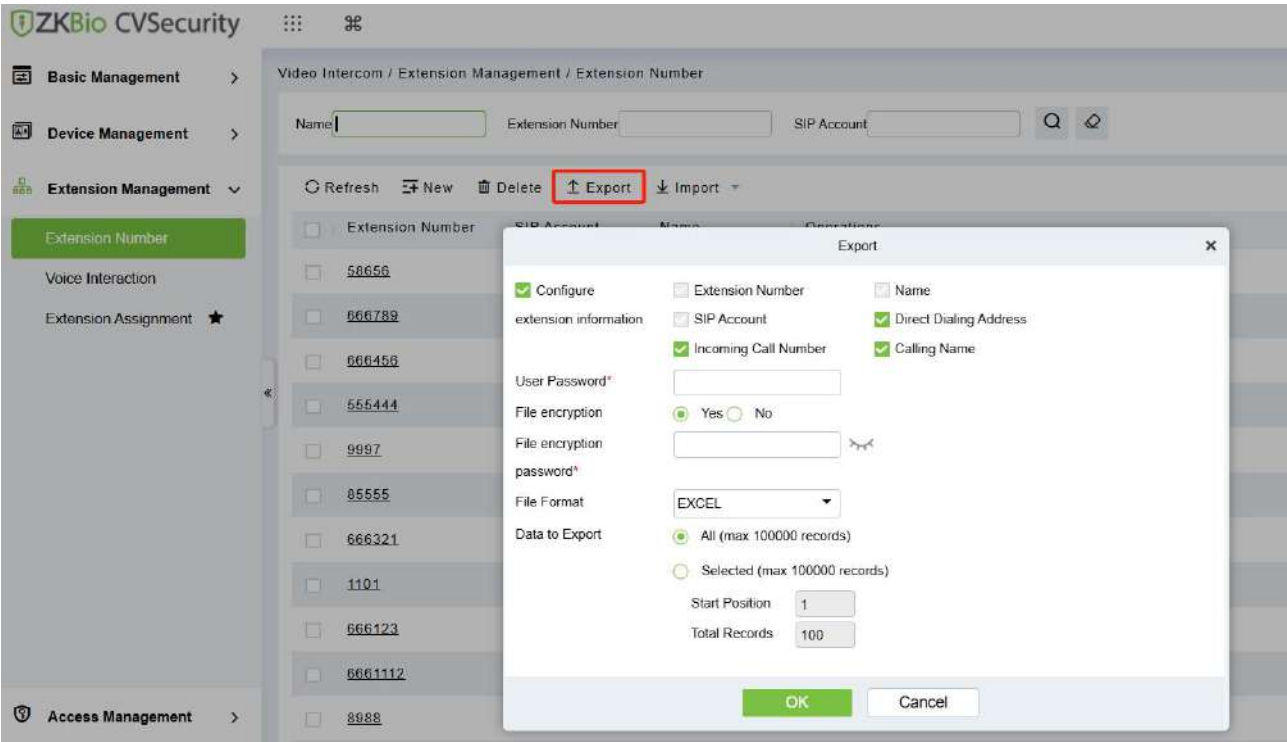


Figure 4- 35 Export Extension Number

4.4.2 Extension Assignment

This feature is designed to assign extension numbers to devices, personnel, and system users that have been added to ZKBio CVSecurity.

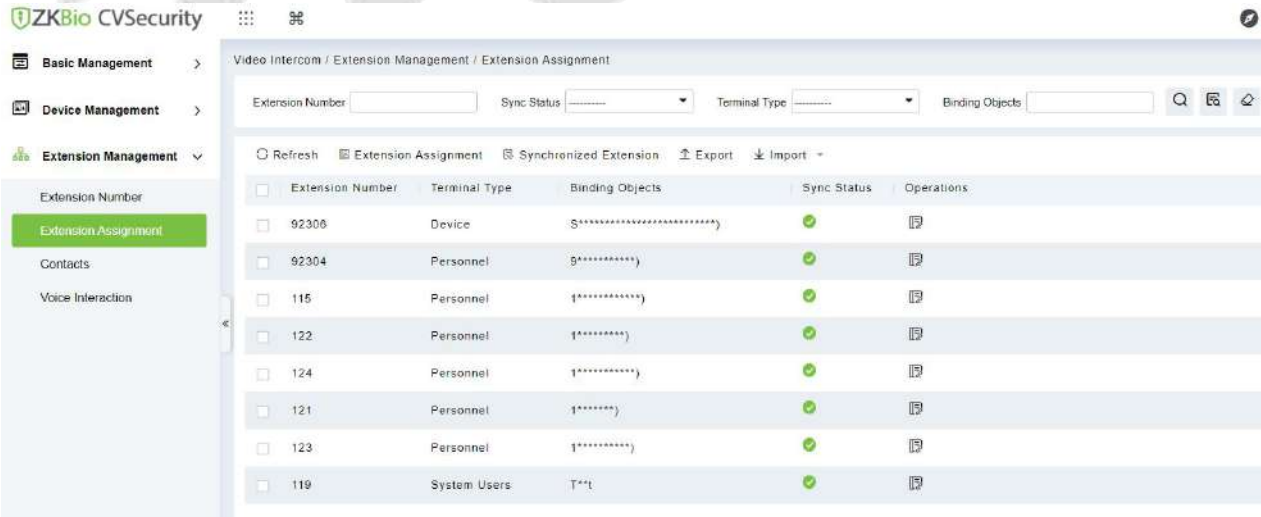


Figure 4- 36 Extension Assignment

4.4.2.1 Extension Number Assignment

4.4.2.1.1 Assign Accounts to Devices

Select the Terminal Type from the drop down list the as **Personnel, System users, Device**, then select the Personnel ID for the device you wish to bind, and select the Extension Number. The account information will be automatically synchronized to the device, eliminating the need for users to manually configure the address on the device.

Authorized Contacts: Assign the selected contact list to the device, enabling it to dial the short numbers or extension numbers within that contact list.

Note: Senseface/Speedpalm /DNK devices require a firmware upgrade to support the contact list functionality. You can refer to the hardware suggestion list for the required firmware versions.


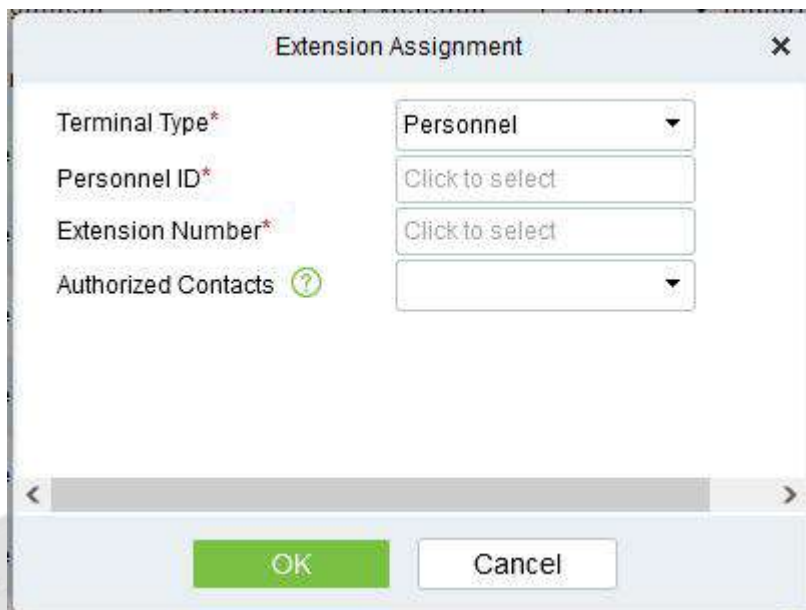


Figure 4- 37 Device

Result Verification

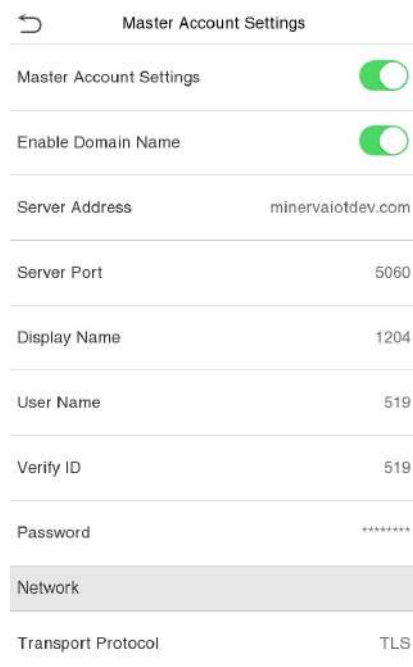In the device's visual intercom interface, under "**Account**," you can see that the SIP server and account information have been automatically written in, as shown in the figure below.



The image shows a 'Master Account Settings' screen. At the top, there is a back arrow and the title 'Master Account Settings'. Below this, there are several settings: 'Master Account Settings' with a green toggle switch, 'Enable Domain Name' with a green toggle switch, 'Server Address' with the value 'minervaiotdev.com', 'Server Port' with the value '5060', 'Display Name' with the value '1204', 'User Name' with the value '519', 'Verify ID' with the value '519', 'Password' with a masked value '*****', a 'Network' section with a grey background, and 'Transport Protocol' with the value 'TLS'.

Figure 4- 38 Device Account


4.4.2.1.2 Assigning Accounts to Personnel (App)

Terminal Type: Select "Personnel" as the Binding Type;

Personnel ID: Choose the Personnel ID for the individual to whom you want to assign the account;

Extension Number: Select the extension number in the Extension Number field.

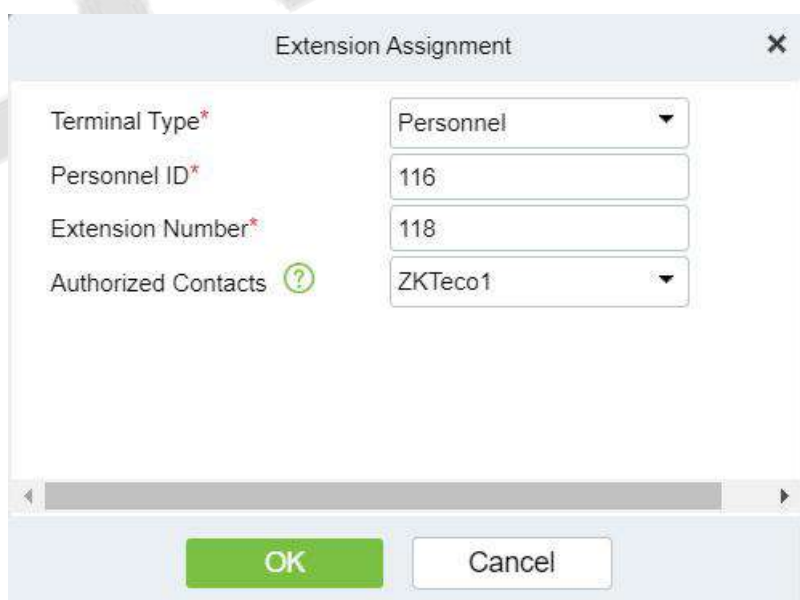
Authorized Contacts: After selecting the contact list, the contacts in that list will be automatically synced to the APP.



The image shows an 'Extension Assignment' dialog box. It has a title bar with a close button (X). Inside, there are four fields: 'Terminal Type*' with a dropdown menu showing 'Personnel', 'Personnel ID*' with a text input field containing '116', 'Extension Number*' with a text input field containing '118', and 'Authorized Contacts' with a dropdown menu showing 'ZKTeco1' and a green question mark icon. At the bottom, there are two buttons: 'OK' (green) and 'Cancel' (white).


Figure 4- 39 Personnel

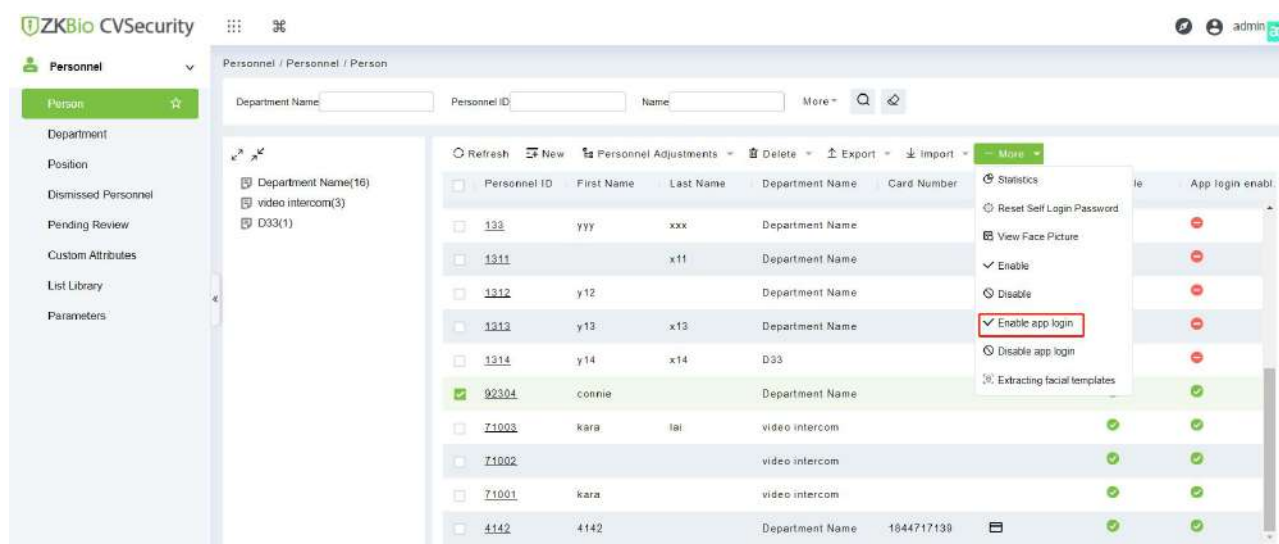If the personnel has already enabled APP Login, then after logging in to the APP, they can directly use the APP for visual intercom communication.



Result Verification:

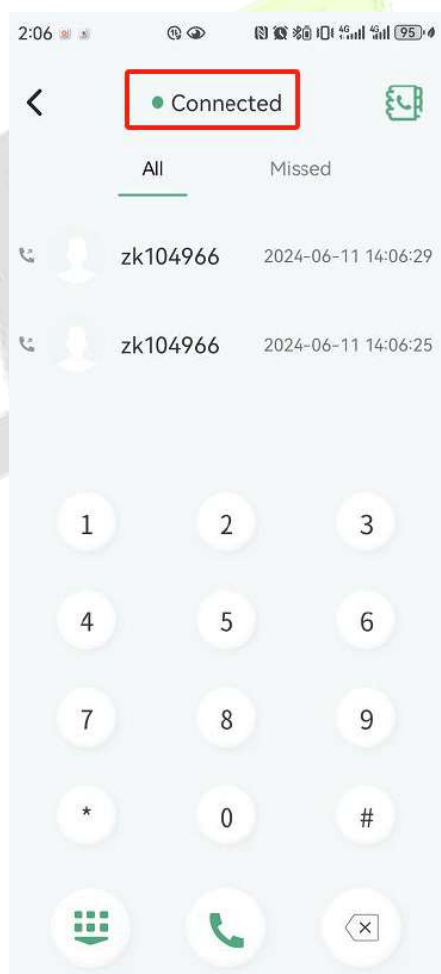After the personnel logs into the APP and enters the Video Call application, the interface status will display as **"Connected"**; if the personnel has not been assigned an extension number, entering the application will prompt "You have not been assigned an extension number, please contact the administrator."




4.4.2.1.3 Assigning Accounts to System User (App)

Terminal Type: Select "System User";

User Name: Choose the system user to whom the account needs to be assigned;

Extension Number: Select the extension number.

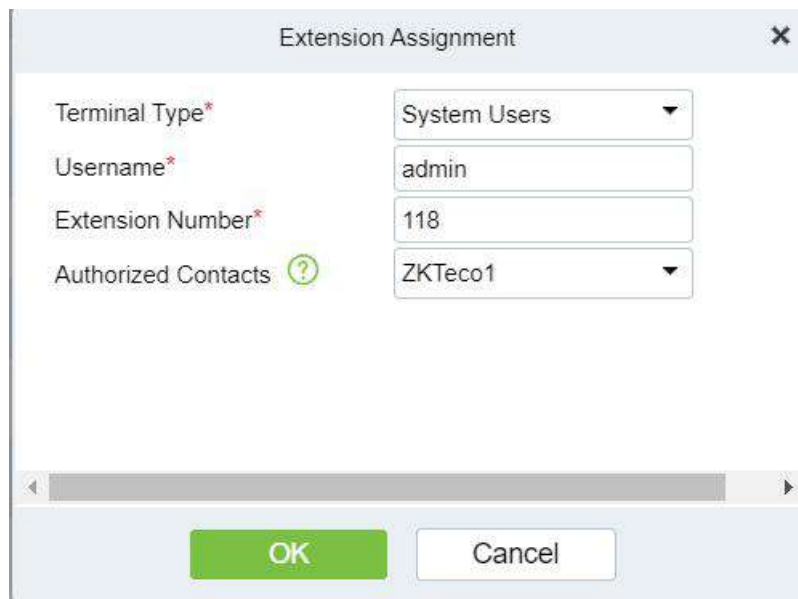Authorized Contacts: Assign the contact list to the system user; after the assignment, the system user can view contacts and make calls through the APP.



Extension Assignment

Terminal Type* System Users ▼

Username* admin

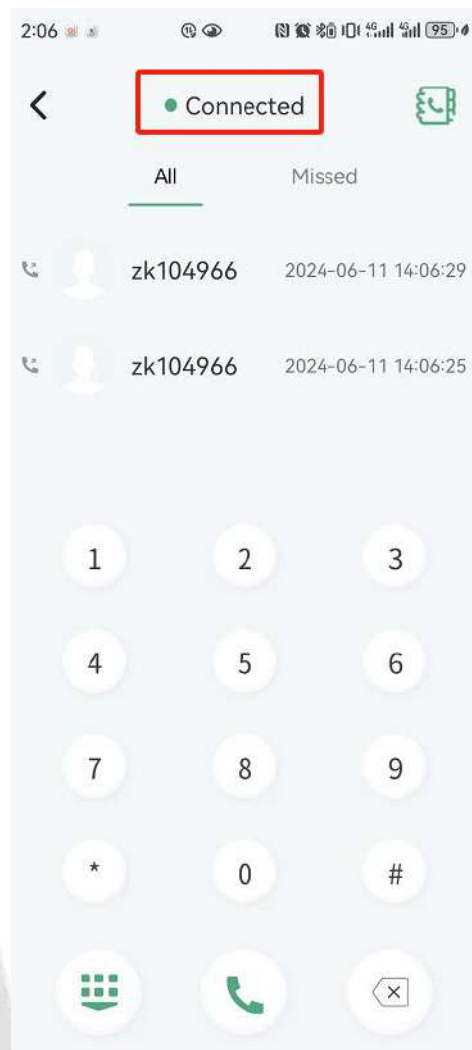
Extension Number* 118

Authorized Contacts ? ZKTeco1 ▼

OK Cancel


Result Verification:

After logging into the APP, upon entering the Video Call application, the interface status will display as "**Connected**"; if no extension number has been assigned, the application will prompt with "You have not been assigned an extension number, please contact the super administrator."



4.4.2.2 Synchronized Extension

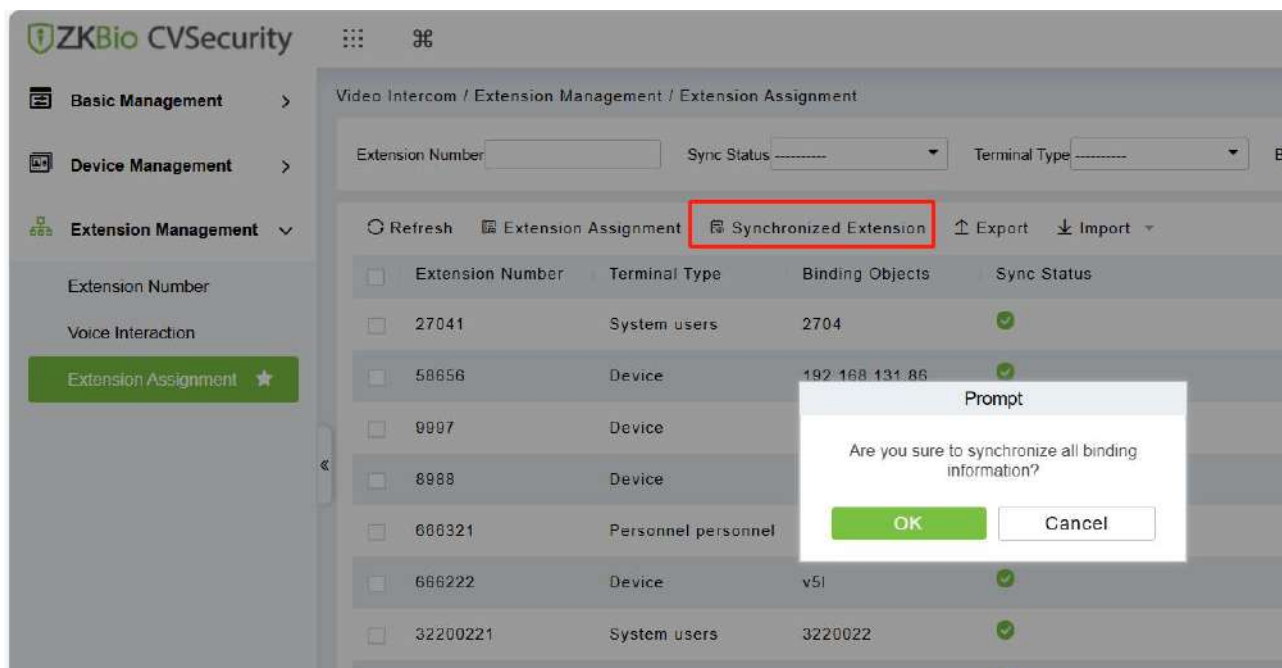Following the aforementioned steps to assign extension numbers to devices, personnel, and system users, the system will automatically synchronize the data to the devices or APPs. If the synchronization is interrupted or not successful, you can also click on "Synchronize Extension" to resynchronize.



4.4.2.3 Import


If you need to add extension numbers in bulk, you can use the Import function.

Step 1: Click on **Import** -> **Download extension information import template**, then and enter the details.

Extension binding information template

Extension Number	Terminal Type	Binding Objects
101	Personnel	101
102	Personnel	102
103	Personnel	103
104	System User	Test
105	Device	105

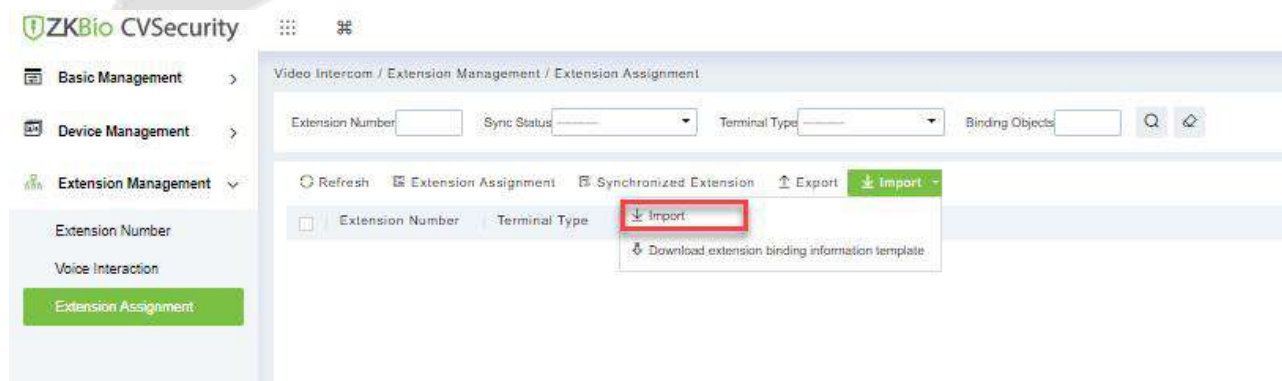Step 2: Download the import template by clicking **Import** -> **import template**.




Step 3: Click on **Import** -> **Import**, then click Browse to select the import template, and click **OK** to start the bulk import process.



4.4.2.4 Export

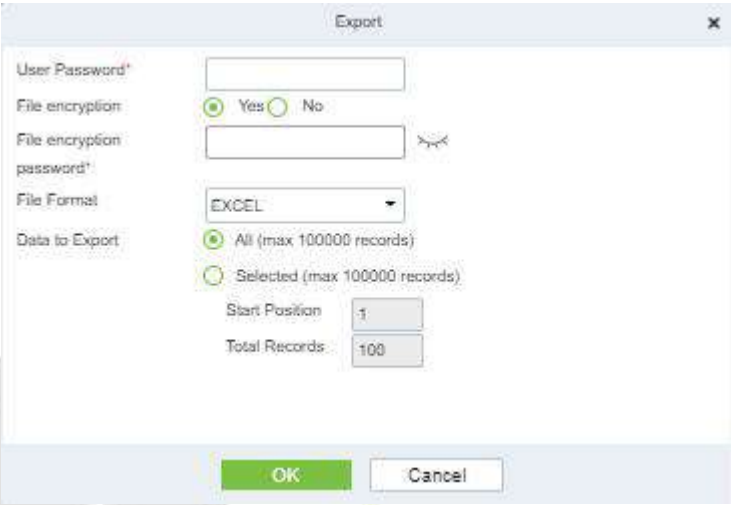
Export the relevant information of the extension assignment.



4.4.2.5 Unbinding Extension




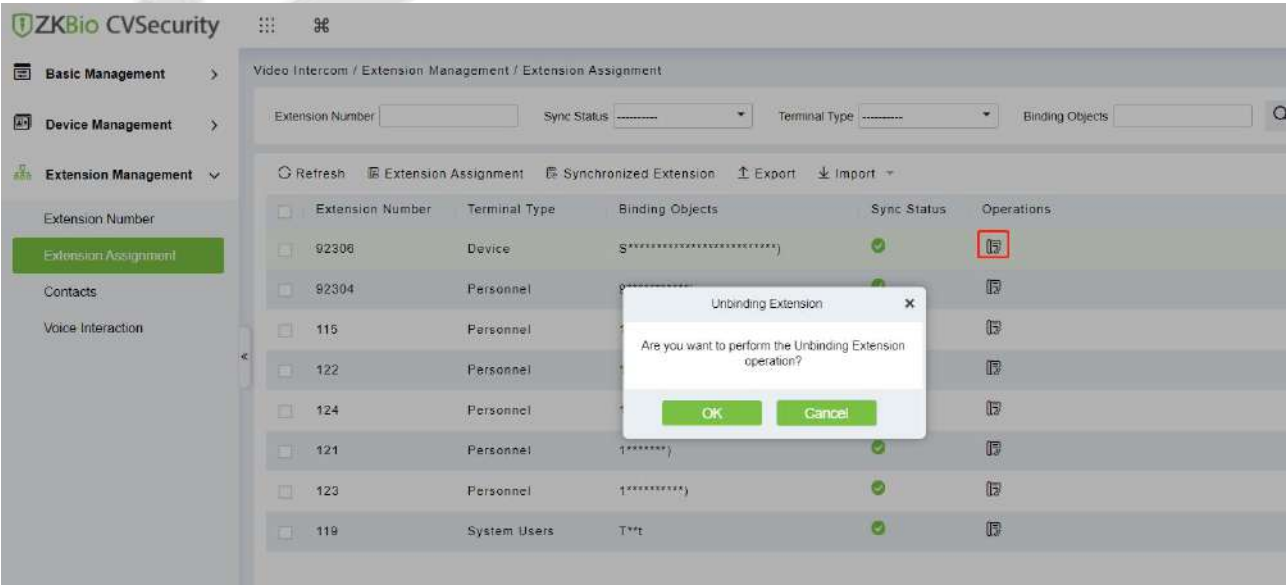Click button, This will unbind the extension number from its current association.



4.4.3 Contact List

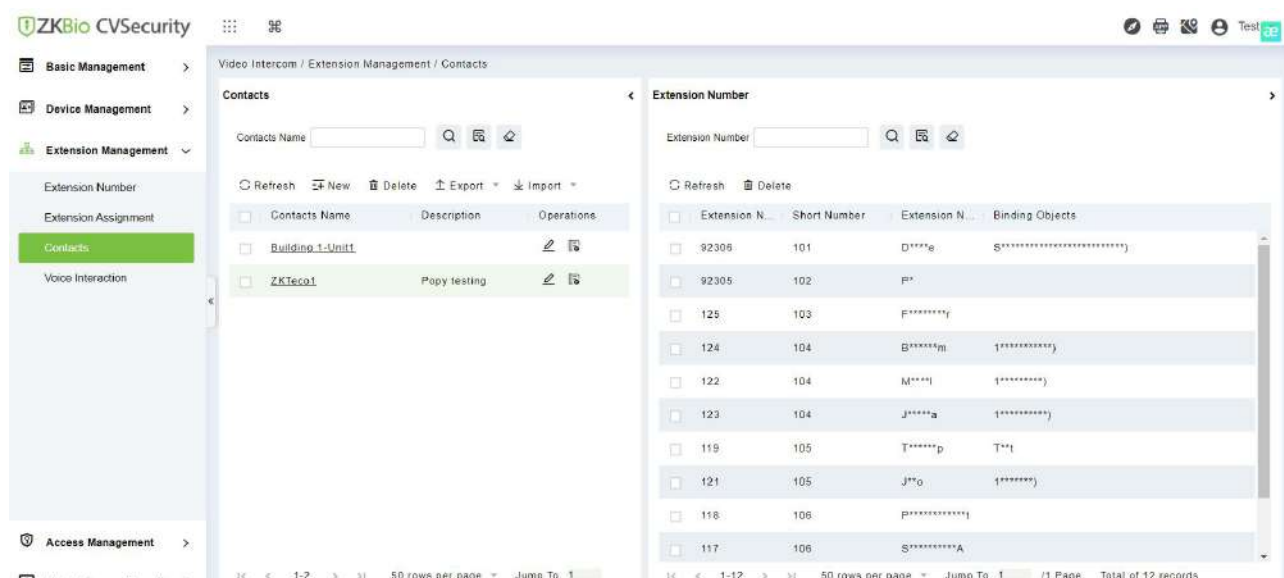User can create a contact list and assign it to devices or the app.



4.4.3.1 New

Click the **New** to create a new contact list.

The 'New' dialog box is shown, with a title bar 'New' and a close button. It contains two input fields: 'Contacts Name*' and 'Description'. The 'Contacts Name*' field is filled with 'Building 1-Unit1'. At the bottom, there are three buttons: 'Save and New' (green), 'OK' (green), and 'Cancel' (white).

4.4.3.2 Add Extension

Click on the  icon to add an extension number to the contact list, as shown in the image below:

The 'Add Extension' dialog box is shown, with a title bar 'Add Extension' and a close button. It contains two input fields: 'Extension Number' and 'Name'. Below these, there are two tables. The 'Alternative' table has columns 'Extension Number' and 'Name', and lists 9 records. The 'Selected(4)' table has columns 'Extension Number', 'Name', and 'Short Number', and lists 4 records. The 'Alternative' table is scrollable, and the 'Selected(4)' table is also scrollable. At the bottom, there are two buttons: 'OK' (green) and 'Cancel' (white).

After selection, the right sidebar allows you to edit and customize the **Short Number**.

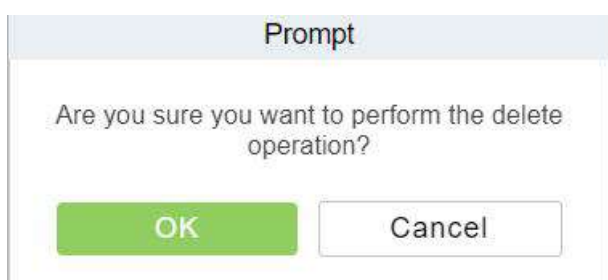
Short Number: Users can customize it, and Short Numbers can be duplicated. For example, if there are 4 members in the engineering maintenance team (4 extension numbers), to facilitate answering calls, they can all define their Short Number as 101. When this contact list is synchronized to the device or extension numbers, dialing 101 from the device will ring all 4 members of the engineering maintenance team.

Note:

1. The ZKBio CVSecurity APP (ZKBio Zexus) supports this contact list feature. Senseface/Speedpalm devices need a firmware upgrade to support it.
2. After creating a contact list, you can assign it to individuals, system users, or devices in the Extension Assignment section.


4.4.3.3 Delete

Click **Delete** to remove the contact list.



4.4.3.4 Export

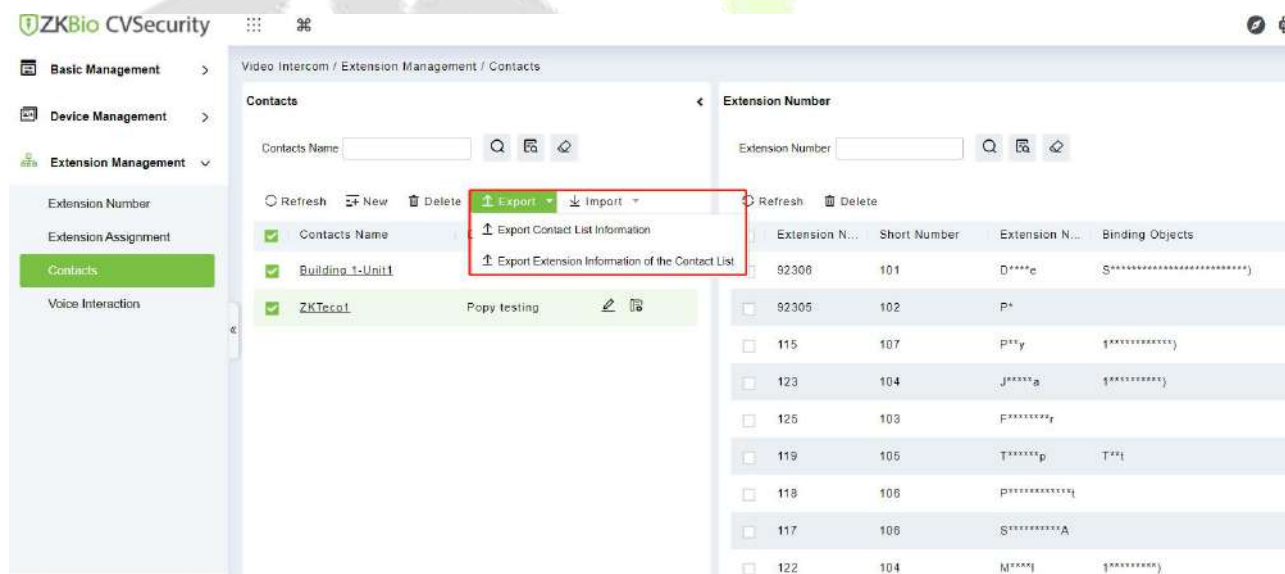Click **Export** to export the contact list.



● Export Contact List Information

Contacts	
Contacts Name	Description
Building 1-Unit1	
ZKTecol	Popy testing


● Export Extension Information of the Contact List

Video intercom address book extension information				
Contacts Name	Extension Number	Short Number	Extension Name	Binding Objects
ZKTecol	92306	101	Device	Senseface 7A(192.168.137.60)
ZKTecol	92305	102	PC	
ZKTecol	115	107	Popy	115(Popy xiao)
ZKTecol	123	104	Jessica	111(Jessica)
ZKTecol	125	103	FLZ-Indoor	
ZKTecol	119	105	Test app	Test
ZKTecol	118	106	Popy PC Client	
ZKTecol	117	106	Senseface 7A	
ZKTecol	122	104	Manual	112(Manuel)
ZKTecol	116	107	Speedpalm V5L	
ZKTecol	124	104	Boopalan	114(Boopalan)
ZKTecol	121	105	Joao	113(Joao)

4.4.3.5 Import

Click "**Import**" to import a contact list.

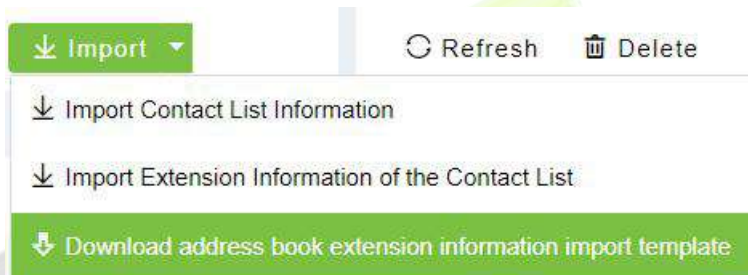You can download the import template and then proceed with the import based on the requirements of the template.



4.4.4 Voice Interaction

IVR (Interactive Voice Response) is a telephone service technology that allows users to interact with an automated telephone system through telephone key presses or voice commands; this feature is only available with PBX Server.

This feature can be used for two major applications: Access Control linkage to video intercom; and IVR Intelligent Voice Interaction.

1. Intelligent Voice Interaction

The IVR system can improve service efficiency, reduce labor costs, and provide users with uninterrupted service 24 hours a day. For example: Suppose the user has configured the IVR extension number to 10086 and has pre-configured the voice guidance content, then the user can dial 10086 via the app, and the guidance content will be played automatically; the user can press buttons according to the guidance, such as pressing 1 to call customer service, pressing 5 to hang up, etc. (Currently, the ZKBio CVSecurity Mobile App does not support retrieving keyboard input during the call process, the next version will support it; the current version can be used in conjunction with the indoor unit.)

4.4.4.1 New

Click on **Video Intercom -> Extension Management -> Voice Interaction page**, and click on New to display the window as shown in the figure below.

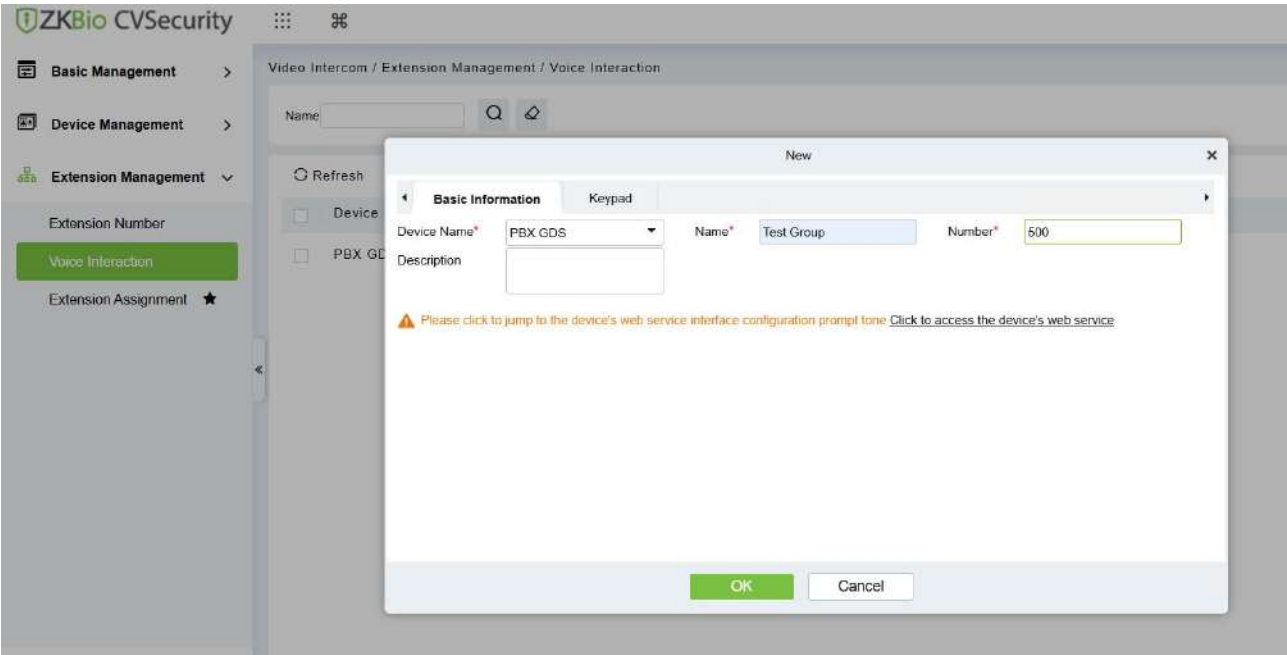


Figure 4- 40 Voice Interaction

●Basic Information

The PBX Server's IVR feature basic information configuration, with field explanations as follows:

Parameter	How to set
Device Name	Select PBX Server
Name	Custom Name: Name this voice interaction
Number	Configure IVR Extension: Set the extension number for the IVR
Description	Description: Provide a description for this IVR

●Keypad

Configure the purpose and actions intended to be achieved by the IVR.


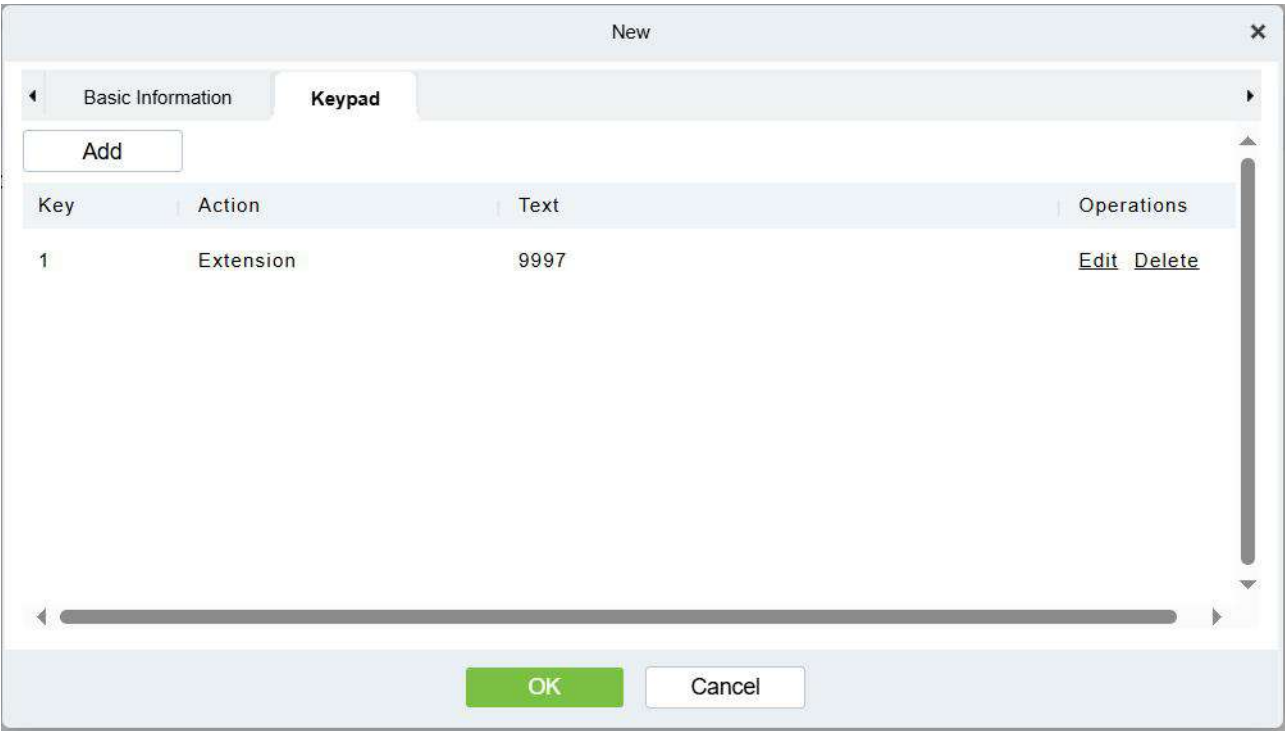


Figure 4- 41 Keypad

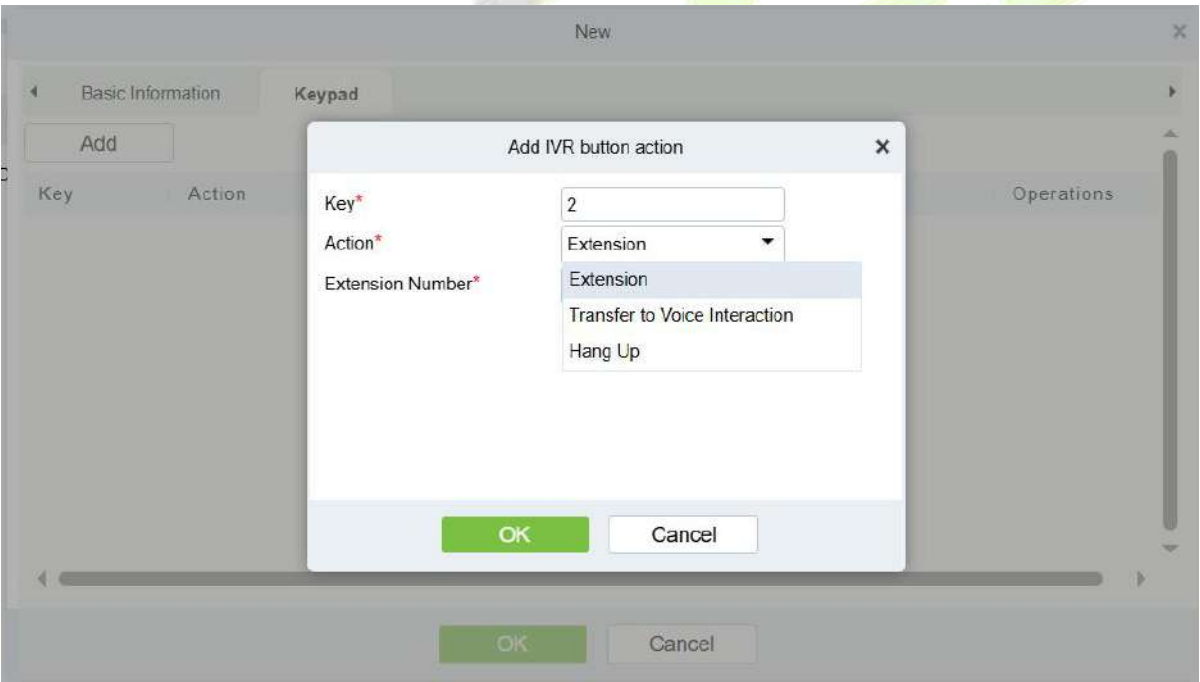Click "**Add**" to begin the configuration.



Parameter	How to set
Key	Keyboard values: 1-9, *, #
Action	A total of 3 actions are supported: <ul style="list-style-type: none">● Extension: Dial an extension number. After selecting this option, you can further choose the extension number.

- **Transfer to Voice Interaction:** Transfer to another IVR. After selecting this option, you can further choose the IVR number.
- **Hang Up:** End the call.

Note: To ensure the normal use of the IVR function, after you have completed the configuration of the above content, you must go to the PBX's Web-IVR page to find the IVR you just saved and edit it to upload the required voice files, as shown in the figure below:

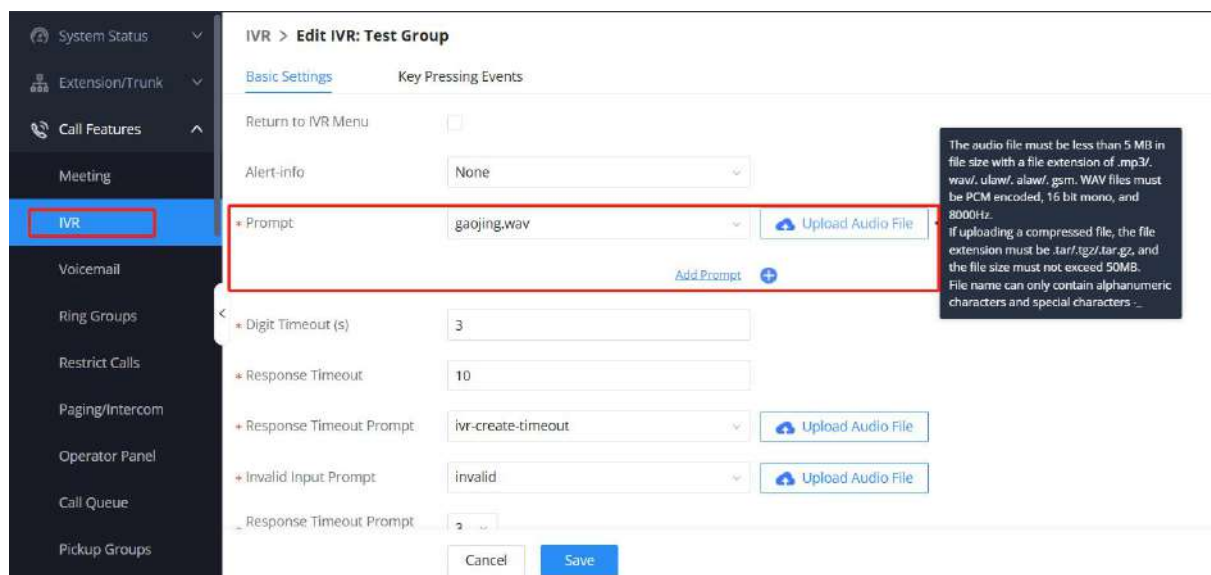


Figure 4- 42 IVR

1. Access Control Linkage

Go to **Access > Access Rule > Linkage**, and click on "New" to start configuring the linkage. In the output actions, you can find Video Intercom. You can select the IVR and the extension number you wish to call.

After the configuration is complete, when the triggering conditions are met, the system will automatically call the specified extension number and play the IVR voice, preventing security personnel from missing emergency alerts.

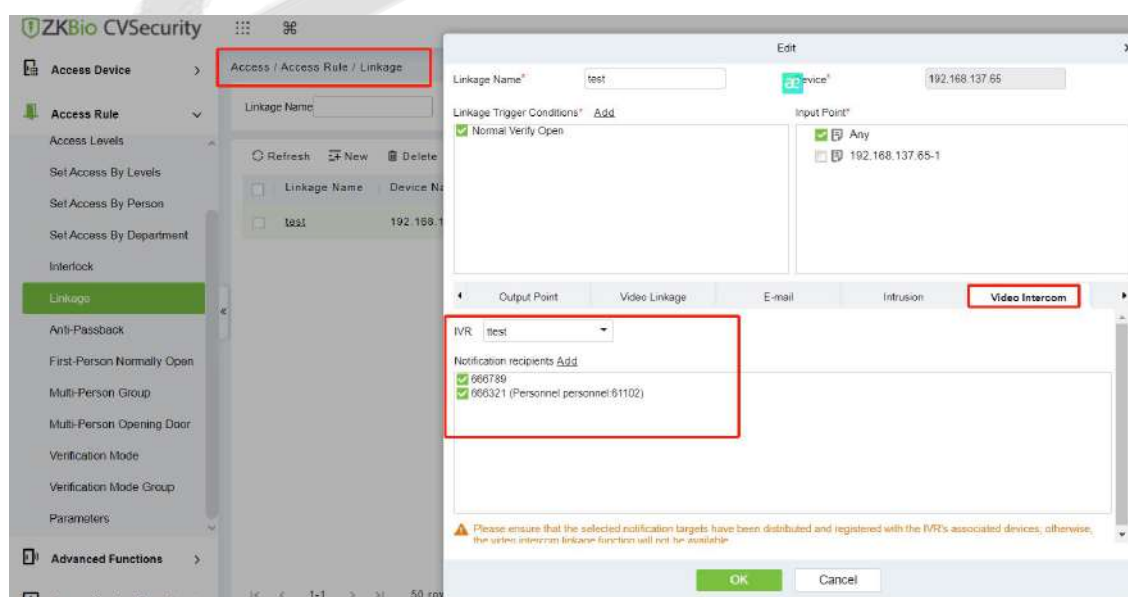


Figure 4- 43 Access Control Linkage

4.4.4.2 Obtain IVR

Go to Video Intercom -> Extension Management ->Voice Interaction page, and click on Open IVR the window as shown in the figure below:

Obtain IVR

Device Name*

OK

Cancel

Parameter	How to set
Device Name	Enter the name of the device.

4.5 Video Intercom Reports

In the video intercom report, you can query all video intercom records, which include call records and unlock records. You have the option to export all records or query specific records. This section describes the Step for querying and exporting reports in ZKBio CVSecurity.

4.5.1 Call Records

4.5.1.1 Record Query

●Operation Step:

Step 1: In the Video Intercom module, choose “**Video Intercom Report > Call Records**”.

Step 2: On the call Records interface, fill in the corresponding query information and click the icon to complete the query of all records, as shown in figure below.



Figure 4- 44 Report Query Page

4.5.1.2 Get Records

●Operation Step:

Step 1: In the Video Intercom module, choose “**Video Intercom Report > Call Records > Get Records**”.

Step 2: On the Get Records interface, select the indoor station, as shown in figure below.

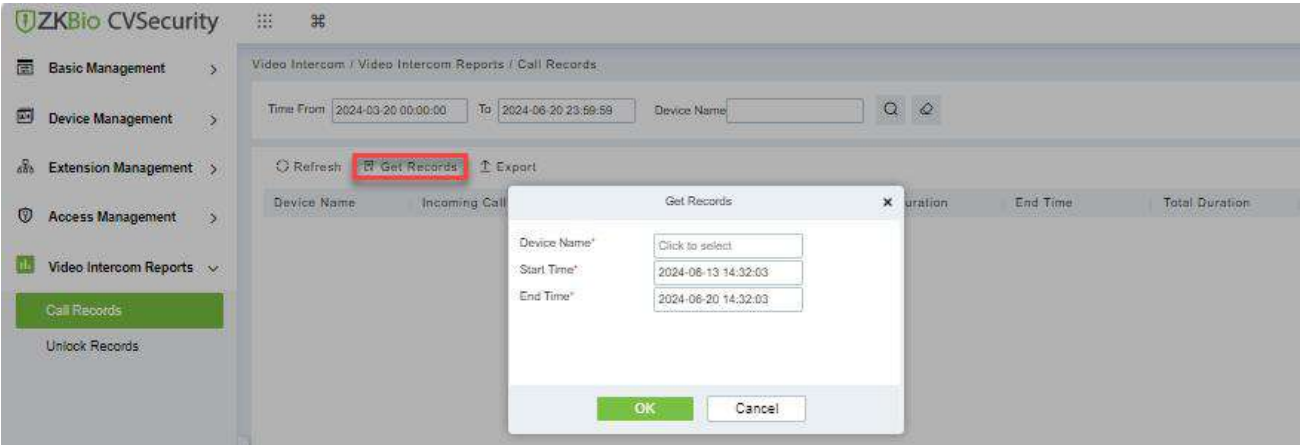


Figure 4- 45 Get Records Page 1

Parameter	Description
Device Name	Select the name of the device.
Start Time	Enter the start time of the device.
End Time	Enter the end time of the device.

Step3: On the Select device interface, select the device you need, as shown in figure below.

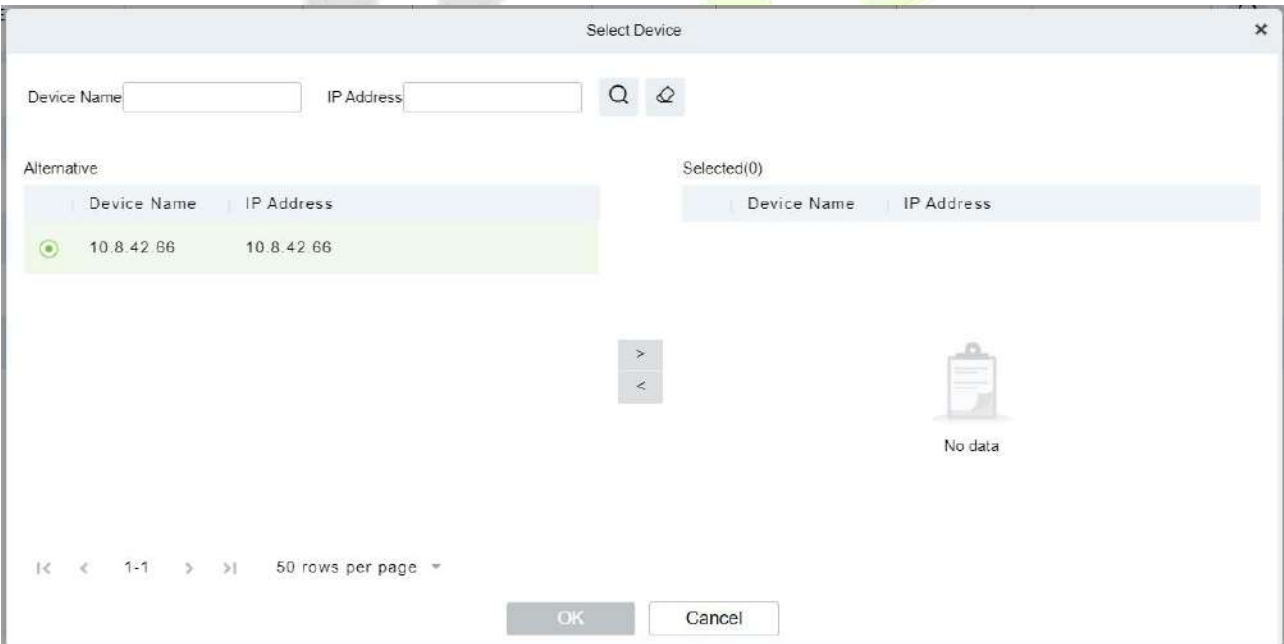


Figure 4- 46 Get Records Page 2

Step 4: Click **OK** to complete the complete acquisition of device records.

4.5.1.3 Export

Click **Export**, enter the user password in the displayed security verification dialog box, and Click **OK**. Select whether to encrypt the file and the file format to export, and click **OK**.

Export

User Password*

File encryption

☒ Yes ☐ No

File encryption password*

File Format

EXCEL

Data to Export

☒ All (max 100000 records)
☐ Selected (max 100000 records)

Start Position

1

Total Records

100

OK

Cancel

Figure 4- 47 Report Export

Call Records					
Time	Device Name	Area Name	Number	Event Type	Ring Duration/s second
2023-11-20 22:56:37	221	Area Name	10.8.14.3		12
2023-11-20 19:15:14	221	Area Name	10001		4
2023-11-20 19:11:19	221	Area Name	10001		3
2023-11-20 19:10:55	221	Area Name	10001		1
2023-11-20 19:09:56	221	Area Name	10001		5
2023-11-20 19:09:46	221	Area Name	10001		4
2023-11-20 19:07:27	221	Area Name	10001		5
2023-11-20 17:44:48	221	Area Name	10.8.14.3		4
2023-11-20 16:13:06	221	Area Name	10.8.14.3		4
2023-11-16 19:54:01	221	Area Name	10001		2
2023-11-16 19:53:52	221	Area Name	10001		3
2023-11-16 19:52:23	221	Area Name	2010008		0
2023-11-16 19:51:49	221	Area Name	2010008		0
2023-11-16 19:51:33	221	Area Name	2010008		0


Figure 4- 48 Call Report Export

4.5.2 Unlock Records

4.5.2.1 Record Query

●Operation Step:

Step 1: In the Video Intercom module, choose “**Video Intercom Report > Unlock Records**”.

Step 2: On the unlock Records interface, fill in the corresponding query information and click the icon  to complete the query of all records, as shown in figure below.

ZKBio CVSecurity

admin

Basic Management

Device Management

Access Management

Video Intercom Reports

Call Records

Unlock Records

Video Intercom / Video Intercom Reports / Unlock Records

Time From 2023-09-24 0:00:00 To 2023-11-24 23:59:59 Personnel ID Device Name

Refresh

Get Records

Expert

Time	Device Name	Personnel ID	First Name	Last Name	Unlock Met.	Number	Status
2023-11-23 14:30:46	单元门口机-194				Password	0000	Success
2023-11-23 14:30:43	单元门口机-194				Password	789	Failed
2023-11-23 14:30:39	单元门口机-194				Password	0000	Success
2023-11-23 14:29:02	单元门口机-194				Password	0000	Success

Figure 4- 49 Report Query Page

4.5.2.2 Get Records

● Operation Step:

Step 1: In the Video Intercom module, choose “**Video Intercom Report > Unlock Records > Get Records**”.

Step 2: On the Get Records interface, select the indoor station, as shown in figure below.

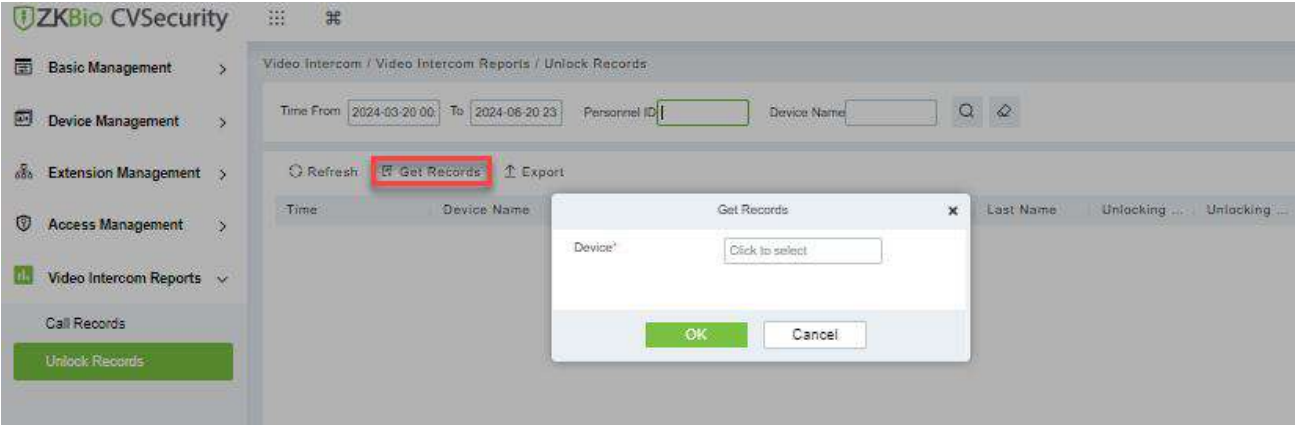


Figure 4- 50 Get Records Page 1

Parameter	Description
Device Name	Select the name of the device.

Step 3: On the Select device interface, select the device you need, as shown in figure below.

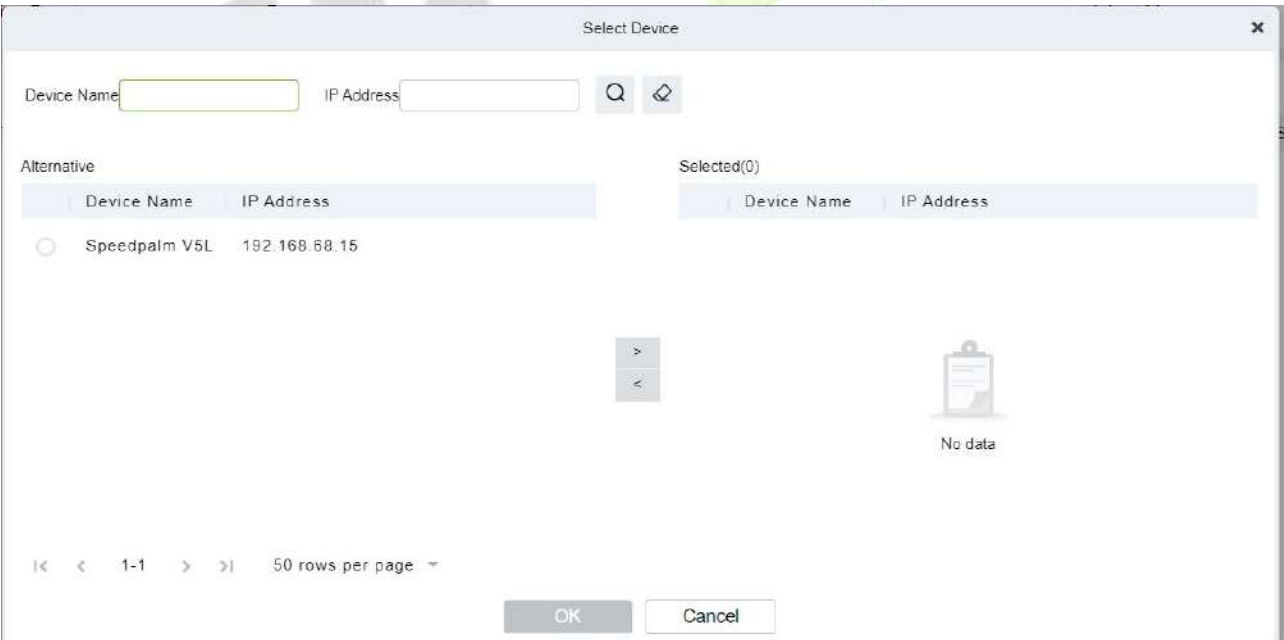


Figure 4- 51 Get Records Page 2

Step 4: Click **OK** to complete the complete acquisition of unlock records.

4.5.2.3 Export

Click **Export**, enter the user password in the displayed security verification dialog box, and Click **OK**. Select whether to encrypt the file and the file format to export, and click OK.

Export

User Password*

File encryption

☒ Yes ☐ No

File encryption password*

File Format

EXCEL

Data to Export

☒ All (max 100000 records)

☐ Selected (max 100000 records)

Start Position

1

Total Records

100

OK

Cancel

Figure 4- 52 Report Export

	A	B	C	D	E	F	G	H
1	Unlock Records							
2	Time	Device Name	Personnel ID	First Name	Last Name	Unlock Method	Number	Status
3	2023-11-23 14:30:46	-164				Password	0000	Succeed
4	2023-11-23 14:30:43	-164				Password	759	Succeed
5	2023-11-23 14:30:39	-164				Password	0000	Succeed
6	2023-11-23 14:29:02	-164				Password	0000	Succeed
7	2023-11-23 14:28:56	-164				Password	8899	Succeed
8	2023-11-23 14:28:52	-164				Password	99	Succeed
9	2023-11-23 14:28:49	-164				Password	0000	Succeed
10	2023-11-22 17:40:54	-164				Password	0000	Succeed
11	2023-11-22 05:57:44	-116				Face		
12	2023-11-22 05:57:13	-116				Face		
13	2023-11-22 07:02:27	-116				Face		
14	2023-11-22 07:00:39	-116				Face		
15	2023-11-22 07:00:17	-116				Face		
16	2023-11-22 06:47:40	-116				Face		
17	2023-11-21 09:37:00	16				Face		
18	2023-11-21 09:35:36	16				Face		
19	2023-11-20 22:31:26	34				Password	123456	
20	2023-11-20 22:37:08	34				Password	11	
21	2023-11-20 19:08:09	34				Password	0000	Succeed
22	2023-11-20 18:06:05	34				Password	0000	Succeed
23	2023-11-20 18:06:09	34				Password	0000	Succeed

Figure 4- 53 Unlock Report Export

5 Smart Video Surveillance

5.1 Device Management

5.1.1 Device (Add Device)

● Scene Description:

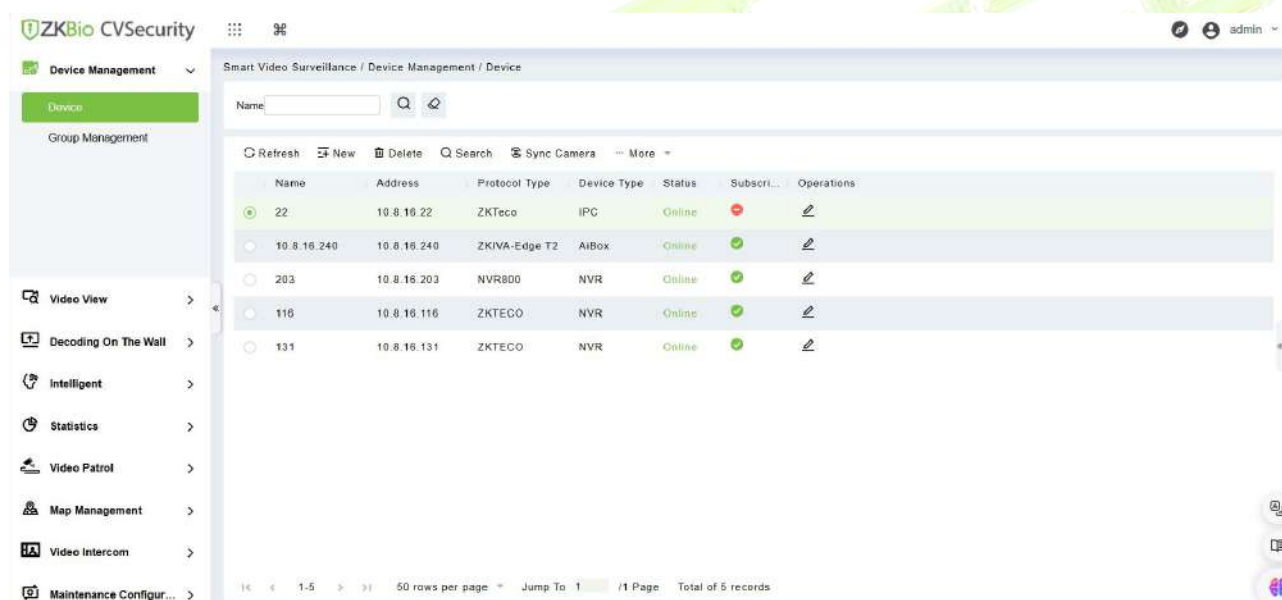
This operation is used to instruct users how to connect NVR to the platform and cameras, so that the platform can manage the connected devices uniformly, such as viewing the live and video recordings of cameras.

5.1.1.1 Manual Add NVR

Maximum supports 1024 video channels, support 64 channels preview and 16 channels real-time playback simultaneously.


● Operating Steps:

Step 1: Under the Smart Video Surveillance module, select **Device Management > Device**.



Note: The default page only shows the master device, if you want to see the cameras added to the

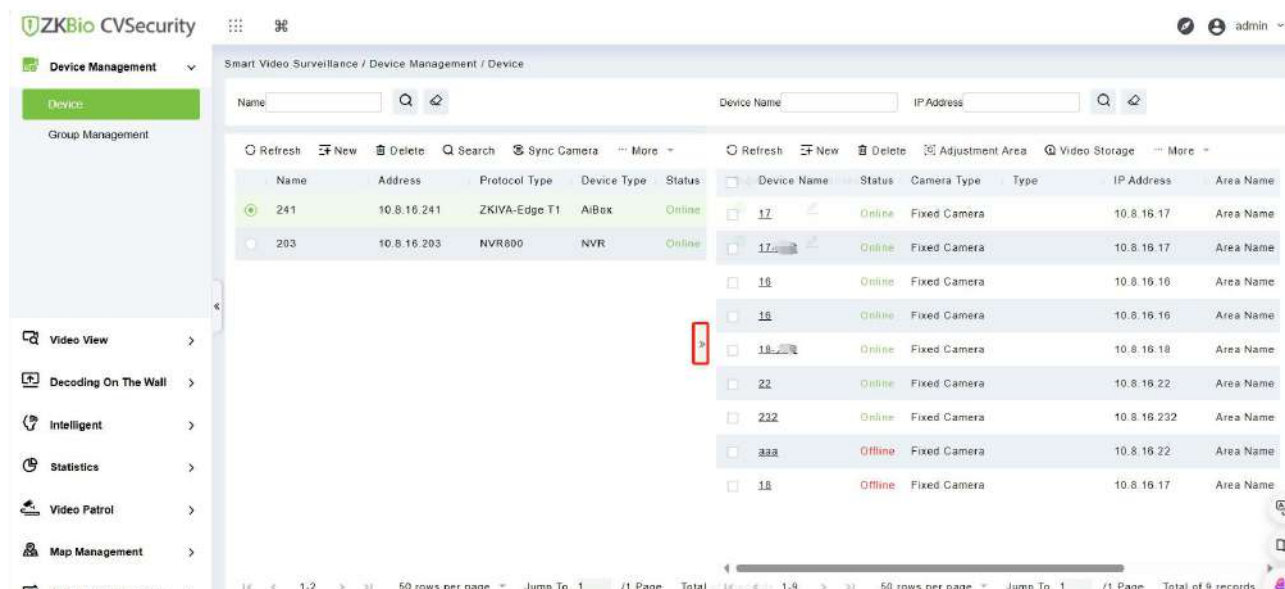master device, please click the icon  on the far right side to see them.



Step 2: Click **New** under the main device list to display the adding interface as shown in figure below, and the description of each parameter is shown in Table 4-1.

Figure 5- 1 New Master Device

● Scene Description:

There are 7 types you can select (IVS1800/NVR800/ZKTECO/TD NVR3000/ONVIF/ZKIVA-Edge T1/ZKIVA-Edge T2). If the purchased device is ZKNVR, select "NVR" for the type. If you want to add ZKIPC, click Type and select "IPC".

Parameters/Buttons	Description
Type	Select the device type.
Protocol Type	Select the type of protocol.
Name	Customize the device name.
Port	Configure the device port. ZKNVR default is 8081.
Address	Configure the device address. The format is: xxx.xxx.xxx.xxx, for example: 192.168. 6.5
Username &	The NVR'S user name and password.

Password	Note: For ZKNVR, the default account is (admin,123456) ForIVS1800, you should to login the web page to add a new account.
----------	--

Table 5- 1 Adding Device Parameters or Function Description

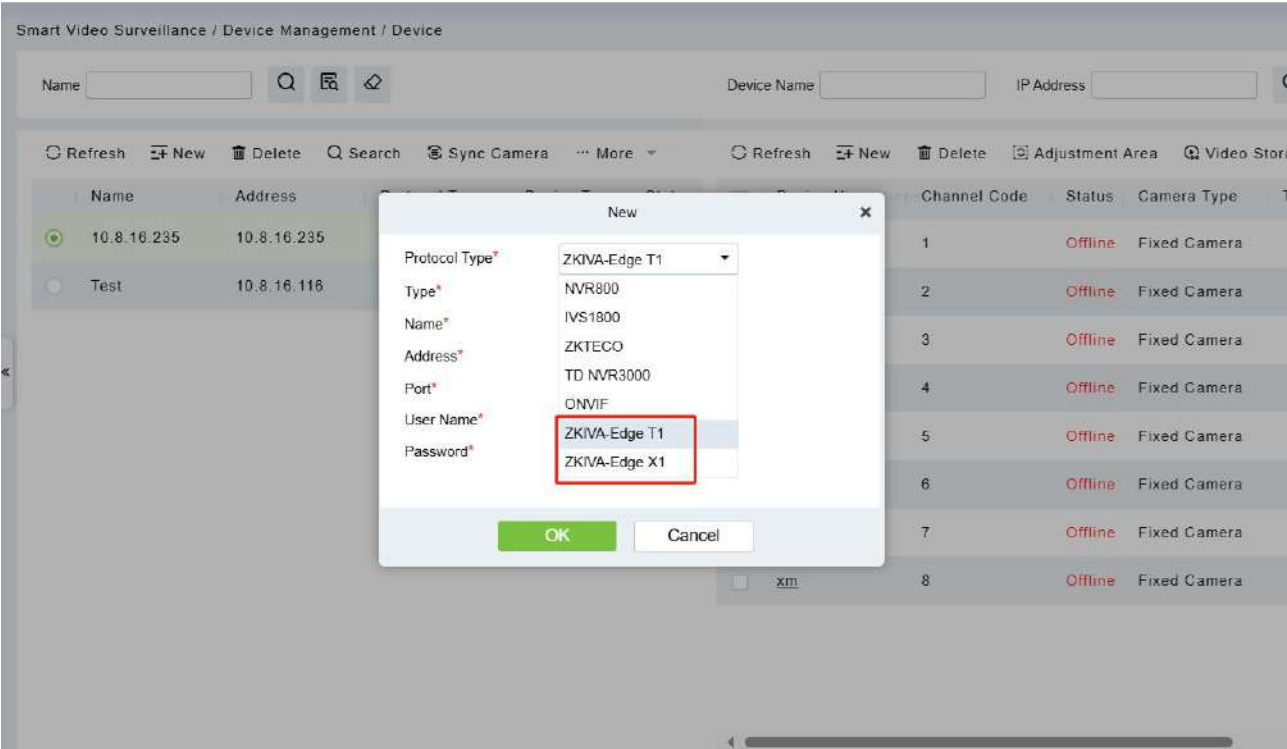
Step 3: Click **OK**.

5.1.1.2 Manual Add ZKIVA-Edge

To add a ZIVA-Edge T1/X1, click 'New.' Currently, the ZKIVA-Edge1 device only supports adding devices through this method and does not support adding devices via search.

Operation Steps

Step 1: Go to **Smart Video Surveillance > Device Management > Device**, and click New. Select your device model; if the device is a ZKIVA-Edge T1, choose that model.




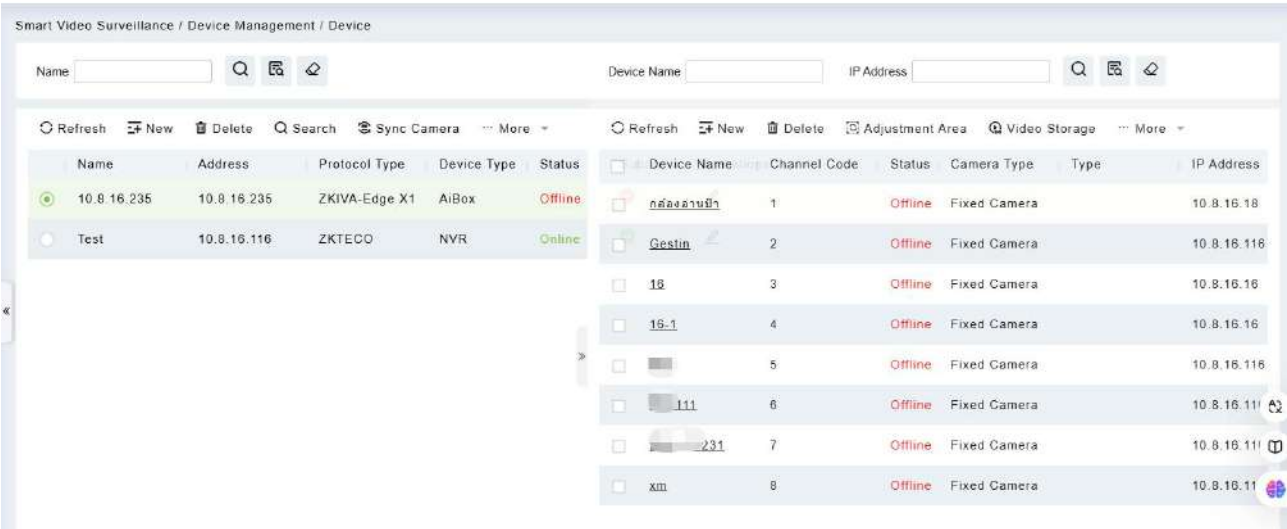
The table below provides a description of the parameters:

Parameter	Description
Protocol Type	Select the protocol type to be added: ZKIVA-Edge T1/X1.
Type	Select the type of device to be added: The default type for ZKIVA-Edge T1/X1 is AiBox.
Name	Customize the device name.
Address	Configure the device address. The format is: xxx.xxx.xxx.xxx, for example: 192.168.6.5.
Port	Configure the device port: The default port value is "80".
Username	The username and password for logging into the Web of the

Parameter	Description
Password	ZKIVA-Edge T1/X1 device.

Step 2: Add the camera to the ZKIVA-Edge.

Select ZKIVA-Edge from the list, and then click  on the expand/collapse window.



Step3: Click **New** to add a new camera to ZKIVA-Edge.

New

Channel Name*

UserName

Password

Main stream*

Area Name*

ZKTeco Building

Save and New

OK

Cancel

Parameter Description is as follows in the table:


Parameter	Description
Channel Name	Distinguish channels by setting camera names.
User Name	The IP address of the connected device (this address must be unique).
Password	Obtain the corresponding main stream after logging into the channel.

Parameter	Description
Main Stream	The username and password for logging into the channel.
Area Name	Select the area where the device is located.

● Video Storage

ZKIVA-Edge supports only algorithmic analysis and has no storage capability, you can bind the camera to an NVR by clicking **Video Storage**. This enables video playback and quickly integrates the camera with the NVR.

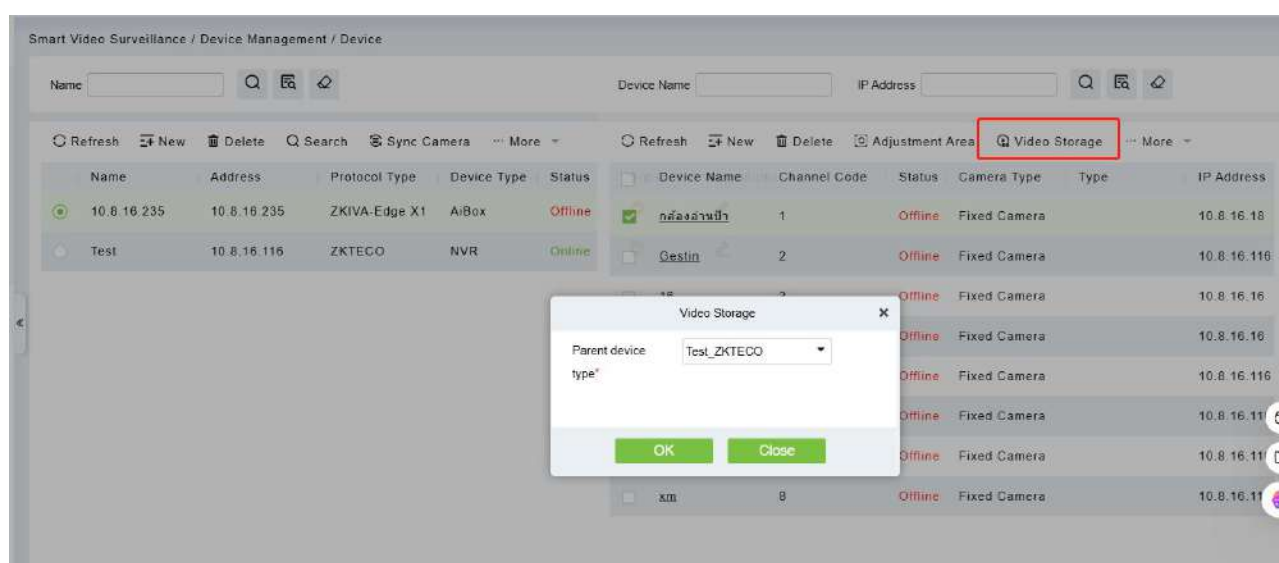Note: If a camera is added to both ZKIVA-Edge and an NVR, it will consume license channel counts on both devices. For example, if a camera is already added to ZKNVR1 and then also added to ZKIVA-Edge X1, it will use 2 license channels.



5.1.1.3 Search to add NVR devices

Click Smart Video Surveillance > Device Management > Device. Note: Search is not supported for IVS1800/TD NVR3000.




Figure 5- 2 Auto Search

5.1.1.4 Delete

Click **Smart Video Surveillance > Device Management > Device**, then select Delete.

5.1.1.5 Sync Camera

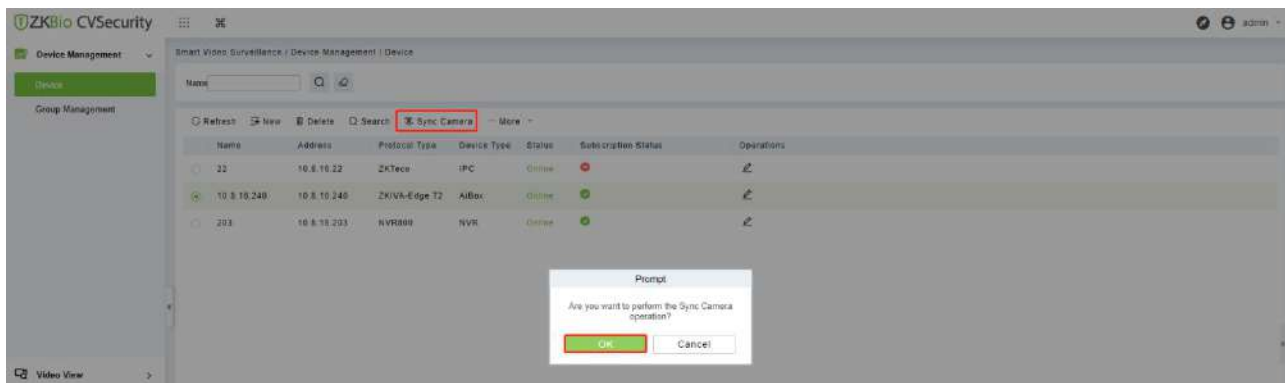Click Smart Video Surveillance > Device Management > Device, then select Sync Camera.



5.1.1.6 Subscription

Click **Smart Video Surveillance > Device Management > Device**, then click **More > Subscription**.

The NVR will only push alerts to ZKBio CVSecurity after Subscription.

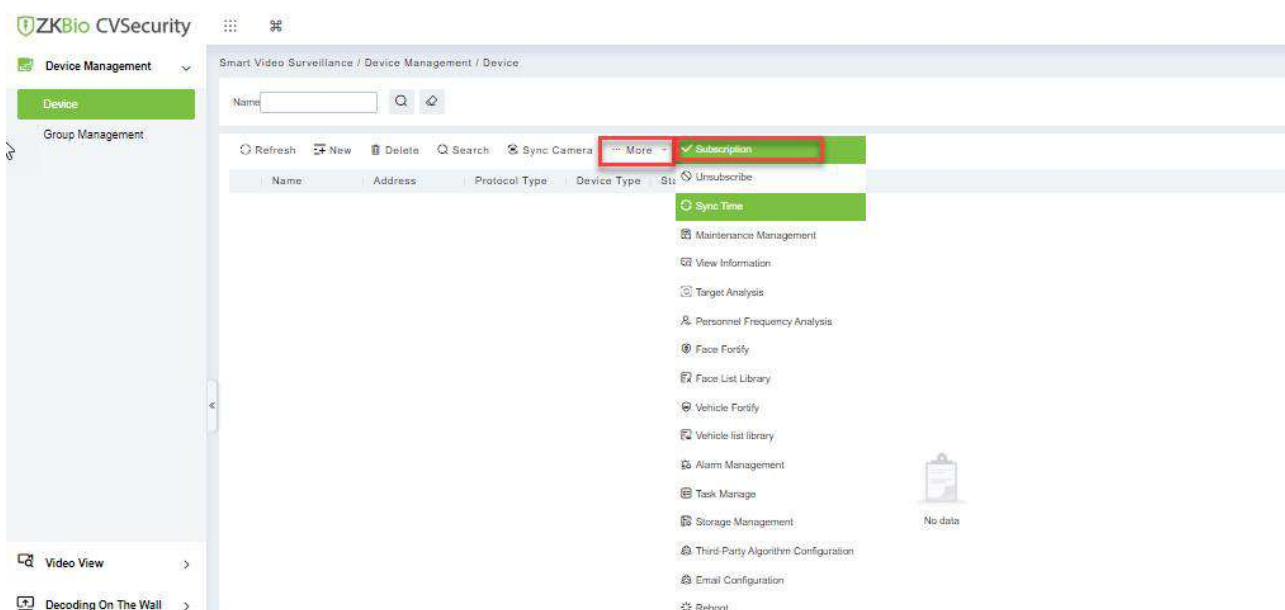


Figure 5- 3

5.1.1.7 Add Camera

Step 1: In the **Smart Video Surveillance** module, select "**Device Management > Device**". Select a NVR device, then click the "**Search**" button on the right.



Figure 5- 4 Search Camera

Step2: Search for cameras by IP address.

In the search interface, select the protocol type, that is, the protocol type ZKTeco-P, Rtsp, ZKTeco or ONVIF (recommended to use ZKTeco) connected to the camera.

Instruction:

1. Protocol type supports the selection of zkteco-P, Rtsp, zkteco and ONVIF protocols. (Recommended to use zkteco).
2. Using ZKTECO protocol access, all functions can be used normally.
3. The ONVIF protocol is used to access, and the IPC parameter configuration except "camera" and "image parameter" does not take effect.
4. Using ZKTECO-P, Rtsp, protocol access, PTZ control cannot be used, and IPC parameter configuration does not take effect.

Click **Search** to start searching for online cameras.

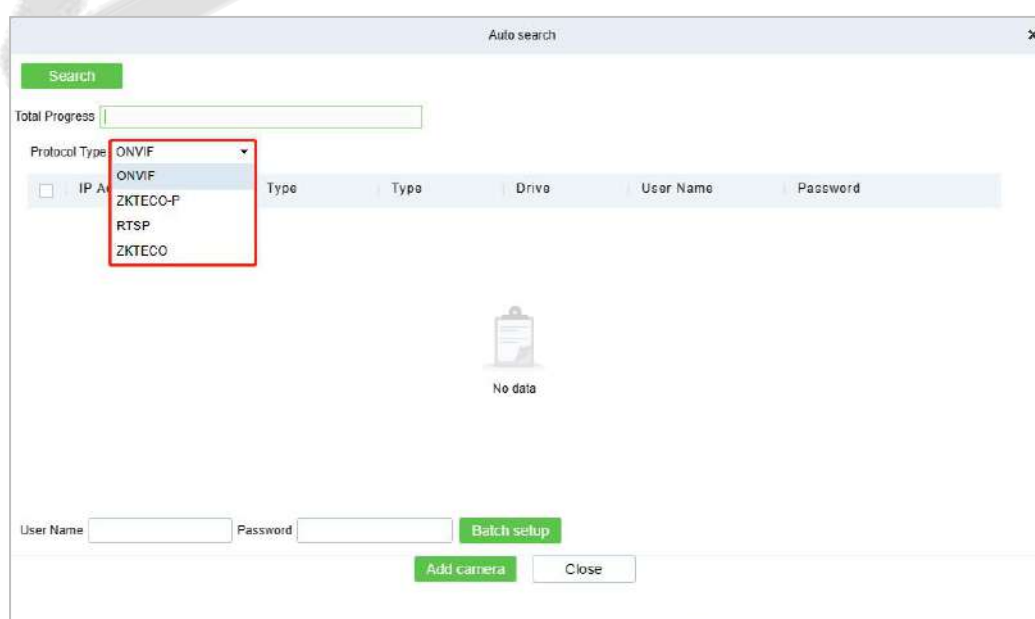


Figure 5- 5 Search Camera

Step 4: Account verification.

For the searched cameras, directly check the cameras in the camera list, and then perform account verification (the account number and password are the camera's registered user name and password), as shown in figure below, and parameter descriptions are shown in Table 4-3.

Auto Search

×

Search

Total Progress

100%

Searched devices count:3

Protocol Type

ONVIF

<input type="checkbox"/>	IP Address	Port	Type	Type	Drive	User Name	Password
<input type="checkbox"/>	192.168.1.102	8000		HI3516D	Onvif	<input type="text"/>	<input type="text"/>
<input type="checkbox"/>	192.168.1.100	8000		HI3516D	Onvif	<input type="text"/>	<input type="text"/>
<input type="checkbox"/>	192.168.1.101	8000		HI3516D	Onvif	<input type="text"/>	<input type="text"/>

User NamePassword

Batch Setup

Add Camera

Close

Figure 5- 6 Search Methods Added

Parameter	Parameter Description
Port	Through zkteco-p, rtsp, zkteco, onvif protocols, the default port is 80.
Account Password	The registered username and password of the camera. If all cameras to be added have the same registered username and the same registered password, you can also use the username and password at the bottom of the search list for batch verification.

Table 5- 2 Parameter Description

Step 5: Close the pop-up window to complete the search and addition of cameras.

Step 6: The subsequent configuration is shown in Table 4-4.




Scenes	Configure
New/Delete	Click  New : Manually add a camera. Click  Delete : Select one or more cameras to delete.
Adjustment Area	Under the Camera Device tab, you can select single or multiple cameras, and then click the  Adjustment Area button to adjust the area to which the cameras belong.

Table 5- 3 Subsequent Configuration Instructions

Step 7: Parameter Setup: Click **More** to get more operation.

	Refresh		New		Delete		Search		Adjustment Area		More
<input type="checkbox"/>	Device Name	Channel Code	Status	Camera Type							
<input type="checkbox"/>	PTZ Camera	1	Online	Fixed Camera							30
<input type="checkbox"/>	CH2	2	Online	Fixed Camera							30
<input type="checkbox"/>	BS-854F22C-S3-I	3	Online	Fixed Camera							30
<input type="checkbox"/>	CH4	4	Online	Fixed Camera							192.168.130
<input type="checkbox"/>	LPR Camera	5	Online	Fixed Camera							192.168.130
<input type="checkbox"/>	ES-852T21C-S6-I	8	Online	Fixed Camera							192.168.130

Figure 5- 7 More

Reboot: Restart the camera.

Basic Configuration: Basic camera parameters configuration, including encoding format, image quality, bit rate, pixels, etc.

Note: If the added camera is PTZ, you need to switch the camera type to **Ball Machine** in this page below.

Basic configuration

System Parameters Video channel

Video settings Image settings

Main stream settings Secondary stream settings

Encoding format: H265

Picture quality: High

Bit rate type: Fixed bitrate

Video frame rate: Full frame rate

Bit rate: 2

I frame interval: 50

Resolution: 1080P(1920*1080)

Video settings

Camera Type

Fixed Camera

Fixed Camera

Bullet With Gimbal

Ball Machine

Hemisphere

Tube Machine

OK Cancel

Figure 5- 8 Basic Configuration

5.1.2 Group Management

Click **Smart Video Surveillance > Device Management > Group Management**.

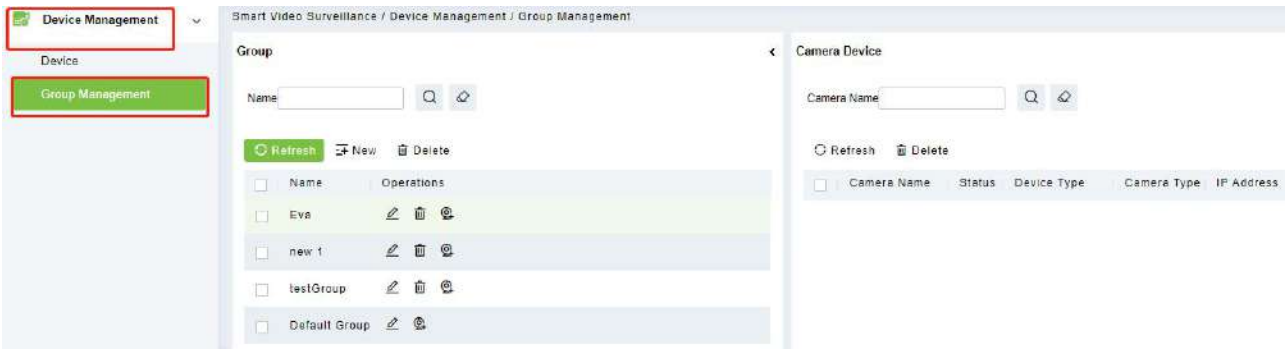


Figure 5- 9 Group Management

5.1.2.1 New

Click Smart Video Surveillance > Device Management > Group Management, then select New.




Figure 5- 10 New (Group Management)

Parameters	Description
Name	Enter the name of the group.

Click **OK** to save and exit.


5.1.2.2 Delete

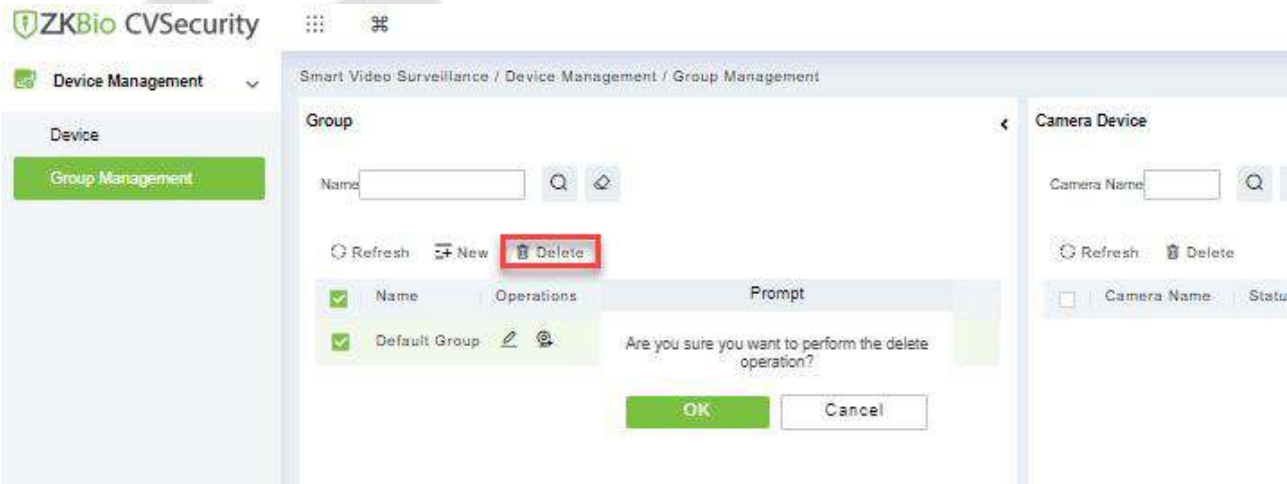Click **Smart Video Surveillance > Device Management > Group Management**, then select Delete.



5.1.2.3 Edit

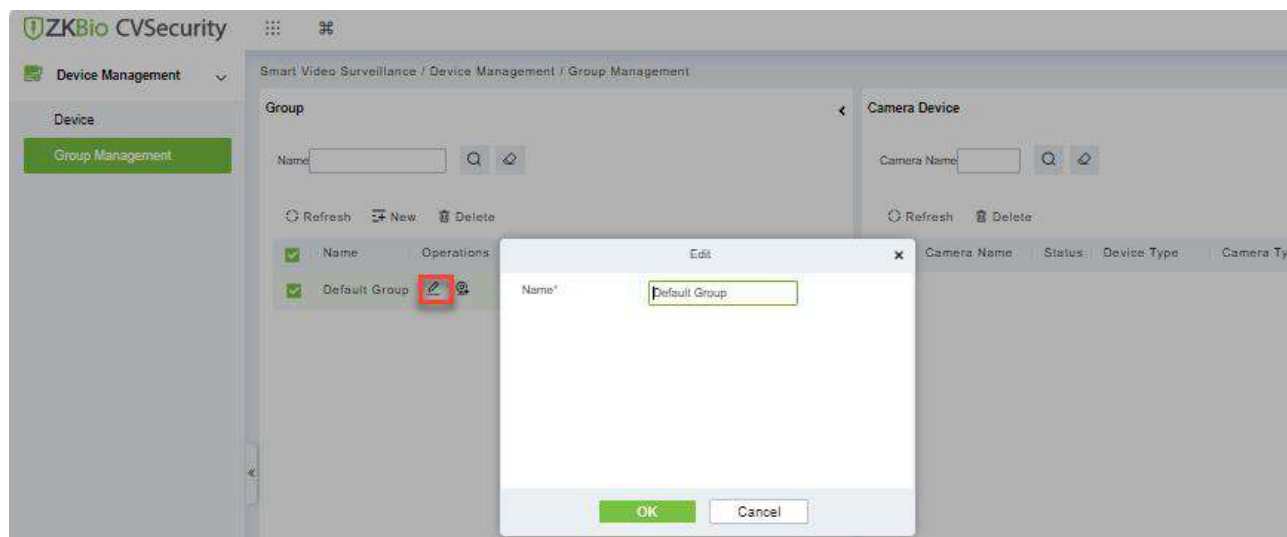Click **Smart Video Surveillance > Device Management > Group Management**, then click on the Edit  icon to edit the required details.



5.1.2.4 Add Camera to Group

Click **Smart Video Surveillance > Device Management > Group Management**, then select Add Camera.

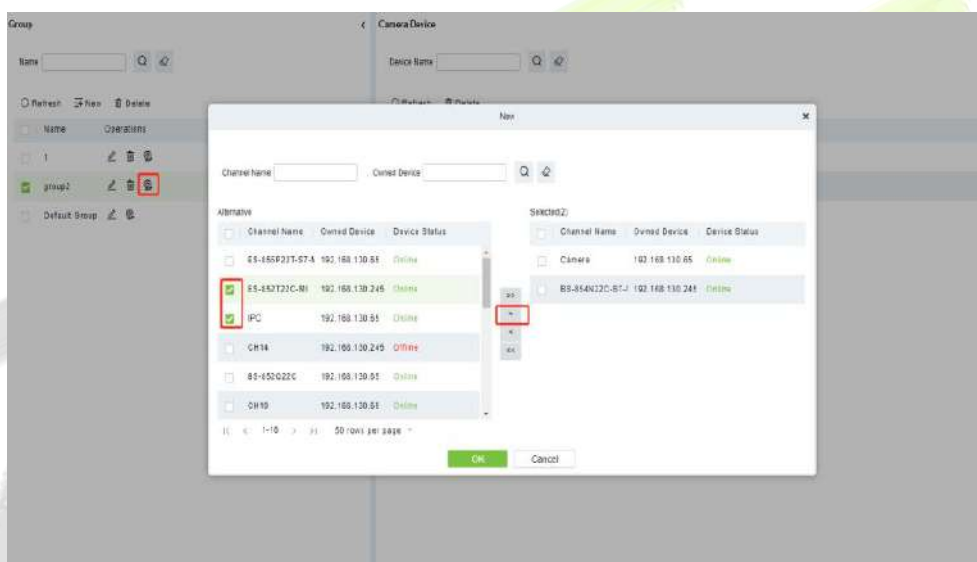


Figure 5- 11 Camera (Group Management)

5.2 Video View

Click **Smart Video Surveillance > Video View**.

In this module you can access the videos as **Video Preview** and **Video Playback**.

5.2.1 Video Preview

Click **Smart Video Surveillance > Video View > Video Preview**.

You can review recorded videos here.

5.2.1.1 Live Preview

●Description:

When applying video monitoring products, please strictly comply with the applicable laws and

regulations for the application and maintenance of video monitoring, recording, snapping and other services. It is forbidden for enterprises or individuals to install monitoring device in office areas, monitor employees' behaviors, or use video monitoring device to snoop on other people's privacy for illegal purposes.

● Single camera live preview:

Step 1: In the Smart Video Surveillance module, select **Video View > Video Preview**.

Step 2: In Full Devices, double-click the online camera to the live playback pane to open live preview.

Description:

During live preview, please do not overlap the windows, interfaces, or dialog boxes of other programs on the window that opens live, otherwise it may cause live screen or video playback to become unstreamlined.

● Live preview of group camera:

Step 1: In the Smart Video Surveillance module, select **"Device Management > Grouping Management"** to group the cameras.

Step 2: Click **Add** in the grouping list, enter the grouping name, and click "Confirm" to complete the addition of camera grouping.

Step 3: Select the newly created camera group and click "Add Camera" on the right side. Double-click the camera in the new interface that pops up, and click **OK** to add it to the grouping, as shown in figure below.

Step 4: In **Intelligent** module, select **"Video View > Video Preview"**, and in **"Grouping Devices"**, double-click the online camera to the live playback pane to open the live preview.

Description:

During live preview, please do not overlap the windows, interfaces, or dialog boxes of other programs on the window that opens live, otherwise it may cause live screen or video playback to be unsmooth.

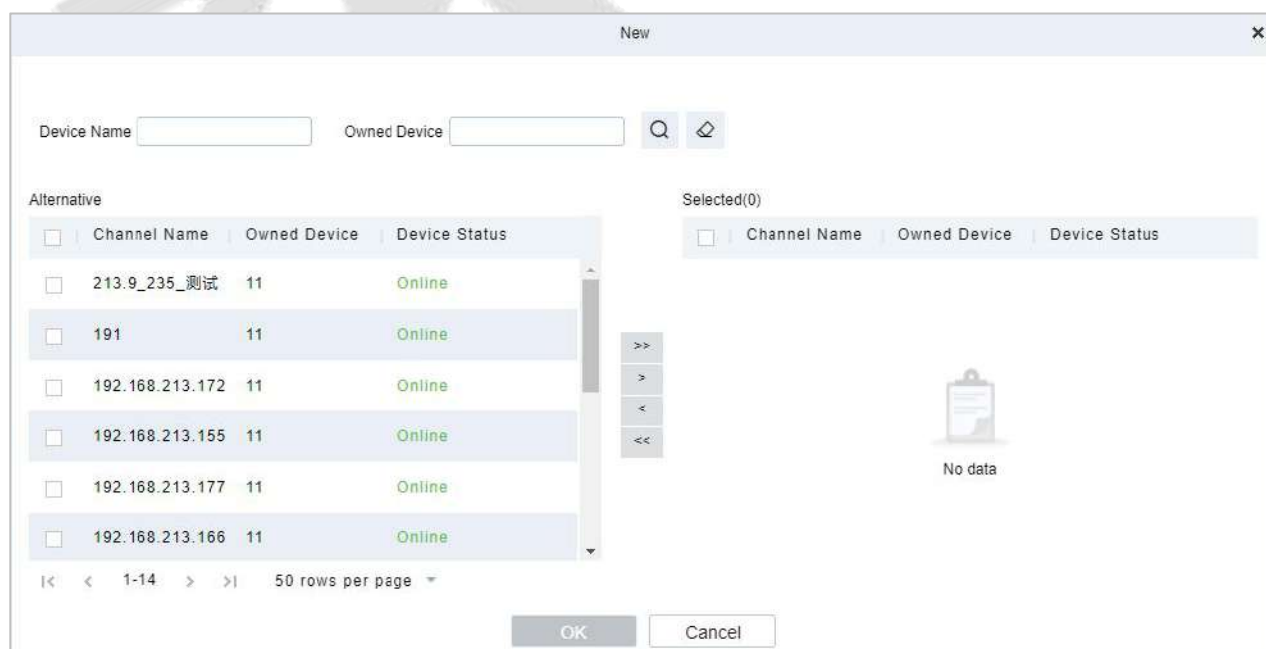


Figure 5- 12 Camera Grouping

5.2.1.2 Video Preview


● Operation scenario:

Using the round patrol function, the user can switch the live pictures monitored by multiple cameras

regularly. For example, there are multiple cameras in a scene, and the live situation of all cameras cannot be displayed on a live split screen interface. The administrator can automatically switch the cameras of a scene to monitor the live situation every 30 seconds by using the round patrol function and realize the live browsing of all cameras in batches and time periods.

●Operating Steps:

Step 1: In the **Smart Video Surveillance** module, select Video View > Video Preview.

Step 2: Under the list of grouped devices or full devices, click "  " on the right to pop up the "Multiple Camera Operation Settings" page.

Step 3: Click "Round Tour" to open the round tour setting window and configure round tour information, as shown in figure below, and the parameter description is shown in Table 4-1.

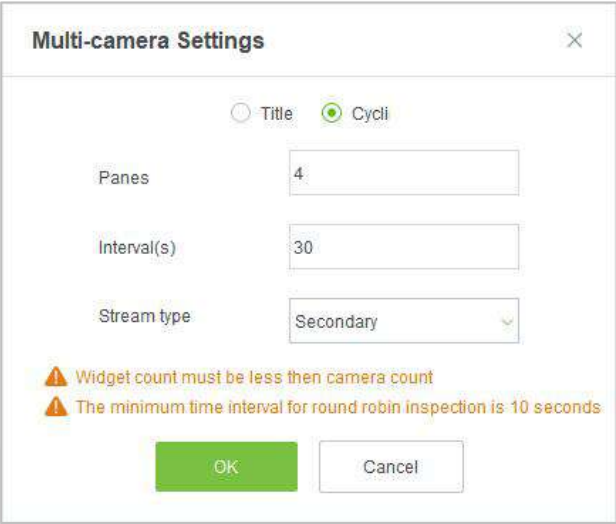



Figure 5- 13 New Rotation Training Group

Parameter	Description
Window number	The number of round-robin windows must be less than the number of round-robin cameras.
Time interval (seconds)	Set the camera rotation picture residence time under the selected main device.
Stream type	<ul style="list-style-type: none">• Main code stream: large code stream, high definition, and high bandwidth occupation.• Auxiliary code stream: The code stream is small, the definition is low, and the bandwidth is small. <p>Description:</p> <p>When there is bandwidth limitation, it is recommended to select secondary code stream.</p>


Table 5- 4 Parameter Description of Round Patrol Configuration

Step 4: Click **OK** to start the round tour.

Step 5: End the round and click the toolbar  below to close all screens.

5.2.2 Video Playback

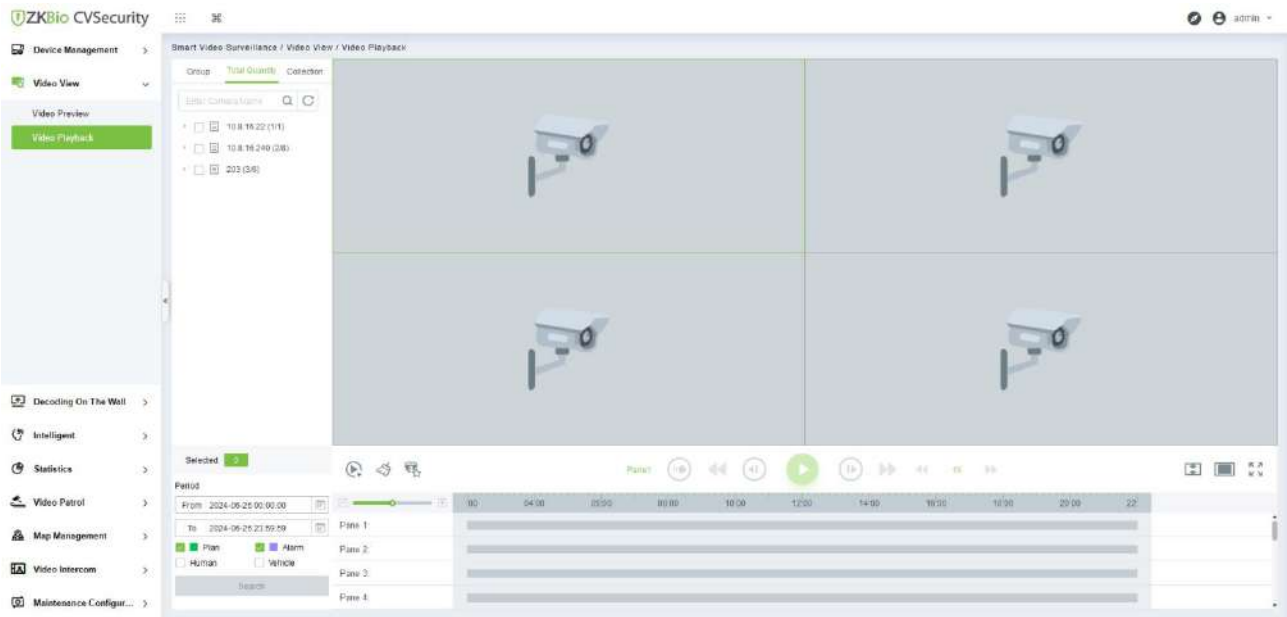Click Smart Video Surveillance > Video View > Video Playback.



5.3 Decoding On the Wall

Click **Smart Video Surveillance > Decoding on The Wall**.



Figure 5- 14 Decoding on the Wall

5.3.1 Decoder

Click **Smart Video Surveillance > Decoding on the wall > Decoder**.

5.3.1.1 New (Add Decoder)

Click **Smart Video Surveillance > Decoding on The Wall**, then select New.

The 'New' dialog box is shown, used for adding a new decoder. It contains the following fields:

- Decoder Name* (text input)
- IP Address* (text input)
- Port* (text input, value: 10200)
- Type* (dropdown menu, value: PEMXP70)
- UserName* (text input)
- Password (text input)

 At the bottom, there are three buttons: 'Save and New', 'OK', and 'Cancel'.

Figure 5- 15 New (Decoding Wall)

Parameter	Description
Decoder Name	Custom decoder name.
IP Address	IP Address of the decoder
Port	Default port 10200
Type	Select the device model to access the decoder Support PEMXP70 and DEC6109 decoder access
Username	Enter the business username
Password	Enter the business password

Table 5- 5 New

Click **OK** to save and exit, or click **Save and New** to continue.

5.3.2 TV Wall

Click **Smart Video Surveillance > Decoding on the wall > TV Wall**.

5.3.2.1 New (Create TV Wall)

Click **Smart Video Surveillance > Decoding on the wall > TV Wall**, then select New (Create TV Wall).

Step 1: In the Smart Video Surveillance module, select "**Decoding Wall > TV Wall**".

Step 2: Click **Add** to enter the "**Add TV Wall**" page, as shown in figure below

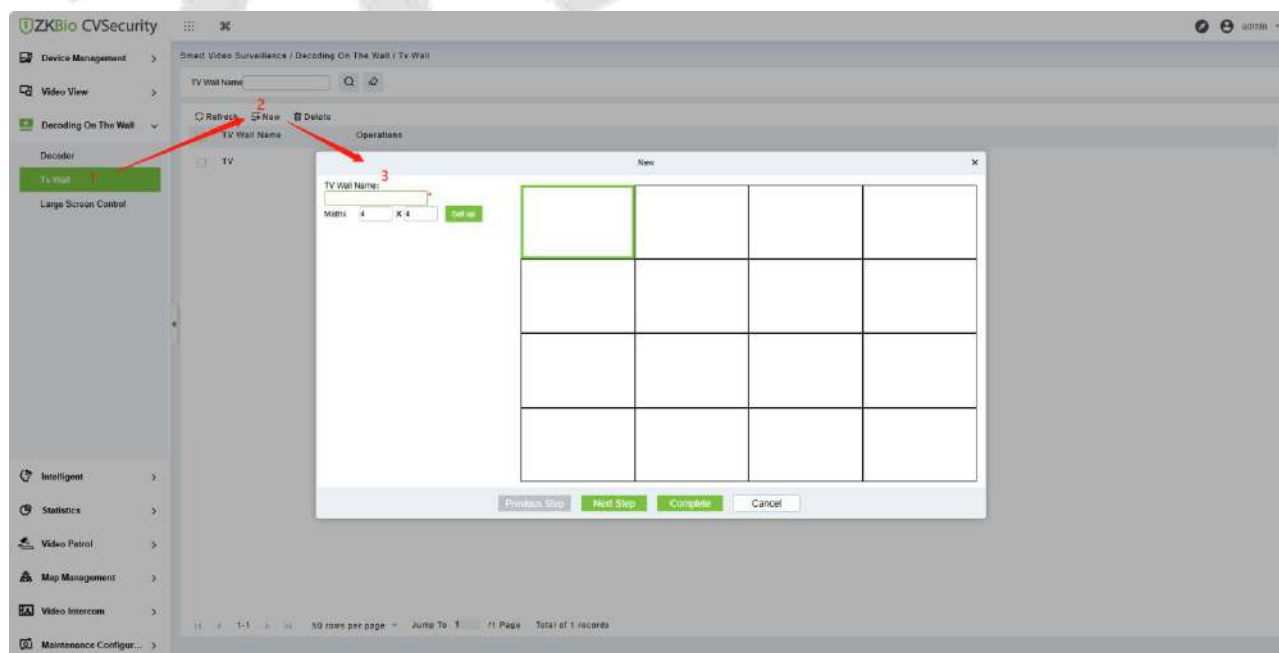


Figure 5- 16 Creating Tv Wall Layout

Step 3: Enter a custom TV Wall Name.

Step 4: In the Matrix Settings box, customize the number of rows and list of input layouts, and click **Settings** to apply the layout.

Description:

Matrix Layout pane settings, supporting a minimum of 1 * 1 and a maximum of 8 * 8.

Step 5: Click next to enter the TV wall binding decoder interface, as shown in figure below.

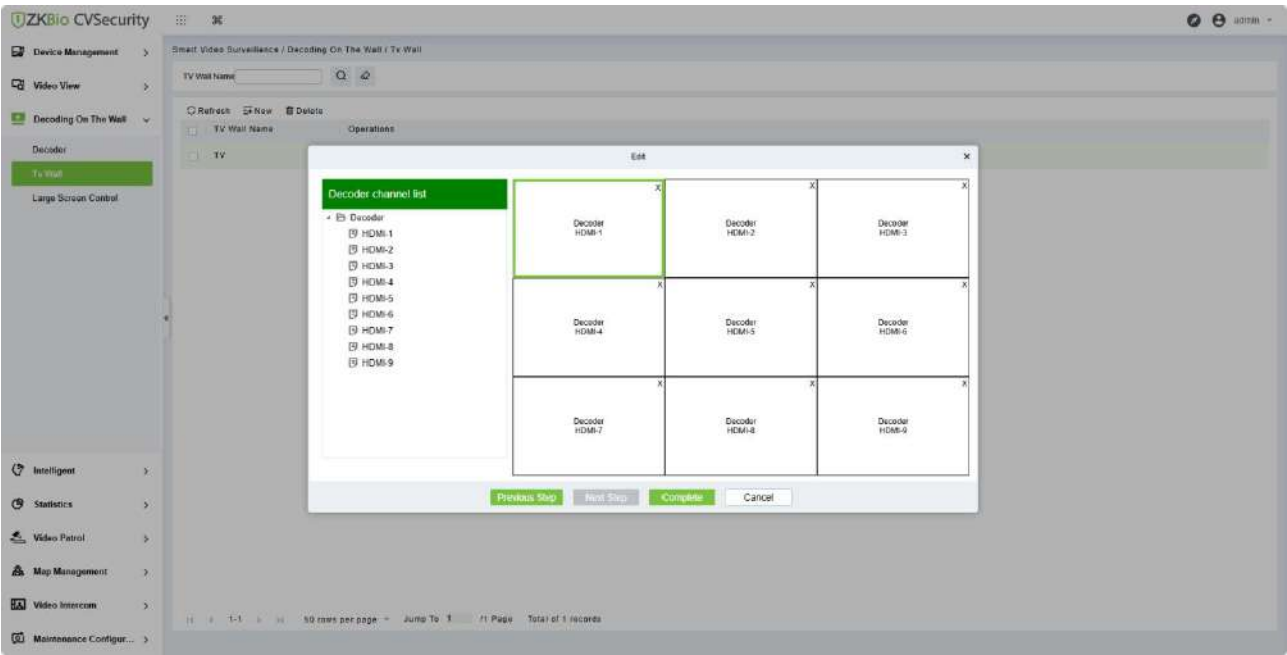


Figure 5- 17 TV Wall Binding Decoder

Step 6: Select the TV wall pane to which you want to add a decoder channel, and then click **Decoder Channel** on the left to complete the binding.

Parameter	Description
TV Wall Name	Enter the TV wall name.

Step 7: Click **Finish** to finish adding the TV wall.

5.3.2.2 Delete

Click **Smart Video Surveillance > Decoding on The Wall > TV Wall**, then select Delete.

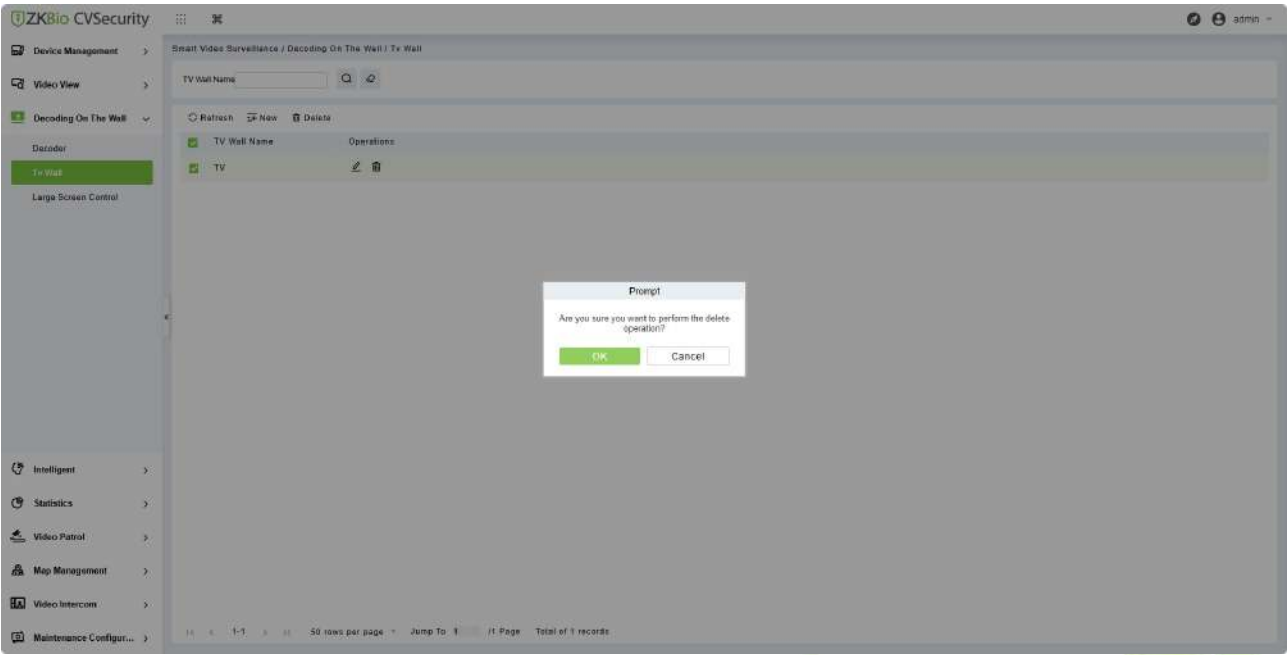


Figure 5- 18 Delete TV Wall

5.3.3 Large Screen Control

5.3.3.1 Device

Click **Smart Video Surveillance > Decoding on the wall > Large Screen Control**.






Figure 5- 19 Large Screen Control

Icon	Parameter	Description
	Alarm Setup	Select a screen to show the events of linked alarms.
	Video Preview	Previewing the current screen.



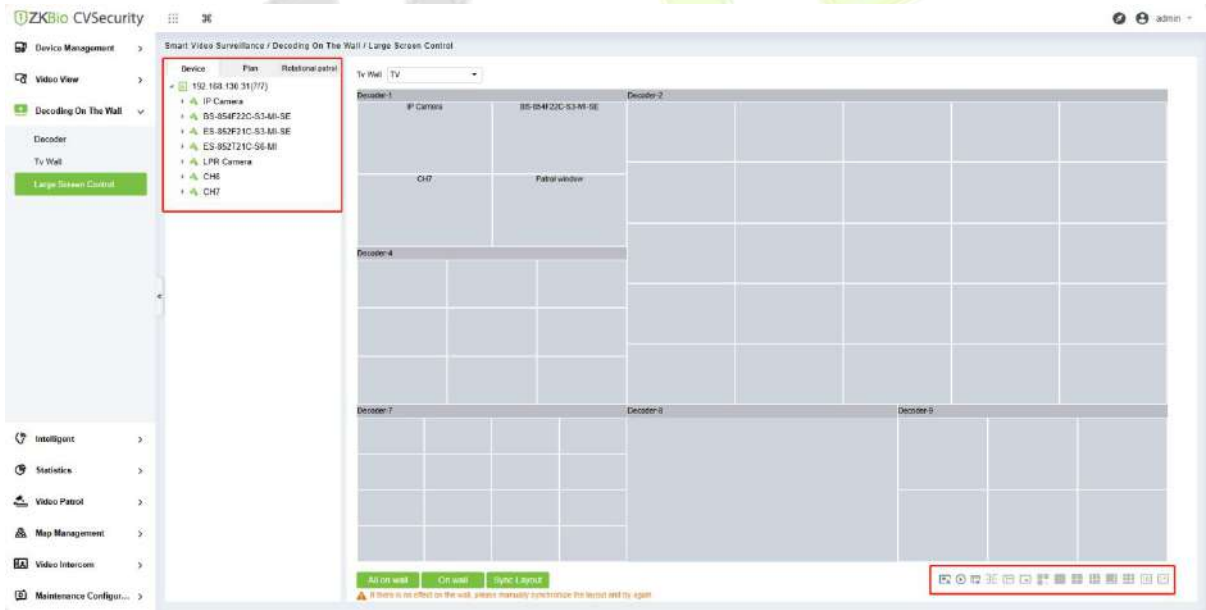








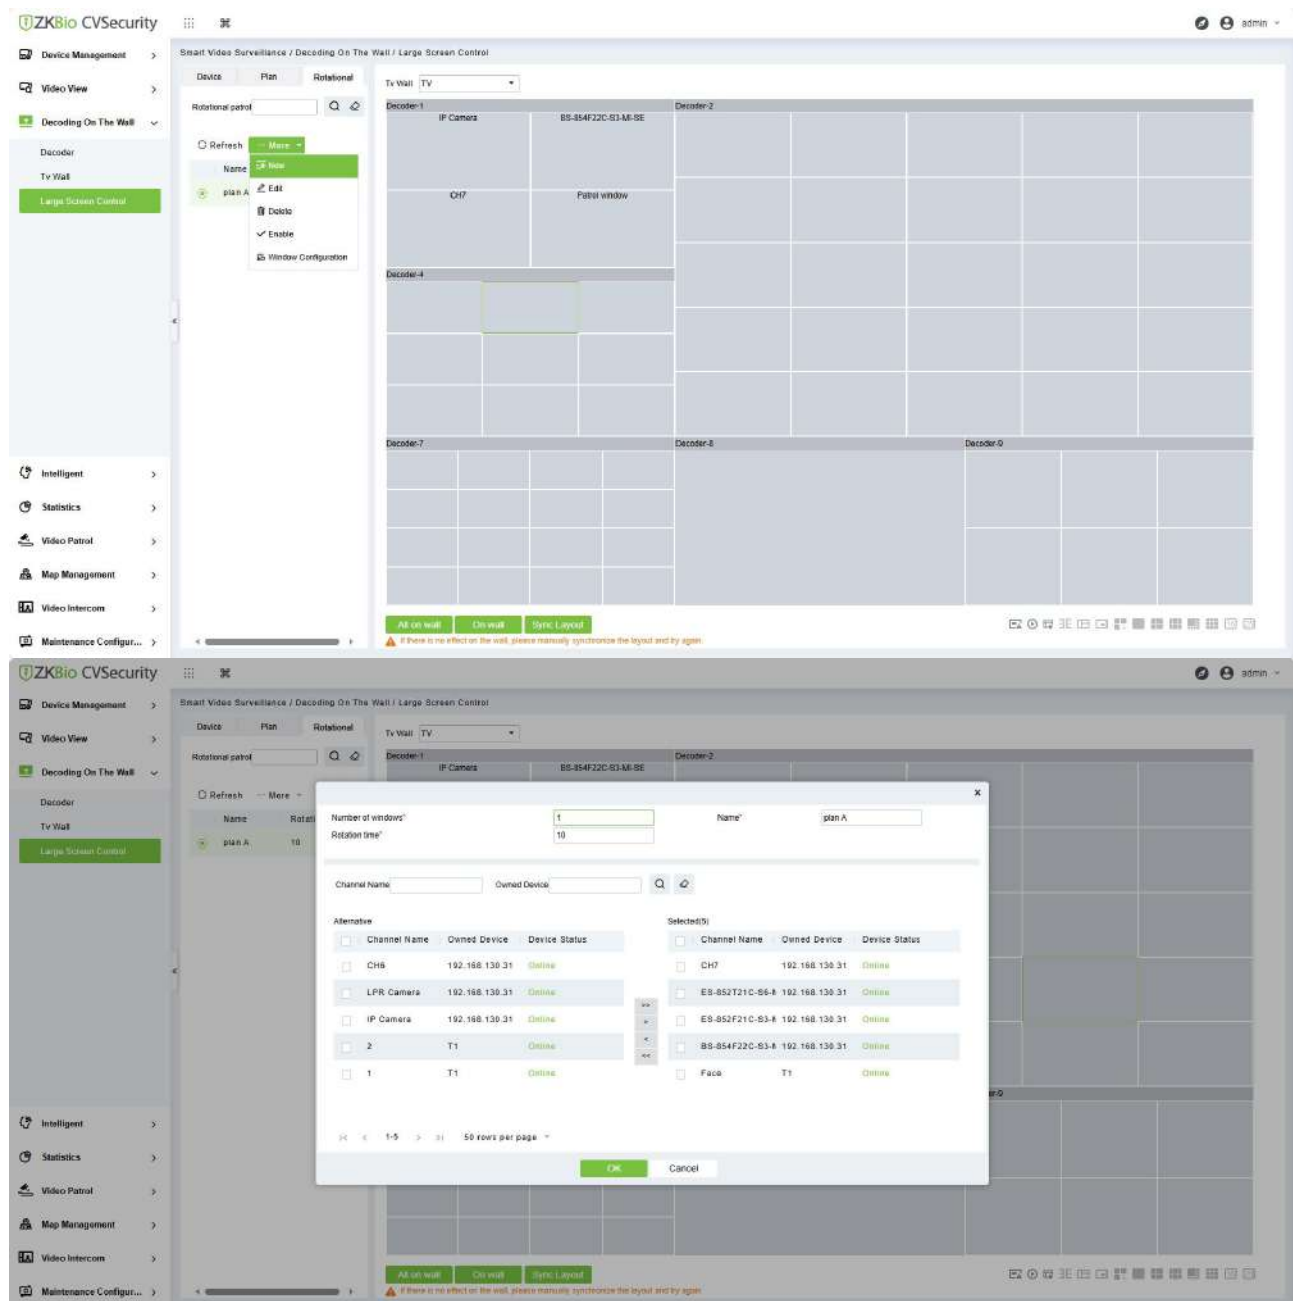
Icon	Parameter	Description
	Collection of Plan	Join the list of collection profiles.
	Merged screen	Merge multiple scattered screens into one.
	Split Screen	Separate the merged screens.
	Floating Window	Floating screen window.
	Down Wall	End on the wall.
	1 Split Screen	1 Split Screen.
	4 Split Screen	4 Split Screen.
	8 Split Screen	8 Split Screen.
	9 Split Screen	9 Split Screen.
	16 Split Screen	16 Split Screen.
	25 Split Screen	25 Split Screen.


Table 5- 6 Icon Description

5.3.3.2 Rotational Patrol

Step 1: Click **More > New**, Enter the number of Windows, Name and Rotation Time, and select the channel to play, and click OK.



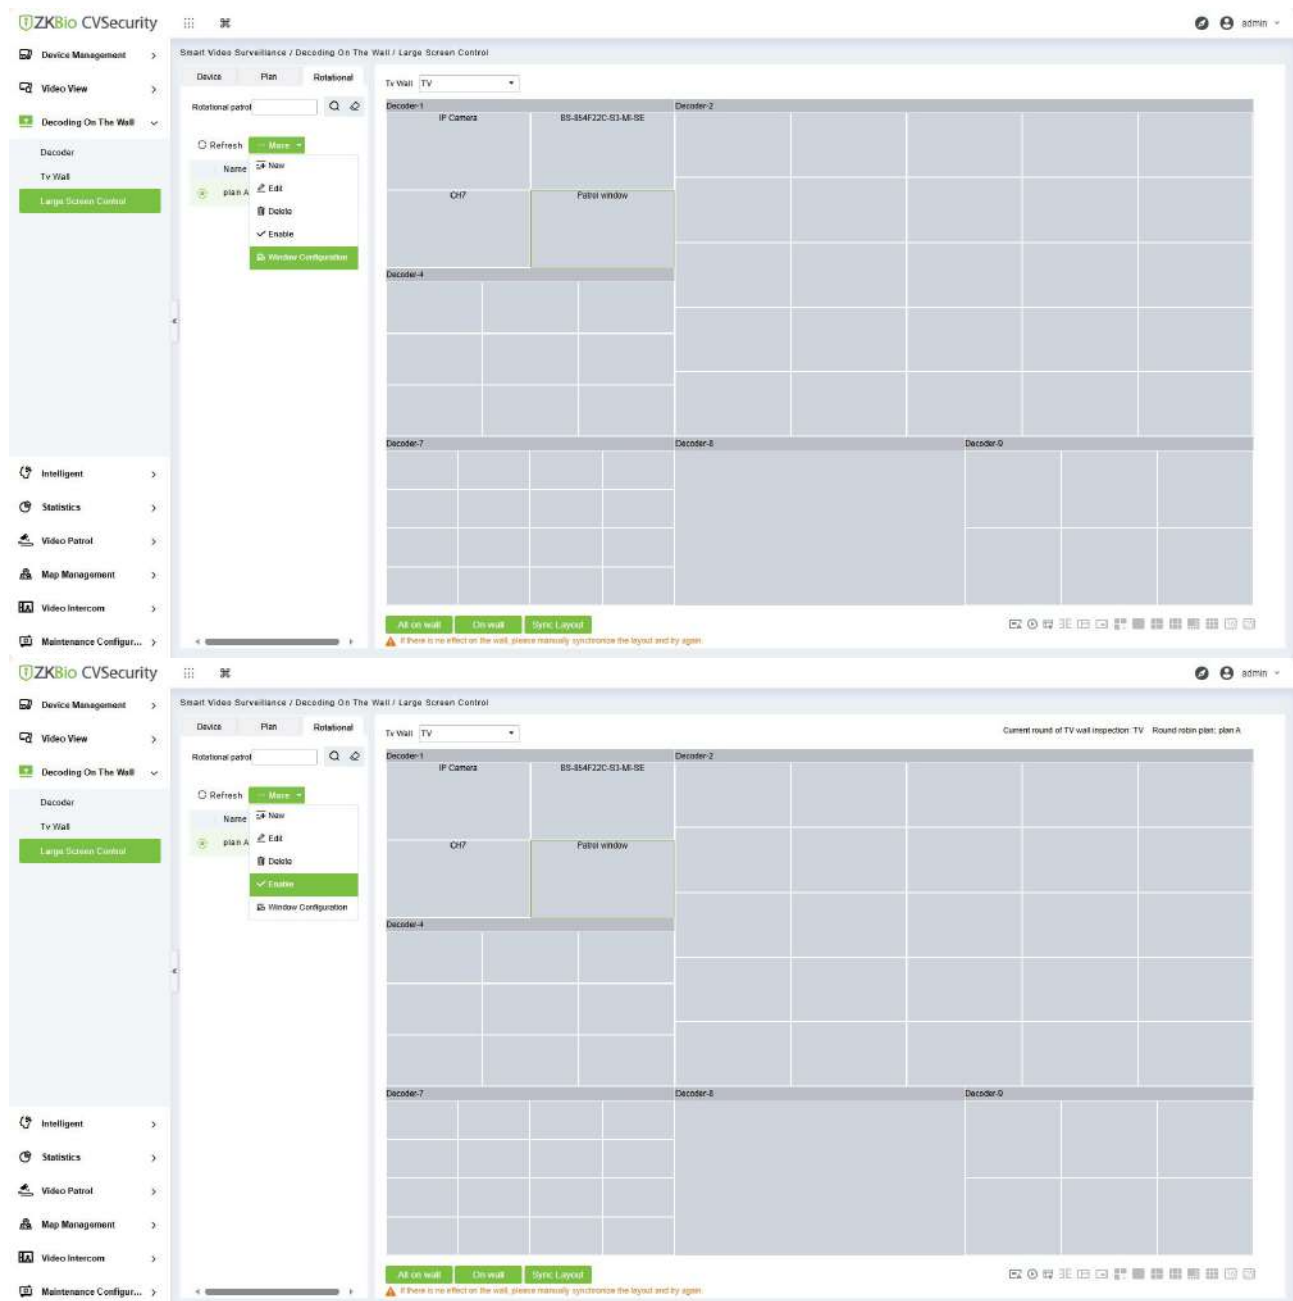Step 2: Select windows, and click **More > Window Configuration > Enable**.



5.4 Intelligent

5.4.1 Behavior Analysis

Configuration of intelligent functions for behavioral analysis using front-end cameras by ZKBio CVSecurity.

Note: The default interface is part of Holowits' functionality.

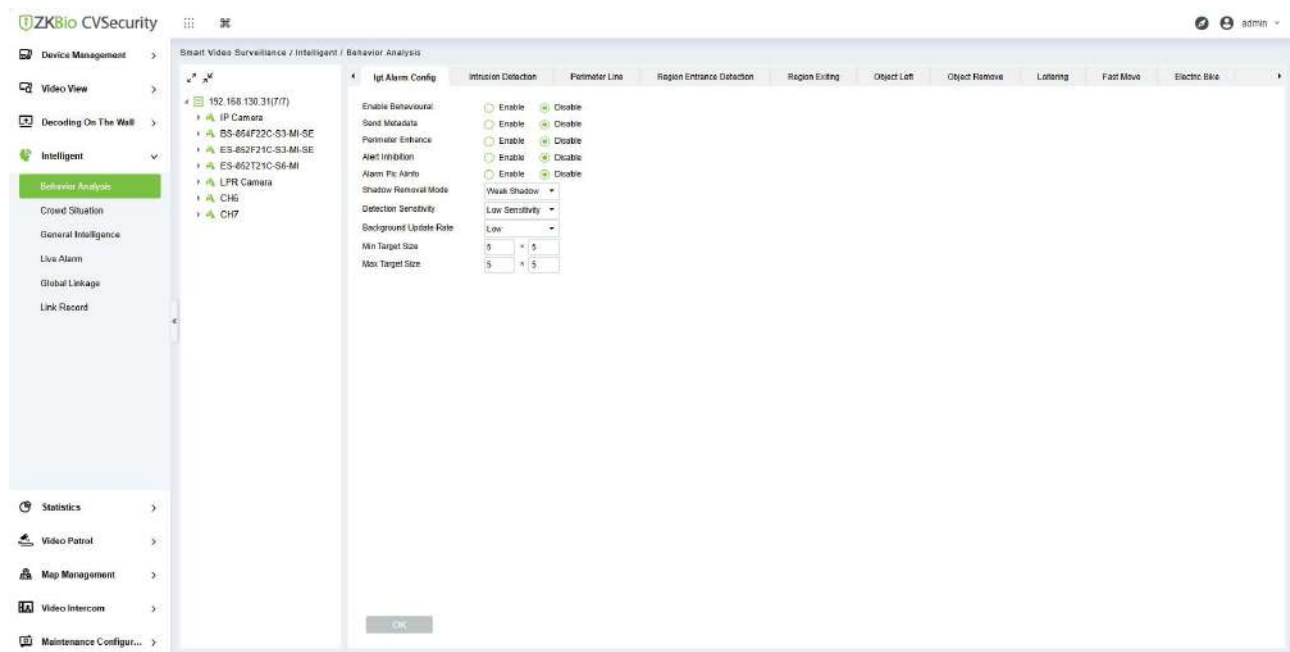


Figure 5- 20 Behavior Analysis

Step 1: Select the camera on the left and the software will automatically switch to the menu of smart features supported by that camera.

1) If it's Holowits branch device, after click, the page shown as below:

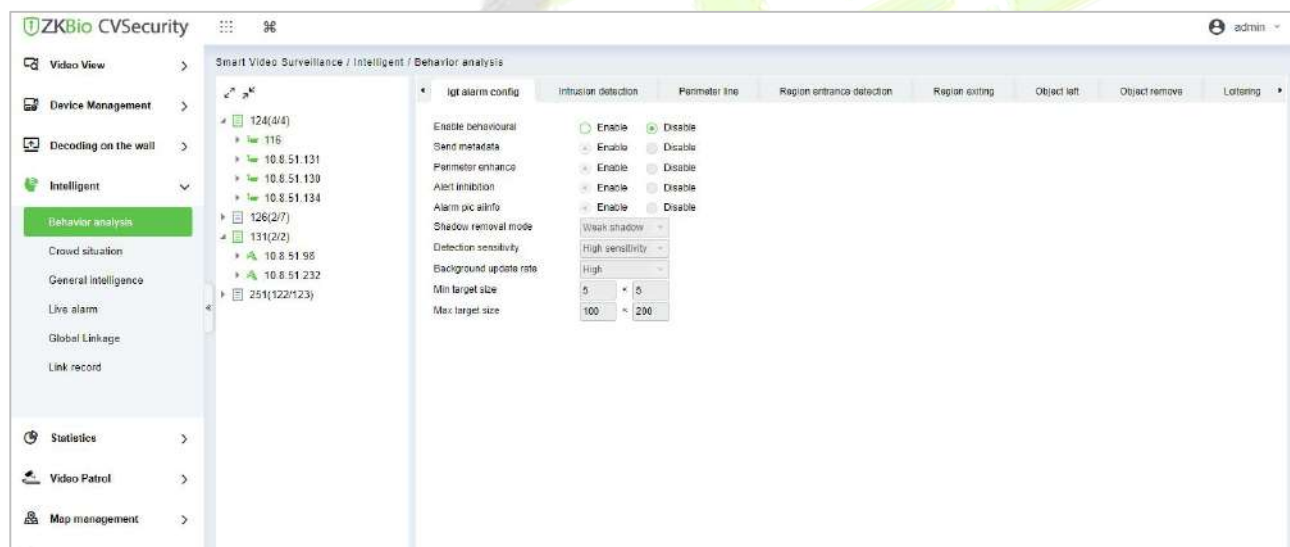


Figure 5- 21 Holowits device page

2) If it's ZKBio Sense device, after click, the page shown as below:

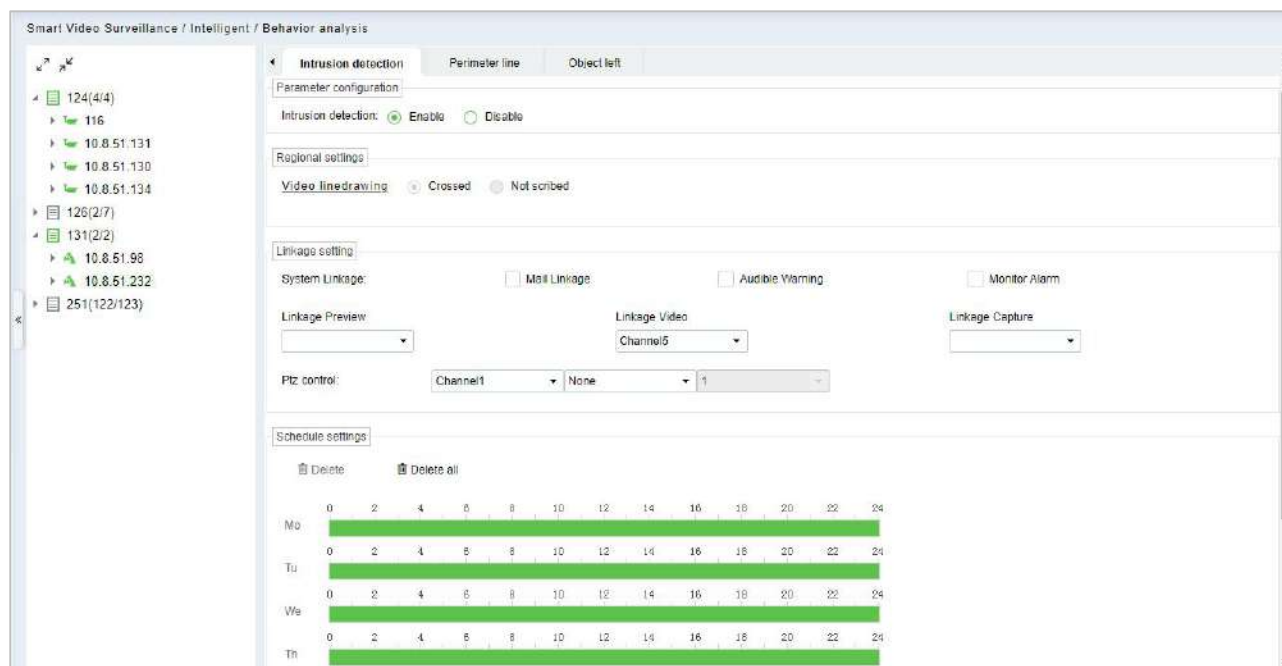


Figure 5- 22 BioSense Series Behavior Analysis

3) If the camera does not support intelligent functions, after click, the page shown as below: No database.

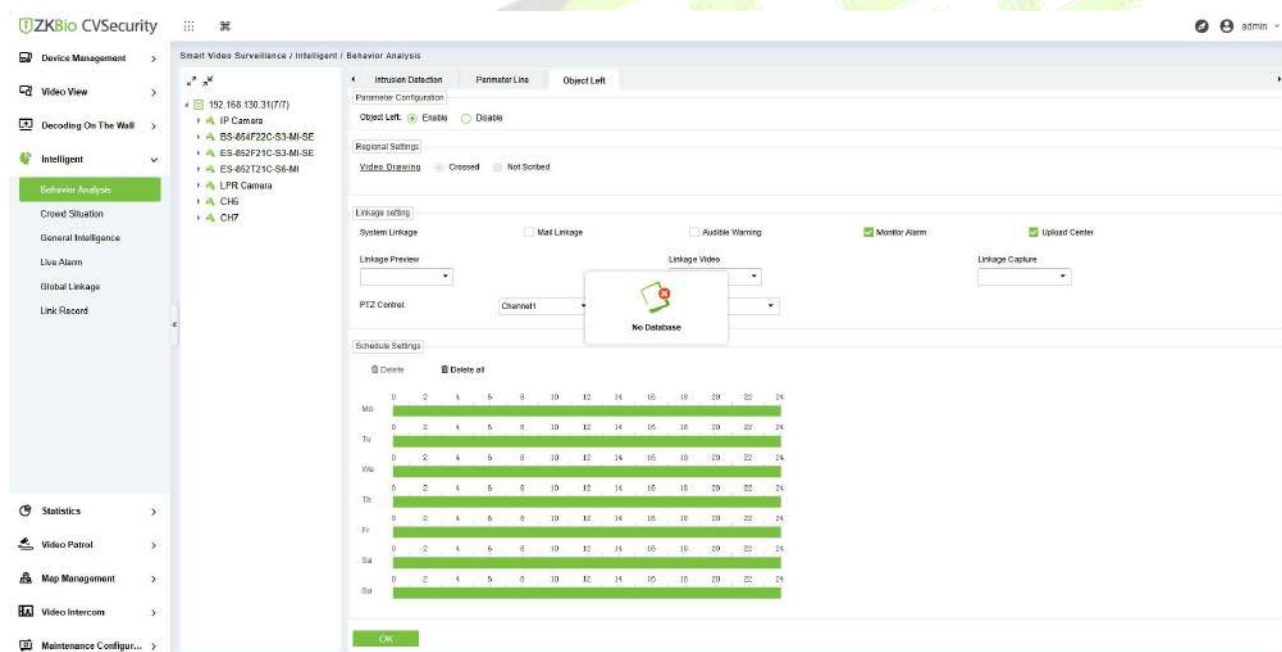


Figure 5- 23 Non-Smart Cameras

The following mainly explains the intelligent function configuration of ZKBio Sense series.

5.4.1.1 Intrusion Detection

Parameter Configuration

Configure to enable intrusion detection.



Figure 5- 24 Parameter Configuration

Regional Settings

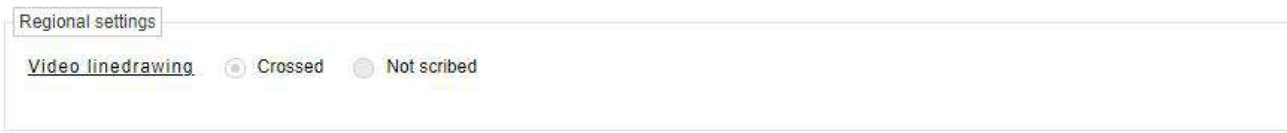


Figure 5- 25 Regional Setting

Crossed: Indicates that a line is currently drawn for this smart feature.

Not Scribed: Indicates that a line is currently not drawn for this smart feature.

Click **Video Link Drawing**, draw the detection area.

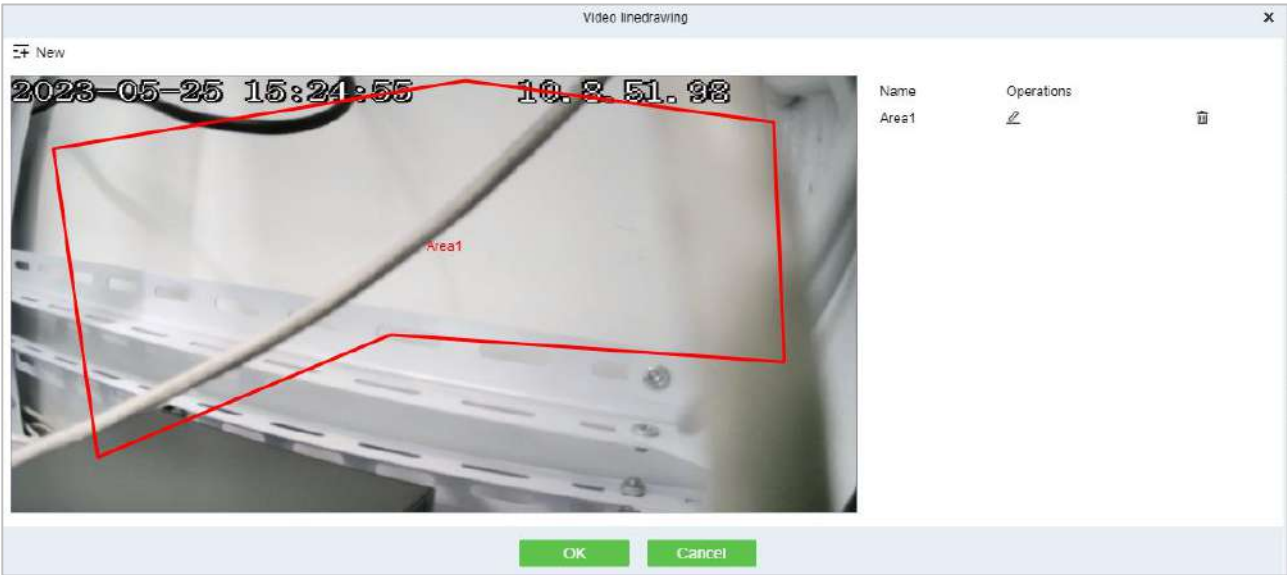


Figure 5- 26 Drawing the Detection Area

Linkage Setting



Figure 5- 27 Light Flashing Alarm

System Linkage:

- a. Mail Linkage: After select the mail linkage, you need to go to Smart Video Surveillance > Device Management > Device, select the NVR. Click More>Email configuration, to set the sending server and recipient address.

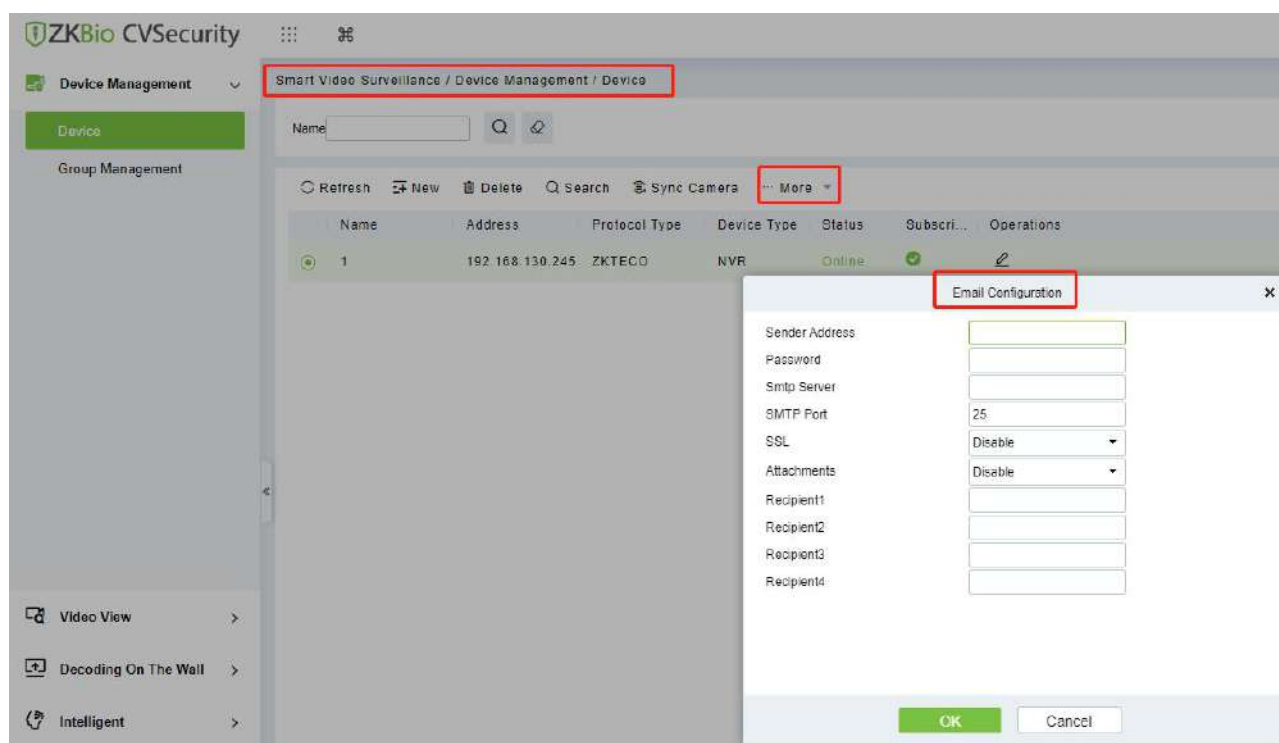


Figure 5- 28

- b. Audible Warning: NVR's buzzer alarm.
- c. Monitor Alarm: Display alarm information in the NVR.
- d. Linkage Preview: A preview of the linked camera is displayed in the NVR.
- e. Linkage Record: Linkage to record.
- f. Linkage Capture: Linkage to snapshot.
- g. PTZ Control: The linkage PTZ executes the preset point and trajectory line.

Schedule Settings:



Figure 5- 29 Schedule Settings

After configuring all the above functions, click **Save**.

5.4.1.2 Perimeter Line

Please refer to [Intrusion Detection](#) setup.

5.4.1.3 Object Left

Please refer to [Intrusion Detection](#) setup.

5.4.2 Crowd Situation

Configuration of intelligent functions for crowd situation of front-end cameras by ZKBio CVSecurity.

Note: The default interface is part of Holowits' functionality.

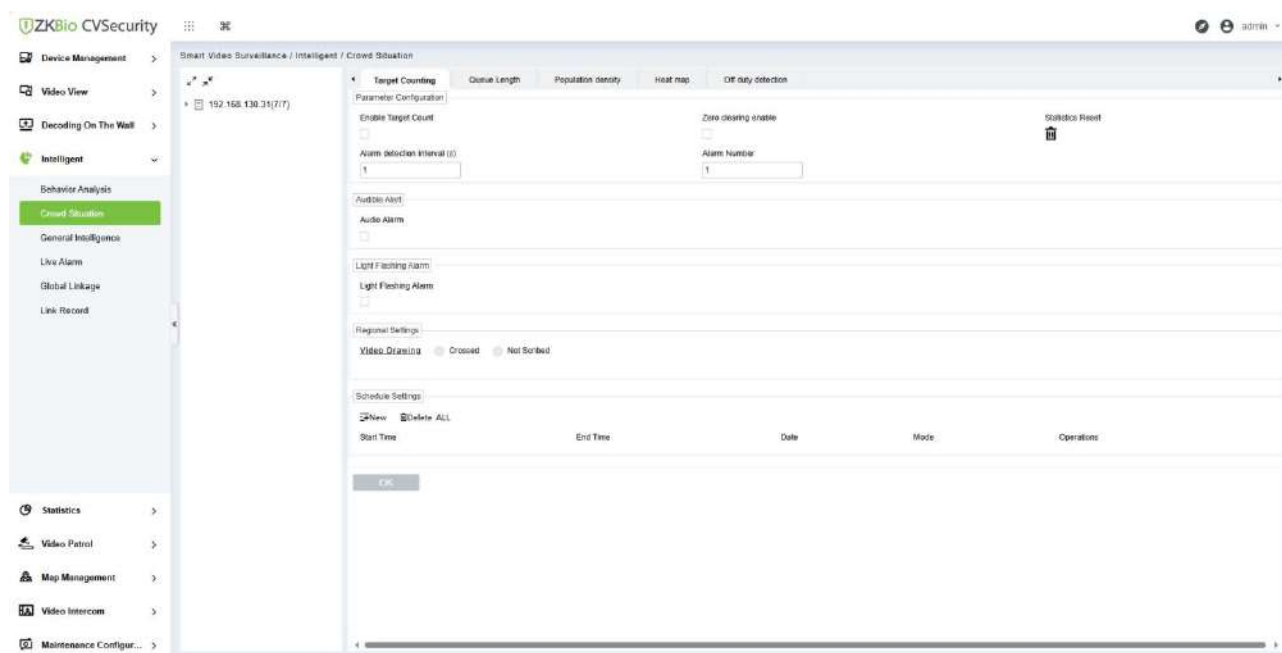


Figure 5- 30 Crowd Situation

Step 1: Select the camera on the left and the software will automatically switch to the menu of smart features supported by that camera.

1) If it's Holowits branch device, after click, the page shown as below:

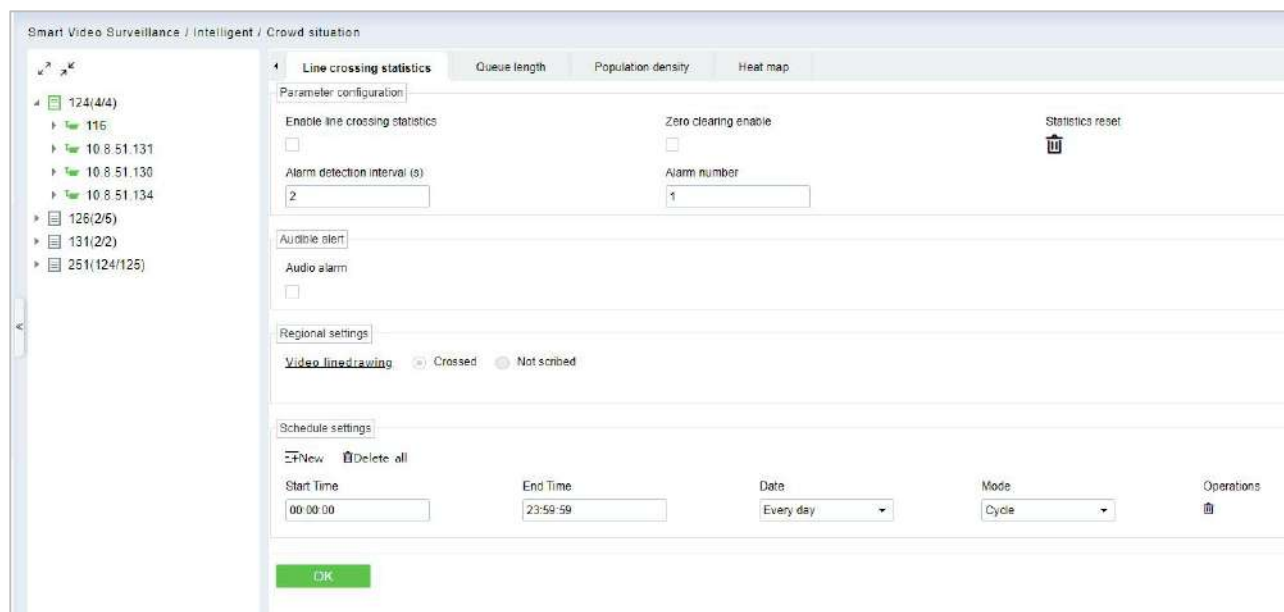


Figure 5- 31 Crowd Situation of Holowits device

2) If it's ZKBio Sense device, after click , the page shown as below:

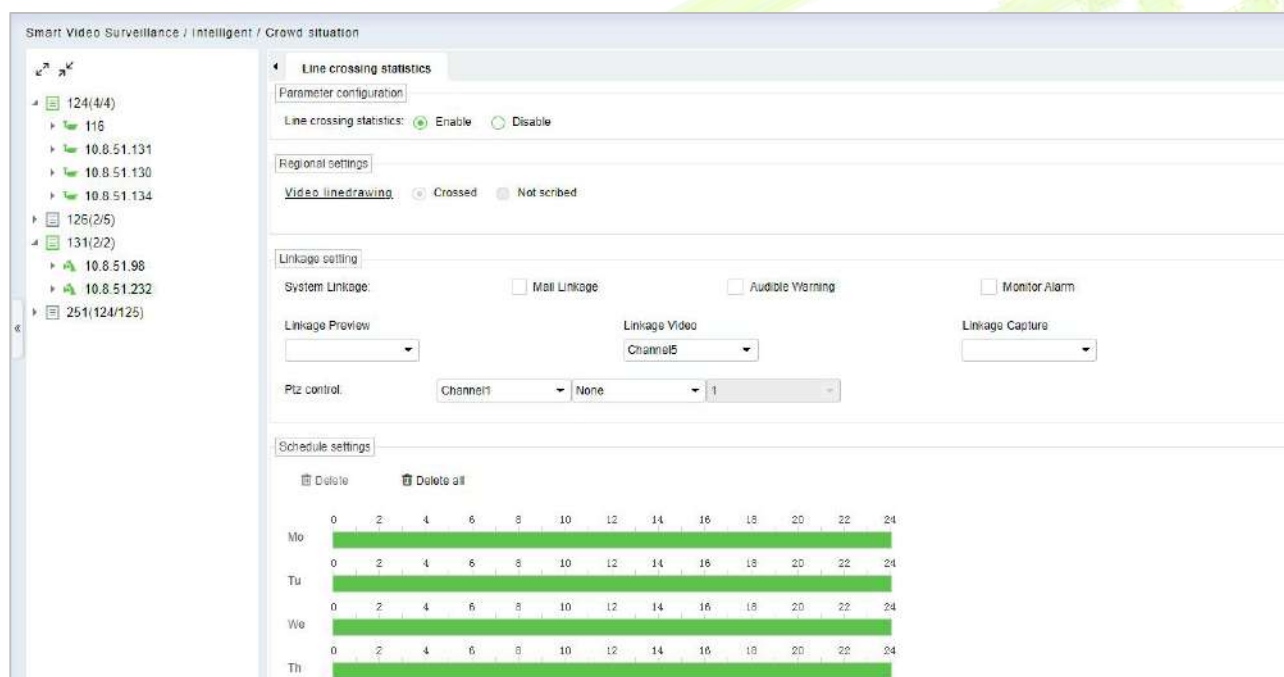


Figure 5- 32 Crowd Situation of ZKBio Sense device

3) If the camera does not support intelligent functions, then after click, the page shown as below: No database.

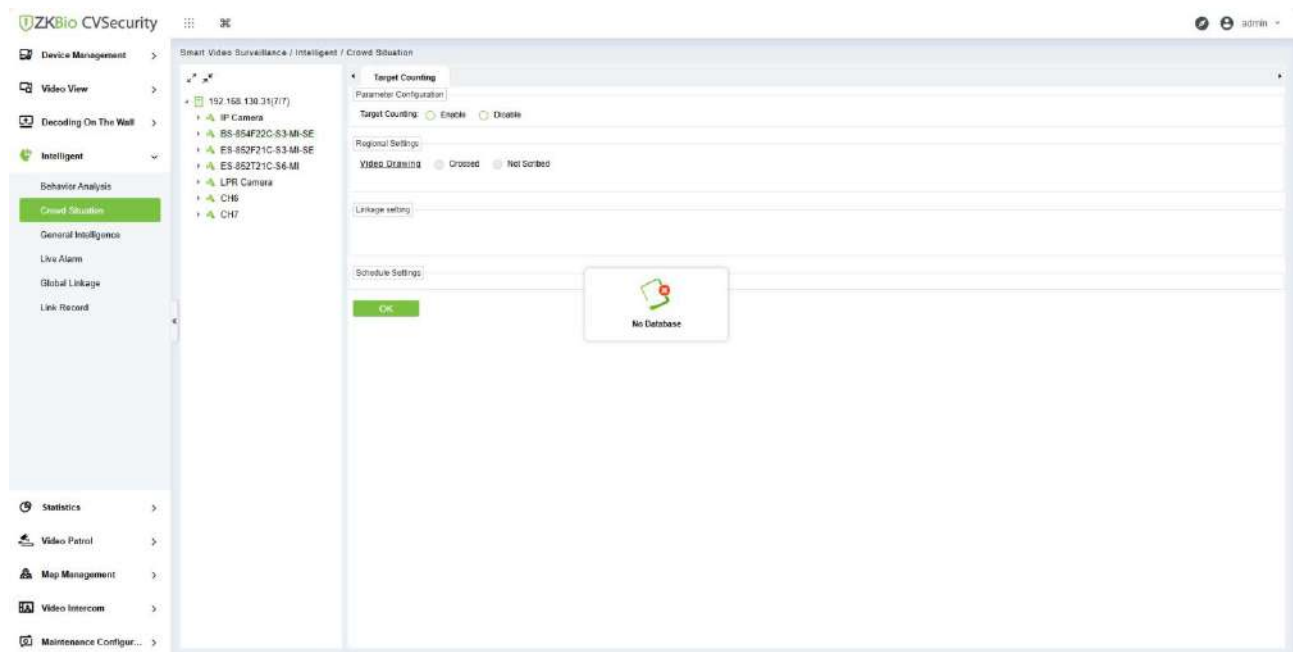


Figure 5- 33 No Database

5.4.2.1 Line Crossing Statistics

Please refer to [Intrusion Detection](#) setup.

5.4.3 General Intelligence

Configuration of general intelligence functions for front-end cameras by ZKBio CVSecurity.

Note: The default interface is part of Holowits' functionality. Different cameras have different intelligences, selecting the camera on the left will display the intelligences according to what the camera has to offer.



Figure 5- 34 General Intelligence

Step 1: Select the camera on the left and the software will automatically switch to the menu of smart features supported by that camera.

1) If it's Holowits branch device, after click, the page shown as below:



Figure 5-35 General Intelligence of Holowits Device

2) If it's ZKBio Sense device, after click, the page shown as below:

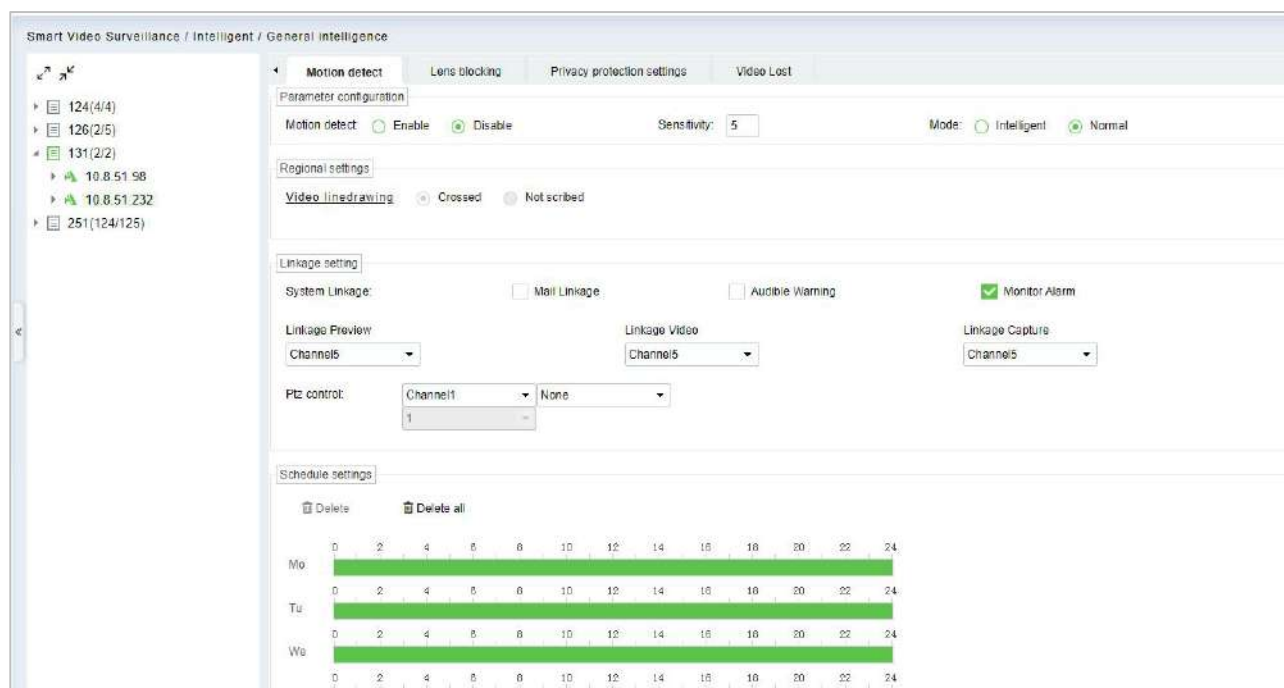


Figure 5-36 General Intelligence of ZKBio Sense device

5.4.3.1 Motion Detection

Please refer to [Intrusion Detection](#) setup.

Parameter Configuration:



Figure 5-37

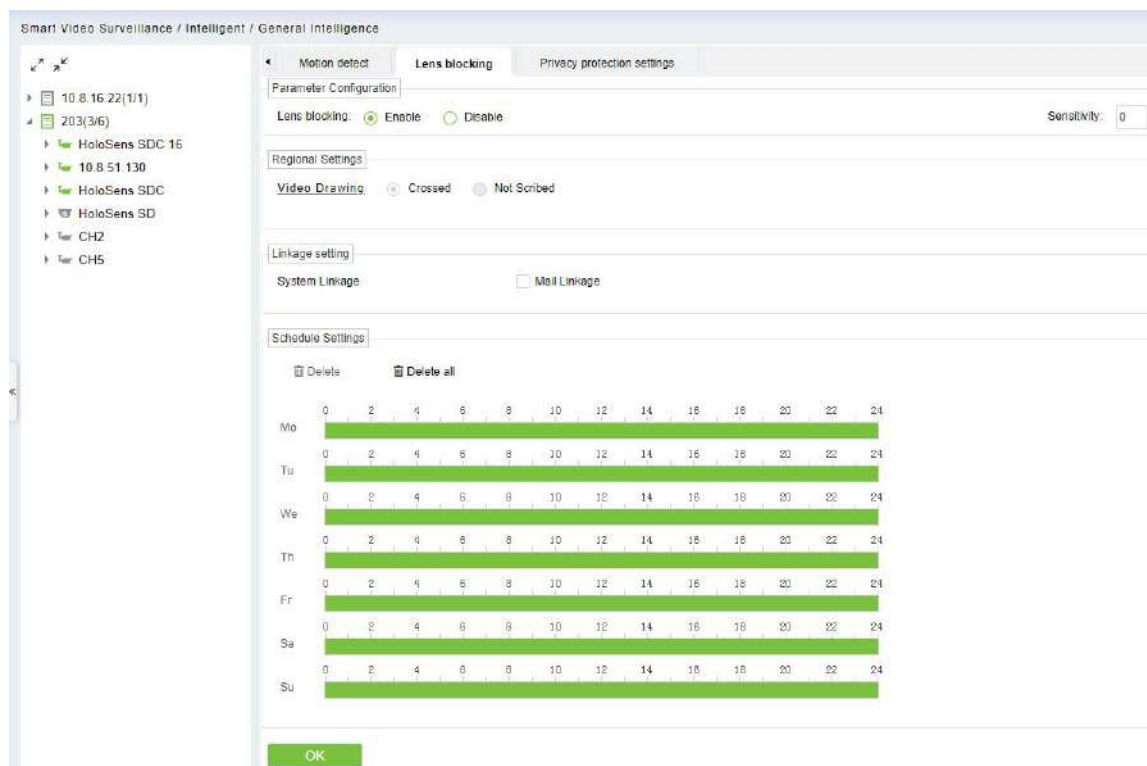
Sensitivity: Detection sensitivity.

Mode: Intelligent: Can distinguish between human or vehicles.

Normal: No distinction between human and vehicles.


5.4.3.2 Lens Blocking

Lens Obstruction Alarm; after clicking **Enable** button to enable, please click **Video Drawing** to configure the detection area.



5.4.3.3 Sound Detect

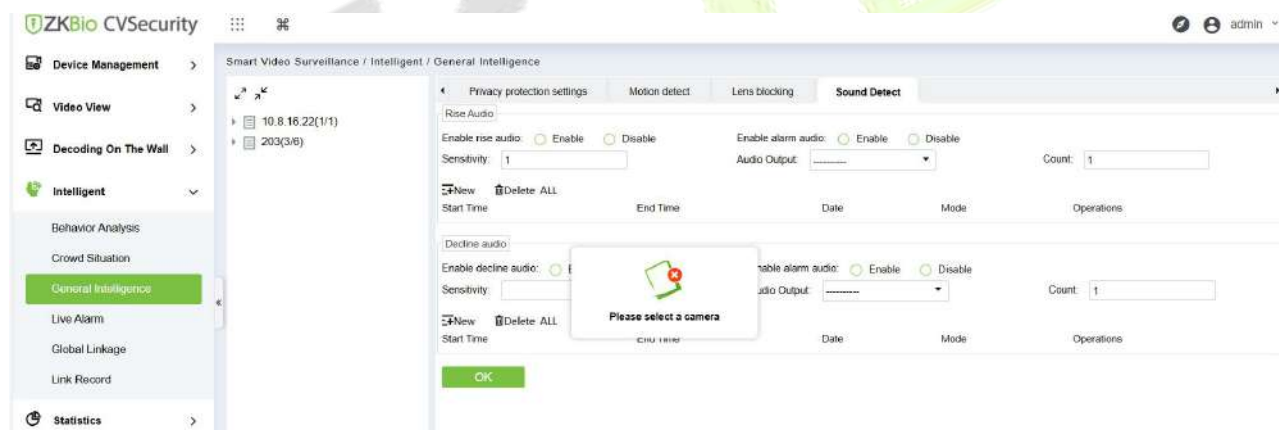Sound diagnostics; this feature is only available with Holowits Camera.



5.4.4 Live Alarm

Real-time video alarm monitoring.

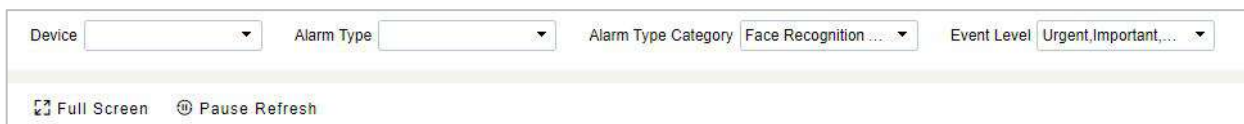


Figure 5- 38 Live Alarm

Full Screen

View the video in the full screen.

Pause Alarm

This function will help you to pause the alarm.

Double-click the alarm card to view the alarm details, as shown in the figure below.

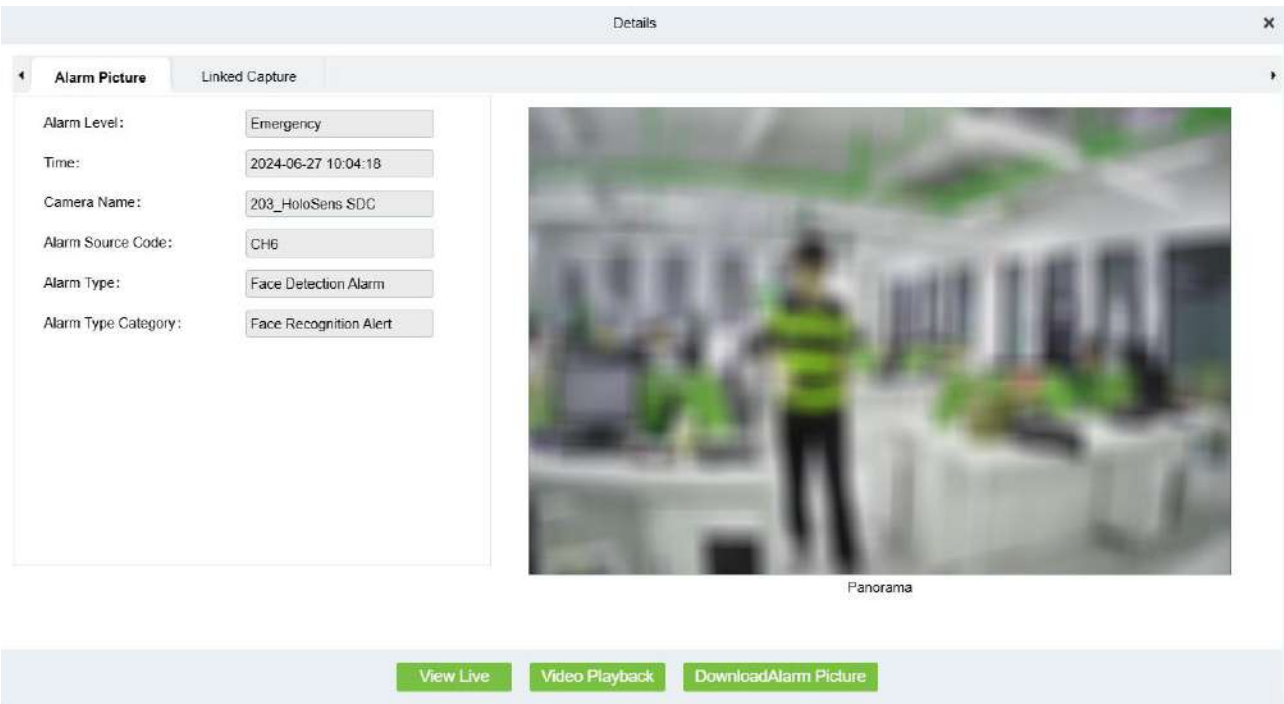


Figure 5- 39 Alarm Detail

●View Live

Click on the **Live View** button to view the live video.

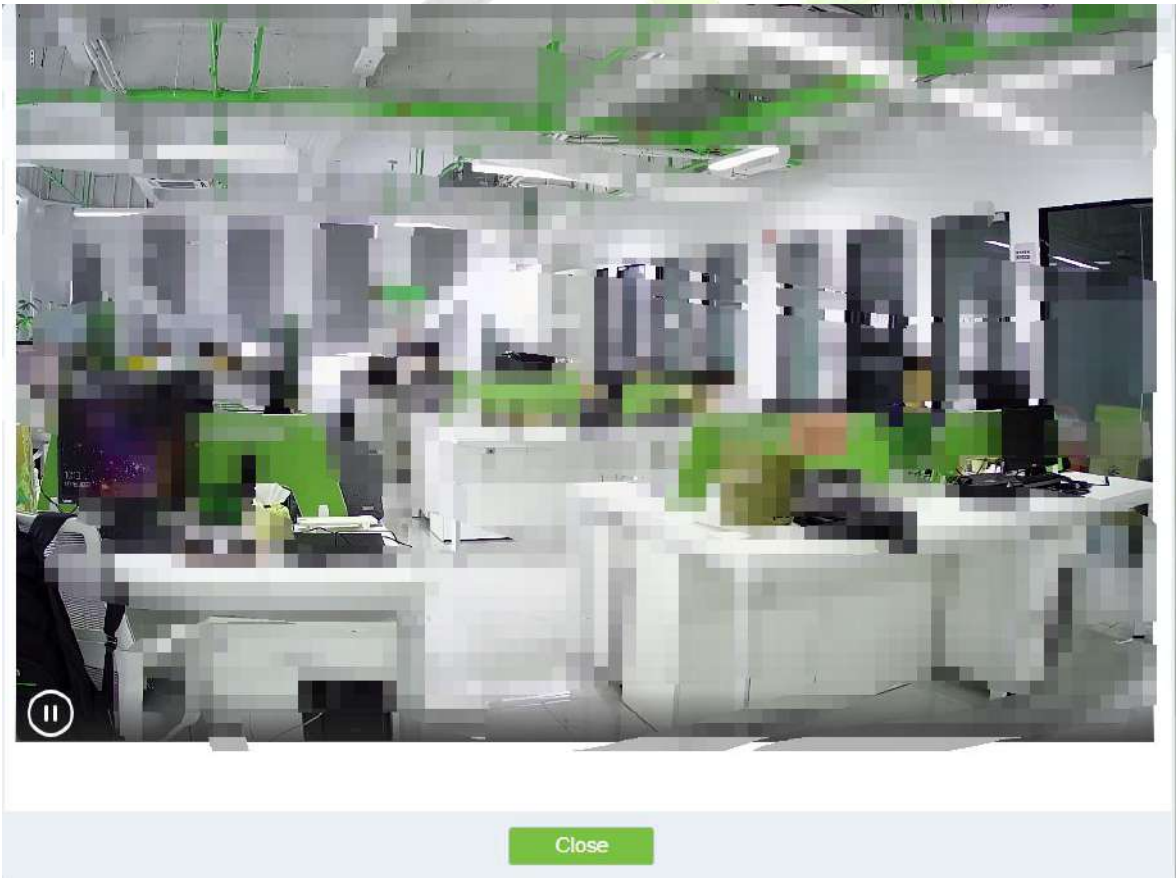


Figure 5- 40 Video Preview

●Video Playback

Click the **Video Playback** button to view the alarm playback in real time.


**Figure 5- 41 Video Playback**

- Download Alarm Picture

Click **Download Alarm Picture** and the browser will download the picture automatically.


5.4.5 Global Linkage

Go to **Smart Video Surveillance > Intelligent > Global Linkage**, click New to set the video linkage.

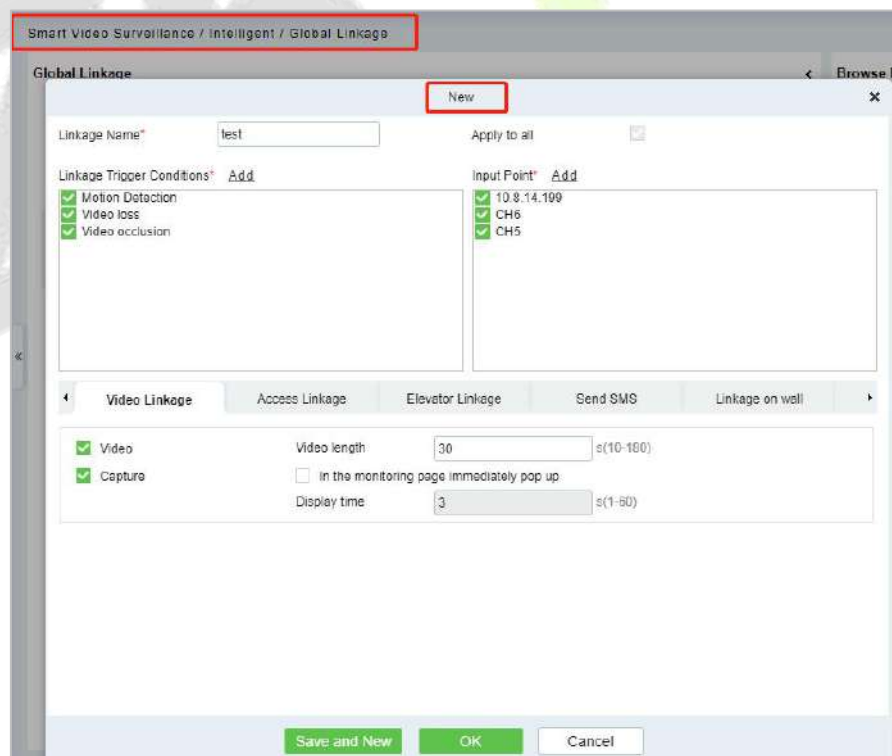**Figure 5- 42 Global Linkage**

5.4.5.1 Delete

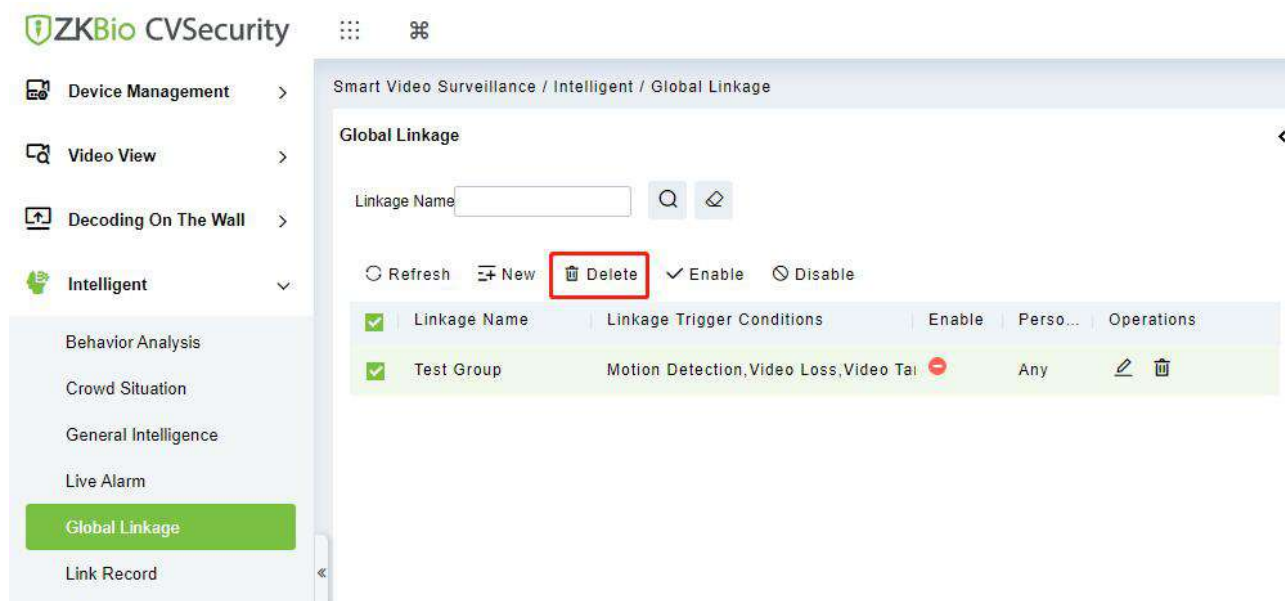Select the **Linkage Name**, click **Delete**, and click **OK** to delete the linkage details.



5.4.5.2 Enable/Disable

Select the **Linkage Name**, click **enable/disable** to either enable or disable the linkage details.

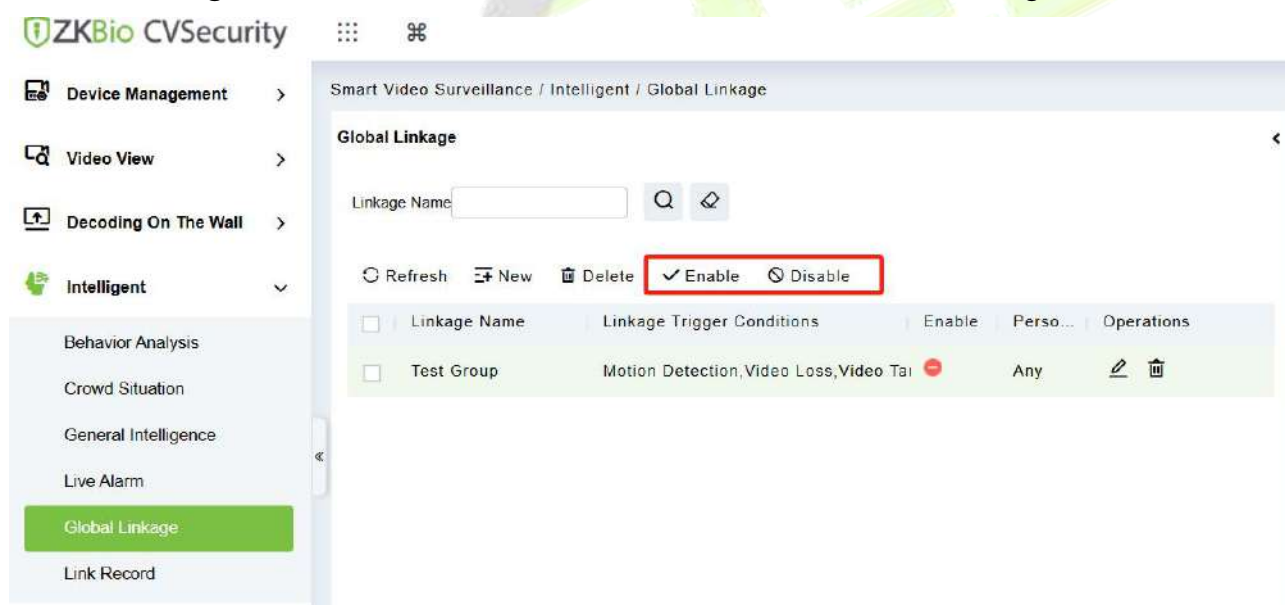


Figure 5- 43 Enable/disable Linkage

5.4.6 Link Record

5.4.6.1 Clear All Data

●Operating Steps:

Step 1: Click **Intelligent** > **Link Records** > **Clear All Data** to view clear all records:

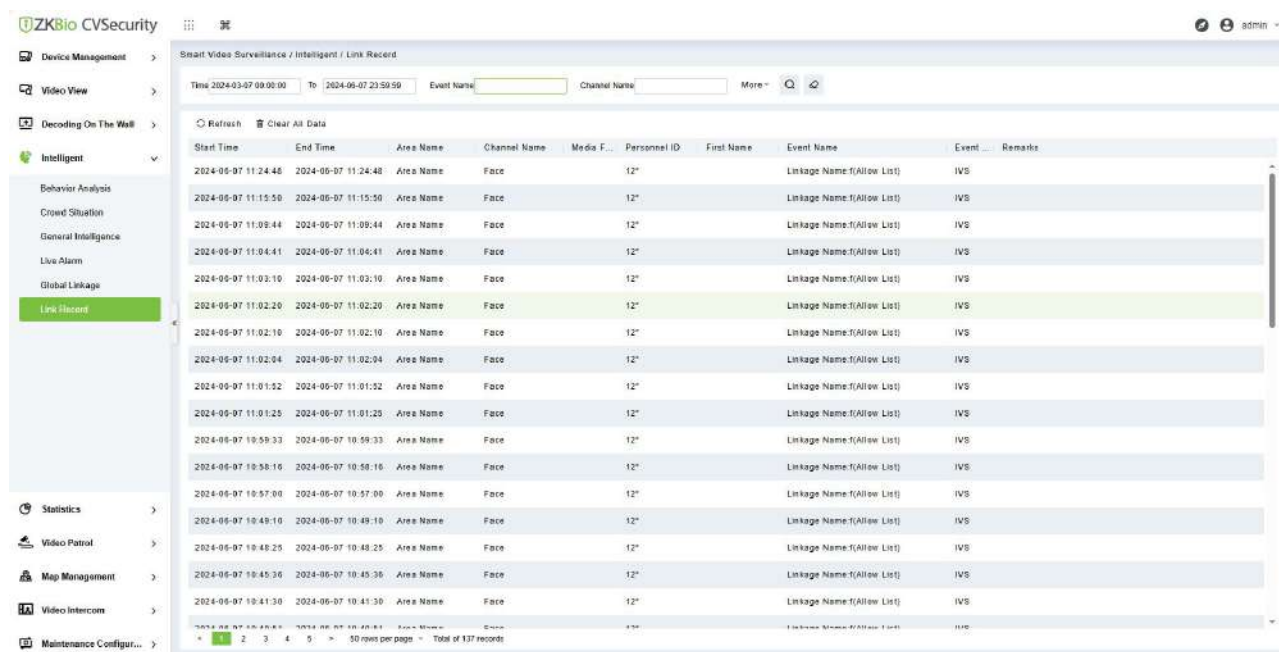


Figure 5- 44 Clear All Records Interface

Step 2: Click **Clear All Data** to pop up prompt and click **OK** to clear all records.

5.5 Statistics

5.5.1 Alarm Report

Click **Statistics > Alarm Report** then select Alarm Type.

In this module, you can access the data for the type of personnel or person can select the start time and end time the serial number of the video channel, and different alarm types to filter the report.


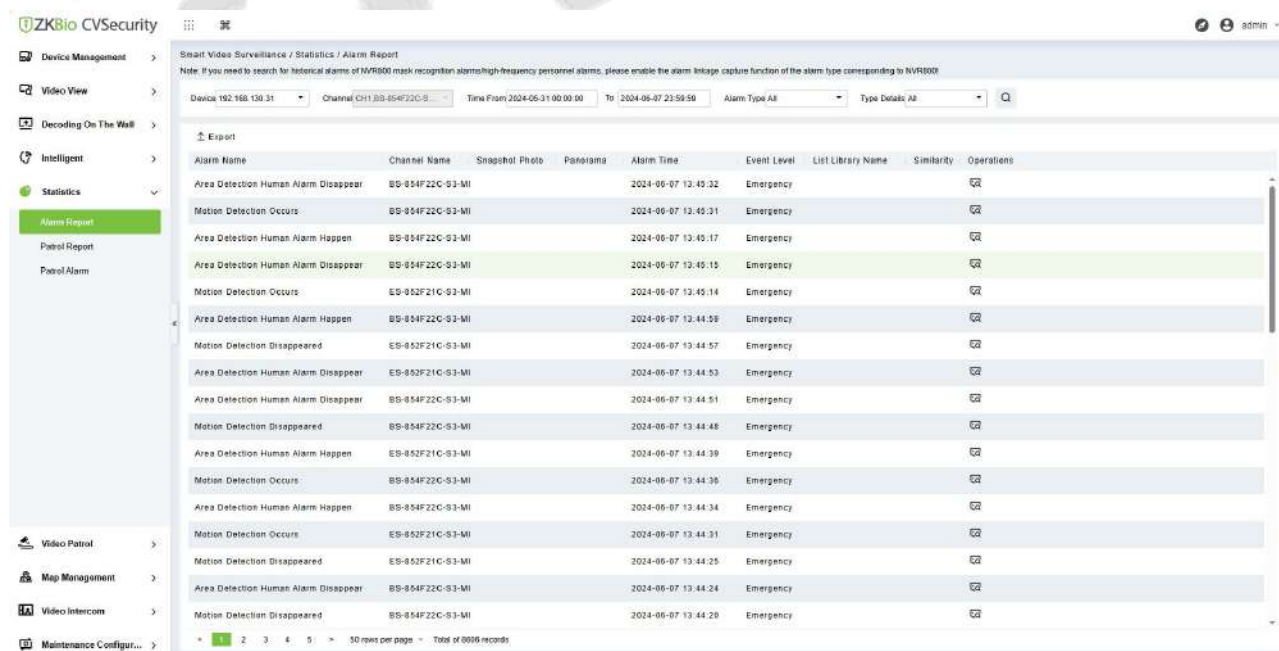


Figure 5- 45 Alarm Report

5.5.1.1 Export

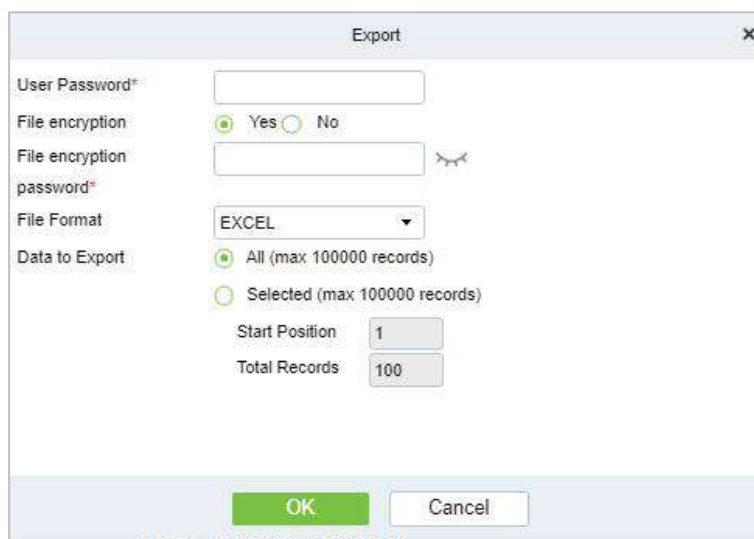Export selected personal information in the area; need enter user password and file encryption; you can export Excel, PDF, CSV or TXT format; Export up to 10000 pieces of data at once.



The 'Export' dialog box contains the following fields and options:


- User Password:** A text input field.
- File encryption:** Radio buttons for 'Yes' (selected) and 'No'.
- File encryption password:** A text input field with a visibility toggle (eye icon).
- File Format:** A dropdown menu currently set to 'EXCEL'.
- Data to Export:** Radio buttons for 'All (max 100000 records)' (selected) and 'Selected (max 100000 records)'.
- Start Position:** A text input field with the value '1'.
- Total Records:** A text input field with the value '100'.
- Buttons:** 'OK' and 'Cancel' buttons at the bottom.

Figure 5- 46 Export

5.5.2 Patrol Report

Click Statistics > Patrol Report, then select Plan Name.

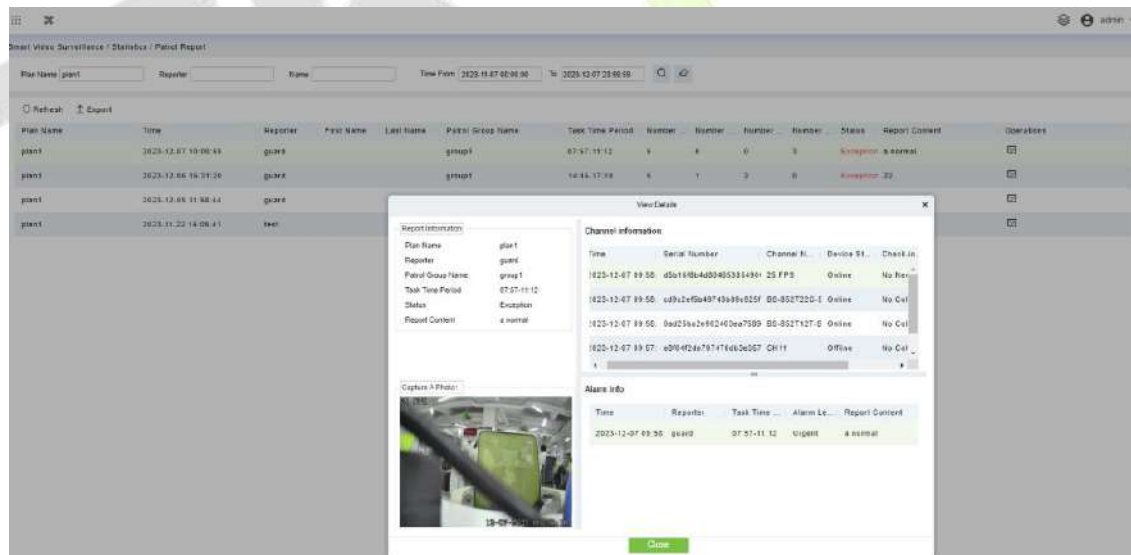In this module, by viewing detailed details, you can see the corresponding channel camera serial number and abnormal captured images.



The 'Patrol Report' interface shows a table of patrol records. A 'View Details' dialog box is open, displaying the following information:

Report Information:

- Plan Name: plan1
- Reporter: guard
- Patrol Group Name: group1
- Task Time Period: 07:57-11:12
- Status: Exception
- Report Content: a normal

Channel Information:

Time	Serial Number	Channel No.	Device St.	Check in
1025-12-07 09:58	45a180b4d040538149a1	25 FPS	Online	No Rev
1025-12-07 09:58	4b912ef0a48748a98e025f	BD-8527220-I	Online	No Cui
1025-12-07 09:58	8ad25aa2e96240da7989	BD-8527127-G	Online	No Cui
1025-12-07 09:57	e0914f24e7917176d3e067	CH11	Offline	No Cui

Alarm Info:


Time	Reporter	Task Time	Alarm Le.	Report Content
2025-12-07 09:58	guard	07:57-11:12	Urgent	a normal

The dialog also includes a 'Capture Photo' button and a thumbnail image of a camera feed.

Figure 5- 47 Patrol Report

5.5.2.1 Export

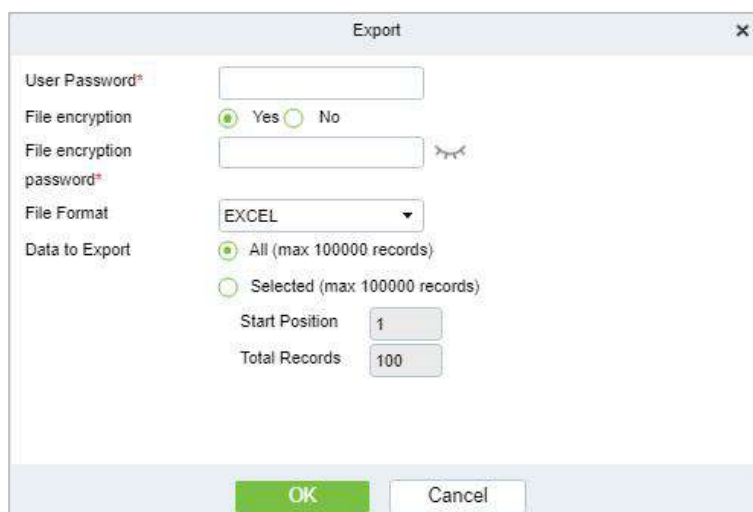Export selected personnel information in the area; you can export Excel, PDF, CSV format.




The 'Export' dialog box contains the following fields and options:

- User Password*: [Text input field]
- File encryption: ☒ Yes ☐ No
- File encryption password*: [Text input field]
- File Format: EXCEL (dropdown menu)
- Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)
- Start Position: 1 (input field)
- Total Records: 100 (input field)
- Buttons: OK, Cancel

Figure 5- 48 Export

5.5.3 Patrol Alarm

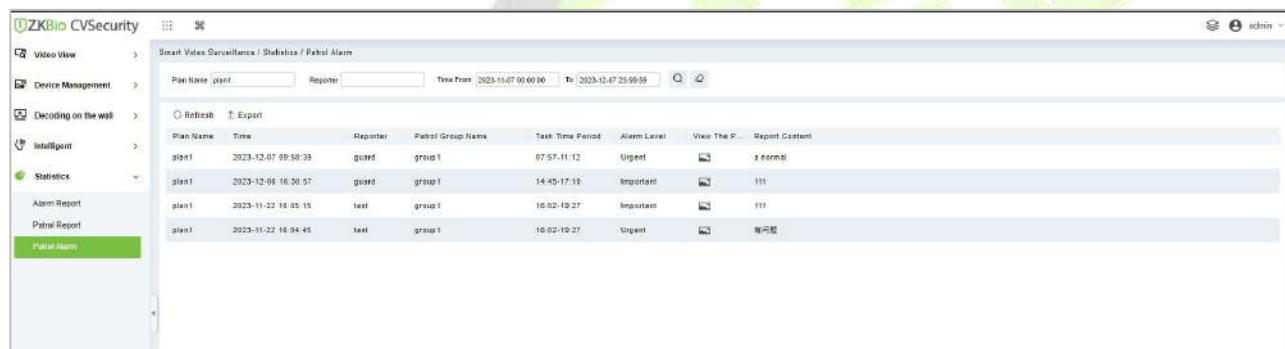Click **Statistics > Patrol Alarm**, then select **Statistical Period** as Daily, Weekly, Monthly, or Quarterly.




The interface shows the 'Patrol Alarm' statistics page with a table of alarm records. The table has columns: Plan Name, Time, Reporter, Patrol Group Name, Task Time Period, Alarm Level, View The P..., and Report Content.

Plan Name	Time	Reporter	Patrol Group Name	Task Time Period	Alarm Level	View The P...	Report Content
plan1	2023-12-07 09:58:38	guard	group 1	07:57-11:12	Urgent	[icon]	2 normal
plan1	2023-12-06 10:30:57	guard	group 1	14:45-17:19	Important	[icon]	111
plan1	2023-11-22 16:05:15	test	group 1	16:02-19:27	Important	[icon]	111
plan1	2023-11-22 16:04:45	test	group 1	16:02-19:27	Urgent	[icon]	报警

Figure 5- 49 Patrol Alarm

5.5.3.1 Export

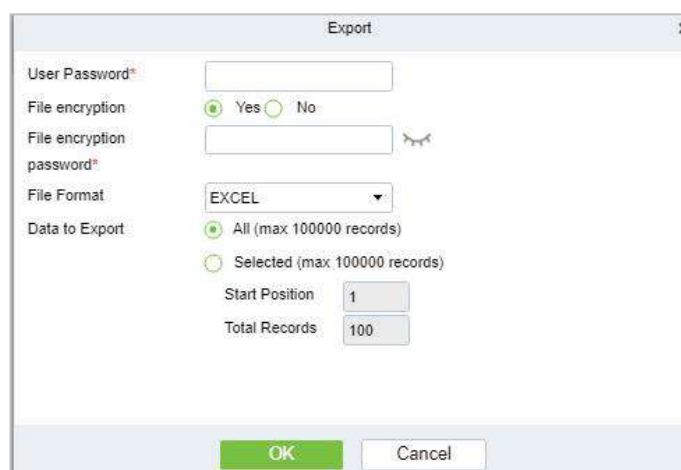Export selected personnel information in the area; you can export Excel, PDF, CSV format.



The 'Export' dialog box contains the following fields and options:

- User Password*: [Text input field]
- File encryption: ☒ Yes ☐ No
- File encryption password*: [Text input field]
- File Format: EXCEL (dropdown menu)
- Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)
- Start Position: 1 (input field)
- Total Records: 100 (input field)
- Buttons: OK, Cancel

Figure 5- 50 Export

5.6 Video Patrol

Click **Video Patrol > Patrol Group**.

On the preset path, you can check the punch-in by a real-time preview of the camera remotely to achieve the same patrol task as the traditional punch-in effect.

5.6.1 Patrol Group

Create a patrol group to add patrol personnel.

Note:

1. Please go to System > Authority Management > Role to add the role group, Assign video patrol permissions.
2. Create the System user and add in the patrol role.

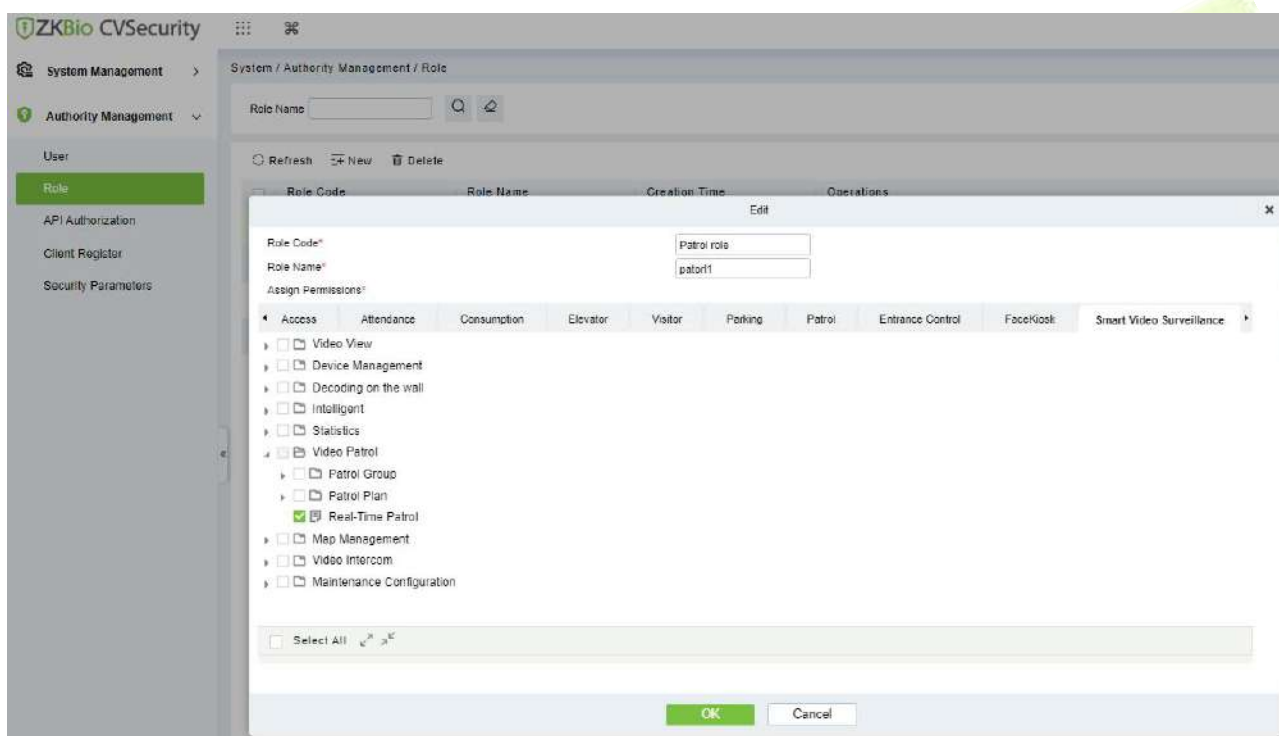


Figure 5- 51 Role Assign Permission

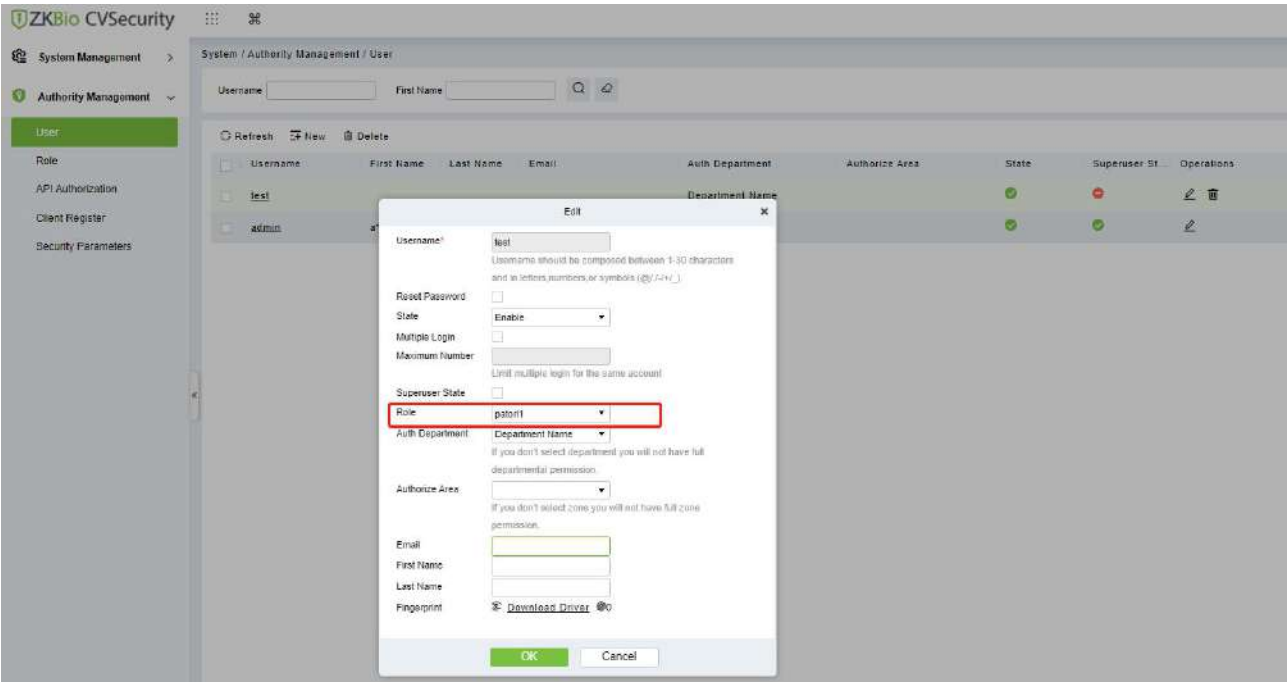


Figure 5- 52 User Select Role

5.6.1.1 New

Click **Video Patrol> patrol group> New** to enter the new editing interface:

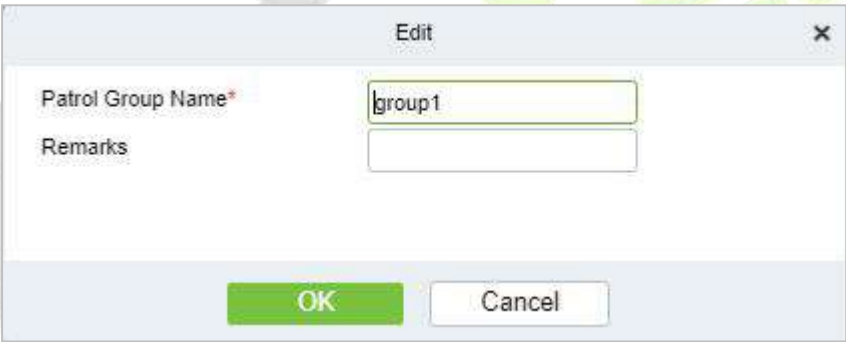



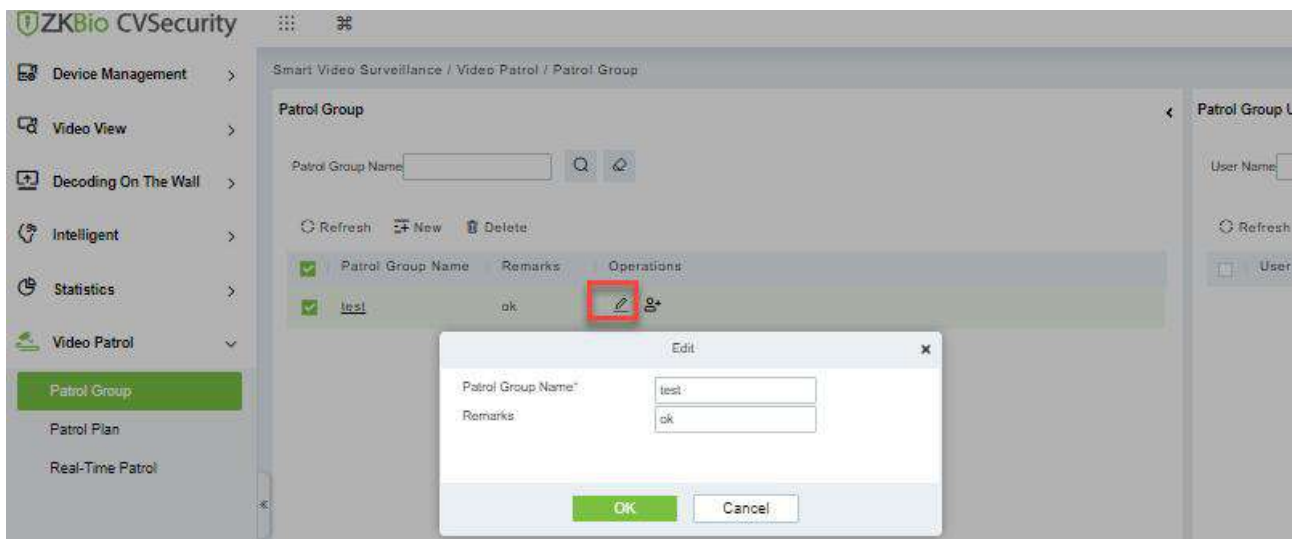
Figure 5- 53 New Patrol Group

Patrol Group Name: Enter the name of the patrol group for easy searching and management non-repeatable.

Remarks: Text notes of the patrol group.

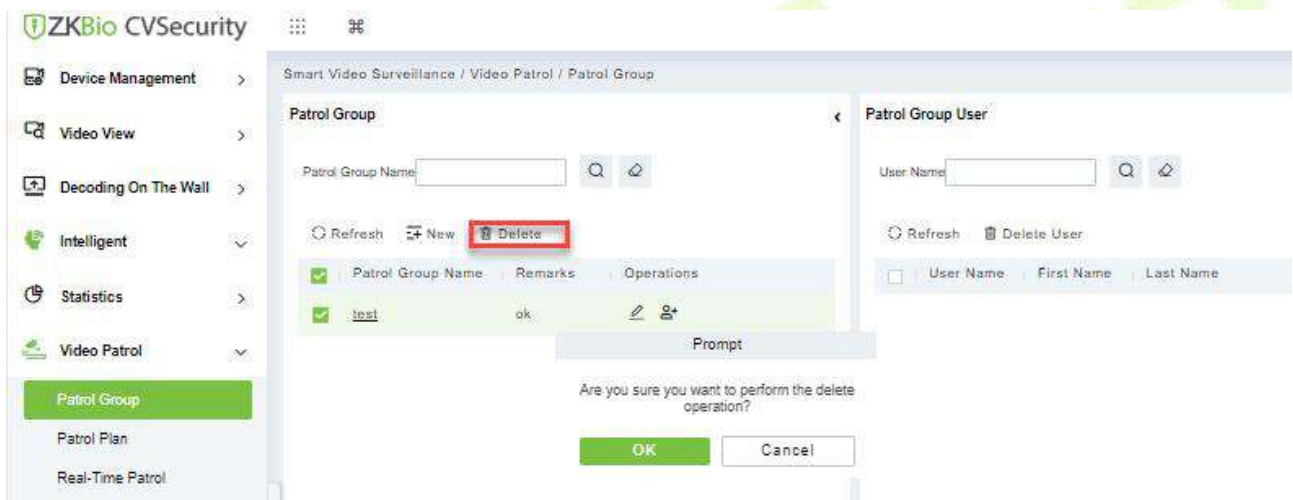
5.6.1.2 Edit

Select the edit patrol group name and click edit  icon button to edit the required details and click "OK" to submit.



5.6.1.3 Delete User

Select the Username and click this button to delete it.



5.6.1.4 Add Patrol Group User

In the patrol group list, click Add User to enter and select to add group members.

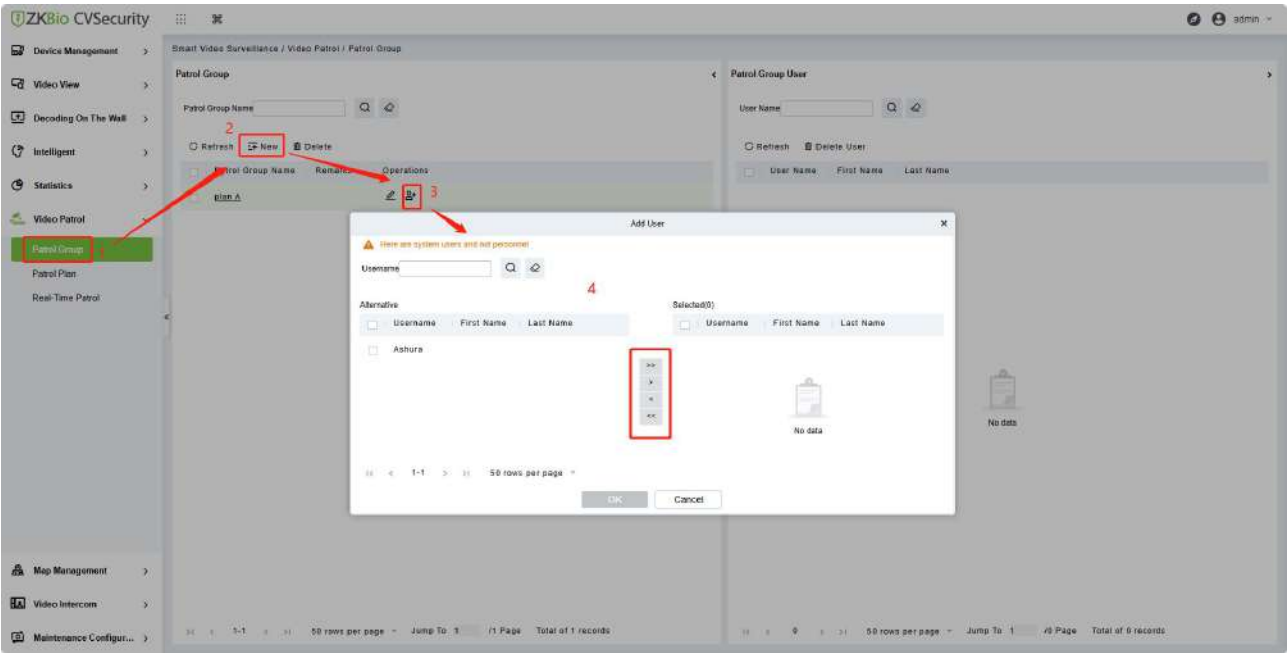


Figure 5- 54 Add Patrol Group User

Select the required patrol users and click the OK button to complete the addition. The added users will be displayed in the group member list on the right.

Note: Patrol users are users of the system. For adding users to the system, please refer to Adding Users.

5.6.2 Patrol Plan

Set a patrol plan for the patrol team.

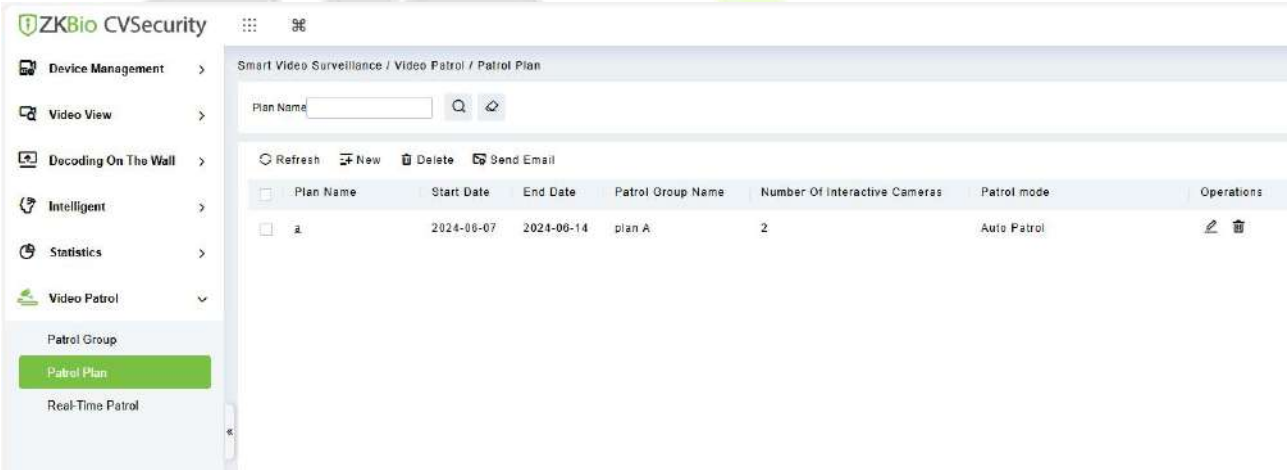


Figure 5- 55 Patrol Plan

5.6.2.1 New

Click **Video Patrol> Patrol Plan> New** to enter the new editing interface:

Edit

Plan Name*

a

Patrol Group*

plan A

Start Date*

2024-06-07

End Date*

2024-06-14

Delete

Delete all

Mo

0

2

4

6

8

10

12

14

16

18

20

22

24

Tu

0

2

4

6

8

10

12

14

16

18

20

22

24

We

0

2

4

6

8

10

12

14

16

18

20

22

24

Th

0

2

4

6

8

10

12

14

16

18

20

22

24

Fr

0

2

4

6

8

10

12

14

16

18

20

22

24

Sa

0

2

4

6

8

10

12

14

16

18

20

22

24

Su

0

2

4

6

8

10

12

14

16

18

20

22

24

Next Step

Cancel

Figure 5- 56 New

●The fields are described as follows:

Parameters	Instructions
Plan Name	Give the plan a name, make it easy to view and find, not repeatable
Patrol Group	Optional created patrol group.
Start Date	Set the start date of the patrol. The start date must not be less than the end date.
End Date	Set the end date of the patrol. The start date must not be less than the end date.
Patrol Time	Drag the time bar to select the time period that needs to be patrolled. Multiple copies are supported.

Table 5- 7 New

Edit

Plan Name*

a

Patrol Group*

plan A

Start Date*

2024-06-07

End Date*

2024-06-14

Delete

Delete all

Mo

0

2

4

6

8

10

12

14

16

18

20

22

24

Tu

0

2

4

6

8

10

12

14

16

18

20

22

24

We

0

2

4

6

8

10

12

14

16

18

20

22

24

Th

0

2

4

6

8

10

12

14

16

18

20

22

24

Fr

0

2

4

6

8

10

12

14

16

18

20

22

24

Sa

0

2

4

6

8

10

12

14

16

18

20

22

24

Su

0

2

4

6

8

10

12

14

16

18

20

22

24

Next Step

Cancel

Figure 5- 57 New

After editing this page, click Next to enter the camera selection interface:

Patrol Plan

Number Of Interactive Cameras:*

2

Patrol mode:

Auto Patrol

Auto Patrol

Manual Patrol

Channel Name

Map:

Patrol Time:

Please enter cruise time

Set up

Alternative

<input type="checkbox"/>	Channel Name	Patrol ...	IP Address
<input type="checkbox"/>	CH7	30	192.168.130.123
<input type="checkbox"/>	ES-852F21C-S3-MI-	30	192.168.130.120
<input type="checkbox"/>	BS-854F22C-S3-MI-	30	192.168.130.246
<input type="checkbox"/>	CH1	30	192.168.130.48
<input type="checkbox"/>	Face	30	192.168.130.241
<input type="checkbox"/>	2	30	192.168.130.36

>>

>

<

<<

Selected(3)

<input type="checkbox"/>	Channel Name	Patrol ...	IP Address
<input type="checkbox"/>	CH6	10	192.168.130.123
<input type="checkbox"/>	LPR Camera	10	192.168.130.118
<input type="checkbox"/>	ES-852T21C-S6-MI	10	192.168.130.241

<

<<

1-7

>

>>

50 rows per page

Previous Step

OK

Cancel

Figure 5- 58 New

Number of interactive Cameras: Set the number of cameras that need to be chick-in, (like "3" means

that Chick-in must be completed on 3 cameras during this patrol plan, this number must be less than or equal to the number of cameras you have chosen)

Channel Name: Search the channel

Device List: Select the equipment on the map that needs to be patrolled. The device list shows only the devices that have been added to the current map, if you want to add a device, go to Device Add

Map: Select the map that needs to be patrolled.

Note:

- (1) You can set the length of time you need to watch each camera by clicking on the cruise time, which is 30 seconds by default
- (2) The camera used in the patrol plan needs to be added in the center of the map. The path is Service Center> Map Center>Map Config.

5.6.2.2 Delete

Select the Patrol Plan to be deleted and click the **Delete** button

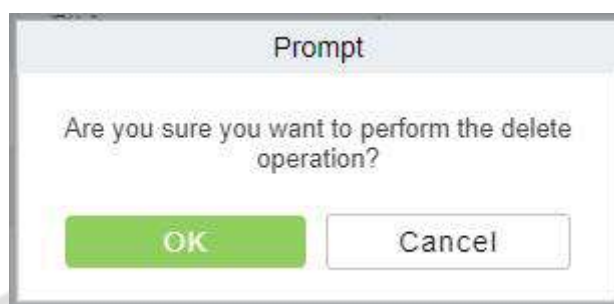


Figure 5- 59 Prompt

Note: Ongoing or pause plans cannot be deleted, please complete the plan first.

5.6.2.3 Send Email

Select Send email button, set remind information and repetitions.

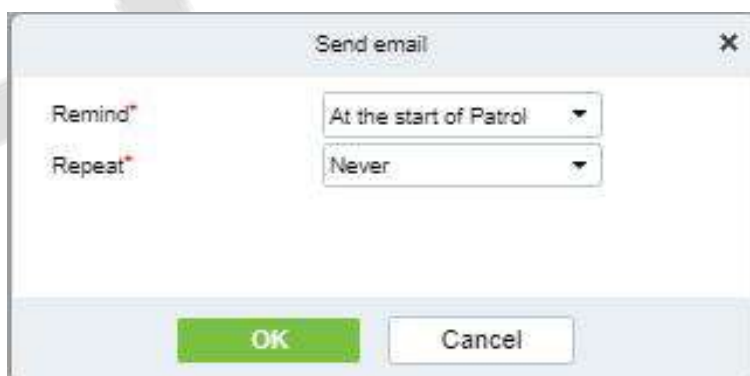


Figure 5- 60 Send email

Note: Email outgoing configuration requires System Management ->Email configuration ->Outgoing Mail Server Settings.



Figure 5- 61 Email Setting

5.6.3 Real-Time Patrol

Click **Video Patrol** > **Real-time Patrol**, Online patrols are only available if the patrolman is logged into the system.

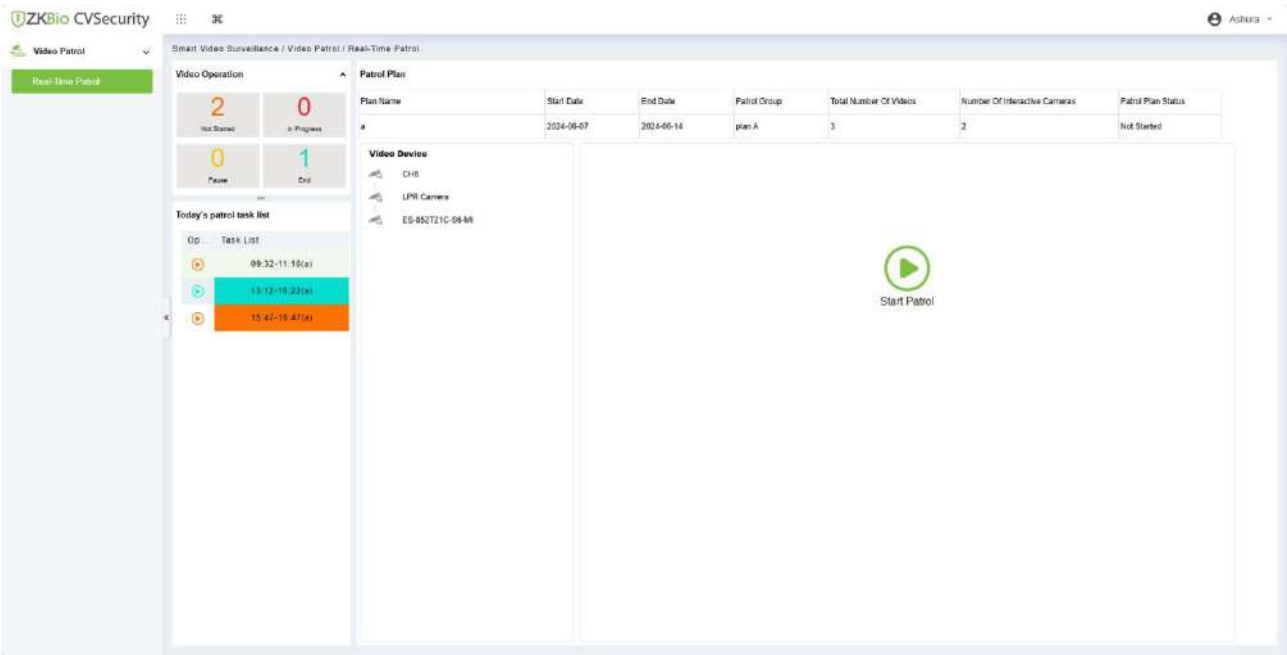


Figure 5- 62 Real-Time Monitoring

●Video Operation:



Figure 5- 63 Video Operation

View different states of the Patrol plan.

Today's Patrol Task List:

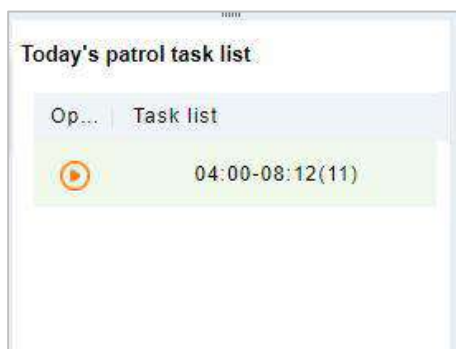



Figure 5- 64 Today's Patrol Task List

Displaying the patrol plan, click  to patrol.

● Patrol Plan:

After clicking **Start Patrol**, the video patrol will start. The map will display all cameras on the patrol route, as shown in the figure below:

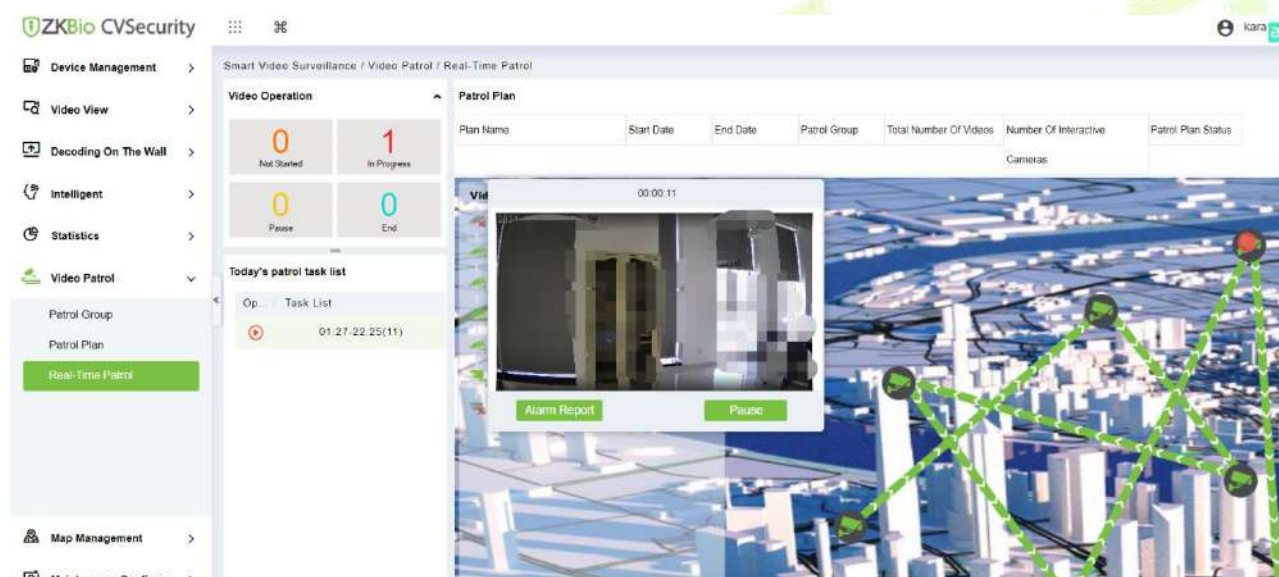



Figure 5- 65 Patrol Plan

Note:

1. You need to add a camera in the center of the map in advance.
2. The camera points in the list are connected on the map to form a patrol route.
3. A red dot on a camera  indicates a camera on patrol.

● Patrol Window:

When the camera is patrolling, the floating window on the map will display real-time images.



Figure 5- 66 Patrol Window

5.7 Map Management

5.7.1 Video Map

5.7.1.1 New/ Add Camera

Click **Map Management > Video Map**. Click New to add a E-map.

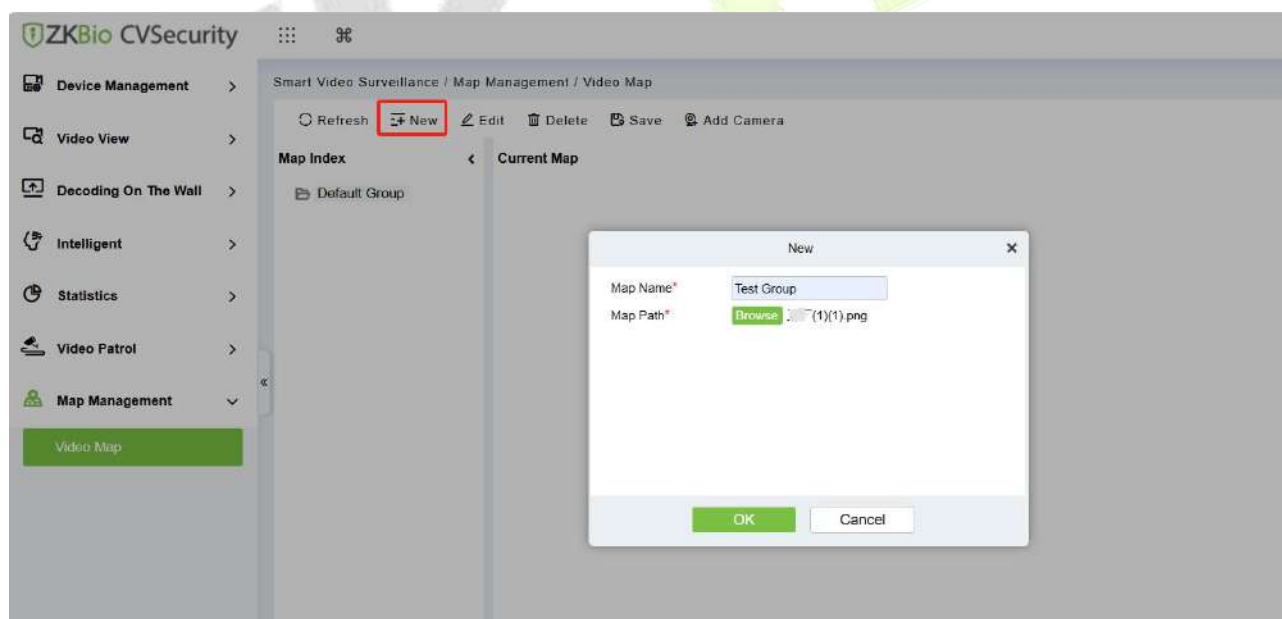


Figure 5- 67 Video Map

Then you can click **Add Camera**. Add the cameras to the map.

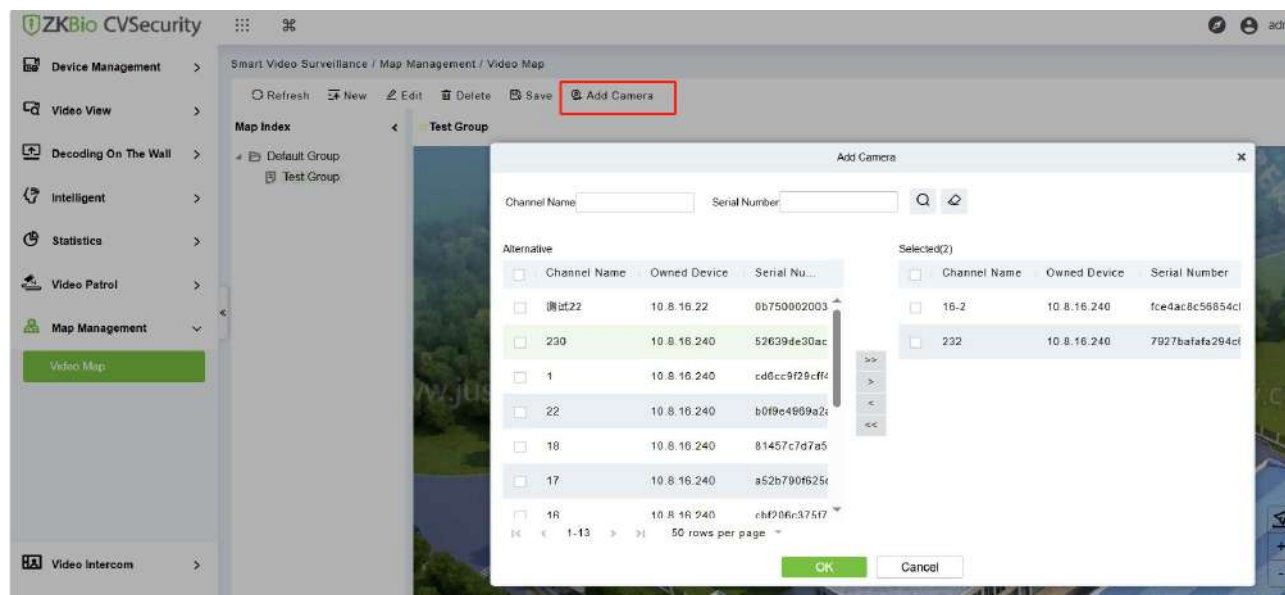


Figure 5- 68 Add Camera

Adjust the position and **Save position**. Click  button and select camera can dimension distance.



Figure 5- 69 Video Map

The map will be displayed as follows:

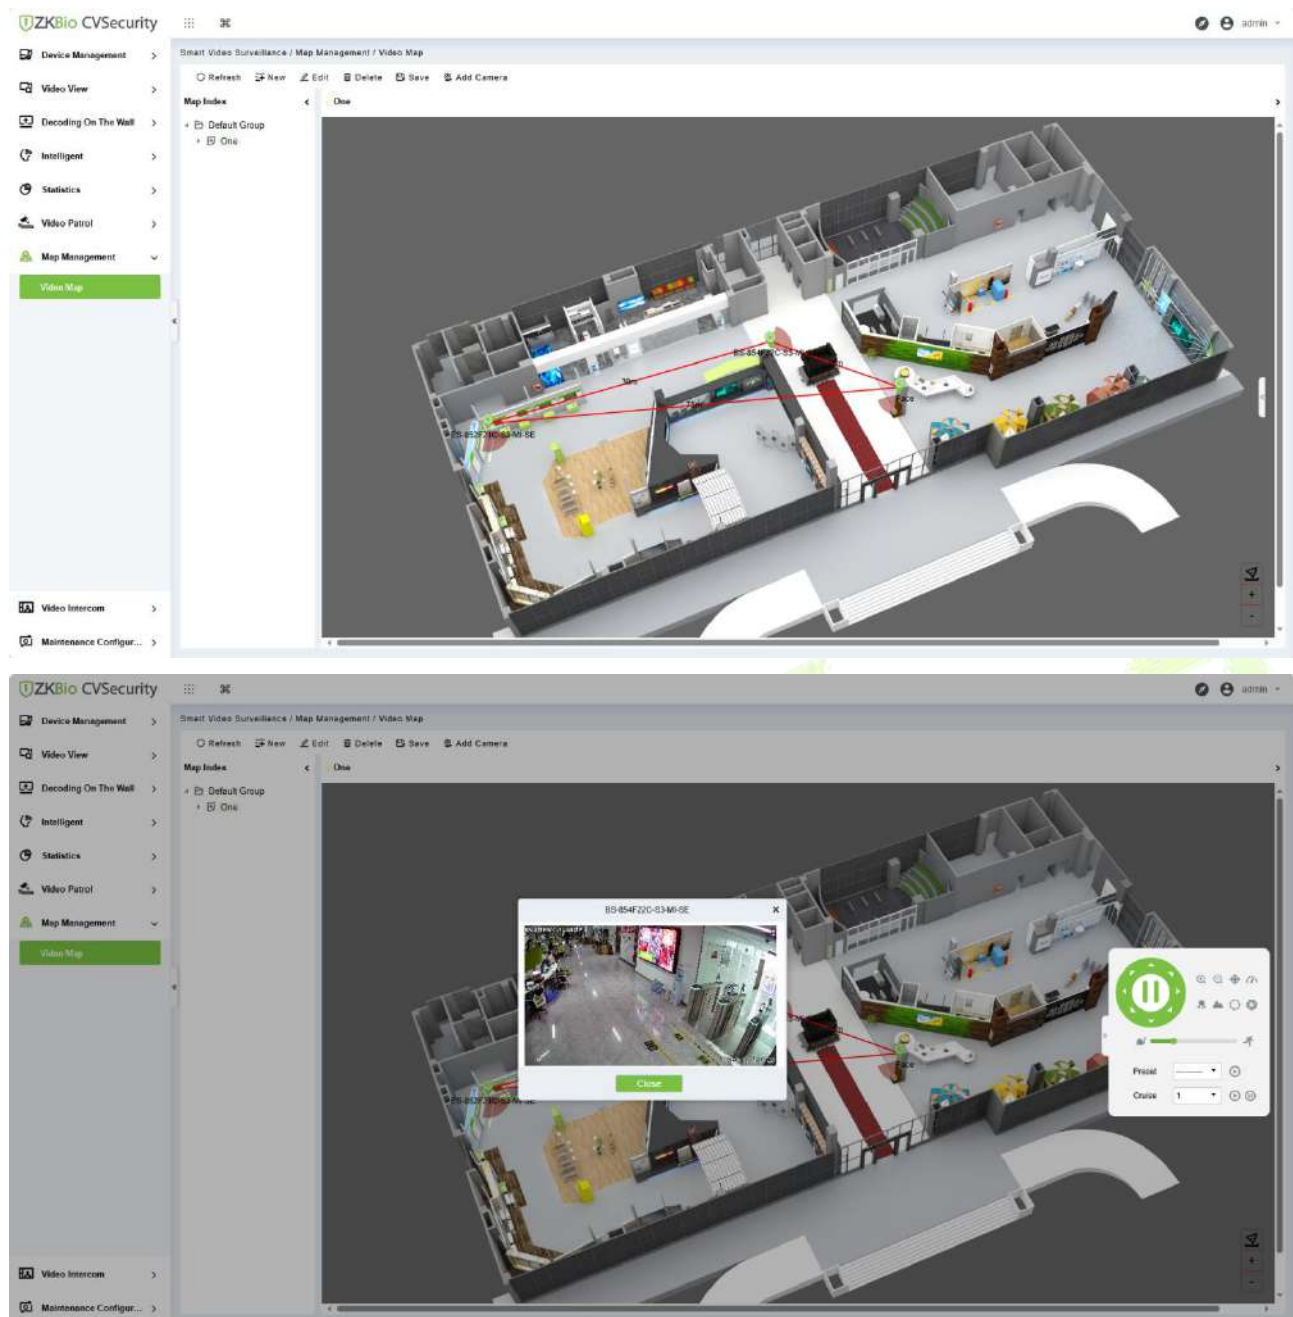



Figure 5- 70 Video Map

5.7.1.2 Edit

Click **Map Management** > **Video Map**, select the map details and then click on the **Edit** icon  to edit the required details.

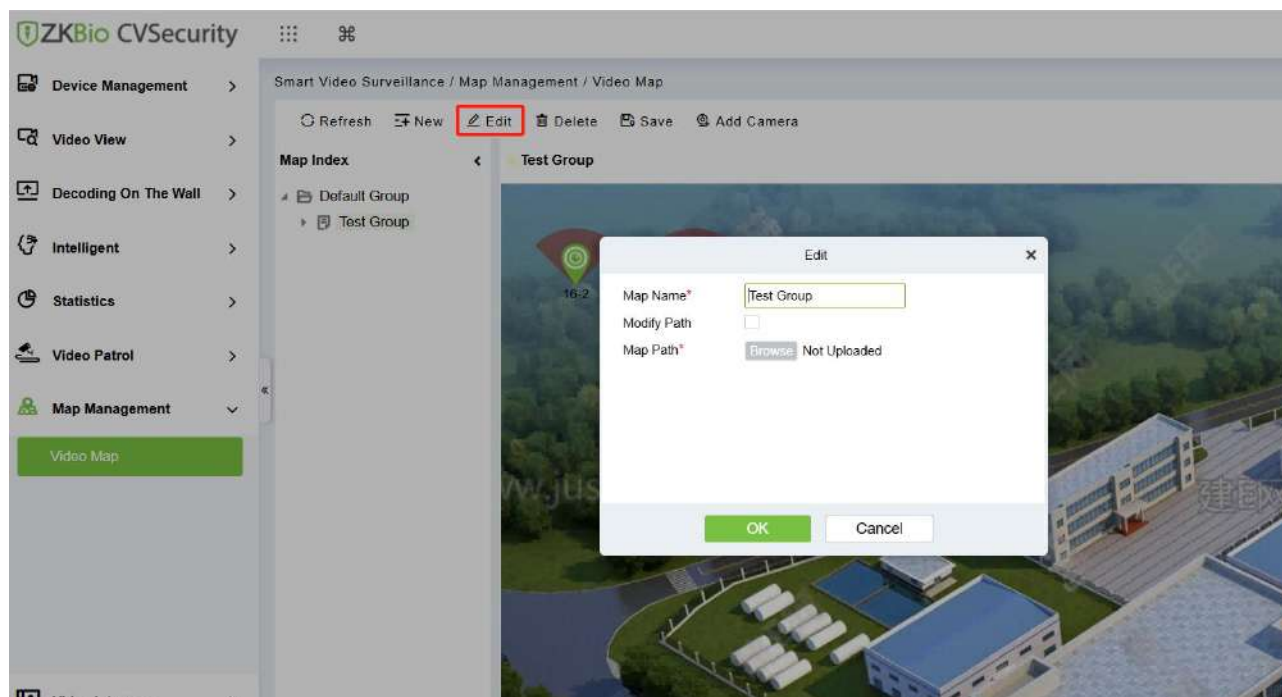


Figure 5- 71 Edit Map

5.7.1.3 Delete

Click **Map Management > Video Map** , select the map details and then click on **Delete** to delete the required details.

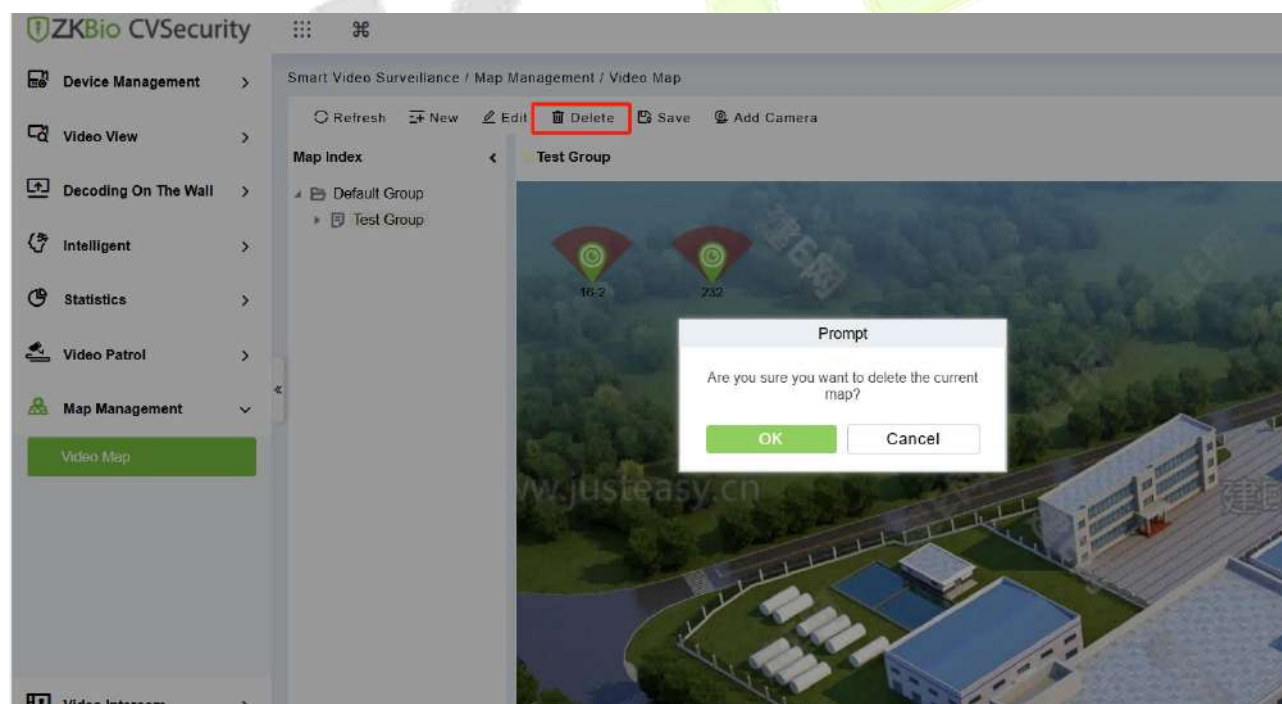


Figure 5- 72 Delete Map

5.8 Maintenance Configuration

5.8.1 Developer Log

Click Intelligent Video > Maintenance Configuration > Developer Log, then select One-Click Collection.

Users can download all system logs and system information to get Click on the **One-Click Collection** option.

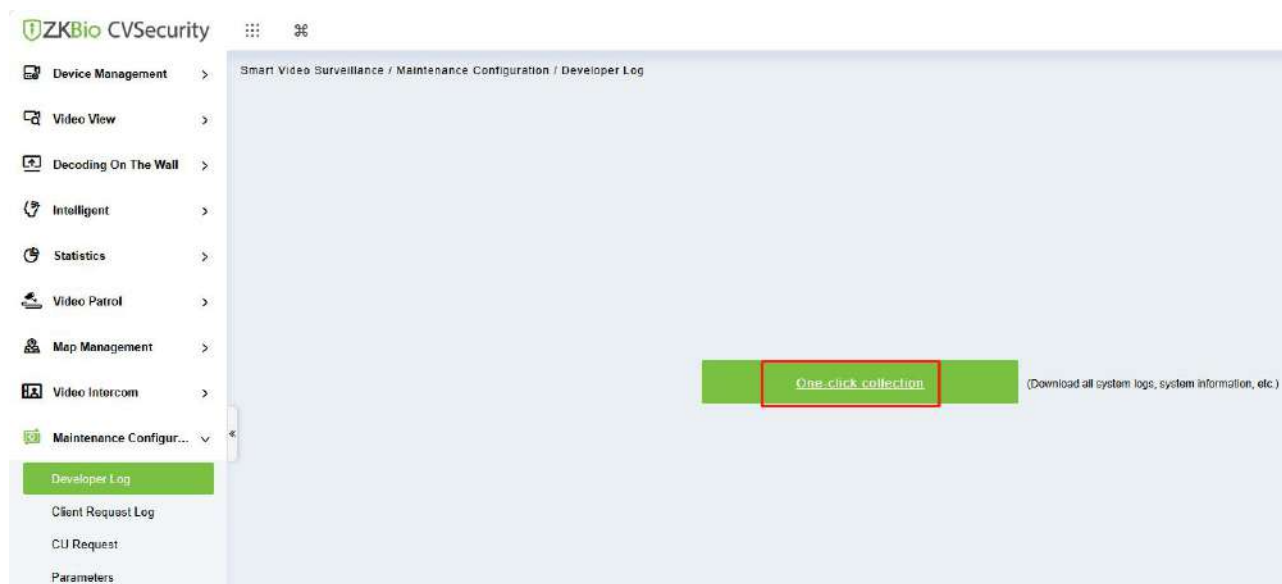


Figure 5- 73 One-Click Collection

5.8.2 Client Request Log

5.8.2.1 Clear All Data

Click **Clear All Data** to pop up the prompt and click **OK** to clear all Data Operations.

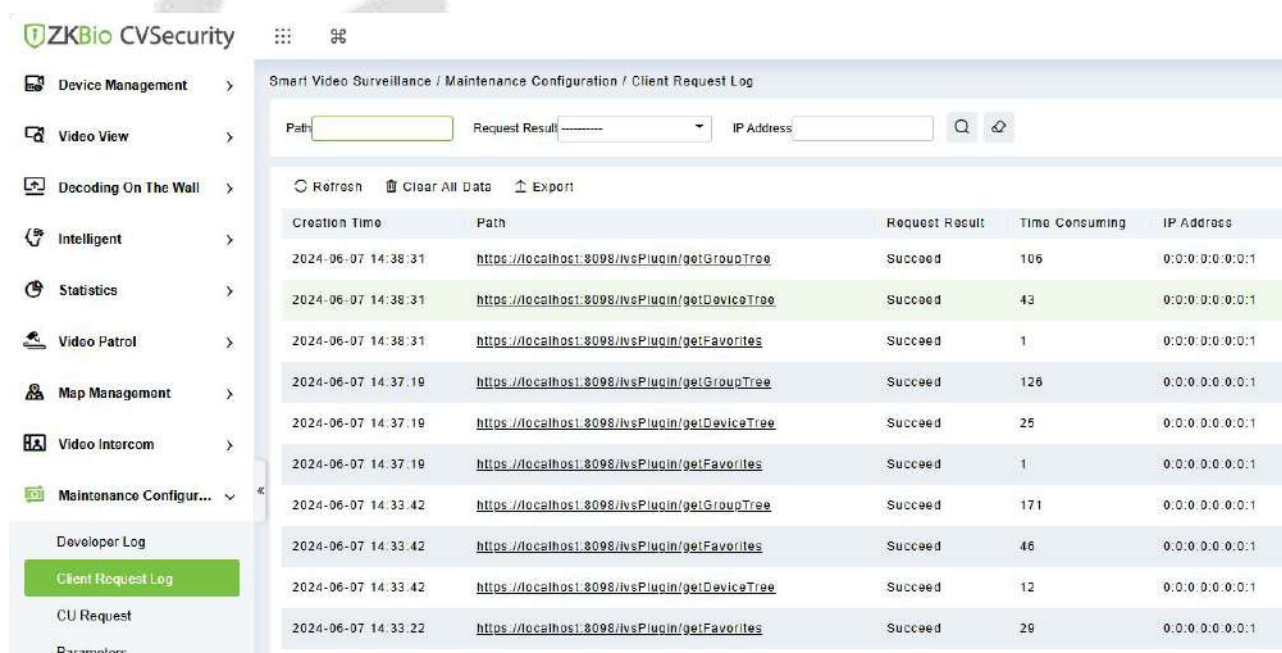
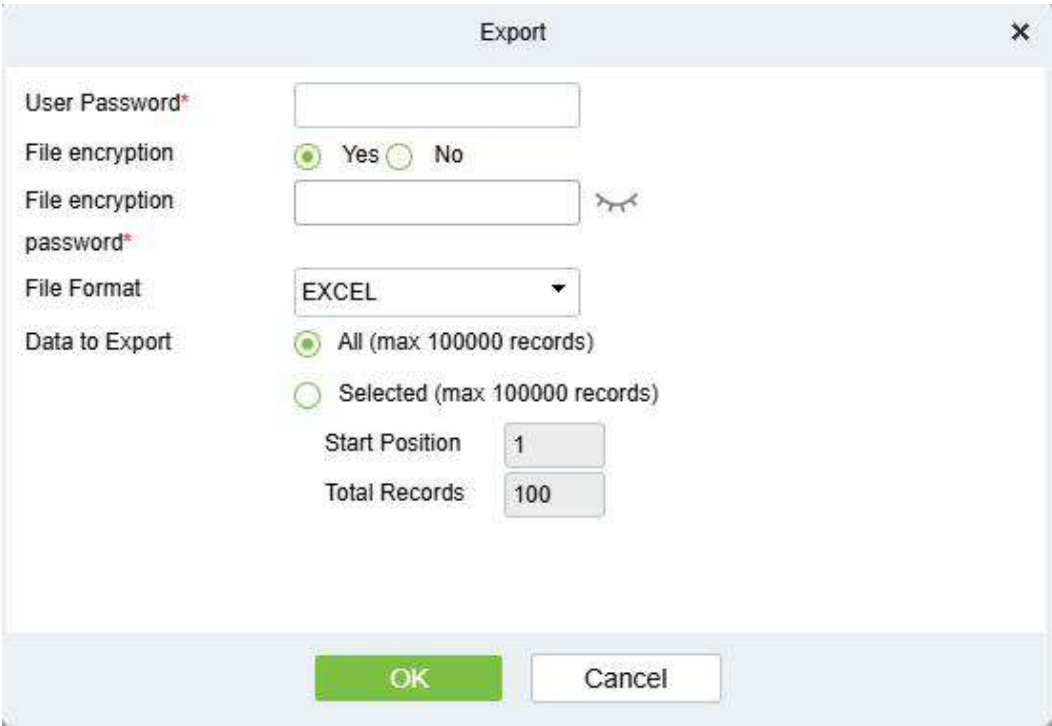


Figure 5- 74 Client Request Log

5.8.2.2 Export

Export selected personnel information in the area; you can export Excel, PDF, CSV format.

An "Export" dialog box with a close button (X) in the top right corner. It contains several fields and options: "User Password*" with an empty text box; "File encryption" with "Yes" selected (radio button) and "No" as an option; another "File encryption password*" with an empty text box and a small eye icon; "File Format" with a dropdown menu showing "EXCEL"; "Data to Export" with "All (max 100000 records)" selected (radio button) and "Selected (max 100000 records)" as an option; "Start Position" with a text box containing "1"; and "Total Records" with a text box containing "100". At the bottom are "OK" and "Cancel" buttons.

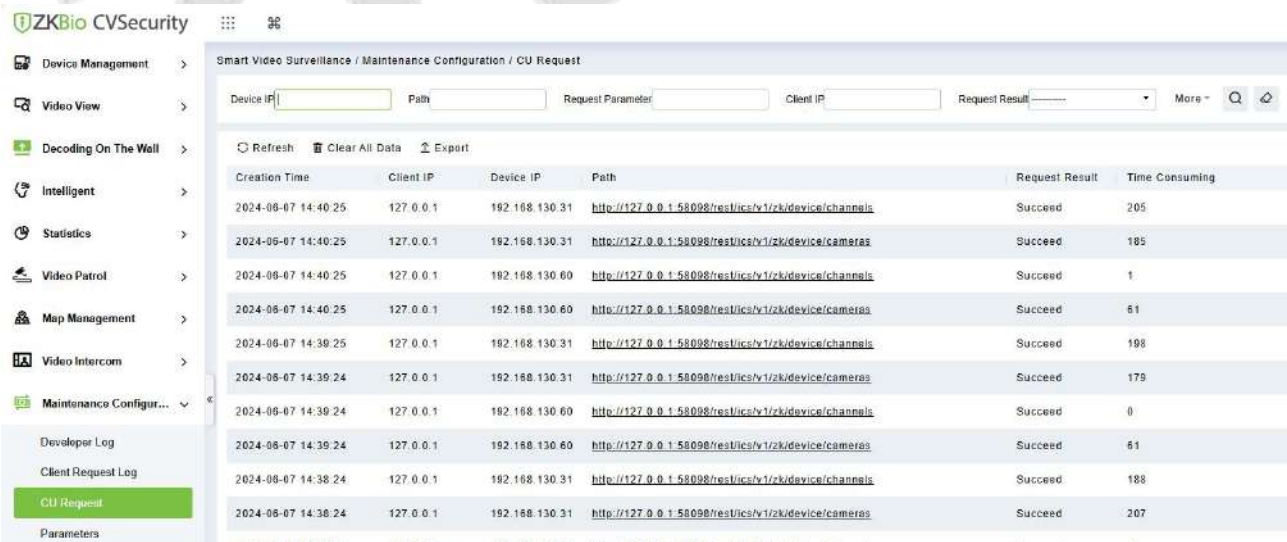
Field	Value
User Password*	
File encryption	Yes
File encryption password*	
File Format	EXCEL
Data to Export	All (max 100000 records)
Start Position	1
Total Records	100

Figure 5- 75 Export

5.8.3 CU Request

5.8.3.1 Clear All Data

Click **Clear All Data** to pop up the prompt and click **OK** to clear all Data Operations.

A screenshot of the "CU Request" interface in the ZKBio CVSecurity application. The left sidebar shows a menu with "CU Request" highlighted. The main area has a title bar "Smart Video Surveillance / Maintenance Configuration / CU Request" and search filters for "Device IP", "Path", "Request Parameter", "Client IP", and "Request Result". Below these are buttons for "Refresh", "Clear All Data", and "Export". A table displays request logs with columns for "Creation Time", "Client IP", "Device IP", "Path", "Request Result", and "Time Consuming".

Creation Time	Client IP	Device IP	Path	Request Result	Time Consuming
2024-06-07 14:40:25	127.0.0.1	192.168.130.31	http://127.0.0.1:58098/rest/ics/v1/zk/device/channels	Succeed	205
2024-06-07 14:40:25	127.0.0.1	192.168.130.31	http://127.0.0.1:58098/rest/ics/v1/zk/device/cameras	Succeed	185
2024-06-07 14:40:25	127.0.0.1	192.168.130.60	http://127.0.0.1:58098/rest/ics/v1/zk/device/channels	Succeed	1
2024-06-07 14:40:25	127.0.0.1	192.168.130.60	http://127.0.0.1:58098/rest/ics/v1/zk/device/cameras	Succeed	61
2024-06-07 14:39:25	127.0.0.1	192.168.130.31	http://127.0.0.1:58098/rest/ics/v1/zk/device/channels	Succeed	198
2024-06-07 14:39:24	127.0.0.1	192.168.130.31	http://127.0.0.1:58098/rest/ics/v1/zk/device/cameras	Succeed	179
2024-06-07 14:39:24	127.0.0.1	192.168.130.60	http://127.0.0.1:58098/rest/ics/v1/zk/device/channels	Succeed	0
2024-06-07 14:39:24	127.0.0.1	192.168.130.60	http://127.0.0.1:58098/rest/ics/v1/zk/device/cameras	Succeed	61
2024-06-07 14:38:24	127.0.0.1	192.168.130.31	http://127.0.0.1:58098/rest/ics/v1/zk/device/channels	Succeed	188
2024-06-07 14:38:24	127.0.0.1	192.168.130.31	http://127.0.0.1:58098/rest/ics/v1/zk/device/cameras	Succeed	207

Figure 5- 76 Clear all Data

5.8.3.2 Export

Export selected personnel information in the area; you can export Excel, PDF, CSV format.

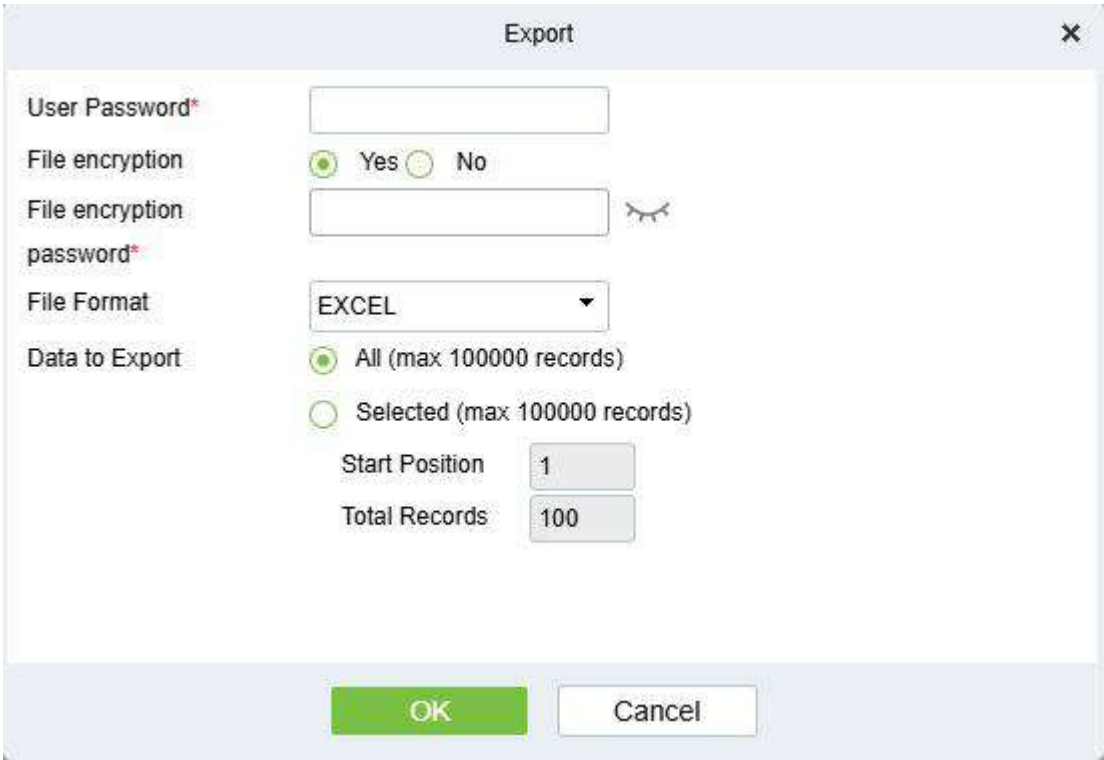


Figure 5- 77 Export

5.8.4 Parameters

Click Intelligent Video > Parameters, then Set up all the settings, then Click OK.

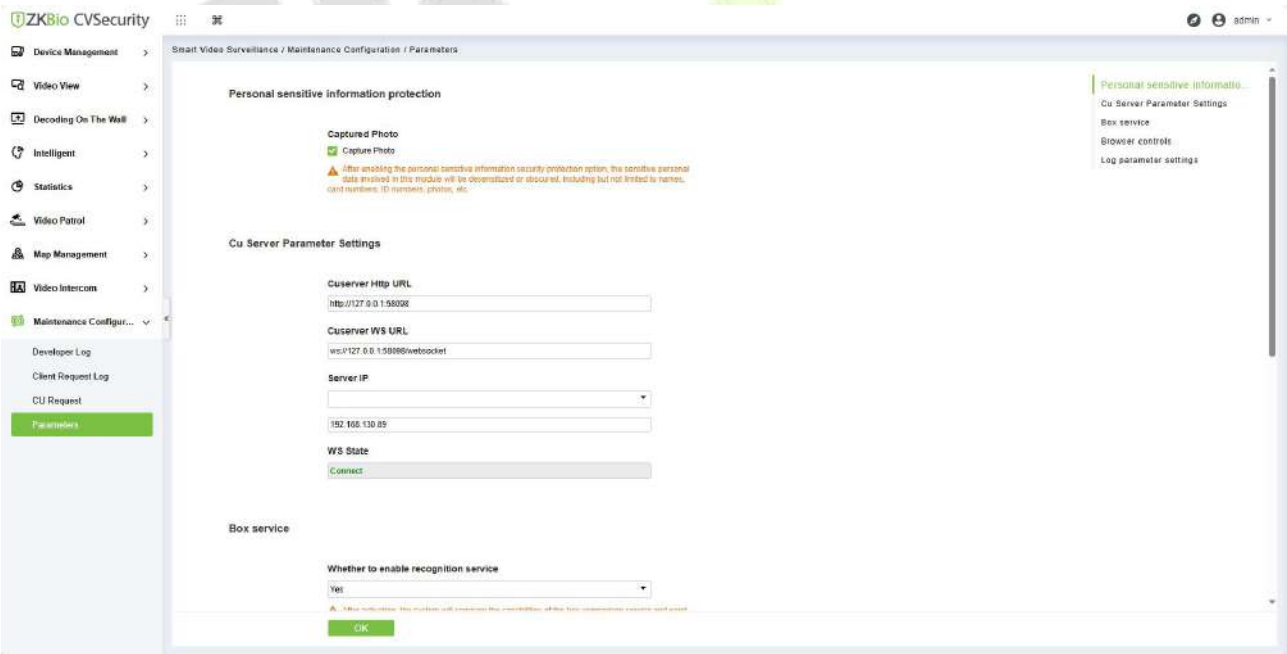


Figure 5- 78 Parameters

Parameters	Instructions
Personal Sensitive Information Protection	After enabling the personal sensitive information security protection option, the sensitive personal data involved in this module will be desensitized or obscured, including but not limited

	to names, card numbers, ID numbers, photos, etc.
CU Server Parameter Settings	Set Up CU server HTTP Url and WS Url and enter Server IP address then can view WS state.
Box service	Whether to receive the alarm of the box and select the terminal to receive the stranger's track.
Browser Controls	Set up the File Storage location and change and restore the path.
Log Parameter Settings	Set Up the debug log and Access log, and select Yes/No.

Table 5- 8 Parameters

5.9 ZKBio Video Client

5.9.1 Installing the Client

● Operating Steps:

Step 1: Click Install package to proceed to the installation process.




Figure 5- 79 Install Package

Step 2: Select the language to use during the installation, and click **OK**.



Figure 5- 80 Select Setup Language

Step 3: Select the additional task 'Install IVS_Client', then click **Next**.

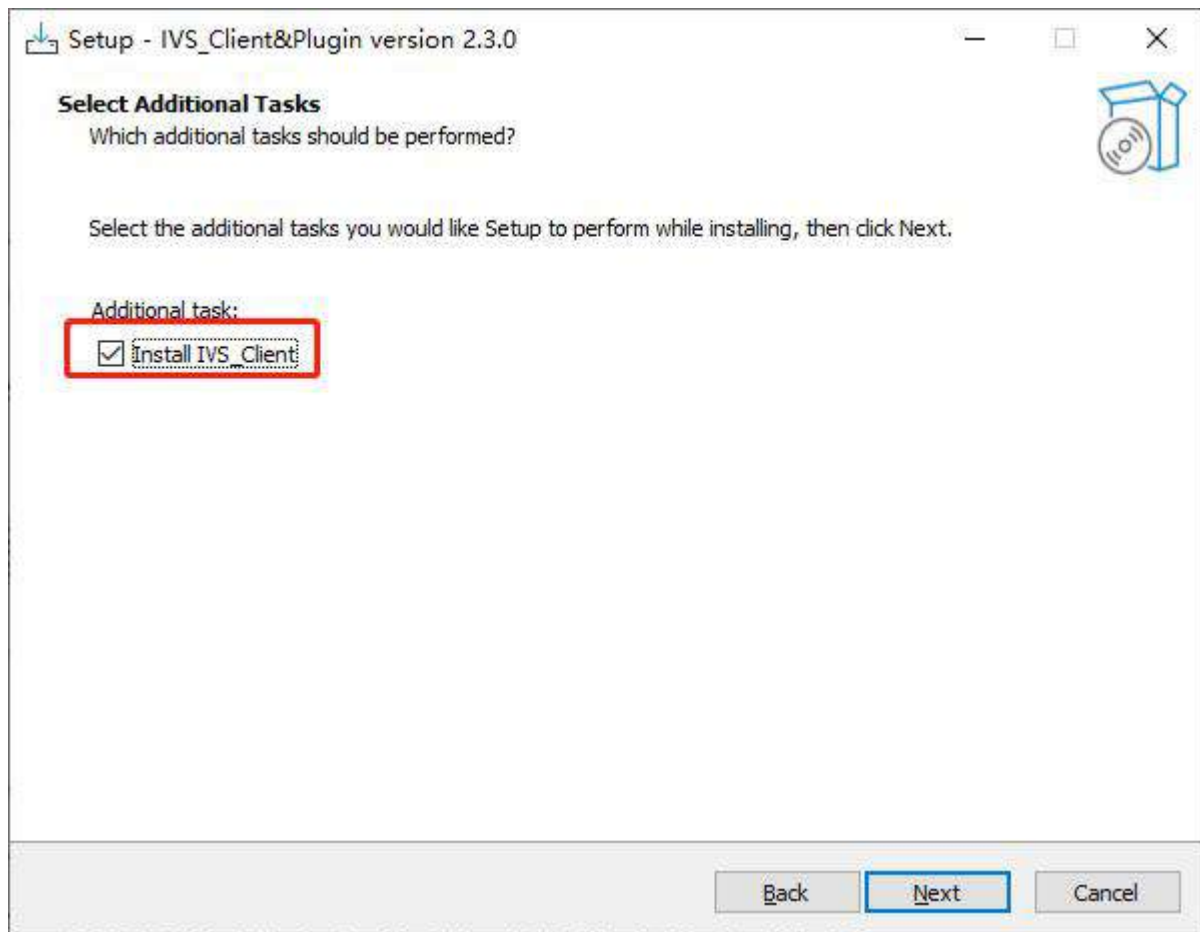


Figure 5- 81 Select Additional Tasks

Step 4: Click **Install** to continue with the installation.

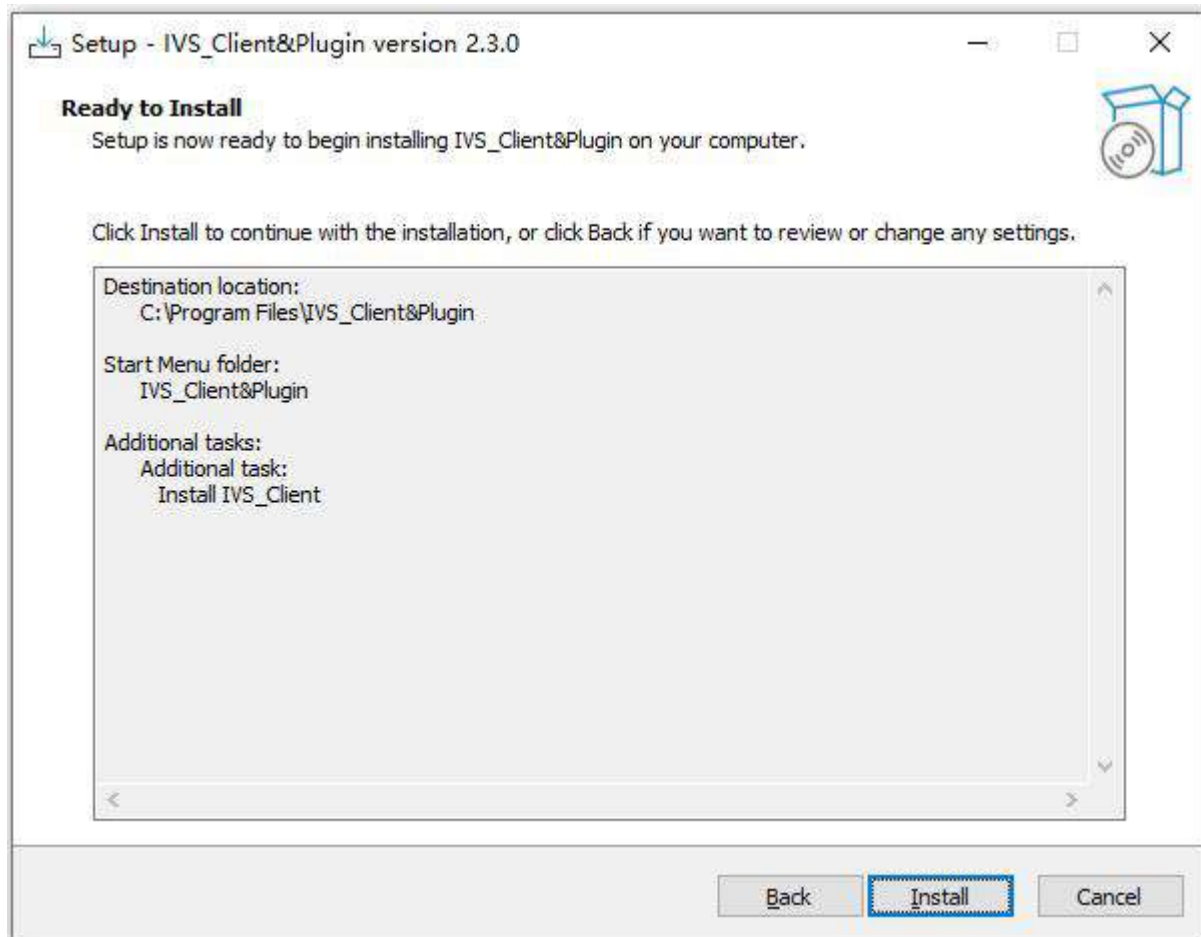


Figure 5- 82 Ready to Install

Step 5: Click **Finish** to complete the installation process.

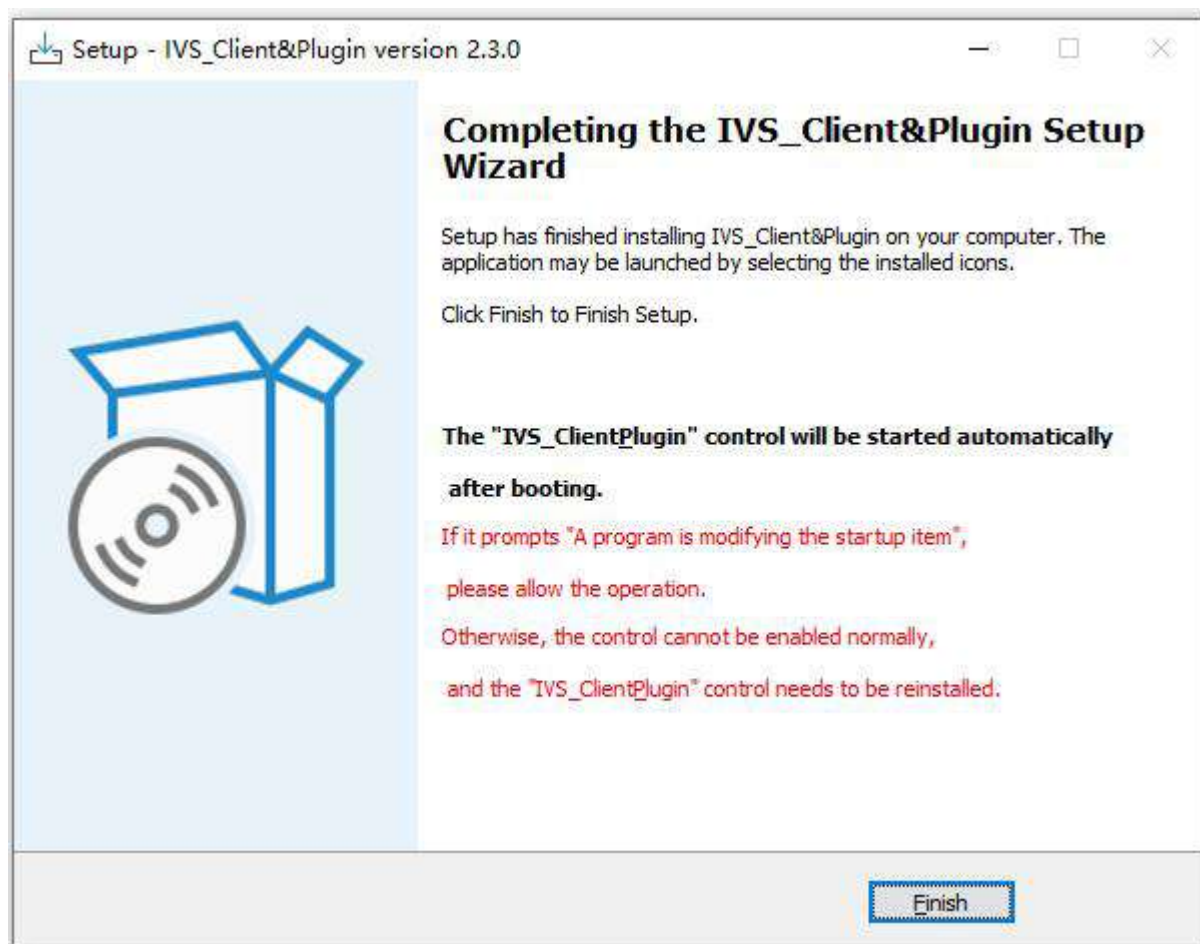


Figure 5- 83 Finish Installation

5.9.2 Configuration And Use

5.9.2.1 Login

●Operating Steps:

Step 1: Click the icon of the client to access the client login page.




Figure 5- 84 ZKBio Video Client

Step 2: Click **Server Setting** and Configure ZKBioCV Security's server IP and port,enable **TLS** and click **OK**.

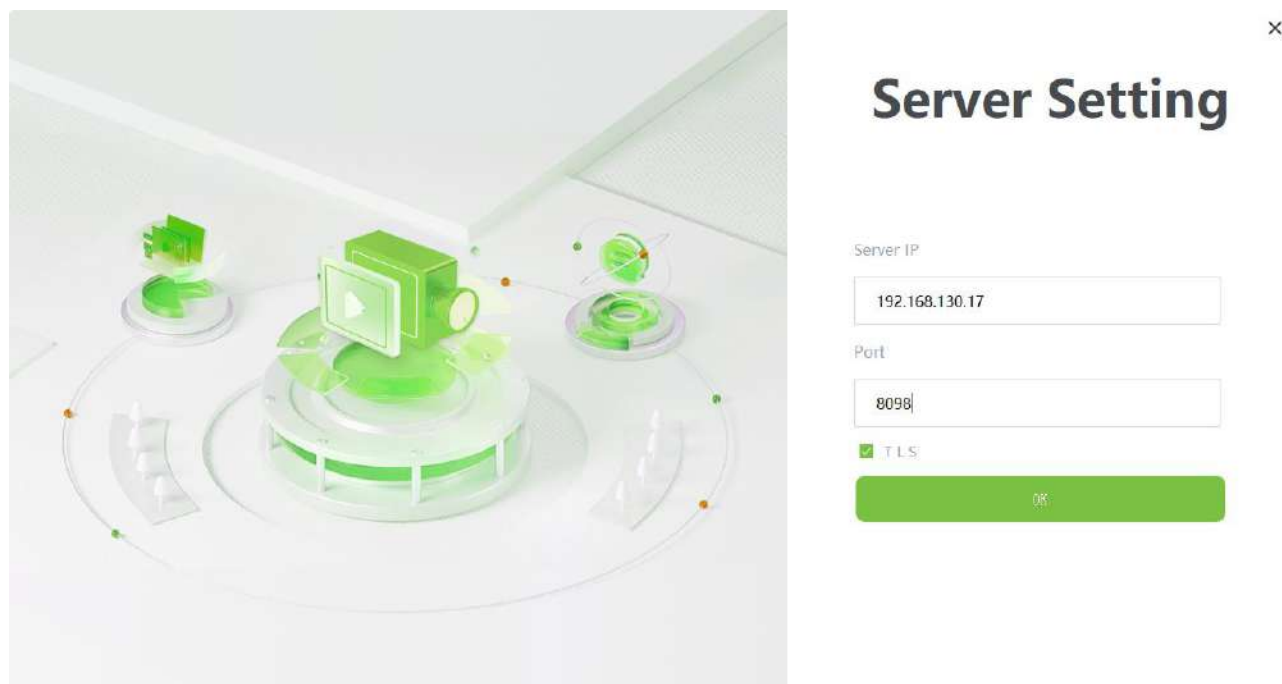


Figure 5- 85 Server Setting

Step 3: Select the language of the client,enter ZKBioCV Security's username and password,then click **Login**.

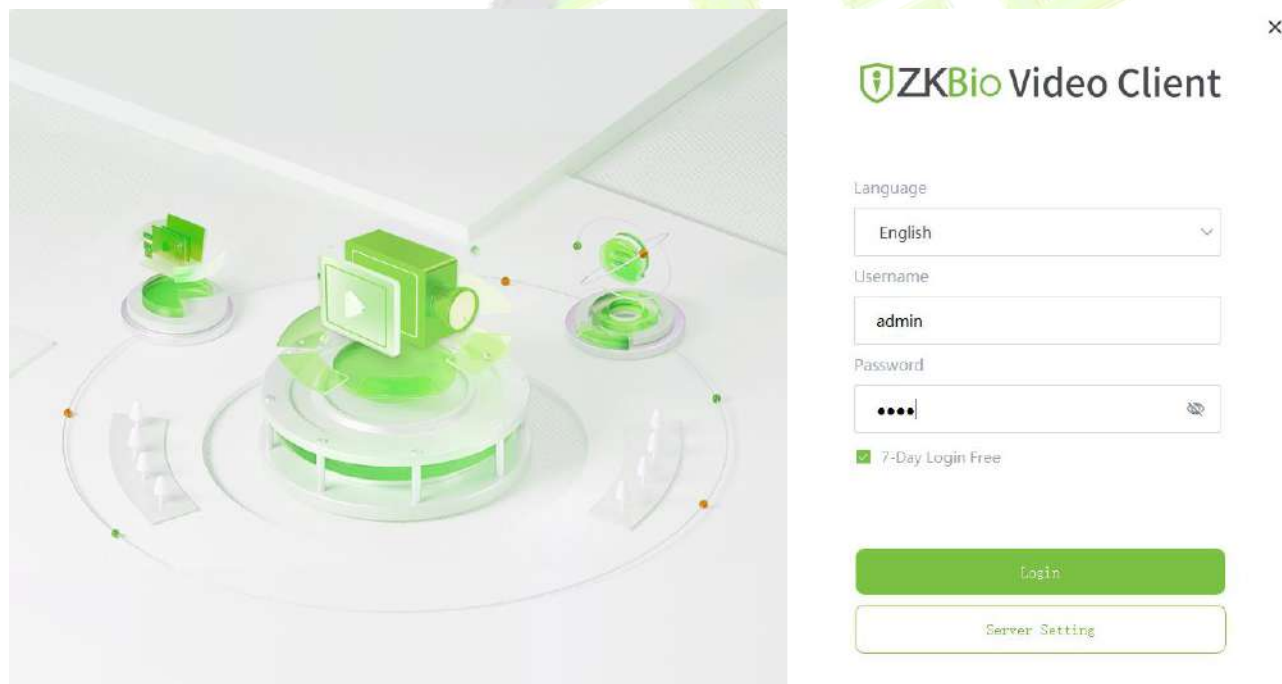


Figure 5- 86 Login

5.9.2.2 Homepage

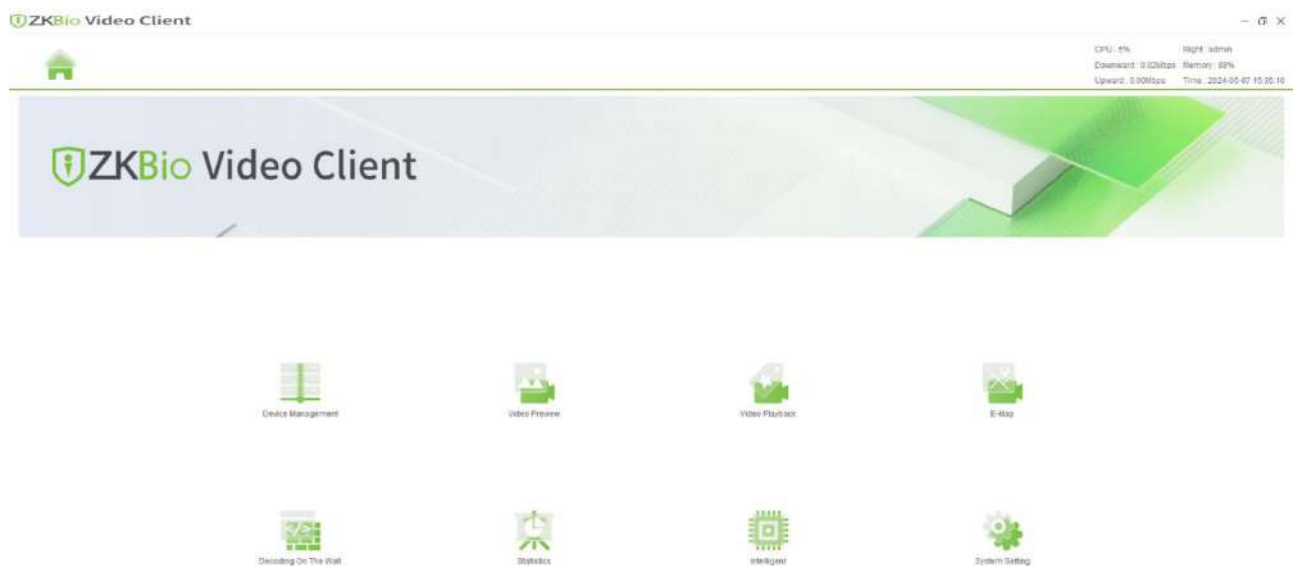


Figure 5- 87 Home Page

5.9.2.3 Device Management

Please refer to [4.1](#) setup.

5.9.2.4 Video Preview

Please refer to [4.2](#) setup.

5.9.2.5 Video Playback

Please refer to [4.2](#) setup.

5.9.2.6 E-Map

Please refer to [4.7](#) setup.

5.9.2.7 Decoding On The Wall

Please refer to [4.3](#) setup.

5.9.2.8 Statistics

Please refer to [4.5](#) setup.

5.9.2.9 Intelligent

Please refer to [4.4](#) setup.

5.9.2.10 System Setting

Please refer to [4.9](#) setup.

6 Time & Attendance Management

6.1 Operation Scenario

Attendance, also known as time management, carries out attendance function operations such as scheduling for employees, and helps enterprises effectively collect attendance data of employees, enter abnormal attendance data, and calculate attendance results.

6.2 Operation Flow

Introduce the configuration process of attendance management business.

The attendance management business configuration process is shown in figure below.

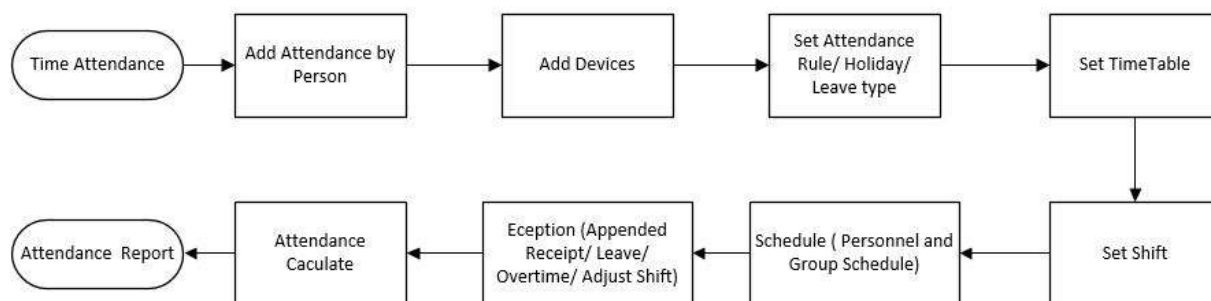


Figure 6- 1 Attendance Configuration Process

6.3 Attendance Management

6.3.1 Personnel Verification Method

Administrators can modify attendance verification methods for staff members.

select multiple staff members, click "**Verification Method Setting**" and choose the appropriate verification method for the selected individuals.

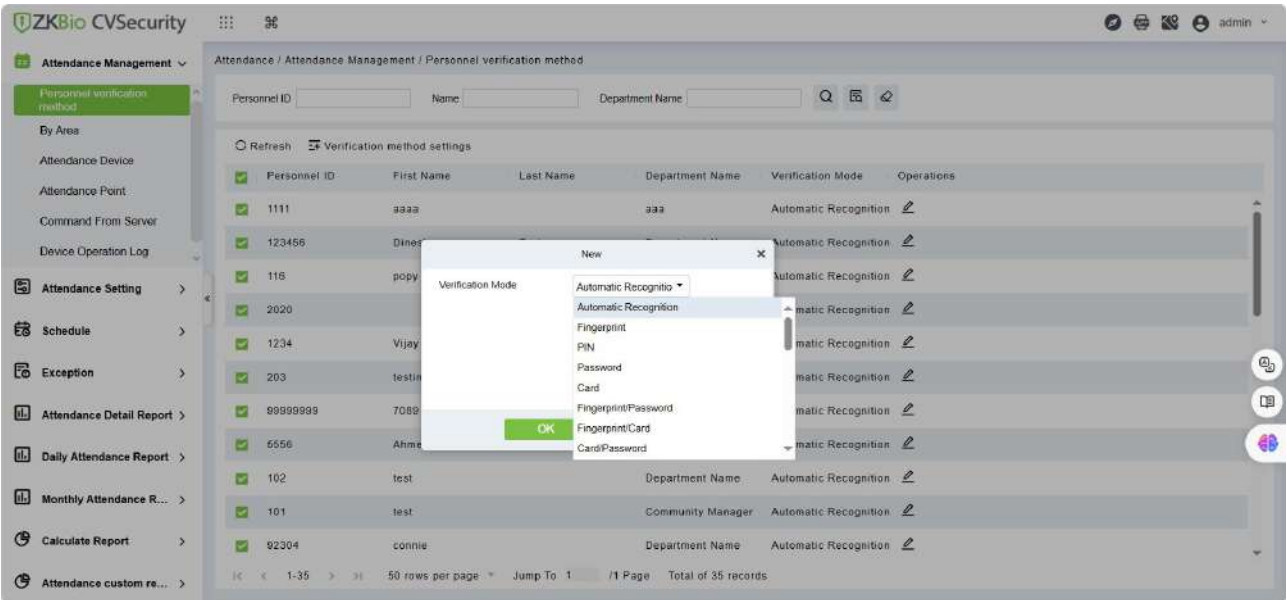


Figure 6- 2 Verification Method

6.3.2 By Area

This action is used to define which persons in the Attendance area can be attended. Only those who are added to the area can be attended.

This paper introduces the configuration Steps of manually setting regional attendance personnel in.

6.3.2.1 Add Area Personnel

● Operating Steps:

Step 1: In **Attendance** module, select "Attendance Management > Setting Personnel by Region", select the region to be set in the list on the left, and then click "Add Regional Personnel" on the right.

Step 2: Add personnel information in the pop-up Add Personnel window, as shown in figure below.

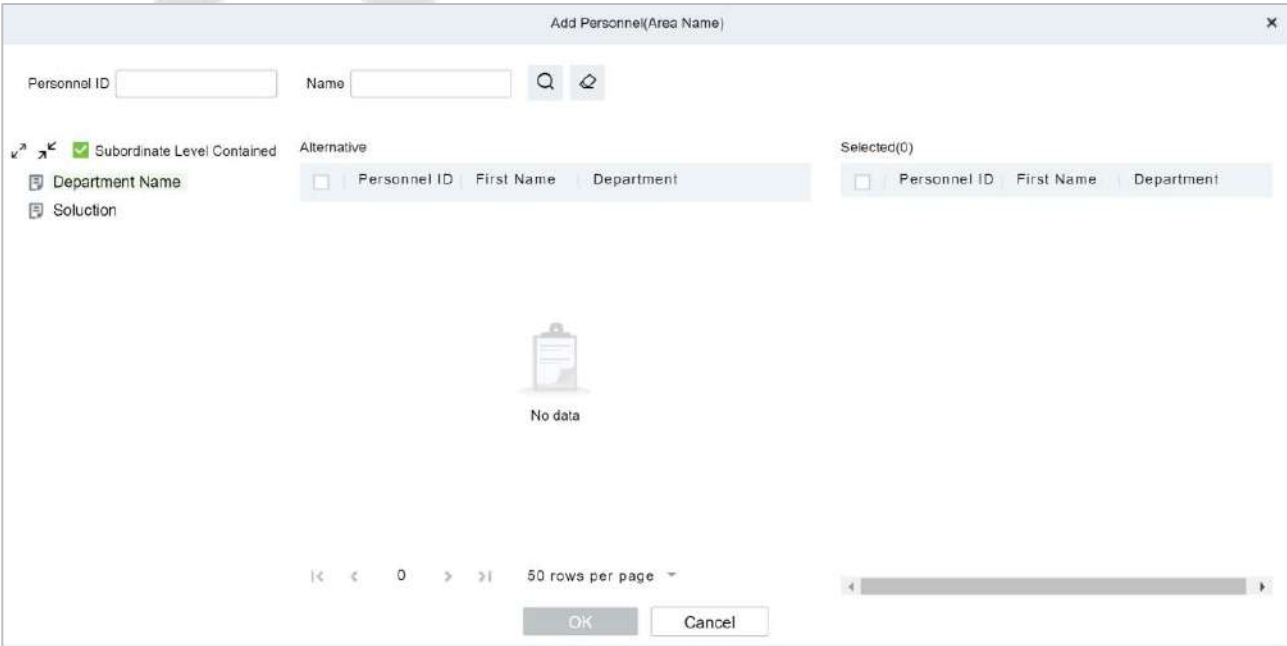


Figure 6- 3 Add by Area

Step 3: Click **OK** to complete the configuration of adding attendance personnel in the area.

6.3.2.2 Delete Area Personnel

Step 1: On the **Area** interface, select the required ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected ID.

Step 3: Click **Delete**, to ensure and delete the selected ID from the list.

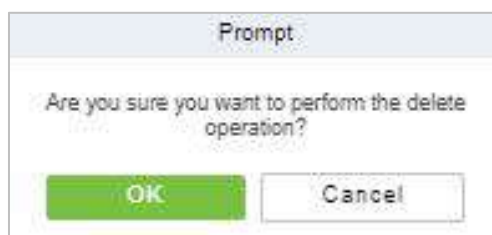


Figure 6- 4 Deleting People

6.3.2.3 Export

You can export all transactions in Excel, PDF, CSV format.

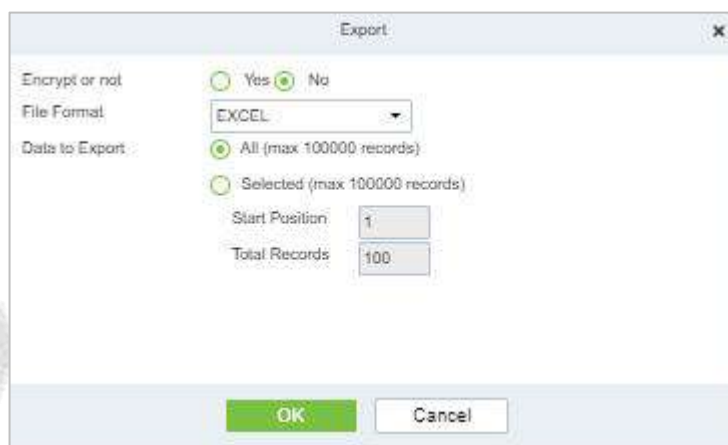


Figure 6- 5 Export People

6.3.2.4 Import

You can import all transactions in Excel, PDF, CSV format.

● Import Area Personnel:

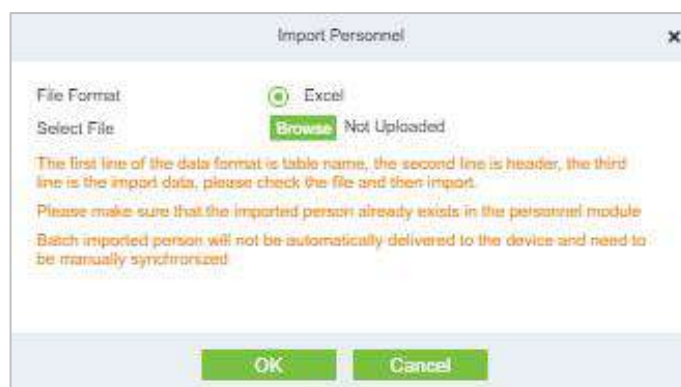


Figure 6- 6 Adding People Import Area

● Import and Delete Area Personnel:

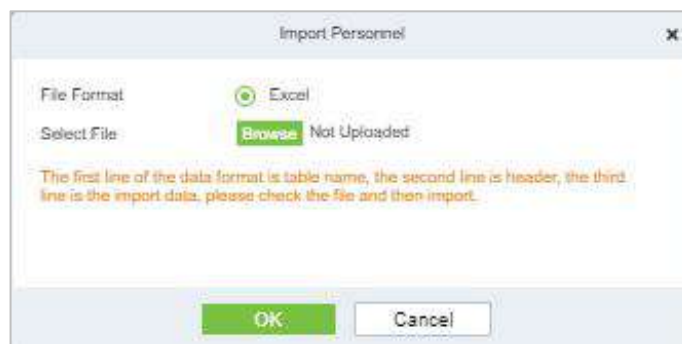


Figure 6- 7 Import Personnel

●Download Import Template:

You can download the entire file in Excel, PDF, CSV format.

6.3.2.5 Private Message

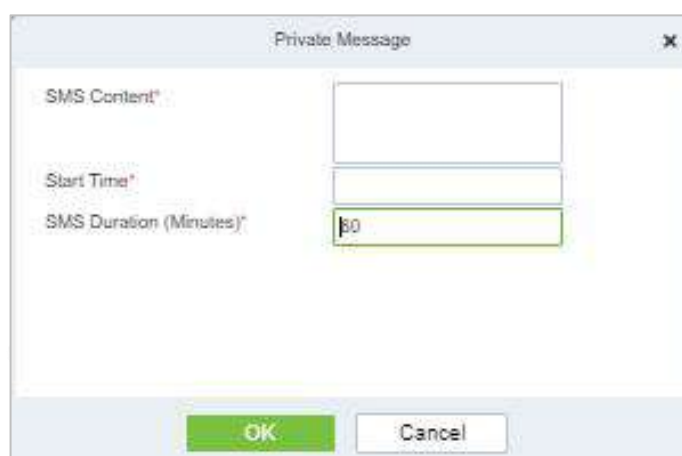


Figure 6- 8 Private Message

6.3.3 Attendance Device

This paper introduces adding attendance device and setting communication parameters of connecting device, including the settings in the system and attendance device. After successful communication, you can view the information of connected devices, monitor the machines remotely, synchronize data and other operations.

Use Attendance Machine as Attendance Data Source.

●Precondition:

You need to set up the communication of the device first:

- 1.Open "Communication Settings > Network Settings" on the attendance device and configure the device network information in the pop-up "Network Settings" window.
- 2.Open "Communication Settings > Cloud Service Settings" and configure cloud server information in the pop-up "Cloud Server Settings" window.

6.3.3.1 Authorized Device

This paper introduces the configuration Steps of adding attendance device in by authorization.

●Operating Steps:

Step 1: In the Attendance module, select **Attendance Management > Attendance Device**, and click "Authorized device".

Step 2: In the **Authorized Devices** window that pops up, add attendance devices, as shown in figure below.

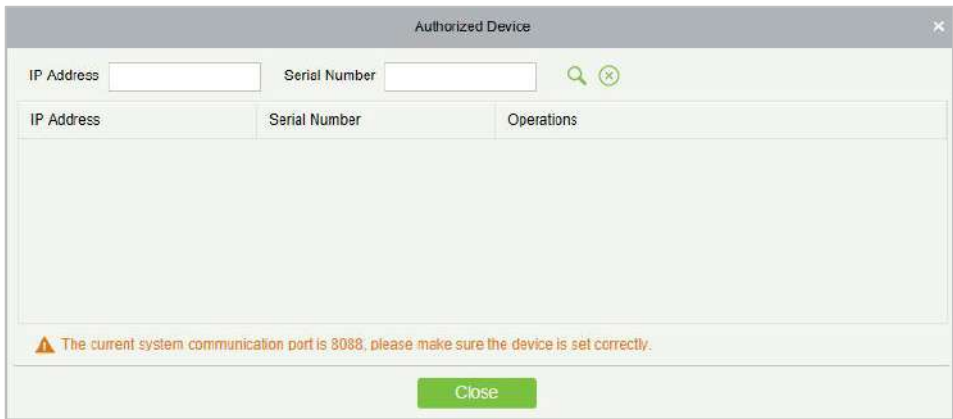


Figure 6- 9 Device Authorization Add Interface

Step 3: In the **Add** window that pops up, configure the device information, as shown in figure below and the key parameters are described in Table 6-1.



Figure 6- 10 Adding Device Setup Interface

Parameter	Description
Attendance Area	The device is divided into regions to realize the management of regional data.
Whether To Register the Machine	If it is not checked, the user data uploaded by the device will not be processed (if the attendance record of the device is checked or not, it will be processed); Check, and the user data uploaded by the device will be processed.

Table 6- 1 Description of Key Parameters.

6.3.3.2 Delete

Step 1: On the **Device** interface, select the required Device Name from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected Device.

Step 3: Click **Delete**, to ensure and delete the selected Device from the list.

6.3.3.3 Device Control

Upgrade Firmware

Tick the device that needs to be upgraded, click **Upgrade firmware** to enter edit interface, then click **Browse** to select firmware upgrade file (named emfw.cfg) provided by Access software, and click **OK** to start upgrading.

Note: The user shall not upgrade firmware without authorization. Contact the distributor before upgrading firmware or upgrade it following the instructions of the distributor. Unauthorized upgrade may affect normal operations.

Reboot Device

It will reboot the selected device.

Public Message

You can set public message in the device so that the device can display short messages on the page (Not all the devices support this function).

Disable/Enable

Select device, click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

Synchronize Software Data to Devices

Synchronize data of the system to the device. Select device, click **Synchronize All Data to Devices** and click **OK** to complete synchronization.

Authorize Area

It can reach certain areas within a period of time after being authenticated.

6.3.3.4 View and Get Information

Get Device Option

It gets the common parameters of the device. For example, get the firmware version after the device is updated.

Get the specified personnel data

Renew the current number of personnel, fingerprints, finger vein and face templates in the device. The final value will be displayed in the device list.

Attendance Data Checking

Select the device to proofread data, select the proofing date, the software issues a command to proofread the software and device attendance data.

Re-Upload Data

To re-upload the data from the device.

View Device Parameters

To view the parameters and the specification of the device.

6.3.3.5 Clear Device Data

Clear unexecuted device commands

Select the device to be cleared. It clears the unexecuted operation command issued by the software in the setting.

Clear the attendance photos

This function will clear all the attendance photo records from the device.

Clear the attendance transactions

Select the device. This function will clear all the attendance data records from the device.

Clear equipment personnel

This function will clear all the equipment personnel records from the device.

6.3.4 Attendance Point

This paper introduces the configuration Steps of using **Access Control /parking/facekiosk/passage/smart video surveillance** machine as attendance data source in.

6.3.4.1 New

●Operating Steps:

Step 1: In the Attendance module, select Attendance Management > Attendance Points, and click New.

Step 2: Add **Access Control** attendance points in the pop-up **Add** window, as shown in figure below. Please refer to Table 6-2 for explanations of key parameters.

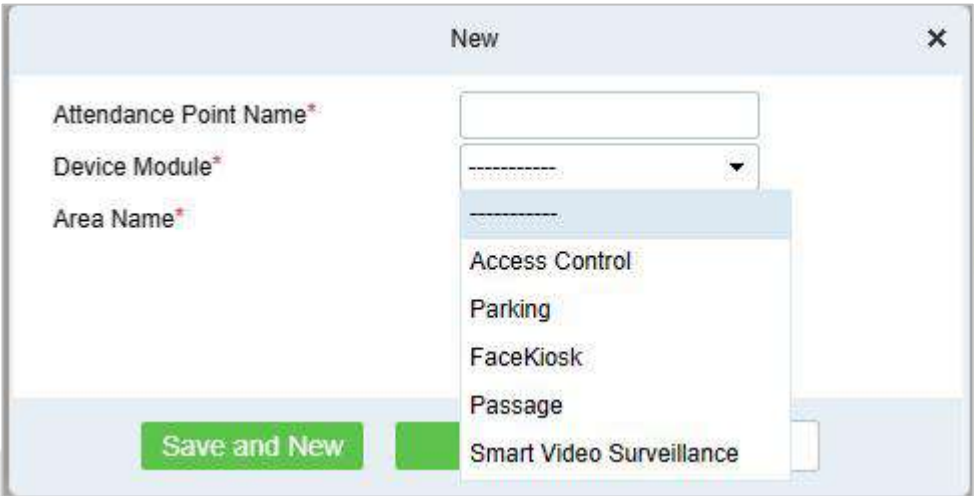


Figure 6- 11 Adding Attendance Point Interface


Parameter	Description
Device Module	Device module for setting attendance record source.
Area Name	The area to which the device belongs.
Door List	You need to set the door corresponding to the attendance record source.

Table 6- 2 Parameter Description

Step 3: Click **OK**.

Step 4: Select "Detailed Report > Original Record Table" and click Synchronous Attendance Point Record.

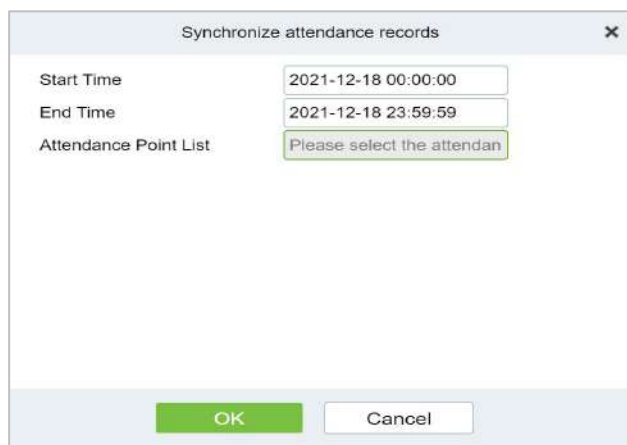Step 5: Select the time node and attendance point to be synchronized in the pop-up **Synchronize Attendance Point Record** window, as shown in figure below.



A dialog box titled "Synchronize attendance records" with a close button (X) in the top right corner. It contains three input fields: "Start Time" with the value "2021-12-18 00:00:00", "End Time" with the value "2021-12-18 23:59:59", and "Attendance Point List" with the placeholder text "Please select the attendan". At the bottom, there are two buttons: "OK" (green) and "Cancel" (white).

Figure 6- 12 Record of Synchronized Attendance Points

Step 6: Click **OK**.

6.3.4.2 Export

You can export all transactions in Excel, PDF, CSV format.

6.3.4.3 Delete

Step 1: On the **Attendance Point** interface, select the required Attendance Point Name from the list.

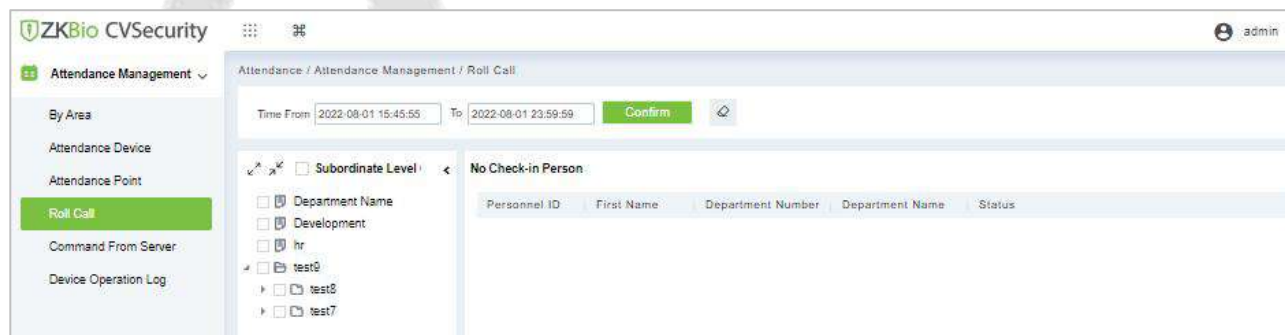
Step 2: Click **Delete** or click on the  icon to delete the selected Attendance Point.

Step 3: Click **Delete**, to ensure and delete the selected Attendance Point from the list.

6.3.5 Roll Call

The procedure of identifying the availability by calling out a list of names.

Note: To use this feature, please go to Attendance Setting -> Attendance Rules -> Enable Real Time Roll Call first.



The ZKBio CVSecurity Roll Call interface. The top bar shows the logo and user "admin". The left sidebar has "Attendance Management" expanded, with "Roll Call" selected. The main area shows "Attendance / Attendance Management / Roll Call". It includes a "Time From" field (2022-08-01 15:45:55) and a "To" field (2022-08-01 23:59:59) with a "Confirm" button. Below this, there's a "Subordinate Level" section with checkboxes for "Department Name", "Development", "hr", "test8", "test6", and "test7". A "No Check-in Person" section contains a table with columns: Personnel ID, First Name, Department Number, Department Name, and Status. The table is currently empty.

Figure 6- 13 Roll Call

6.3.6 Command from Server

6.3.6.1 Clear Command List

Step 1: You can clear command as required. Click **Clear Command** after selecting the corresponding ID.

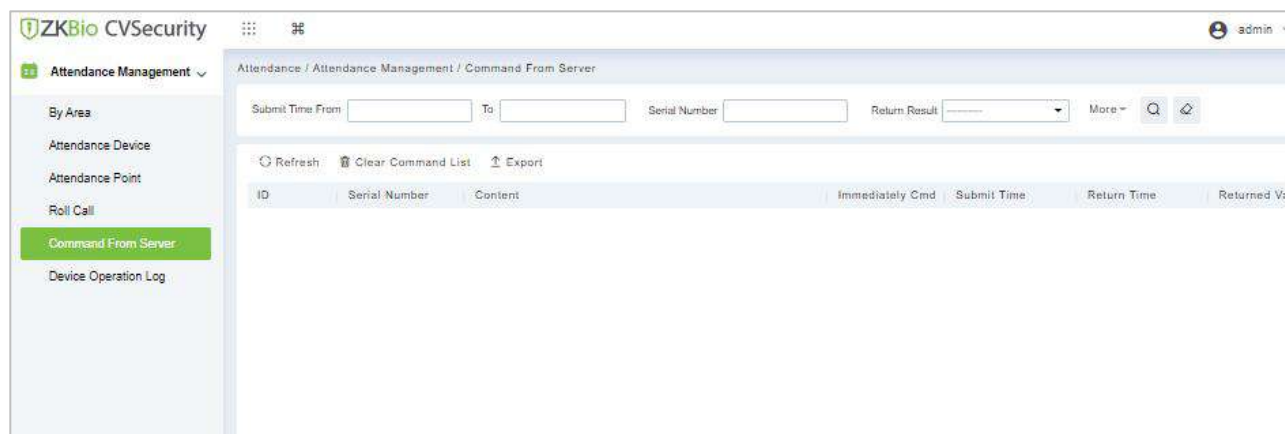


Figure 6- 14 Roll Call Clear Command List

6.3.6.2 Export

You can export all transactions in Excel, PDF, CSV format.

6.3.7 Device Operation Log

For communication between the system and device, data uploading, configuration downloading, device and system parameters shall be set. Users can edit access controllers within relevant levels in the current system; users can only add or delete devices in Device Management if needed.

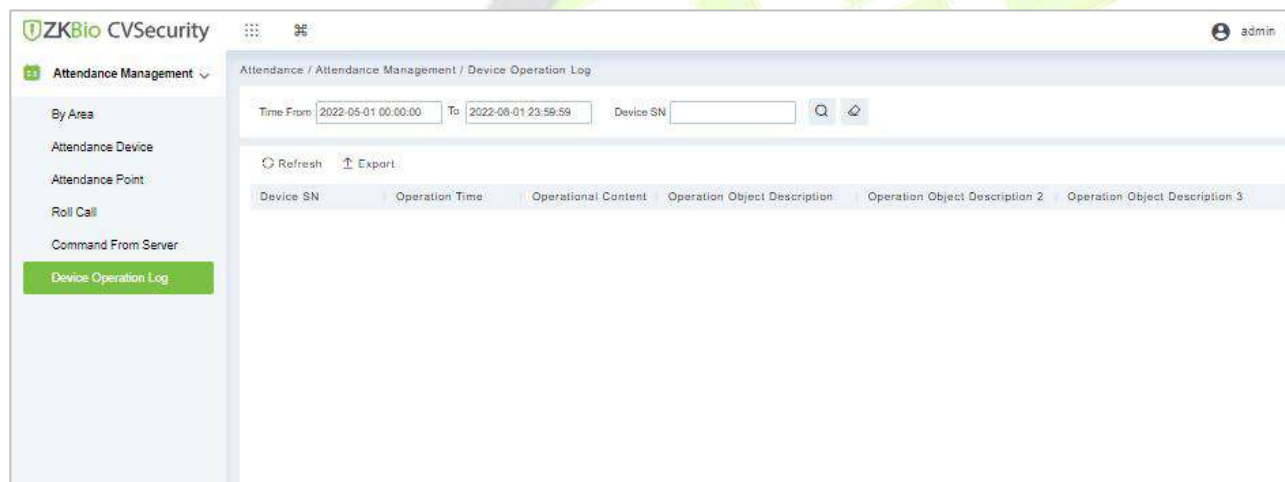


Figure 6- 15 Device operation Log

6.3.7.1 Export

You can export all transactions in Excel, PDF, CSV format.

6.4 Attendance Setting

Attendance settings affect attendance results, is the core of attendance calculation logic, including attendance rules settings, holiday settings, fake settings.

6.4.1 Attendance Rule Setting

Because the attendance system is different in each company, it is necessary to manually set attendance rules to ensure the accuracy of the final attendance calculation. The setting of attendance rules is the main way to reflect the attendance system of enterprises.

This paper introduces the configuration Steps of attendance rules in.

6.4.1.1 Basic Rule Setting

●Operating Steps:

Step 1: In the Attendance module, select Attendance Settings > Attendance Rules.

Step 2: In the Attendance Rule interface, fill in the attendance rules as required, as shown in figure below, and the basic rule parameter description is shown in Table 6-3.

The screenshot displays the 'Basic Rule Setting' window within the 'Attendance / Attendance Setting / Attendance Rules' path. On the left, a sidebar menu lists 'Timetable', 'Shift', 'Personnel Schedule', 'Group Schedule', and 'Schedule Details'. The main area contains several settings: 'Check-In Rule' set to 'The Earliest Rule', 'Check-Out Rule' set to 'The Latest Rule', 'Attendance calculation result for cross-day shift' set to 'First Day', 'Overtime Statistics' set to 'Yes', 'Late and Early Leave Counted as Absent' set to 'No', 'Intelligent Matching Shift Rule' set to 'Least Abnormal', and 'Missing Check-In count as' set to 'Absent' with a value of '0' minutes. An 'OK' button is located at the bottom left. On the right, a 'Basic Rule Setting' sidebar lists 'Non-Leave Calculation Setting', 'Annual Leave Balance Setting', 'Real Time Roll Call Setting', and 'Employee Self-Service Login'.

Figure 6- 16 Attendance Rules

6.4.1.2 Non-Leave Calculation Setting

●Operating Steps:

Step 1: In the Attendance module, select Attendance Settings > Attendance Rules>Non-Leave Calculation Setting.

Step 2: In the Attendance Rule interface, fill in the attendance rules as required, as shown in figure below, and the Non-Leave Calculation description is shown in Table 6-3.

Non-Leave Calculation Setting

No Check-In
Overtime
Not Scheduled
Adjust Shift
Rest Day
Adjust Rest
Holiday

Minimum Unit*
1minute

Rounding Control*
Up (Carry)

Report Display Symbol*
√

Figure 6- 17 Attendance Rules Settings

6.4.1.3 Annual Leave Balance Setting

●Operating Steps:

Step 1: In the Attendance module, select **Attendance Settings > Attendance Rules>Annual Leave Balance Setting**.

Step 2: In the **Attendance Rule** interface, fill in the attendance rules as required, as shown in figure below, and the Annual Leave Balance description is shown in Table 6-3.

Annual Leave Balance Setting

⚠ To use the annual leave balance function, you need to set the hire date for each employee; when the hire date is not set, the remaining annual leave of the staff's annual leave balance table is displayed as empty.

⚠ If the current date is greater than the clearing issue date, this modification will take effect the following year; if the current date is less than the clearing issue date, when the clearing issue date is reached, it will be cleared and the annual leave will be reissued.

Annual Leave Clearing and Issuing Date

Every year1Month1Day

Calculate According to Work Time Ratio

☐ Down (Discard)

☒ rounding

☐ Up (Carry)

Annual Leave Rule ?

Working Years ≤1Year, Yes1Days of Annual Leave

1YearWorking Years ≤2Year, Yes5Days of Annual Leave

Working Years >2Year, Yes5Days of Annual Leave

Figure 6- 18 Annual Leave balance Setting

6.4.1.4 Real Time Roll Call Setting

●Operating Steps:

Step 1: In the Attendance module, select **Attendance Settings > Attendance Rules>Real Time Roll Call Setting**.

Step 2: In the Attendance Rule interface, fill in the attendance rules as required, as shown in figure below, and the Real Time Roll Call description is shown in Table 6-3.



Figure 6- 19 Roll Call Real Time

6.4.1.5 Employee Self-Service Login

●Operating Steps:

Step 1: In the Attendance module, select Attendance Settings > Attendance Rules>Employee Self Service Login Setting.

Step 2: In the Attendance Rule interface, fill in the attendance rules as required, as shown in figure below, and the Employee Self Service Login description is shown in Table 6-3.



Figure 6- 20 Roll Call Real Time

Parameter	Specific Parameters	Description
Basic Rule	Work check-in and card collection rules	<ul style="list-style-type: none"> The earliest (by default, the first punch-in record is taken within the valid card taking range) Nearby (take the clock-in record closest to working hours within the valid card-taking range).
	Rules for sign-out and card collection after get off work	<ul style="list-style-type: none"> Latest (by default, the last punch-in record is taken within the valid card taking range) Nearby (take the clock-in record closest to the attendance checking time within the valid card-taking range).
	The shortest attendance period should be greater than (10 minutes)	120 (default); Range: 10 to 999; Required
	The longest attendance period should be less than (1440 minutes)	600 (default); Range: 10 to 1440; Required
	The shift time period spans days, and the attendance calculation results	<ul style="list-style-type: none"> On the first day, if there is a cross-day, count the working hours in the effective shift on the second day to the first day. On the second day, if there is a cross-day, the working

Parameter	Specific Parameters		Description
			hours in the effective shift on the first day are counted to the second day.
	Being late and leaving early is absenteeism		<ul style="list-style-type: none"> • No (default) • If yes, there are cases of being late and leaving early, and this period is recorded as absenteeism.
	Statistical overtime		<ul style="list-style-type: none"> • Yes (default) • No; If the first switch of overtime statistics is set to No, overtime will not be calculated.
	Minimum overtime time per time (minutes)		This parameter is applied to overtime rule duration statistics. If overtime duration is less than the set minimum overtime duration, it will not be reflected in attendance statistics.
	Exact number of decimal points		1 (default), 2.
	Failure to sign in is recorded as		<p>Three ways:</p> <ul style="list-style-type: none"> • Absence • Be late • Incomplete <p>Description:</p> <ul style="list-style-type: none"> • When you are late, you should set the number of minutes you are late. • Absence and incompleteness are not valid attendance, but absence is absenteeism and incompleteness is absenteeism. Statistics attendance by setting basic rules in monthly detailed reports and other related reports.
Non-Pseudo Class Calculation Settings	Set up various states of non-fake classes (including	Minimum unit	Calculate the smallest unit of this arix
		Rounding	<ul style="list-style-type: none"> • Down (discard): discard the decimal part, as long as the

Parameter	Specific Parameters		Description	
	being late, leaving early, not signing in, etc.)	control	integer. <ul style="list-style-type: none"> • Rounding: If the first decimal place is greater than 5, the integer will be added with 1, otherwise, the integer will be taken. • Up (carry): With decimal, discard decimal, integer plus 1 	
		Report presentation symbol	Symbols for associated report presentation	
Setting of Annual Leave Balance	Annual leave cleared and issued date		Set the annual leave clearing date	<p>Description</p> <ul style="list-style-type: none"> • Using the annual leave balance function requires setting the entry time for each person; When the induction time is not set, the remaining annual leave in the personnel annual leave balance table is displayed as blank. • If the current date is greater than the clearing and issuing date, the revised content will take effect the following year; If the current date is less than the zero-clearing issue date, the annual leave will be cleared and reissued when the zero-clearing issue date is reached. <p>For example</p> <p>Sam San joined the company on September 1 last year</p> <p>Setting of annual leave balance</p> <p>The clearing and issuing date is January 1 of each year; According to the proportion of work rounded calculation; There are 3 days" annual leave when the length of service is less than or equal to 1 year, and 5 days" annual leave when the length of service is less than or equal to 3 years</p> <p>Annual leave entitlement calculation</p> <p>It enjoyed $4/12 \times 3 = 1.0$ days from September 01 to December 31 last year</p> <p>This year's 01-01 to 12-31 enjoys 4.0 days (this year's 01-01 to 08-31 enjoys $8/12 \times 3 = 2.0$ days + this year's 09-01</p>
	Calculated according to the proportion of working hours		<p>There are three ways to calculate the proportional duration:</p> <ul style="list-style-type: none"> • Down (discard): discard the decimal part, as long as the integer. • Rounding: If the first decimal place is greater than 5, the integer will be added with 1, otherwise, the integer will be taken. • Up (carry): With decimal, discard decimal, integer plus 1 	
	Rules of annual leave duration		Set annual leave days according to length of service, which can be added by symbols	

Parameter	Specific Parameters	Description	
			to 12-31 enjoys 4/12 x5 ≈ 2.0 days)
Real-Time Roll Call Setting		Turn on the real-time roll call function, and the sign-in status of personnel will be displayed in the "sign-in Table" under the report.	
Employee Self Service Login		The frequency of setting attendance points to obtain records includes (10 seconds/time, 20 seconds/time, 30 seconds/time, 1 minute/time ~ 8 minutes/time).	

Table 6- 3 Description of Basic Rule Parameters

6.4.2 Holidays

This paper introduces the configuration Steps of manually adding holidays in.

6.4.2.1 New

● Operating Steps:

Step 1: In the **Attendance** module, select "Attendance Settings > Holidays" and click **New**.

Step 2: Configure holiday information in the pop-up **Add** window.

Figure 6- 21 New Holidays

Step 3: Click OK.

6.4.2.2 Delete

Step 1: On the **Holiday** interface, select the required Holiday Name from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected Holiday list.

Step 3: Click **Delete**, to ensure and delete the selected Holiday from the list.

6.4.3 Leave Type

This paper introduces the configuration Steps of adding Leave Type.

6.4.3.1 New

●Operating Steps:

Step 1: In the Attendance module, select **Attendance Settings > Leave Type** and click Add.

Step 2: Configure fake information in the pop-up **Add** window, as shown in figure below. Please refer to Table 6-4 for explanations of key parameters.

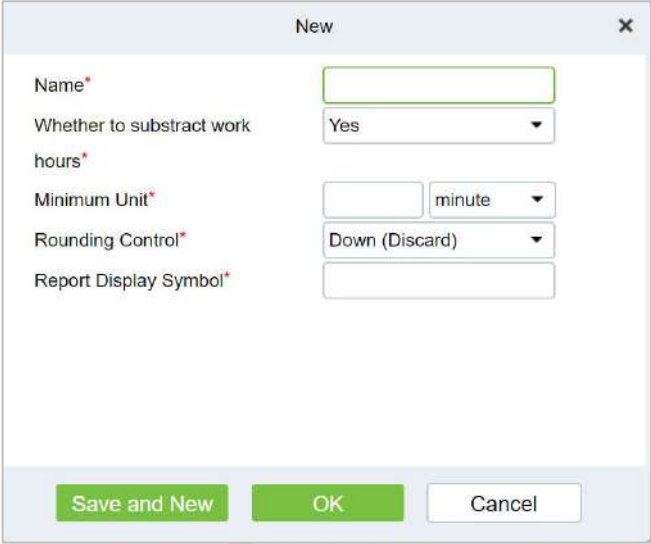


Figure 6- 22 New Leave Type

Parameter	Description
Name	Character length 30, required.
Whether To Deduct Working Hours	Whether the working hours should be deducted for setting this kind of leave, for example, maternity leave/marriage leave/annual leave are all legal holidays, and the working hours are not deducted.
Minimum Unit	Calculate the smallest unit for this alias.
Rounding Control	Down (discard): discard the decimal part, as long as the integer; Rounding: If the first decimal place is greater than 5, the integer will be added with 1, otherwise, the integer will be taken; Up (carry): There are decimals, decimals are discarded, integers are added by 1.
Report Presentation Symbol	Symbols for the presentation of the associated report.

Table 6- 4 Description of Key Parameters

Step 3: Click **OK**.

6.4.3.2 Delete

Step 1: In the **Leave Type** interface, select the required Leave from the list.

Step 2: Click **Delete** or click on the  icon.to delete the required Leave from the list.

Step 3: Click **Delete**, to ensure and delete the selected Leave from the list.

6.4.4 Automatic Report

The Automatic reporting feature helps you to send the reports to the designated person at the specified time.

6.4.4.1 New

● Operating Steps:

Step 1: In the Attendance module, select **Attendance Settings > Automatic Report** and click New.

Step 2: Click to **New** to configure all the details.

Figure 6- 23 Automatic Report

6.4.4.2 Delete

Step 1: In the **Automatic Report** interface, select the required File from the list.

Step 2: Click **Delete** or click on the  icon to delete the required File from the list.

Step 3: Click **Delete**, to ensure and delete the selected File from the list.

6.4.4.3 Enable/Disabled

Select device, click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

6.4.5 Process Settings

To achieve the approval function, it is necessary to maintain the relationship between positions at all levels in the personnel module and assign them to the corresponding personnel. Then setup the approval process for different process types and different positions.

6.4.5.1 New

● Operating Steps:

Step 1: In the Attendance module, select **Attendance Settings > Process Settings** and click New.

Step 2: Click to **New** to configure all the details.

The screenshot shows a 'New' configuration window. At the top, there are four input fields: 'Number' (text box), 'Name' (text box), 'Choose position' (dropdown menu), and 'Flow Type' (dropdown menu with 'Appended Log' selected). Below these is an 'Inform the person' text box and a 'Clear' button. A horizontal separator line is below. Under the separator, there is a 'New' button with a plus icon. Below that is a tabbed interface with tabs: 'The name of the no...', 'The a...', 'Position of ...', 'Inform the person', and 'Operations'. The 'Inform the person' tab is active, showing the text 'Directly under the leac' and two icons (a pencil and a trash can). At the bottom of the window are three buttons: 'Save and New' (green), 'OK' (green), and 'Cancel' (white).

Figure 6- 24 Processing Setting

6.4.5.2 Enable/Disabled

Select device, click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

6.5 Regular Shift Setting Schedule

Regular shifts can choose one or more normal time periods to form a regular shift according to laws. Regular shifts are often used in regular occasions, such as office buildings, governments, banks, etc.

6.5.1 Timetable

6.5.1.1 Add Normal Timetable

This paper introduces the configuration Steps of adding normal time period to the regular shift configuration of VAORIDA.

●Operating Steps:

Step 1: In the Attendance module, select **Schedule Management > Time Period** and click Add Normal Time Period.

Step 2: Configure the time period information in the **Add Normal Time** Period window, as shown in figure below. Please refer to Table 6-5 for the explanation of key parameters.

New

Name*

Check-In Time*

09 : 00 (HH:MM)

Check-Out Time*

18 : 00 (HH:MM)

Before going to Work*

60

Check-In is valid within

minutes

Before Going Off Duty*

60

Check-In is valid within

minutes

After Work*

60

Check-In is valid within

minutes

After Work*

60

Check-In is valid within

minutes

Allow Late(Minutes)

0

Allow Early

Leave(Minutes)

0

Must Check-In*

Yes

Must Check-Out*

Yes

Auto Deduct Break Time*

No

Work Time (Minutes)*

540

☐ On Duty

0

Check-In Minutes ago for Overtime , Minimum Overtime Minutes

30

, Limit the maximum

overtime hours

0

☐ Off Duty

0

Start counting overtime minutes later , Minimum Overtime Minutes

30

, Limit the maximum

overtime hours

0

☐ Enable Flexible

Can go to work in advance.

0

minutes

Save and New

OK

Cancel

Figure 6- 25 New Time Period

Parameter	Description
Before/after work, Before/after work	Set the valid range of check-in/check-out for this time period, and the check-in/check-out records outside this range are invalid records. The valid sign-in time after going to work and the valid sign-out time before going off work cannot overlap, which must be filled in.
Minutes allowed to be late/leave early	Refers to how long it is allowed to be late and leave early within the specified time points for going to and from work, and the minutes allowed to be late and leave early must be within the valid time range of sign-in and sign-out before they can take effect.
You must sign in/return	In the selected time range, set whether you must sign in and sign out when going to and from work.
Whether it is deducted between segments	When used for attendance calculation, whether to subtract the number of minutes defined by inter-segment deduction for this time period.
Start counting overtime before/after N minutes from work/work, with the shortest overtime minutes and the maximum overtime hours limited	Select whether to record the verification records before and after work as overtime.

Parameter	Description
Enable flexible hours to work	It refers to the flexible working parameter that people who go to work early can get off work early and people who work at night need to get off work late. When checked, you need to set the number of minutes that can be advanced/delayed, and it must be within the valid sign-in/sign-out time range.

Table 6- 5 Description of Key Parameters

Step 3: Click **OK**.

6.5.1.2 Add Flexible Timetable

●Operating Steps:

Step 1: In the Attendance module, select **Schedule Management > Time Period** and click Add Flexible Timetable.

Step 2: Configure the time period information in the **Add Flexible Timetable** window.

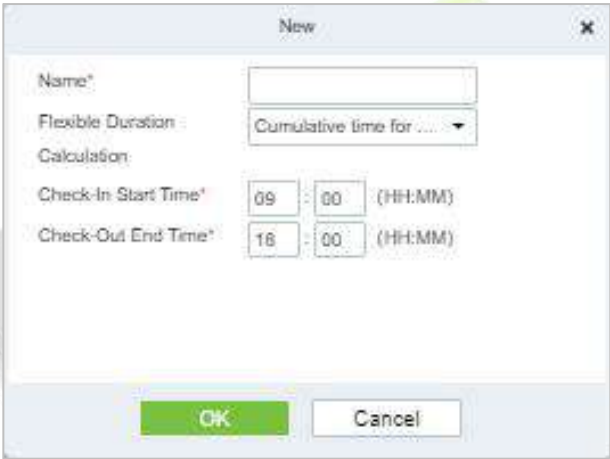



Figure 6- 26 Adding Flexible Time Table

6.5.1.3 Delete

Step 1: In the **Timetable** interface, select the required Type from the list.

Step 2: Click **Delete** or click on the  icon.to delete the required Timetable Type from the list.

Step 3: Click **Delete**, to ensure and delete the selected Type from the list.

6.5.1.4 Add Regular Shift

●Operating Steps:

Step 1: In the Attendance module, select '**Schedule Management > Shift**' and click "Add Regular Shift".

Step 2: Configure shift information in the "Add Regular Shift" window, as shown in figure below. Please refer to Table 6-6 for explanation of key parameters.

Figure 6- 27 New Shift

Parameter	Description
Unit	<p>Set the unit of the cycle, and the default is "day".</p> <p>There are three types of units:</p> <ul style="list-style-type: none"> • Day • Week • Month
Period	<p>Defines the number of cycles of a shift, and the cycle of the shift = cycle number * units.</p> <ul style="list-style-type: none"> • If the unit is "day", the range is 1 to 99. • If the unit is "week", the range is 1 to 15. • If the unit is "month", the range is 1 to 12.
Period starting type	<p>This field is displayed only when the cycle unit is Day,</p> <p>Description</p> <ul style="list-style-type: none"> • It is not displayed when the units are "week" and "month". • There is cycle start date and scheduling start date, and the default is cycle start date. • If you select Scheduling Start Date, the start date when scheduling is the first day of the cycle.
Period start date	<p>This field is displayed only when the cycle start type is Cycle Start Date. Define the start date of the shift, and the date before the start date is not affected by the shift. The default system start date is the current system date.</p>
Type of work	<ul style="list-style-type: none"> • Normal work: This shift is a normal work shift • Overtime on rest days: This shift is overtime on rest days • Overtime on holidays: This shift is overtime on holidays.
Attendance mode	<ul style="list-style-type: none"> • Swipe the card normally according to the shift: the default item of the system, and punch in normally according to the punch in.

Parameter	Description
	<ul style="list-style-type: none"> • Brush a valid card once a day: only need to brush the card once in the swiping interval defined by the time period within one day, even if it is normal to punch in. • Punch-in-free: Setting this shift can avoid punch-in.
Overtime mode	<ul style="list-style-type: none"> • Computer automatic calculation: It is connected with "whether the delay counts overtime" in the time period. When "whether the delay counts overtime" is "no", the delayed overtime is not calculated, and the overtime time of the overtime bill is not calculated at the same time. • Overtime must be applied: delayed overtime is not calculated, only the overtime order shall prevail; When the signing-back time is less than the end time of overtime, the overtime time is not calculated. • Not counting overtime: overtime hours are not counted for delayed overtime or overtime application.

Table 6- 6 Description of Key Parameters

Step 3: Click **OK**.


6.5.1.5 Add Flexible Shift

Step 1: In the shift interface, click **Set Time Period** under the operation bar of the added regular shift, and configure the time period information in the pop-up **Set Time Period** window.

Figure 6- 28 Adding Flexible Shift

6.5.1.6 Delete

Step 1: In the **Shift** interface, select the required Shift Type from the list.

Step 2: Click **Delete** or click on the  icon to delete the required Shift Type from the list.

Step 3: Click **Delete**, to ensure and delete the selected Shift Type from the list.

6.5.1.7 Clear Timetable

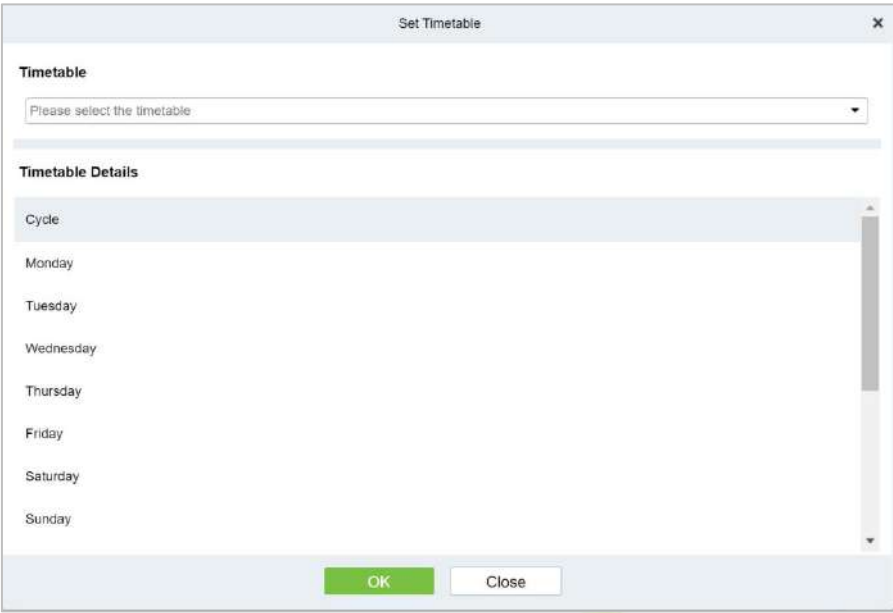


Figure 6- 29 Adding Time Periods

Step 6: Click **OK** to complete the addition of time period, and the specific time period is displayed in the time period details on the right.

6.5.2 Personnel Schedule

Personnel scheduling operations is completely same as group scheduling, but when scheduling personnel, the object of choice is personnel at the top left corner of the interface.

6.5.2.1 Cycle Schedule

Step 1: In the Attendance module, select **Schedule Management > Personnel Schedule** and click Cycle Schedule.

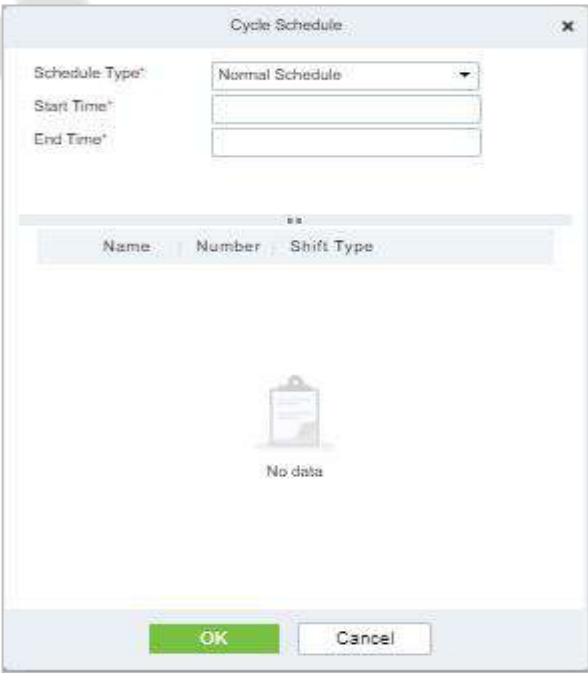


Figure 6- 30 Adding Personnel Schedule

6.5.2.2 Temporary Schedule

Step 1: In the Attendance module, select **Schedule Management > Personnel Schedule** and click Temporary Schedule.

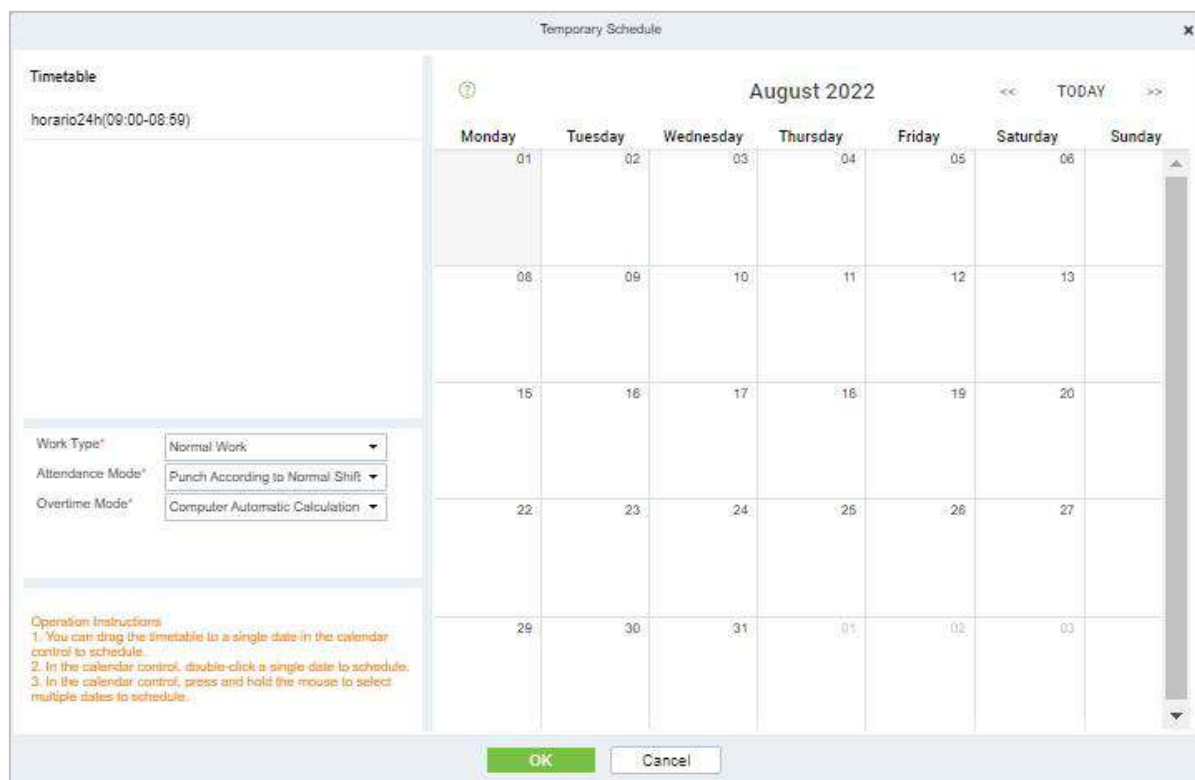


Figure 6- 31 Adding Temporary Schedule

6.5.2.3 Clear Cycle Schedule

Step 1: In the **Attendance** module, select **Schedule Management > Personnel Schedule** and then click on the Personnel ID that you want to delete, and click **Clear Cycle Schedule**.

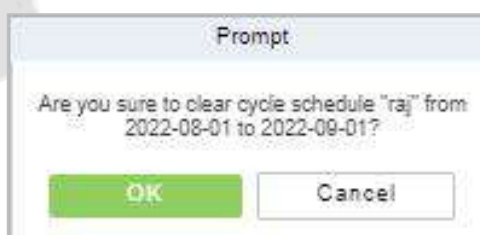


Figure 6- 32 Clear cycle schedule

6.5.2.4 Clear Temporary Schedule

Step 1: In the **Attendance** module, select **Schedule Management > Personnel Schedule** and then click on the Personnel ID that you want to delete, and click **Clear Temporary Schedule**.



Figure 6- 33 Clear Temporary Schedule

6.5.3 Group Schedule

Grouping scheduling means grouping people, and then scheduling people in batches by grouping. This paper introduces the configuration Steps of grouping cycle scheduling in.

6.5.3.1 Edit Personnel for Group

New

Step 1: In the Attendance module, select **Schedule> Group Schedule** and click New.

Step 2: Configure the Schedule Name in the **Group Schedule** interface.

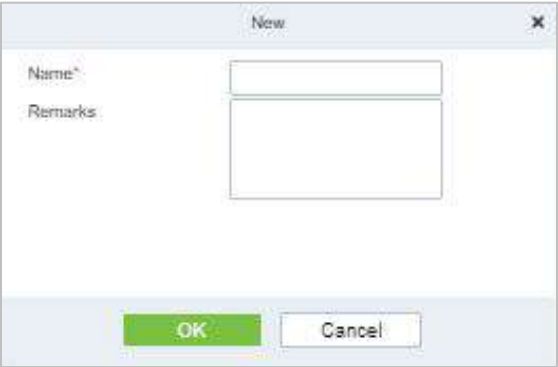


Figure 6- 34 Adding Elastic Time Period


Parameter	Description
Name	Can not contain special symbols, period name can not be duplicated, length is 30 characters, required.
Remarks	Mentioning comments.

Table 6- 7 Description of Key Parameters

Step 3: Click **OK**.

Delete

Step 1: In the **Schedule** interface, select the required Shift Type from the list.


Step 2: Click **Delete** or click on the  icon.to delete the required Shift Type from the list.

Step 3: Click **Delete**, to ensure and delete the selected Shift Type from the list.

6.5.3.2 Browse the Group Personnel

Delete Personnel

Step 1: In the **Schedule** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon.to delete the required Personnel ID from the list.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

Cycle Schedule

Step 1: In the **Attendance** module, select **Scheduling Management > Personnel Scheduling**, check the personnel under the department that needs scheduling or the designated personnel, and click "Periodic Scheduling".

Step 2: Configure scheduling information in the pop-up **Cycle Scheduling** window, as shown in figure below. Please refer to Table 6-8 for parameter description.

Cycle Schedule

Schedule Type*

Normal Schedule

Start Time*

End Time*

	Name	Number	Shift Type
<input type="checkbox"/>	Flexible st 2		Flexible Shift
<input type="checkbox"/>	1	1	Regular Shift

OK

Cancel

Figure 6- 35 Cycle Scheduling

Parameter	Description
Scheduling Type	<ul style="list-style-type: none">• Normal Shift Scheduling: Only one shift can be selected for normal shift scheduling• Intelligent scheduling: Intelligent scheduling can select multiple shifts. Select intelligent scheduling, and the software will automatically judge the most suitable shift according to the punch-in record for attendance calculation.
Start Time/End Time	Set which date segment the schedule works on.
Select Shift	Select the shift to use for scheduling.

Table 6- 8 Description of Key Parameters of Cycle Scheduling

Step 3: Click **OK** to complete the configuration of personnel cycle scheduling.

Temporary Schedule

Step 1: In the **Attendance** module, select '**scheduling Management > Personnel Scheduling**', check the personnel under the department that needs scheduling or the designated personnel, and click "Periodic Scheduling".

Step 2: Configure scheduling information in the pop-up **Temporary Schedule** window, as shown in figure below. Please refer to Table 6-9 for parameter description.

Step 3: Click **OK** to complete the configuration of temporary personnel scheduling

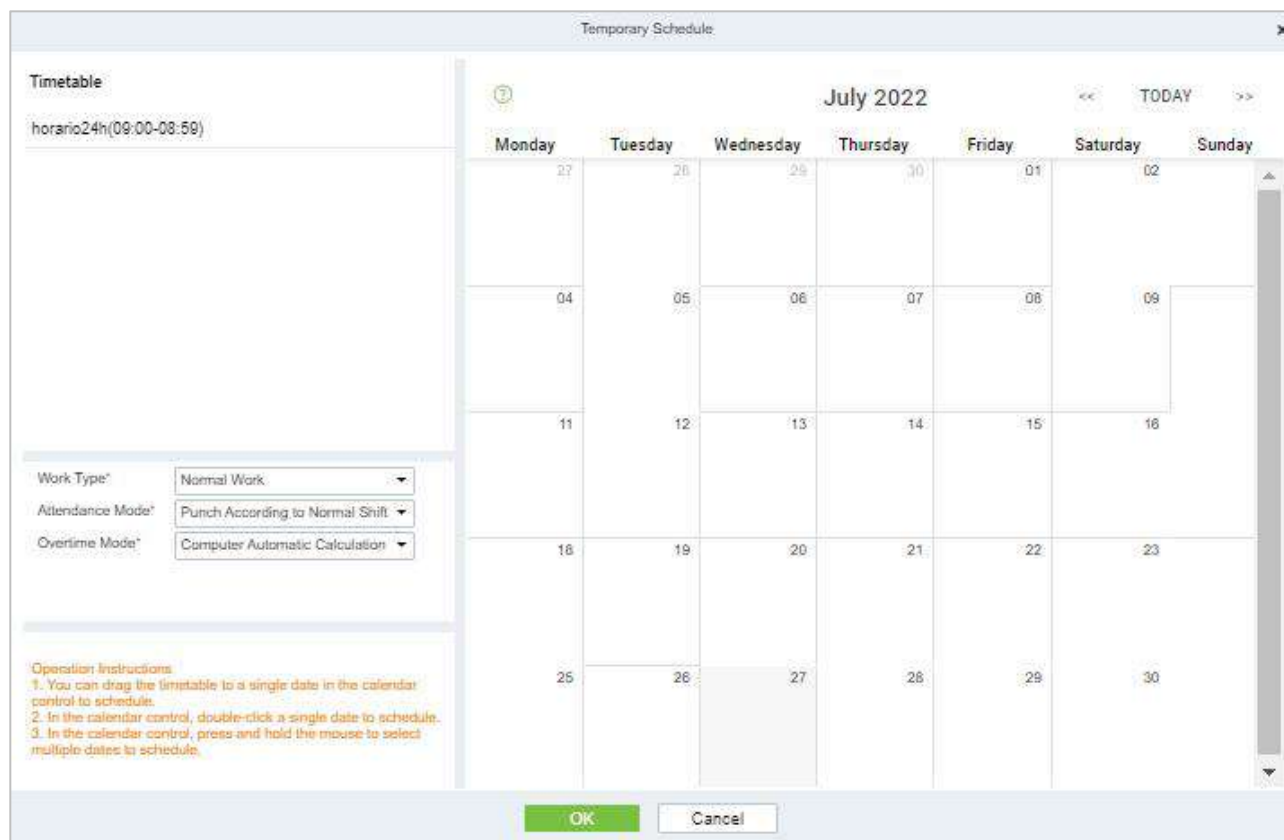


Figure 6- 36 Group Temporary schedule

Parameter	Description
Type of Work	<ul style="list-style-type: none"> • Normal work: This shift is a normal work shift. • Overtime on rest days: This shift is overtime on rest days. • Overtime on holidays: This shift is overtime on holidays.
Attendance Mode	<ul style="list-style-type: none"> • Swipe the card normally according to the shift: the default item of the system, and punch in normally according to the punch in • Brush a valid card once a day: only need to brush the card once in the swiping interval defined by the time period within one day, even if it is normal to punch in. • Punch-in-free: Setting this shift can avoid swiping cards.
Overtime Mode	<ul style="list-style-type: none"> • Computer automatic calculation: It is connected with "whether the delay counts overtime" in the time period. When "whether the delay counts overtime" is "no", the delayed overtime is not calculated, and the overtime time of the overtime bill is not calculated at the same time. • Overtime must be applied: delayed overtime is not calculated, only the overtime order shall prevail; When the signing-back time is less than the end time of overtime, the overtime time is not calculated. • Not counting overtime: overtime hours are not counted for delayed overtime or overtime application.

Table 6- 9 Description of Key Parameters of Temporary Scheduling

Clear Cycle Schedule

Step 1: In the **Attendance** module, select **Scheduling Management > Personnel Scheduling**, check the personnel under the department that needs scheduling or the designated personnel, and click **Periodic Scheduling**.

Step 2: Configure scheduling information in the pop-up **Clear Cycle Schedule** window.

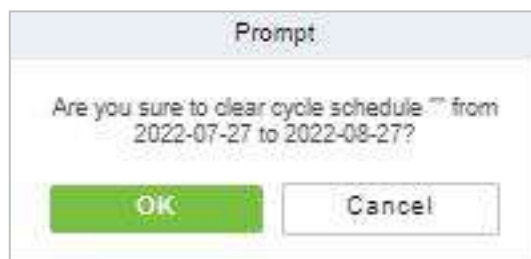



Figure 6- 37 Group Clear cycle Schedule

6.5.4 Schedule Details

After setting the attendance time period and shift, you can schedule the personnel.

6.5.4.1 Delete

Step 1: In the **Schedule** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the required Personnel ID from the list.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

6.5.4.2 Export

You can export all transactions in Excel, PDF, CSV format

6.6 Exception

6.6.1 Appended Log

In the case of personnel going out on business or forgetting to punch in, the manual supplementary recording of attendance records in the attendance report is called supplementary signing card, which is generally summarized and entered by the management personnel according to the attendance results and the attendance system of the enterprise after the attendance cycle ends.

6.6.1.1 New

●Operating Steps:

Step 1: In the Attendance module, select **Exception Management > Appended Log** and click Add.

Step 2: Configure the card replacement information in the pop-up **Add** window, first select the "Department" where the person to be resigned is located, then select the person to be resigned, and finally enter the date and time of the card replacement.


The screenshot shows a 'New' window for creating a replacement card. At the top, there are input fields for 'Personnel ID' and 'Name', followed by search and refresh icons. Below these, there are checkboxes for 'Subordinate Level Contained' and 'Alternative'. A table with columns 'Personnel ID', 'First Name', 'Last Name', and 'Department' is visible, with a row containing '1' and 'Solution'. To the right, a 'Selected(1)' table shows a row with '1' and 'Si'. Below the tables, there are input fields for 'Punch Date' (2021-12-18) and 'Punch Time' (15:42), and a 'Remarks' text area. At the bottom, there are buttons for 'Save and New', 'OK', and 'Cancel'.

Figure 6- 38 Replacement Card

Step 3: Click **OK**.

6.6.1.2 Delete

Step 1: In the **Appended Log** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the required Personnel ID from the list.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

6.6.1.3 Approval

Passed: The approval by the Supervisor, and more than a certain number of days approved by the Manager.

Refused: The denial of leave by the immediate Supervisor and the Manager.

6.6.1.4 Export

You can export all logs in Excel, PDF, CSV format.

6.6.1.5 Import

You can import all logs in Excel, PDF, CSV format.

6.6.2 Ask For Leave

When encountering special circumstances, people may need to take time off for different reasons, and hope that the time off can be displayed in the system statistics.

6.6.2.1 New

● Operating Steps:

Step 1: In the Attendance module, select **Exception Management > Leave** and click New.

Step 2: Configure the leave form information in the pop-up **Add** window, first select the "Department" where the person to take leave is located, then select the leave person, finally enter the leave time, and

optionally upload the leave attachment.

Figure 6- 39 Leave Request Form

Step 3: Click **OK**.

6.6.2.2 Delete

Step 1: In the **Leave** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the required Personnel ID from the list.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

6.6.2.3 Approval

Passed: The approval by the Supervisor, and more than a certain number of days approved by the Manager.

Refused: The denial of leave by the immediate Supervisor and the Manager.

6.6.2.4 Export

You can export all logs in Excel, PDF, CSV format.

6.6.2.5 Import

You can import all logs in Excel, PDF, CSV format.

6.6.3 Overtime

6.6.3.1 New

Step 1: In the Attendance module, select **Exception Management > Overtime** and click New.

Step 2: Configure overtime form information in the pop-up **Add** window, first select the "Department" where the person to work overtime is located, then select the overtime person, and finally enter


overtime hours.

Figure 6- 40 Overtime Form

Step 3: Click **OK**.

6.6.3.2 Delete

Step 1: In the **Overtime** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the required Personnel ID from the list.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

6.6.3.3 Approval

Passed: The approval by the Supervisor, and more than a certain number of days approved by the Manager.

Refused: The denial of leave by the immediate Supervisor and the Manager.

6.6.3.4 Export

You can export all logs in Excel, PDF, CSV format.

6.6.3.5 Import

You can import all logs in Excel, PDF, CSV format.

6.6.4 Adjust Rest

6.6.4.1 New

● Operating Steps:

Step 1: In the Attendance module, select **Exception Management > Leave Adjustment** and click New.

Step 2: In the pop-up **Add** window, configure the information of the leave adjustment form, first select the "Department" of the person to be transferred, then select the person to be transferred, and finally


enter the leave adjustment time.

Figure 6- 41 Leave Adjustment Form

Step 3: Click **OK**.

6.6.4.2 Delete

Step 1: In the **Adjust Rest** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the required Personnel ID from the list.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

6.6.4.3 Approval

Passed: The approval by the Supervisor, and more than a certain number of days approved by the Manager.

Refused: The denial of leave by the immediate Supervisor and the Manager.

6.6.4.4 Export

You can export all logs in Excel, PDF, CSV format.

6.6.4.5 Import

You can import all logs in Excel, PDF, CSV format.

6.6.5 Shift Adjustment

6.6.5.1 New

● Operating Steps:

Step 1: In the Attendance module, select **Exception Management > Shift Adjustment** and click New.

Step 2: In the pop-up **Add** window, configure the shift adjustment list information, first enter the shift adjustment "Personnel Number", then select "shift Adjustment Date", and finally select "shift Adjustment Name".

The image shows a 'New' dialog box for leave adjustment. It contains the following fields and controls:


- Adjust Type:** A dropdown menu with the text 'Adjust the personal s...'.
- Personnel ID*:** A text input field containing the number '1'.
- First Name:** An empty text input field.
- Department Name:** A text input field containing the text 'Solution'.
- Adjust Date*:** A text input field containing the date '2021-12-18'.
- Adjust Shift Name:** A dropdown menu with a downward arrow.
- Remarks:** A large empty text area.
- Buttons:** At the bottom, there are three buttons: 'Save and New' (green), 'OK' (green), and 'Cancel' (white).

Figure 6- 42 Leave Adjustment Form

Step 3: Click **OK**.

6.6.5.2 Delete

Step 1: In the **Adjust Shift** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the required Personnel ID from the list.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

6.6.5.3 Approval

Passed: The approval by the Supervisor, and more than a certain number of days approved by the Manager.

Refused: The denial of leave by the immediate Supervisor and the Manager.

6.6.5.4 Export

You can export all logs in Excel, PDF, CSV format.

6.6.5.5 Import

You can import all logs in Excel, PDF, CSV format.

6.6.6 Attendance Detail Report

The image shows a dropdown menu for 'Attendance Detail Rep...'. The menu is open, displaying the following options:

- Manual Calculate
- Transactions
- Daily Attendance


Figure 6- 43

6.6.6.1 Manual Calculation

In the Attendance Report, you can review an individual's clock-in record and verify their attendance status through attendance calculation. If the status is accurate, it indicates that the attendance business configuration is complete.

● Operating Steps:

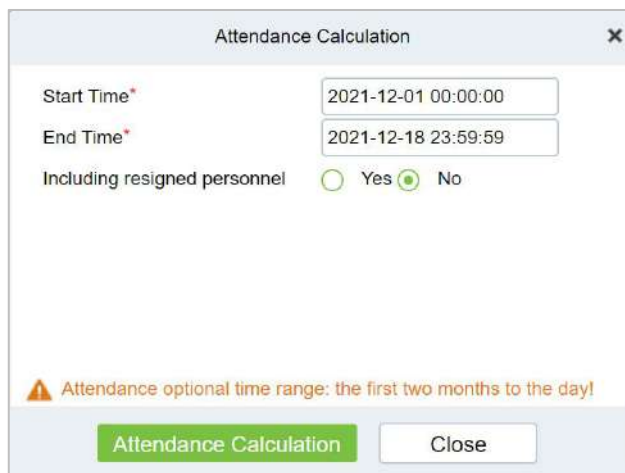Step 1: In **Attendance** Module, select **Detailed Report > Manual Calculation**, check the person who needs to perform attendance calculation, and click **Attendance Calculation**.



The dialog box titled "Attendance Calculation" contains the following fields and controls:

- Start Time***: 2021-12-01 00:00:00
- End Time***: 2021-12-18 23:59:59
- Including resigned personnel**: Radio buttons for Yes (unselected) and No (selected).
- Warning message**: Attendance optional time range: the first two months to the day!
- Buttons**: "Attendance Calculation" (green) and "Close" (white).

Figure 6- 44 Manual Calculation


6.6.6.2 Attendance Transaction

This interface will display attendance records for all employees, including those from uploaded attendance transactions. The original record for a normal punch on the device will be uploaded to the software. When a specific data point is selected, its details will be shown on the right side of the page.

● Operating Steps:

Step 1: In the Attendance module, select **Detailed Report > Transaction**.

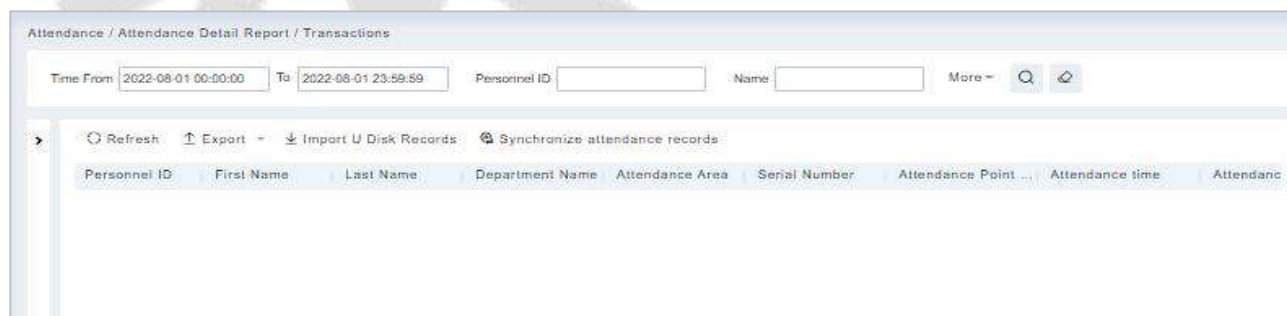Step 2: In the original record table interface, fill in the corresponding query information, and click the **Query** symbol to complete the query of all record tables.



The "Report Query Interface" shows the "Attendance / Attendance Detail Report / Transactions" section. It includes the following elements:

- Search filters**: Time From (2022-08-01 00:00:00), To (2022-08-01 23:59:59), Personnel ID, Name, and a "More" dropdown.
- Actions**: Refresh, Export, Import U Disk Records, and Synchronize attendance records.
- Table headers**: Personnel ID, First Name, Last Name, Department Name, Attendance Area, Serial Number, Attendance Point ..., Attendance time, and Attendance.

Figure 6- 45 Report Query Interface

Export:

Step 1: In the original record table interface, click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

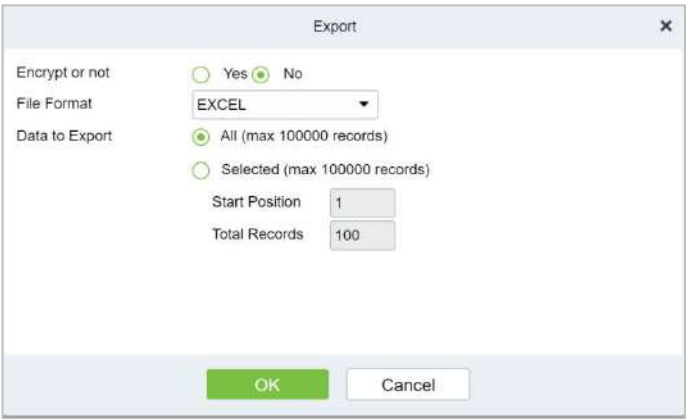


Figure 6- 46 Report Export Interface

Step 2: After selecting the address where the corresponding file is stored, the export of the file can be completed.

Import U Disk Records:

The “Import U disk record” feature allows you to import the device data (including access control, parking, Facekiosk, Video records) to the transaction table.

Synchronize Attendance Records:

The access control records can be synchronized to attendance records through this function. Select the start time and end time to import, check the attendance point list and click **OK**.

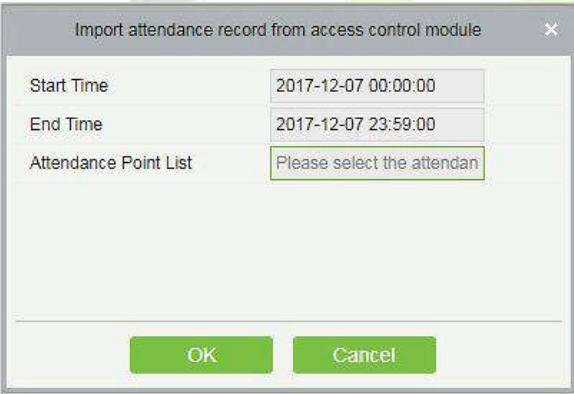


Figure 6- 47 Synchronize Attendance Records

6.6.6.3 Daily Attendance

The table shows personnel’s daily attendance status, punch time, the early leaving time, the latest time, the detailed punch time during the selected period.

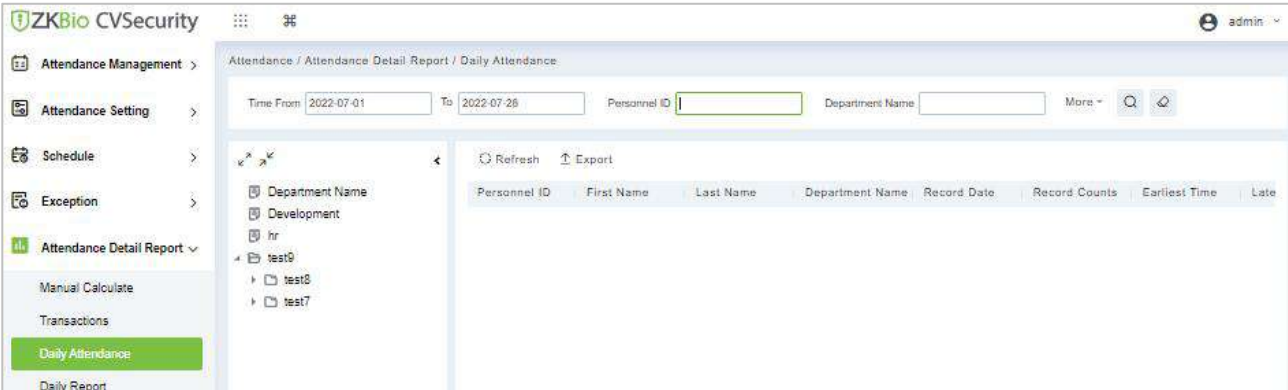


Figure 6- 48 Daily Attendance

6.6.7 Daily Attendance Report

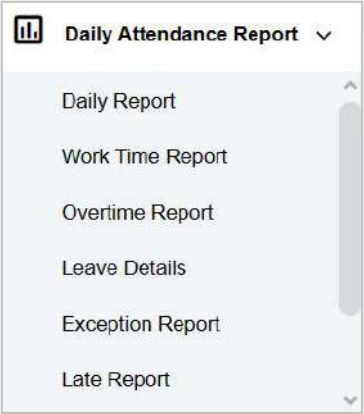


Figure 6- 49 Daily Attendance Report Interface

6.6.7.1 Daily Report

The table shows personnel's daily attendance status, punch time, the early leaving time, the latest time, the detailed punch time during the selected period.

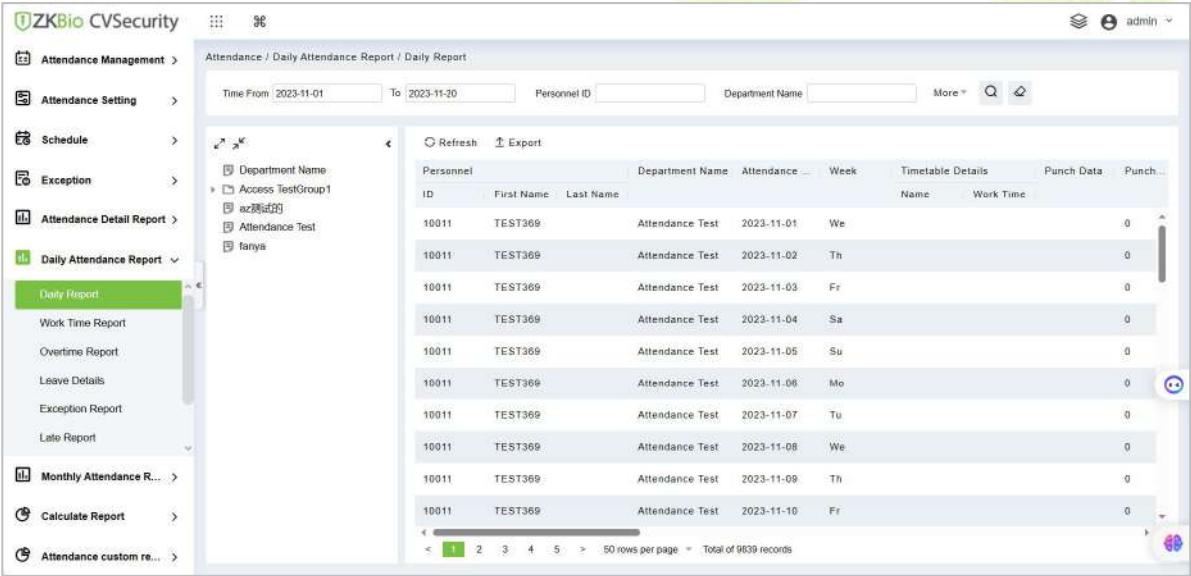


Figure 6- 50 Daily Report Interface

Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Personnel		Department Name	Attendance Date	Week	Timetable Details		Punch Data	Punch Counts	Exception/Abnormality			Lateness/Early			Sick/Unwell			Daily Report			Punch
ID	First Name				Name	Work Time			Reason	Actual	Valid	Counts	Duration	Total	Counts	Duration	Total	Weekday	Weekend	Holiday	Total
10001	TEST369	Attendance Test	2023-11-01	Tu				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-02	We				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-03	Th				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-04	Fr				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-05	Sa				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-06	Su				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-07	Mo				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-08	Tu				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-09	We				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0
10001	TEST369	Attendance Test	2023-11-10	Th				0	0.0	0.0	0.0	0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0

Figure 6- 51 Report Export Interface

6.6.7.2 Work Time Report

These interfaces display the personnel's work data, including actual work time and overtime data, and allow for the export of the data.

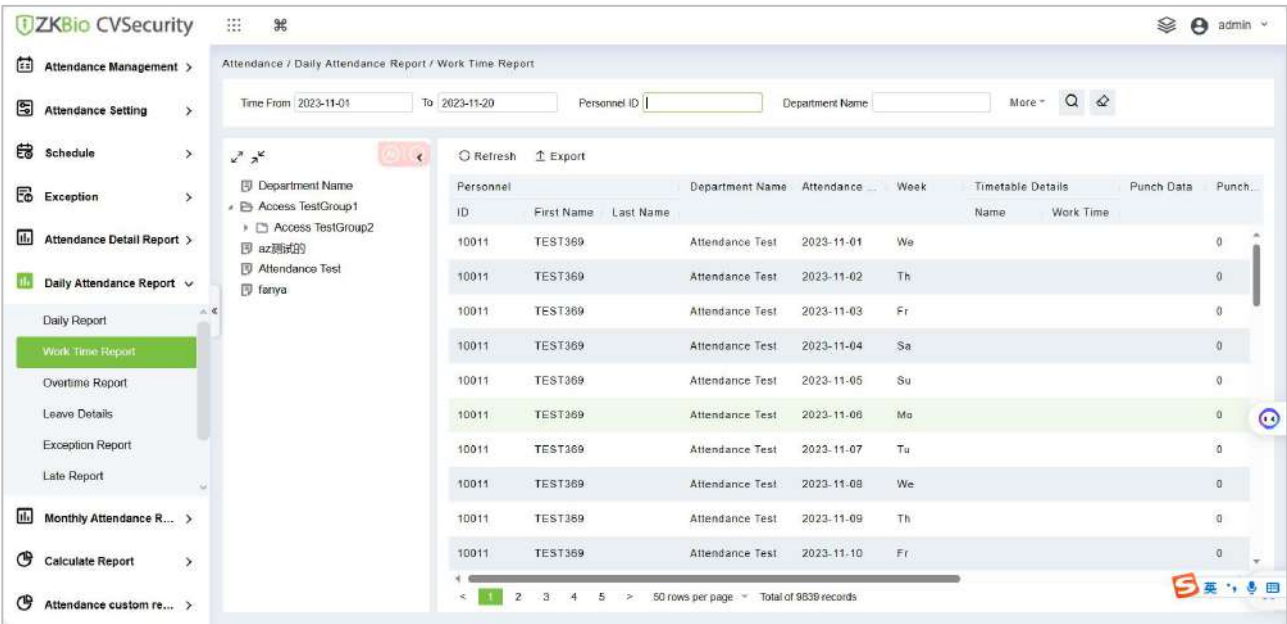


Figure 6- 52 Work Time Report Interface

●Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Work Time Report																
ID	Personnel		Department	Attendance Date	Week	Timetable Details		Punch Data	Punch Counts	Expected/Actual(minute)			Overtime(hour)			
	First Name	Last Name				Name	Work Time			Should	Actual	Valid	Weekday	Weekend	Holiday	Total
10011	TEST369		Attendance	2023-11-01	We				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-02	Th				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-03	Fr				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-04	Sa				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-05	Sa				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-06	Mo				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-07	Tu				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-08	We				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-09	Th				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-10	Fr				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-11	Sa				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-12	Sa				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-13	Mo				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-14	Tu				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-15	We				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-16	Th				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-17	Fr				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-18	Sa				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10011	TEST369		Attendance	2023-11-19	Sa				0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Figure 6- 53 Report Export Interface

6.6.7.3 Overtime Report

The Overtime report interface displays the overtime work hours of the personnel and allows for the export of the details.

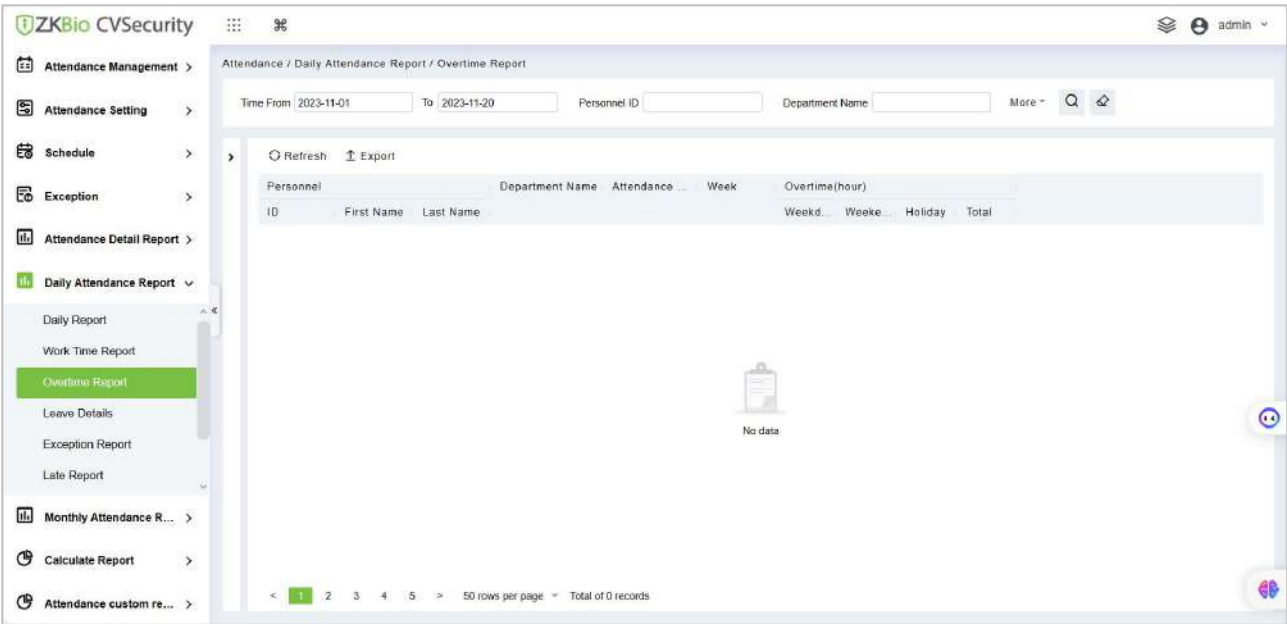


Figure 6- 54 Overtime Perport Interface

Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.7.4 Leave Details

Personnel can apply for leave, and the requests will be displayed here.

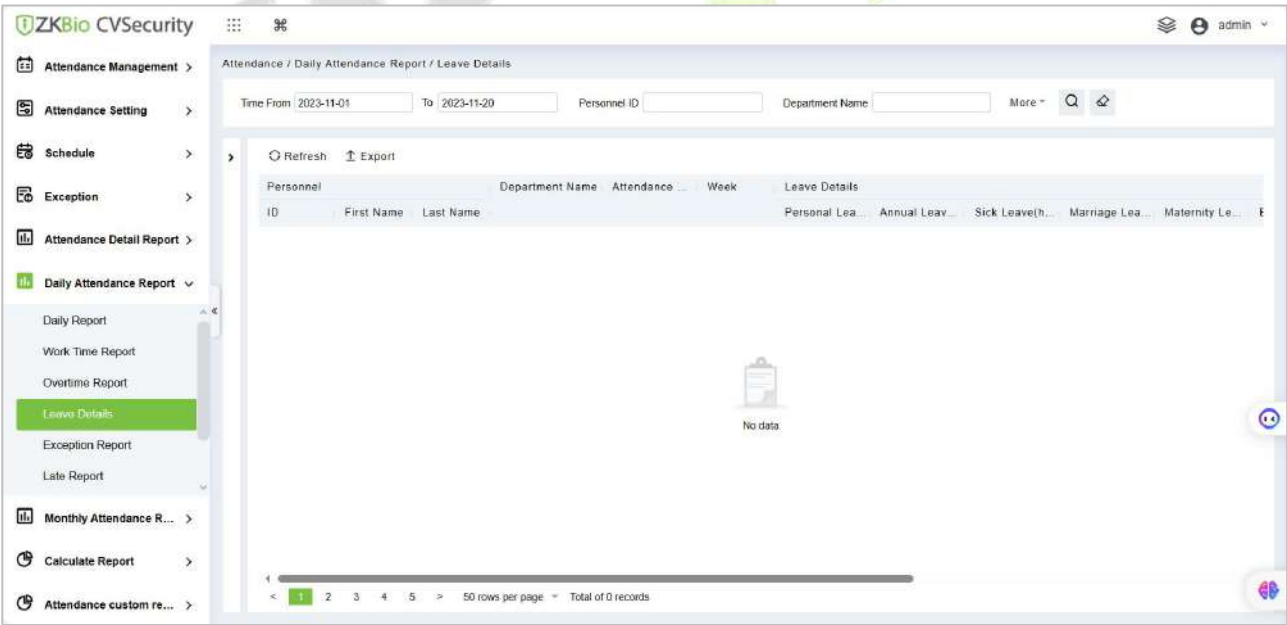


Figure 6- 55 Leave Details Interface

Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.7.5 Exception Report

It displays all the attendance exceptions like misses in and out punches.

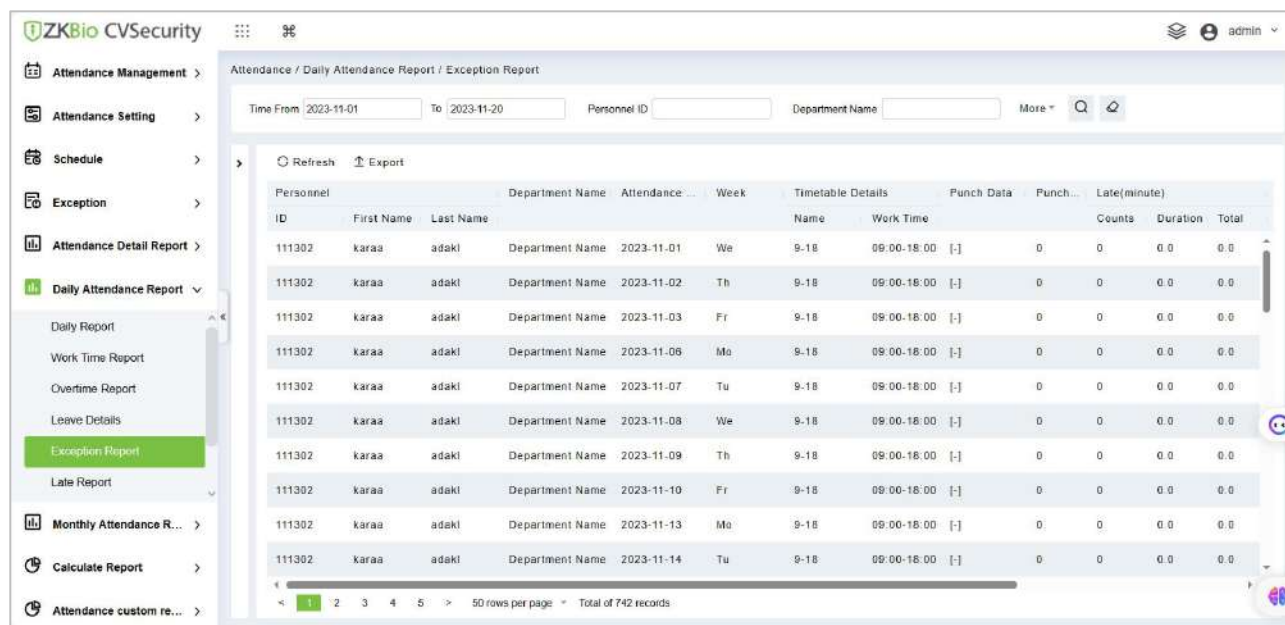


Figure 6- 56 Exception Report Interface

●Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Exception Report																	
Personnel			Department Name	Attendance Date	Week	Timetable Details		Punch Data	Punch Count	Late (minute)			Total	Early (minute)			Absent (hour)
ID	First Name	Last Name				Name	Work Time			Counts	Duration	Counts		Duration	Total		
111302	karaa	adaki	Department	2023-11-01	We	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-02	Th	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-03	Fr	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-06	Mo	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-07	Tu	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-08	We	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-09	Th	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-10	Fr	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-13	Mo	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-14	Tu	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-15	We	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-16	Th	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	
111302	karaa	adaki	Department	2023-11-17	Fr	9-18	09:00-	-	0	0	0.0	0.0	0	0.0	0.0	9.0	

Figure 6- 57 Report Export Interface

6.6.7.6 Late Report

The list displays the late arrival time of the employees.

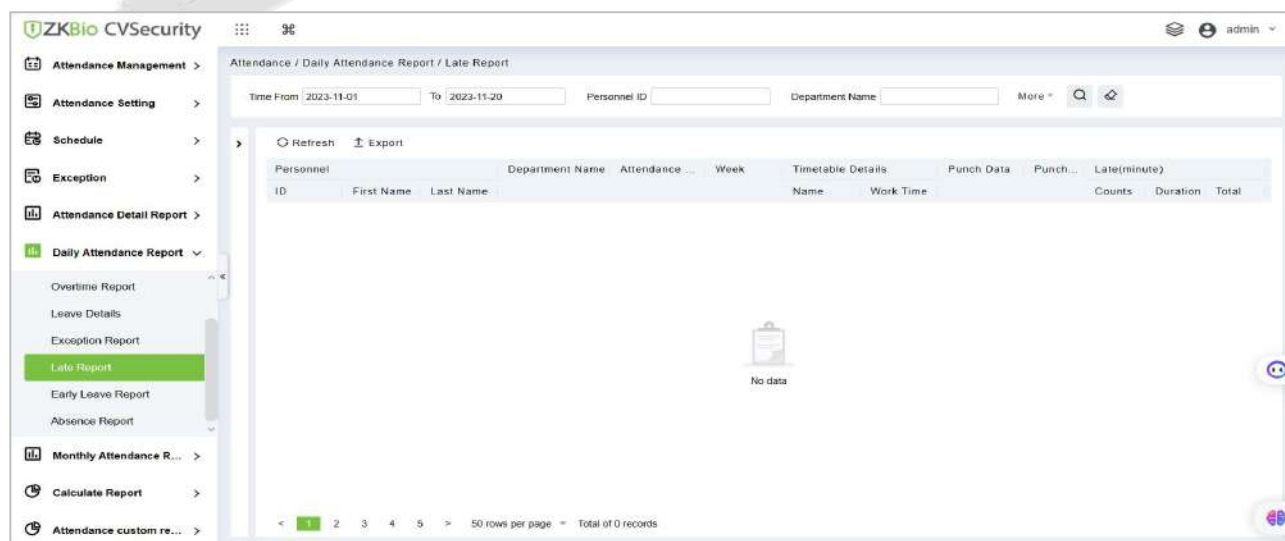


Figure 6- 58 Late Report Interface

Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.7.7 Early Leave Report

The list shows the time of the early leave of the employees.

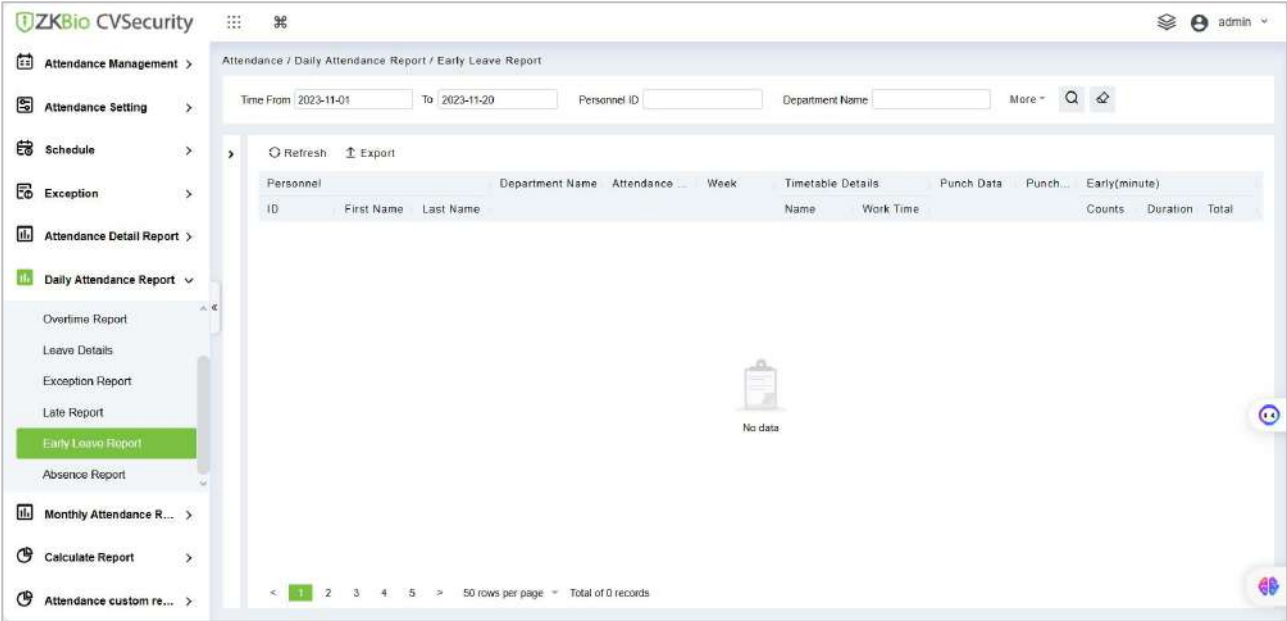


Figure 6- 59

Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.7.8 Absence Report

The list displays the late arrival, early leave, and absent details of the employees.

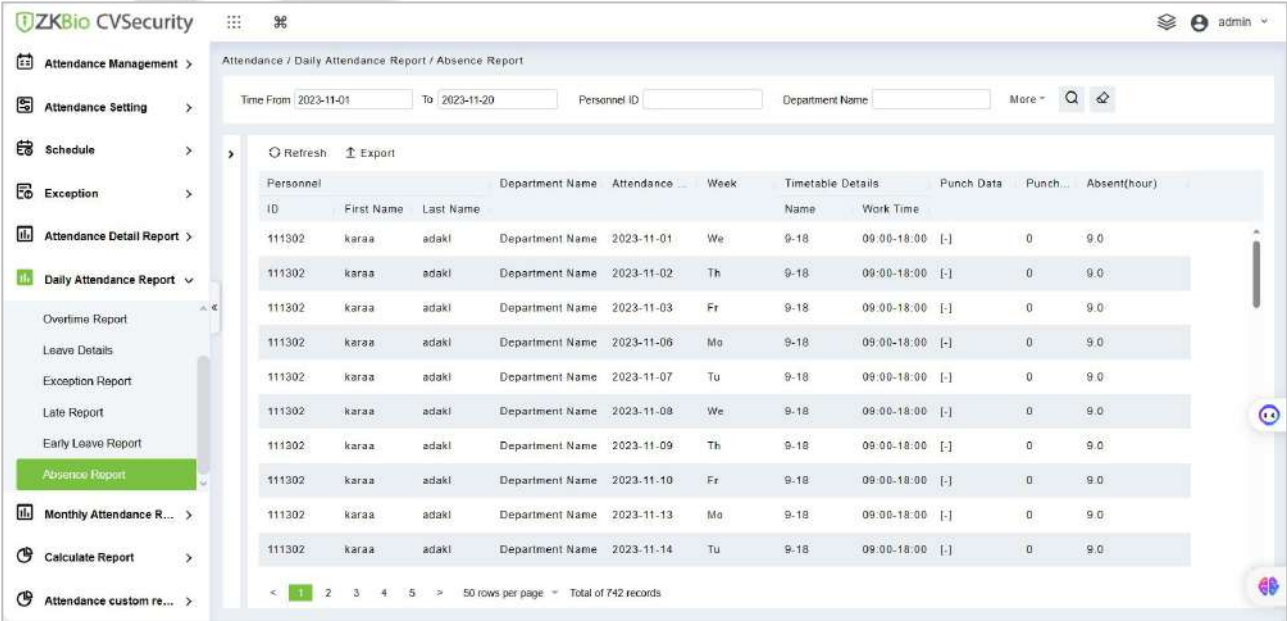


Figure 6- 60 Absence Repoert Interface

Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.8 Monthly Attendance Report



6.6.8.1 Monthly Detail Report

The Monthly Detail Report is used to analyse the entire attendance of all the employees in that month. It includes Present hours, Absent hours, Holidays, Weekly-off and shifts so on

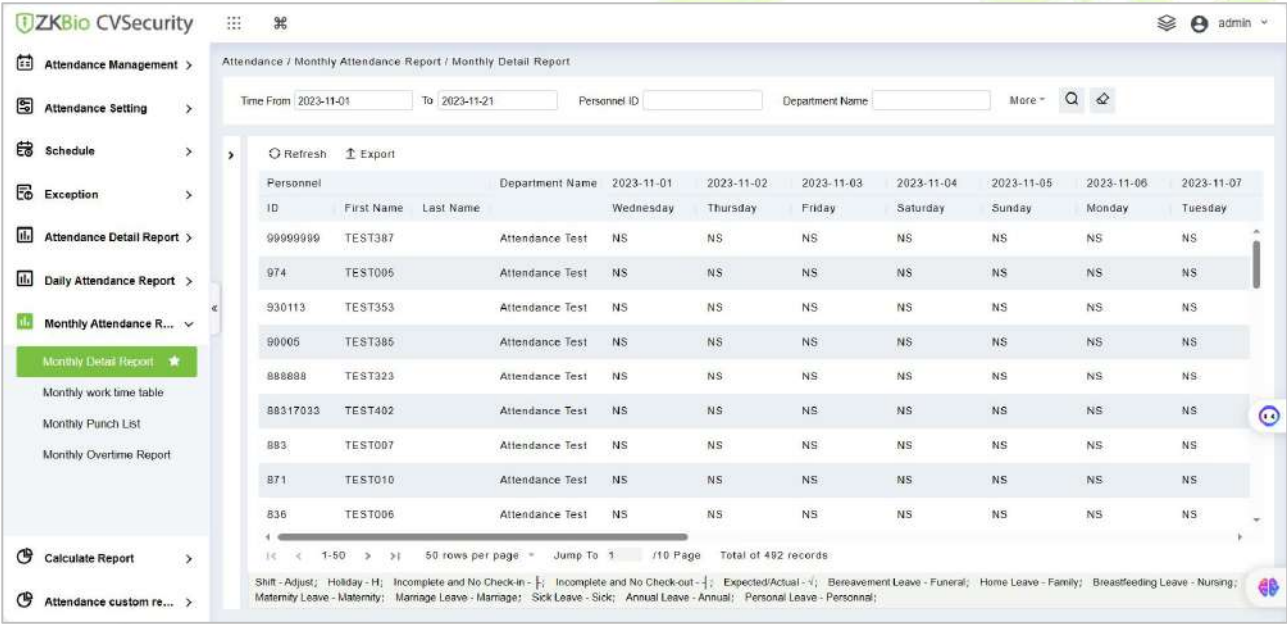


Figure 6- 61 Monthly Detail Report Interface

●Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Monthly Detail Report													2
Personnel			Department Name	2023-11-01	2023-11-02	2023-11-03	2023-11-04	2023-11-05	2023-11-06	2023-11-07	2023-11-08	2023-11-09	
ID	First Name	Last Name			Wednesday	Thursday	Friday	Saturday	Sunday	Monday	Tuesday	Wednesday	Thursday
99999999	TEST387		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
974	TEST005		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
930113	TEST353		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
90005	TEST385		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
888888	TEST323		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
88317033	TEST402		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
883	TEST007		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
871	TEST010		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
836	TEST006		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
80233	TEST008		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
8023	TEST009		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
7777777	TEST350		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
7658	TEST352		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	
67890	TEST347		Attendance Test	NS	NS	NS	NS	NS	NS	NS	NS	NS	

Figure 6- 62 Monthly Details Report

6.6.8.2 Monthly Work Time

The monthly work time report gives the details of attendance status, Clock-in time, Clock-out time and the total worked hours.

Personnel ID	First Name	Last Name	Department Name	2023-11-01 Wednesday	2023-11-02 Thursday	2023-11-03 Friday	2023-11-04 Saturday	2023-11-05 Sunday	2023-11-06 Monday	2023-11-07 Tuesday
99999999	TEST387		Attendance Test	0	0	0	0	0	0	0
974	TEST005		Attendance Test	0	0	0	0	0	0	0
930113	TEST353		Attendance Test	0	0	0	0	0	0	0
90005	TEST385		Attendance Test	0	0	0	0	0	0	0
888888	TEST323		Attendance Test	0	0	0	0	0	0	0
88317033	TEST402		Attendance Test	0	0	0	0	0	0	0
883	TEST007		Attendance Test	0	0	0	0	0	0	0
871	TEST010		Attendance Test	0	0	0	0	0	0	0
836	TEST006		Attendance Test	0	0	0	0	0	0	0
80233	TEST008		Attendance Test	0	0	0	0	0	0	0

Figure 6- 63 Monthly Work Time Interface

●Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Personnel ID	First Name	Last Name	Department Name	2023-11-01 Wednesday	2023-11-02 Thursday	2023-11-03 Friday	2023-11-04 Saturday	2023-11-05 Sunday	2023-11-06 Monday	2023-11-07 Tuesday	2023-11-08 Wednesday	2023-11-09 Thursday	2023-11-10 Friday	2023-11-11 Saturday	2023-11-12 Sunday
99999999	TEST387		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
974	TEST005		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
930113	TEST353		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
90005	TEST385		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
888888	TEST323		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
88317033	TEST402		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
883	TEST007		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
871	TEST010		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
836	TEST006		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
80233	TEST008		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
8023	TEST009		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
777777	TEST350		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
7658	TEST352		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
67890	TEST347		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
666666	TEST391		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
6629	TEST115		Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60061			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60060			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60059			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60058			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60057			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60056			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60055			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60054			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60053			Attendance	0	0	0	0	0	0	0	0	0	0	0	0
60052			Attendance	0	0	0	0	0	0	0	0	0	0	0	0

Figure 6- 64 Export Report Interface

6.6.8.3 Monthly Punch

The monthly punch Report displays the attendance details namely Status, Clock-in, Clock-out, Early Leave, Late coming, assigned to each employee.

Personnel ID	First Name	Last Name	Department Name	2023-11-01	2023-11-02	2023-11-03	2023-11-04	2023-11-05	2023-11-06	2023-11-07
60059			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60058			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60057			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60056			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60055			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60054			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60053			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60052			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60051			Attendance Test	09:00-]	[-]	[-]			[-]	[-]
60050			Attendance Test	09:00-]	[-]	[-]			[-]	[-]

Figure 6- 65 monthly Punch Report Interface

●Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Personnel ID	First Name	Last Name	Department Name	2023-11-01	2023-11-02	2023-11-03	2023-11-04	2023-11-05	2023-11-06	2023-11-07	2023-11-08	2023-11-09	2023-11-10	2023-11-11	2023-11-12	2023-11-13	2023-11-14	2023-11-15
99999999	TEST387		Attendance															
974	TEST005		Attendance															
930113	TEST353		Attendance															
90005	TEST385		Attendance															
888888	TEST323		Attendance															
88317033	TEST402		Attendance															

Figure 6- 66 Export Report Interface

6.6.8.4 Monthly Overtime Report

The Overtime Summary Report displays the overtime hours worked by the employees.

Personnel ID	First Name	Last Name	Department Name	2023-11-01	2023-11-02	2023-11-03	2023-11-04	2023-11-05	2023-11-06	2023-11-07
99999999	TEST387		Attendance Test	0	0	0	0	0	0	0
974	TEST005		Attendance Test	0	0	0	0	0	0	0
930113	TEST353		Attendance Test	0	0	0	0	0	0	0
90005	TEST385		Attendance Test	0	0	0	0	0	0	0
888888	TEST323		Attendance Test	0	0	0	0	0	0	0
88317033	TEST402		Attendance Test	0	0	0	0	0	0	0
883	TEST007		Attendance Test	0	0	0	0	0	0	0
871	TEST010		Attendance Test	0	0	0	0	0	0	0
836	TEST006		Attendance Test	0	0	0	0	0	0	0
80233	TEST008		Attendance Test	0	0	0	0	0	0	0

Figure 6- 67 Monthly Overtime Report Interface

● Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Monthly Overtime Report																		
Personnel			2023-11-01	2023-11-02	2023-11-03	2023-11-04	2023-11-05	2023-11-06	2023-11-07	2023-11-08	2023-11-09	2023-11-10	2023-11-11	2023-11-12	2023-11-13	2023-11-14	2023-11-15	2023-11-16
ID	First Name	Last Name	Wednesday	Thursday	Friday	Saturday	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday	Monday	Tuesday	Wednesday	Thursday
99999999	TEST387	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
974	TEST005	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
930113	TEST353	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
90005	TEST385	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
888888	TEST323	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
88317033	TEST402	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
883	TEST007	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
871	TEST010	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
836	TEST006	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
80233	TEST008	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
8023	TEST009	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7777777	TEST350	Attendance	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Figure 6- 68 Export Report Interface

6.6.9 Calculate Report

6.6.9.1 Monthly Staff Report

The Attendance Status Summary report is used to analyse the entire attendance status of all the employees in that month. It includes Present hours, Absent hours, Holidays, Weekly-off and so on.

Figure 6- 69 Monthly Staff Report Interface

● Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

Monthly Staff Report														
Personnel			Expected/Actual(minute)			Late(minute)		Early(minute)		Overtime(hour)				Personal L
ID	First Name	Last Name	Should	Actual	Valid	Duration	Counts	Duration	Counts	Weekday	Weekend	Holiday	Total	
99999999	TEST387	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
974	TEST005	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
930113	TEST353	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
90005	TEST385	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
888888	TEST323	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
88317033	TEST402	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
883	TEST007	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
871	TEST010	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
836	TEST006	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
80233	TEST008	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0
8023	TEST009	Attendance	0.0	0.0	0.0	0.0	0	0.0	0	0.0	0.0	0.0	0.0	0.0

Figure 6- 70 Export Report Interface

●Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.9.4 Monthly Department Summary

The Department Summary displays all the data of a department including the number of employees, late arrivals, leaves, absents, and more(count). The procedure to view the department summary is the same as the Employee Summary.

ZKBio CVSecurity

<

Figure 6- 73 Monthly Department Summary Report Interface

●Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.9.5 Department Overtime Summary

The Overtime Summary Report displays the overtime hours worked by the employees in a department.

ZKBio CVSecurity

Figure 6- 74 Department Overtime Summary Report Interface

● Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.9.6 Department Leave Summary

The department leave summary displays the total leaves taken by the employees in a department. It includes sick leave, casual leave, parental leave, annual leave, compassionate leave, and more.

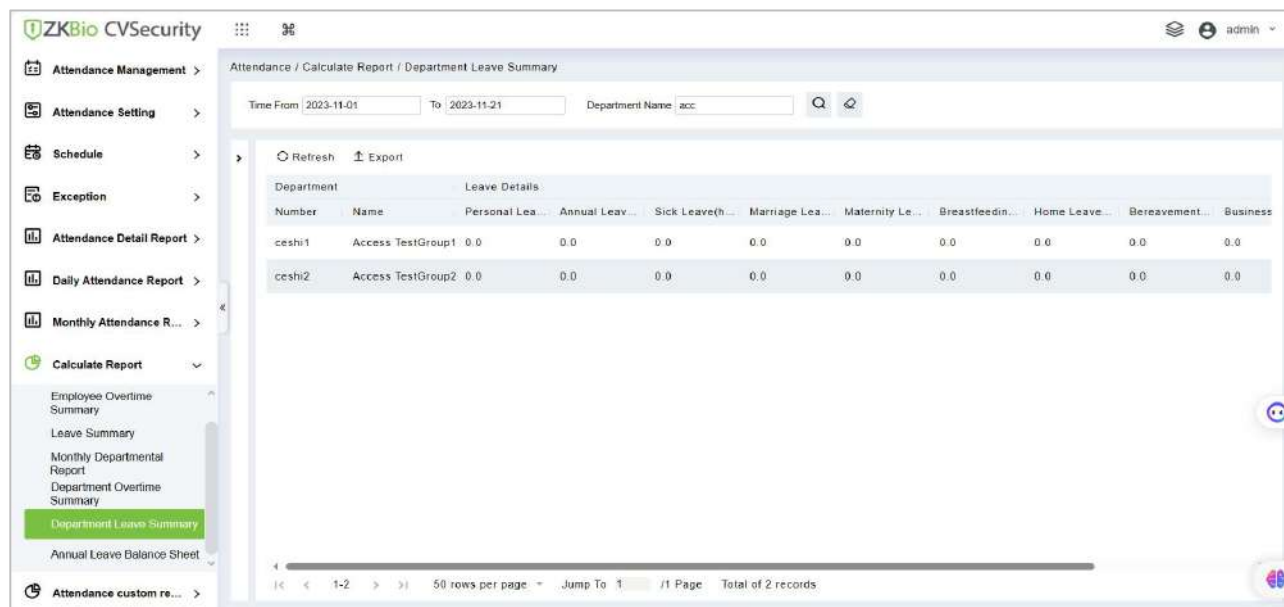


Figure 6- 75 Department Leave Summary Report Interface

● Export:

Click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and click **OK**.

6.6.9.7 Annual Leave Balance Summary

The Yearly Summary displays all the data of the employee including the number of late arrivals, leaves, absents, and working (count).

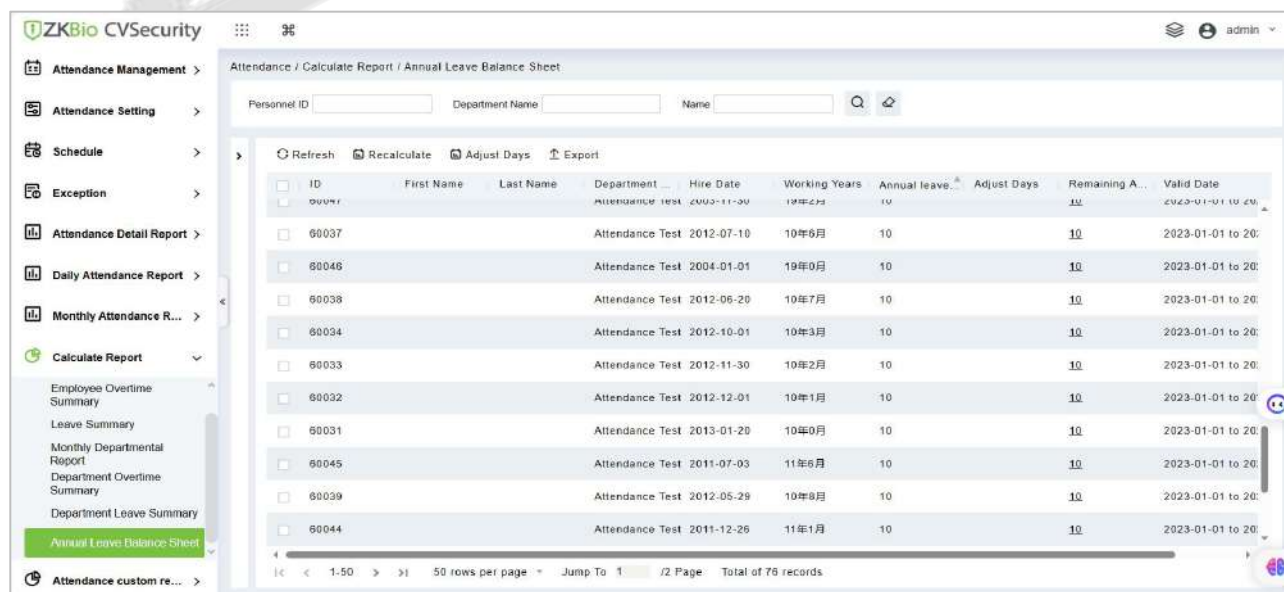


Figure 6- 76 Annual Leave Balance Summary Report Interface

6.6.10 Attendance Custom Report

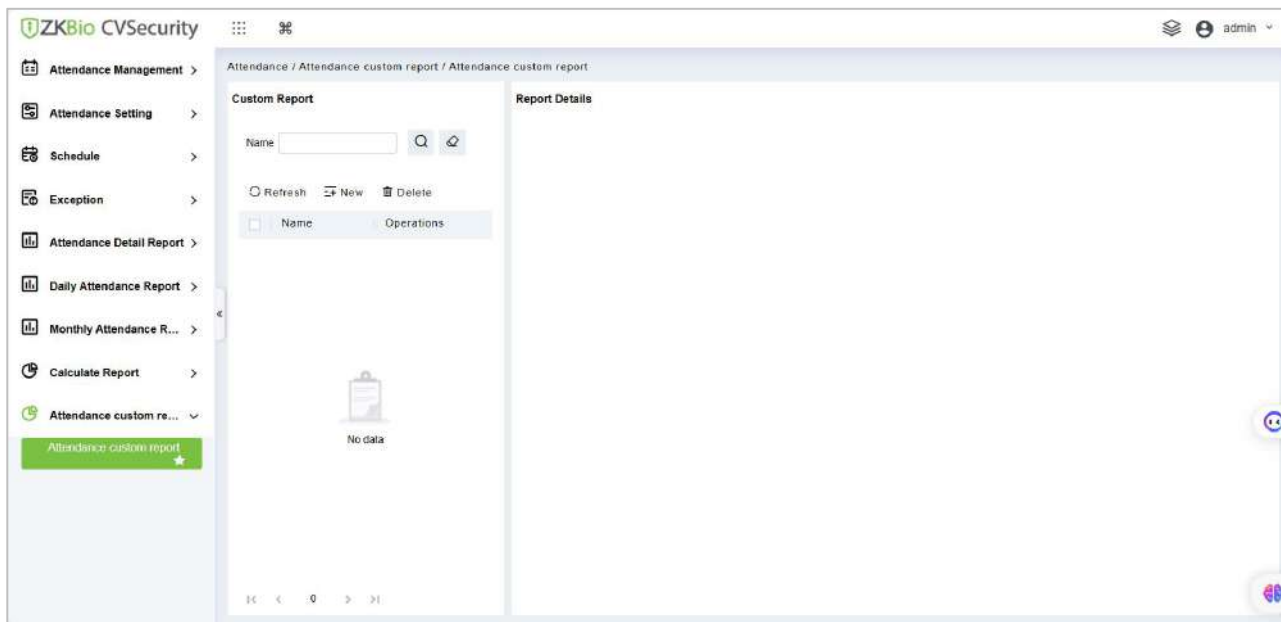


Figure 6- 77

6.6.10.1 New

1. Go to Attendance > Attendance Custom Report, click  New.

The 'New' form is used to create a custom report. It has a title bar 'New' with a close button. The form is divided into several sections. The top section contains 'Name*' (with a text input field containing 'Test') and 'Report Type*' (with a dropdown menu set to 'By Day Detail'). Below this is the 'Optional Fields' section, which contains several checkboxes: 'Department Name', 'Week', 'Punch Data', 'Expected/Actual(minute)', 'Late(minute)', 'Early(minute)', 'Overtime(hour)', and 'Absent(hour)'. There is also a 'Leave+Details' button. The 'Selected Fields' section contains four items, each with a trash icon: 'Personnel', 'Attendance Date', 'Timetable Details', and 'Punch Counts'. At the bottom are three buttons: 'Save and New' (green), 'OK' (green), and 'Cancel' (white).

Figure 6- 78

Name: The name of your customized report.

Report Type: There are 3 types, Summary by Dept, Summary by Person, By Day Detail. Optional fields vary by type.

2. After saving, you can view and export the custom report.

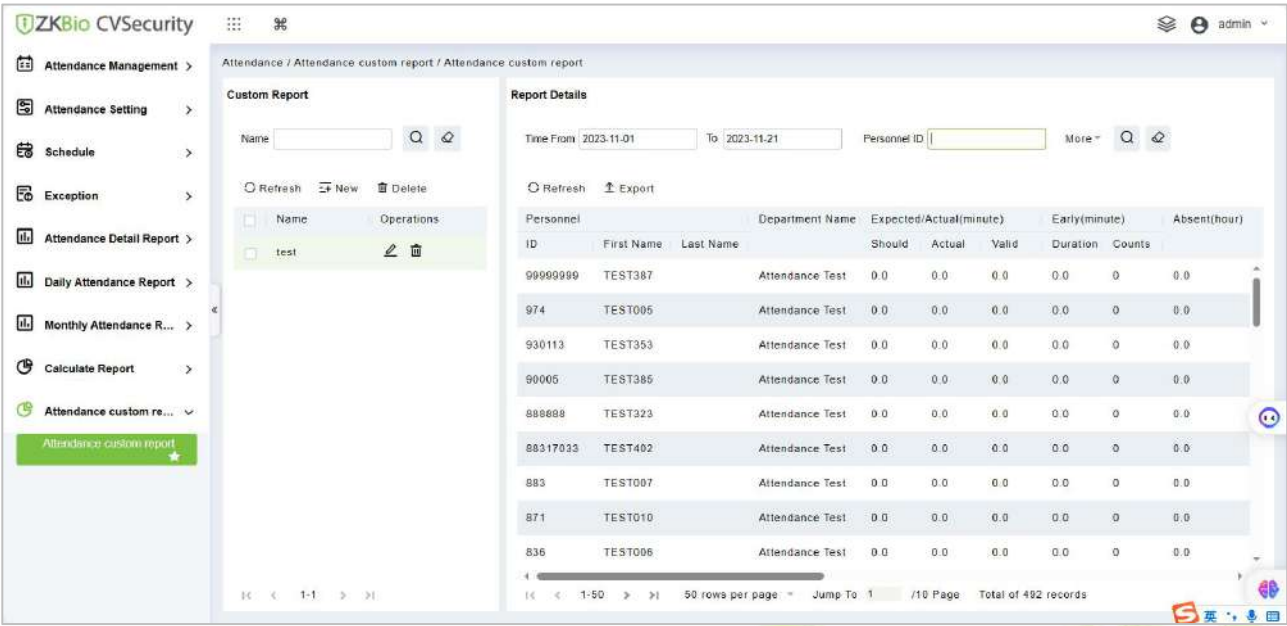


Figure 6- 79

7 Parking Management

7.1 Operation Scenario

In modern parking lot management, vehicle management is an important aspect, especially for special parking lots, parks and communities, it is required to strictly manage all kinds of vehicles in real time, strictly monitor their entry and exit time, and register and identify all kinds of vehicles (including internal vehicles and external vehicles). In a large-scale field, there are many vehicles coming in and out. For example, every vehicle must be judged manually, which is time-consuming and not conducive to management and inquiry, and the security work is difficult and inefficient. In order to improve this management mode, which is not commensurate with modern parking lots, residential areas, etc., It is necessary to realize the authorization and intelligence of vehicle management as soon as possible, and manage it in the form of computer network, so as to monitor and manage all the vehicles at the entrance and exit effectively and accurately. It is required that the system provide corresponding application software to realize the high efficiency and intelligence of parking lot management.

7.2 Operation Flow

This paper introduces the configuration process of parking management business.

The parking management business configuration process is shown in figure below.

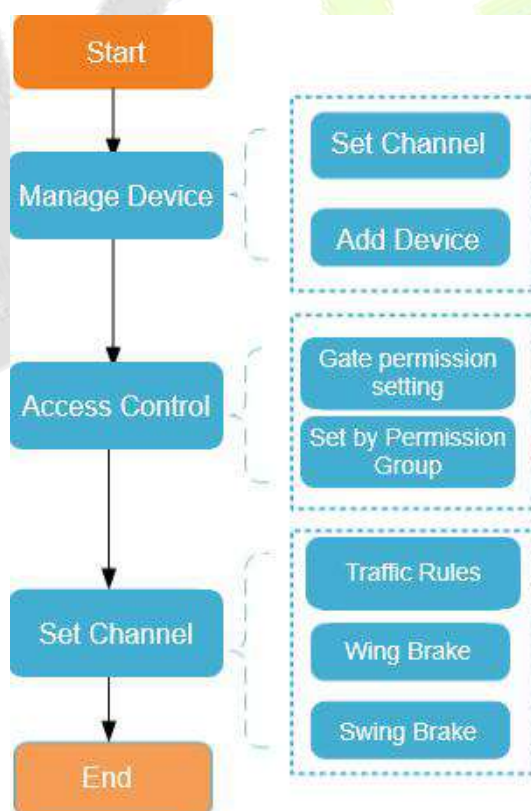


Figure 7- 1 Parking Configuration Flow

7.3 Basic Parking Setting

7.3.1 Parking Settings

This paper introduces the public parameters of the parking lot under.

●Operating Steps:

Step 1: In the Parking module", select "Parking Basic Management > Parking Settings".

Step 2: In the Parking setting interface, as shown in figure below, fill in relevant parameters. Please refer to Table 10-1 for parameters.

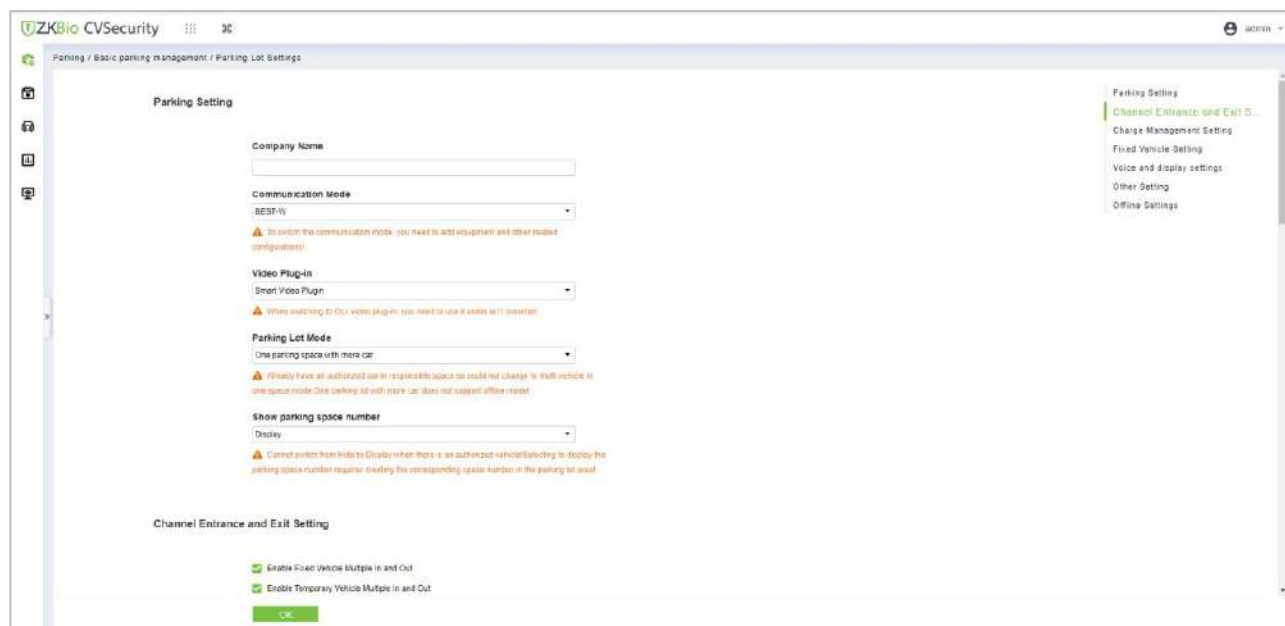


Figure 7- 2 Parking Parameter Setting Interface

Parameter	Specific Parameters	Parameter Description
Parking Setting	Company Name	You can customize the Parking company name, which can be displayed in the billing receipt.
	Communication Mode	Selection according to the communication protocol of the device.
	Parking Lot Mode	<ul style="list-style-type: none"> One Parking Space with one car: means that only one fixed car can be authorized in one parking space at present. One Parking Space with more car: a parking space that allows multiple fixed cars to be authorized.
	Display Parking Space Number	You can choose whether to display the parking space number or not, and you can specify a certain parking space number.
	Real Time Preview Channel Count	The number of videos that can be displayed on the Real Time Monitoring page can be switched from 4/6/8/12/16.

Parameter	Specific Parameters	Parameter Description
Entrance and Exit Lane Setting	Enable the. fixed or temporary vehicles are multiple In and out.	Allow the fixed or Temporary vehicles to the parking area and vehicles are multiple in and out.
	Matching Precision of Entrance and Exit	Vehicles are allowed by exact match and 5 or 6digits registration numbers to the entrance and exit area of the parking.
	Special license plate contains characters	Enter the special license plates contains characters wherever required.
	Duplicate license plate waiting time	In Duplicate license plate waiting time Mention the timings of single channel mode and normal mode
Charge Management Settings	Enable the fixed car charging standard	If the fixed car charging standard has been set in advance, check this setting, and when the fixed car is authorized and postponed, it will be implemented according to this charging standard; If it is not checked, you can only manually enter the extension time and amount.
	Print the charge receipt	If the receipt printer is set and connected, the corresponding receipt will be printed when the charge is successful.
	Enable consumption discounts	Set the "Discount Strategy" in advance and then check the Enable Consumption Discount System, and the consumption discount will be carried out.
	Unmatched processing mode	There are two existing ways to deal with mismatches: "free release" and "opening the gate after charging fees"; Manual release is to open the gate directly, and when the gate is opened after charging, a charge confirmation box will pop up during manual release (only for temporary vehicles).
	Synchronize data to the cloud	After opening, offline parking data will be uploaded to the cloud platform synchronously.
Fixed Vehicle Setting	Statistic parking space of fixed car	<ul style="list-style-type: none"> If it is checked, the number of cars will not be deducted after authorization, and the number of cars will be counted in real time when vehicles enter and leave the field. If it is not checked, the number of fixed cars will be deducted after authorization.
	Enable fixed vehicles to switch to temporary vehicles	<ul style="list-style-type: none"> If this option is checked, the fixed car will be automatically converted into a temporary car after it expires, and the charge will be made according to the temporary charging method. If it is not checked, this option will require manual

Parameter	Specific Parameters	Parameter Description
		release for the fixed car to come out when it expires.
	Warning days for fixed vehicles	If the warning days are set to 5 days, it is necessary to prompt the vehicles to postpone the fixed vehicles when entering and leaving the field within 5 days.
Voice And Display Settings	Enable external display	Checking this parameter will display the relevant parking data on the external display.
	The entrance shows the remaining parking spaces	Display the remaining parking spaces at the entrance of the parking lot.
	Statistics of car Parking area parking spaces in car Parking area	The statistics of the number of cars in the corresponding booth in the big Parking area include the number of cars in the small Parking area.
	Vehicle entry and exit broadcast license plate	If this parameter is checked, the license plate will be broadcast when the vehicle enters and exits.
	Display color	Set the display color of parking machine.
Other Settings	Maximum vehicle stay time	Set the maximum stay time of on-site vehicles. If the on-site vehicles have not left after this time, the records of on-site vehicles will be displayed in the "On-site Stay Timeout Vehicles" report.
	Save days of snapshot photos	Set snapshot photos saved more than the set number of days photos will be automatically deleted, if you do not want to delete snapshot photos will change the parameter set to 0 days.
	Snapshot Save Path	You can customize the path where photos are saved.

Table 7-1 Description of Parking Parameters

Step 3: After setting the parameters, Click **OK**.

7.3.2 Device

For communication between the system and device, data uploading, configuration downloading, device and system parameters shall be set. Users can edit access controllers within relevant levels in the current system; users can only add or delete devices in Device Management if needed.

7.3.2.1 Edit or Delete a Device

Step 1: Click Device Name or click **Edit** to access the edit interface.

Step 2: Select device, click **Delete**, and click **OK** to delete the device.

7.3.2.2 Reboot Device

It will reboot the selected device.

7.3.2.3 Synchronize Time

It will synchronize time with server’s current time.

7.3.2.4 Get Device Parameters

Click Get Device Parameters Users can get device parameters which is they need from the system.

7.3.2.5 Delete Device Command

Click Delete Device command, to delete the selected device command' data.

7.3.2.6 Get Device Version

Click Device version to get selected device version.

7.3.3 Parking Area

This paper introduces the Step configuration of and Parking area.

7.3.3.1 Add New

Operating Steps:

Step 1: In the Parking module, select **Parking Basic Management > Parking Area**.

Step 2: In the **Parking Area** interface, click **Add New** and fill in the relevant parameters, as shown in figure below. Please refer to Table 10-2 for parameter description.

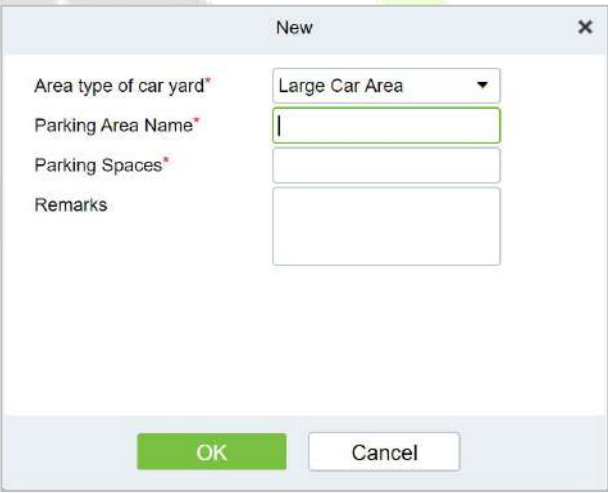


Figure 7- 3 New Interface in Parking Area

Parameter	Description
Type Of Parking Area	Set whether the current Parking area is a big Parking or a small Parking.
Name Of Parking Area	The name of the Parking area cannot be duplicated.
Parking Spaces	Set total number of parking spaces in this area.

Parameter	Description
Remarks	Text description.

Table 7-2 Parameter Description of Parking Area

Step 3: Click **OK** to complete the setting of the Parking area.

7.3.3.2 Edit

Click a parking area name or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

7.3.3.3 Delete

Select one or more parking areas and click **Delete** at the upper part of the list and click **OK** to delete the selected parking areas. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single parking area.

7.3.3.4 Refresh

Click **Refresh** at the upper part of the list to load new parking areas.

7.3.4 Entrance And Exit Area

This paper introduces the Step configuration of parking entrance and exit area.

7.3.4.1 Add New

Operating Steps:

Step 1: In the Parking module, select "**Parking Basic Management > Entrance and Exit Area**".

Step2: In the interface of Entrance and Exit Area, click **Add New** and fill in relevant parameters, as shown in figure below. Please refer to Table 10-3 for parameter description.



Figure 7- 4 Add Interface of Entrance and Exit Area

Parameter	Description
Parking Area	The name of Entrance and Exit Area cannot be duplicated.
Name Of Entrance and Exit Area	The Parking area to which the Entrance and Exit Area belongs.

Table 7-3 Description of Parameters of Entrance and Exit Area

Step 3: Click **OK** to complete the setting of Entrance and Exit Area.

7.3.4.2 Edit

Click an entrance and exit area name or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

7.3.4.3 Delete

Select one or more entrance and exit areas and click **Delete** at the upper part of the list and click **OK** to delete the selected entrance and exit areas. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single entrance and exit area.

7.3.4.4 Refresh

Click **Refresh** at the upper part of the list to load new entrance and exit areas.

7.3.5 Guard Booth

This paper introduces the Step configuration of ZKBio CVSecurity Guard Booth. After the configuration is completed, you can check and monitor the Guard Booth interface and operate the gate opening.

7.3.5.1 Add New

Operating Steps:

Step 1: In the Parking module, select "**Parking Basic Management > Guard Booth**".

Step 2: In the **Guard Booth** interface, click **Add New** and fill in the relevant parameters, as shown in figure below. Please refer to Table 10-4 for parameter description.

Figure 7- 5 Added Guard Booth Interface

Parameter	Description
Name of Guard Booth	Set the name of the booth.
Guard Booth Computer IP	When the booth mode is browser, the IP address of the booth needs to be set.
Guard Booth Mode	There are two modes of Guard Booth: <ul style="list-style-type: none"> Browser: You need to set the IP of the booth computer

Parameter	Description
	<ul style="list-style-type: none"> Platform: Automatically generate platform registration code
Platform Registration Code	When the booth mode is a platform, it is automatically generated for CS booth registration.
Name Of Entrance and Exit Area	Entrance and Exit Area to which the booth belongs.
Parking Area	After selecting the Entrance and Exit Area, the information of the parking lot area will be read, which is read-only.
Allow Temporary Cars Free of Charge	Set whether the temporary car is free or not, check the interface of opening the billing result of the temporary car, and there will be a "Free" button to allow the temporary car to be free.
Enable Replacement Models	Set whether the replacement vehicle is enabled or not and check the temporary vehicle charging result interface to change the temporary vehicle type of the vehicle. Different vehicle types have different charging standards, so the charging result will also change.
Enable Manual Clearance	Set whether to enable manual release. After checking Enable, you can manually control the gate to open for vehicle release.
Temporary Cars Come Out Quickly	Set whether to enable the temporary car to come out quickly. If the temporary car does not incur parking fees after checking the enable, the billing result confirmation interface will not pop up, and the gate will be opened and released directly.
Single Channel Mode	Set whether to enable the single channel mode. After checking Enable, the previous channel of the current scene application can be used for both entry and exit. However, in terms of logical settings, it is recommended to establish different logical channels to bind different IPC devices.

Table 7-4 Parameter Description of Guard Booth

7.3.5.2 Edit

Click a guard booth name or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

7.3.5.3 Delete

Select one or more guard booths and click **Delete** at the upper part of the list and click **OK** to delete the selected guard booths. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single guard booth.

7.3.5.4 Refresh

Click **Refresh** at the upper part of the list to load new guard booths.

7.3.6 Channel

This paper introduces the configuration of relevant Steps of parking passage.

7.3.6.1 Add New

Operating Steps:

Step 1: In the Parking module, select **Parking Basic Management > Passage**.

Step 2: Click **Add New** in the channel interface and fill in the relevant parameters, as shown in figure below. Please refer to Table 10-5 for parameter description.

Figure 7- 6 New Channel Interface

Parameter	Description
Channel Name	You can customize the channel name here
Name of Guard Booth	Select the corresponding booth
Import And Export Status	Select the channel properties of the entrance and exit of the corresponding booth entrance and exit area
IPC1_IP/IPC1 Corresponds to Video Port Position	The ip address of device 1, and the corresponding video port position is the monitoring position where the device is located
IPC2_IP/IPC2 Corresponds to Video Port Position	The ip address of device 2, and the corresponding video port position is the monitoring position where the device is located
Opening Mode of Fixed Car	Direct release (open the gate directly after identifying the license plate) Confirm the release (pop up the confirmation box and click the button manually to open the gate)
Temporary Vehicle Opening Mode	Pick up and release (open the gate directly after identifying the license plate)

Parameter	Description
	Confirm the release (pop up the confirmation box and click the button manually to open the gate)
Type of Vehicles Prohibited from Passing in Limited Mode	You can set those car types not to pass here, and you can choose multiple

Table 7-5 Description of Channel Parameters

Step 3: Click **OK** to complete the channel setting.

7.3.6.2 Edit

Click a channel name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.3.6.3 Delete

Select one or more channels and click **Delete** at the upper part of the list and click **OK** to delete the selected channels. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single channel.

7.3.6.4 Refresh

Click **Refresh** at the upper part of the list to load new channels.

7.3.7 Vehicle Definition

This paper introduces the configuration of related Steps of vehicle definition.

7.3.7.1 Add New

Operating Steps:

Step 1: In the Parking module, select **Parking Basic Management > Vehicle Definition**.

Step 2: Click **Add New** in the vehicle definition interface and fill in the relevant parameters, as shown in figure below. Please refer to table below for parameter description.

Parameter	Description
Vehicle Definition	Select the corresponding. vehicle
Vehicle Type	Vehicle type of the charging standard
Status	Select the vehicle status enable or disable
Remarks	Text description

Table 7-6 Description of vehicle definition Parameters

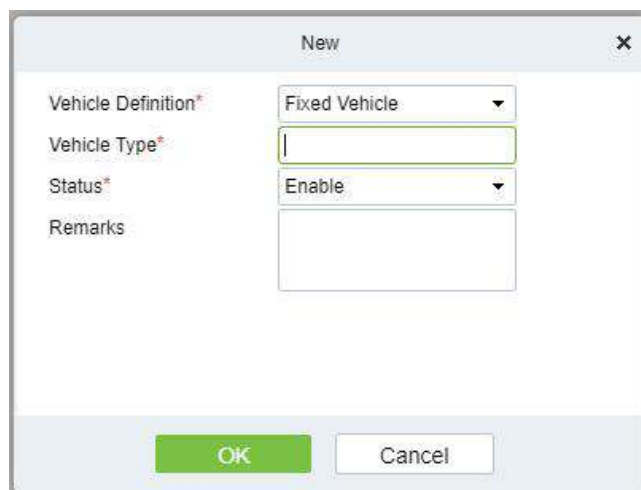
A dialog box titled "New" with a close button (X) in the top right corner. It contains four fields: "Vehicle Definition*" with a dropdown menu showing "Fixed Vehicle"; "Vehicle Type*" with an empty text input field; "Status*" with a dropdown menu showing "Enable"; and "Remarks" with an empty text area. At the bottom are "OK" and "Cancel" buttons.

Figure 7- 7 New vehicle definition

7.3.7.2 Editing the Vehicle Type

Step 1: Click a vehicle type name or **Edit** in the operation column. The Edit page is displayed.

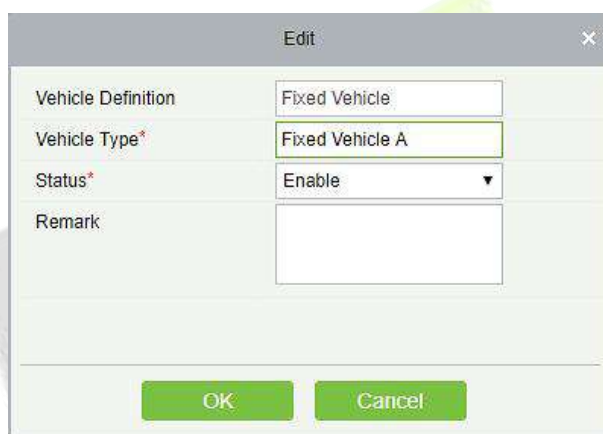
A dialog box titled "Edit" with a close button (X) in the top right corner. It contains four fields: "Vehicle Definition" with a dropdown menu showing "Fixed Vehicle"; "Vehicle Type*" with a text input field containing "Fixed Vehicle A"; "Status*" with a dropdown menu showing "Enable"; and "Remark" with an empty text area. At the bottom are "OK" and "Cancel" buttons.

Figure 7- 8 Edit vehicle Type

Step 2: Set Vehicle Type, select a Status, and enter the vehicle type description in Remark.

Step 3: Click **OK** to save and exit.

7.3.7.3 Delete

Select one or more channels and click **Delete** at the upper part of the list and click **OK** to delete the selected channels. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a vehicle definition.

7.3.7.4 Refresh

Click **Refresh** at the upper part of the list to load new vehicle definitions.

7.3.8 Shift Settings

This paper introduces the configuration of related Steps of parking shift.

7.3.8.1 Add New

Operating Steps:

Step 1: In the Parking module, select "**Parking Basic Management > Shift Setting**".

Step 2: In the **Shift Setting** interface, click **Add New** to fill in relevant parameters, as shown in figure below. Please refer to Table below for parameter description.

Figure 7-9 New Shift Interface

Parameter	Description
Shift name	Distinguish the difference between shifts by setting the device name
Name of Guard Booth	Distinguish the differences between booths by setting device names
Start time	Select the time when the shift starts
End time	Select the time when the shift ends
Across the sky	Is the shift time set across days

Table 7-7 Shift Parameter Description

Step 3: Click **OK** to complete the setting of adding shift settings.

7.3.8.2 Edit

Click a channel name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.3.8.3 Delete

Select one or more channels and click **Delete** at the upper part of the list and click **OK** to delete the selected channels. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a shift setting.

7.3.8.4 Refresh

Click **Refresh** at the upper part of the list to load new shift settings.

7.3.9 Manual Release Reason

A manual release reason must be selected when the manual release function is used on the online

monitoring page.

7.3.9.1 Add New

Operating Steps:

Step 1: In the Parking module, select "Parking Basic Management > Manual Release Reason.

Step 2: In the **Manual Release Reason** interface, click **Add New** to fill in relevant parameters, as shown in figure below. Please refer to Table 10-8 for parameter description.



Figure 7- 10 New Manual Release Reason Interface

Parameter	Description
Shift Name	Distinguish the difference between shifts by setting the device name
Name Of Guard Booth	Distinguish the differences between booths by setting device names
Start Time	Select the time when the shift starts
End Time	Select the time when the shift ends
Across the Sky	Is the shift time set across days

Table 7-8 for Manual Release Reason parameter description

7.3.9.2 Edit

Click a channel name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.3.9.3 Delete

Select one or more channels and click **Delete** at the upper part of the list and click **OK** to delete the selected channels. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a manual release reason.

7.3.9.4 Refresh

Click **Refresh** at the upper part of the list to load new Manual Release Reason.

7.4 Charge Management

This paper introduces the related configuration of parking charge management, mainly setting the charging rules of various car types in the parking lot and the discount strategy of merchants.

7.4.1 Fixed Cars Are Charging Rules

This paper introduces the operation Steps of periodic charging rules for fixed cars in.

7.4.1.1 Add New

Operating Steps:

Step 1: In the Parking module, select "**Charge Management > Fixed Car Charge Rules**"

Step 2: In the fixed car charging rules interface, click **Add New** and fill in the corresponding parameters, as shown in figure below. Please refer to Table 10-9 for parameter description.

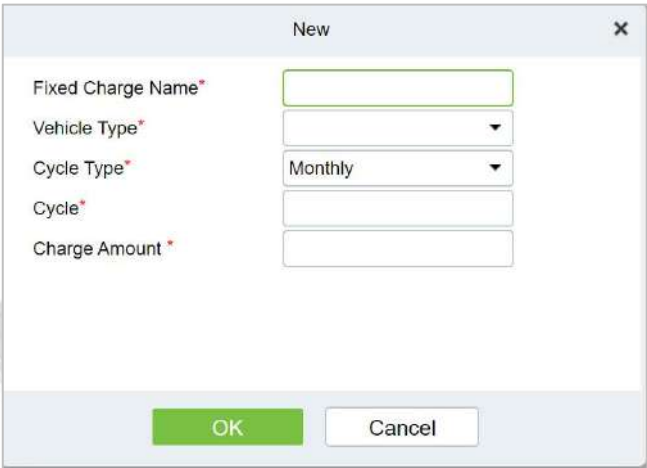


Figure 7- 11 Fixed Car Charge Rules Interface

Parameter	Description
Name of Fixed Car Charge	Set the name of the charging standard for fixed cars, which cannot be repeated.
Car Type	Select the car type corresponding to the fixed car charging standard, and each car type can only be set once.
Periodic Type	Fixed car charging cycle type, monthly/daily.
Period	Set the cycle time, that is, the effective time of the fixed car.
Amount	Set the amount charged.

Table 7-9 Parameter Description of Fixed Car Charging Rules

7.4.1.2 Edit

Click a fixed charge name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.4.1.3 Delete

Select one or more temporary vehicle charge and click **Delete** at the upper part of the list and click **OK** to delete the selected temporary vehicle charge. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single fixed vehicle charge.

7.4.1.4 Refresh

Click **Refresh** at the upper part of the list to load new fixed vehicle charge.

7.4.2 Temporary Car Charging Rules

This paper introduces the Step configuration of temporary car charging rules in.

7.4.2.1 Add New

Operating Steps:

Step 1: In the Parking module, select "Parking Charge Management > Temporary Car Charge Rules".

Step 2: In the Temporary Car Charge Rules interface, click **Add New**.and fill in the corresponding parameters, as shown in figure below. Please refer to Table 10-10 for parameter description.

The screenshot displays the 'New' window for configuring temporary car charging rules. The main form contains several input fields and checkboxes. The 'Detail' section is expanded, showing the 'According to time period' option selected. The 'Time Period1' is configured as '00:00 to 00:00' with the 'Cross Day' checkbox unchecked. On the right side, there is a 'Test Charging Rule' panel with fields for 'Vehicle Type', 'In Time', and 'Out Time', along with a 'Save and test' button. Below this, the 'Amount Receivable' is shown as '0.0'. At the bottom of the window, there are 'OK' and 'Cancel' buttons.

Figure 7- 12 Temporary Car Charge Rules Interface

Parameter	Description
Temporary Vehicles Charging Rules Name	Set the name of temporary car charging rule, which cannot be duplicated.
Vehicle Type	Select the vehicle type corresponding to the charging standard.
Daily Highest Amount	The maximum charge within one day (for example, 10 yuan per hour, 240 yuan for a full day; If the maximum charge amount for the whole day is set to 100 yuan, just charge 100 yuan).
Free Minutes	There is no charge for parking time within this value range.

Parameter	Description
Charging Time Includes Free Minutes	<ul style="list-style-type: none"> Check this item, assuming that the free minute is 30 minutes, and the parking time is 31 minutes. If the parking time exceeds the free minute, the parking time will be charged according to 31 minutes at this time. If this item is not checked, assuming that the free minute is 30 minutes and the parking time is 31 minutes, if it exceeds the free minute, the parking time at this time is 1 minute (31 minutes minus 30 minutes).
Cross Time Splitting	<p>Suppose that the charge for period 1 is set at 1 yuan every 15 minutes from 9:00 to 10:00, the charge for period 2 is set at 10 yuan every 15 minutes from 10:00 to 11:00, and the parking time is from 9:43 to 10:30.</p> <ul style="list-style-type: none"> If this item is not checked, 1 yuan will be charged from 9:43 to 9:58, and if it is only two minutes and less than 15 minutes from 9:58 to 10:00, it will be supplemented from 10:00 to 10:13, then charged according to time period 2 from 10:13 to 10:28, and so on. If this item is checked, 1 yuan will be charged from 9:43 to 9:58, only two minutes will be less than 15 minutes from 9:58 to 10:00, 1 yuan will be charged according to time period 1, time period 2 will be charged from 10:00 to 10:15, and so on.
Enable The Same License Plate to Enter and Leave the Maximum Charge for Multiple Times in A Cycle of 24 Hours (24 Hours on Natural Days)	<p>That is, rolling charges. If the accumulated fees for the same license plate entering and leaving the parking lot for many times exceed this value, no fees will be charged within the set period. The cycle can be set as 24 hours on a natural day or 24 hours on a cycle: 24 hours on a natural day refers to 0:00-24: 00; Cycle 24 hours refers to the time from the admission time to the next day.</p>
By Time Period	<ul style="list-style-type: none"> Time period: Set the charging standards for different time periods, and check the cross-day, but to ensure that the cumulative sum of all time periods is 24 hours, multiple time periods can be added, and the time periods remain continuous. Charge by time: If this item is checked, the first time charge, the amount of unit time charge cannot be filled in, only the highest charge is charged, and the fee set in "Maximum Charge" is charged every time; If this item is not checked, the fee will be charged according to the first time charge, and the remaining time exceeding the first time charge setting will be charged according to the unit time; If the first time charge is not set, the charge will be charged directly according to the unit time, and the unit minute must be a multiple of 15. If the charge exceeds the charge set in the "Maximum Charge", it will be charged according to the maximum charge amount. First time charge: Set the first time within how many minutes, the amount of charge. Maximum charge: the maximum amount of charge in the setting period. Charge amount per unit time: Set the charge amount for how many minutes in this time period.

Parameter	Description
Periodically	<ul style="list-style-type: none"> • Cycle: From the admission time, the next 1440 minutes (24 hours) can be divided into multiple cycle charging standards. • Charge by time: set whether to charge by time in the cycle. After checking, you can only set the maximum charge amount in the cycle, but you cannot set the charge amount per unit time. • Maximum charge: the maximum amount of charge in the setting period. • Charge amount per unit time: Set the charge amount for how many minutes within the minutes of the cycle.

Table 7-10 Parameter Description of Temporary Car Charging Rules

7.4.2.2 Edit

Click a temporary charge name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.4.2.3 Delete

Select one or more temporary vehicle charge and click **Delete** at the upper part of the list and click **OK** to delete the selected temporary vehicle charge. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single temporary vehicle charge.

7.4.2.4 Refresh

Click **Refresh** at the upper part of the list to load new temporary vehicle charge.

7.4.3 Overtime Charging Rules

This paper introduces the operation Steps of charging rules when vehicles time out in.

7.4.3.1 Add New

Operating Steps:

Step 1: In the Parking module, select **Parking Charge Management > Overtime Charge Rules**.

Step 2: In the **Overtime Charge** Rule interface, click **Add New** and fill in the corresponding parameters, as shown in figure below. Please refer to Table 10-11 for parameter description.

New

Name of Over Time Charge

Status*

Enable

Rule*

Detail

Temporary Small Vehicle A

Allowable Retention Time *

 minutes

☐ Include

Retention Time

 /Hour

Temporary Small Vehicle B

Allowable Retention Time *

 minutes

☐ Include

Retention Time

 /Hour

Temporary Medium Vehicle

Allowable Retention Time *

 minutes

☐ Include

Retention Time

 /Hour

Temporary Large Vehicle

Allowable Retention Time *

 minutes

☐ Include

Retention Time

 /Hour

Over Time Charge Rules *

 /Hour

Over Time Charge Rules *

 /Hour

Over Time Charge Rules *

 /Hour

Over Time Charge Rules *

 /Hour

OK

Cancel

Figure 7- 13 Interface of Timeout Charging Rules

Parameter	Description
Overtime Charge Standard	Set the name of timeout charging standard, which cannot be duplicated.
Status	Select whether to enable the charging standard.
Detailed Settings	Set the allowed detention time of each temporary vehicle type after the central payment and the charging standard after exceeding the time.
Allowable Residence Time	The detention time allowed in the garage after the central payment; In case of overtime, you need to charge again.
Including Residence Time	Assume that the allowed detention time is 30 minutes, and the detention time is 31 minutes after payment. If this item is checked, it will be charged according to the timeout of 31 minutes; If this item is not checked, it will be charged according to the timeout of 1 minute.
Overtime Charging Rules	The billing standard for exceeding the allowable residence time.

Table 7-11 Parameter Description of Overtime Charge Rules

7.4.3.2 Edit

Click a name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.4.3.3 Delete

Select one or more temporary vehicle charge and click **Delete** at the upper part of the list and click **OK** to delete the selected temporary vehicle charge. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a time charging rules.

7.4.3.4 Refresh

Click **Refresh** at the upper part of the list to load new over time charging rules.

7.4.4 Discount Strategy

This paper introduces the Step configuration of parking discount strategy for parking discount.

7.4.4.1 Add New

Operating Steps:

Step 1: In the Parking module, select **Parking Charge Management > Discount Strategy**.

Step 2: In the discount policy interface, click **Add New** and fill in the relevant parameters, as shown in figure below. Please refer to Table 10-25 for parameter description.



Figure 7- 14 New Discount Policy Interface

Parameter	Description
Policy Name	Set the name of discount policy, which cannot be duplicated.
Discount Type	Select the discount type: <ul style="list-style-type: none">• Free, no charge.• The amount of reduction and exemption, the cost is directly deducted from the fixed amount.• Reduce minutes, subtract minutes from parking time and then charge.• Percentage of reduction and exemption, percentage of expense deduction.
Amount of Relief	At present, the discount type is reduction amount, and the corresponding field name is reduction amount; If it is another type, it corresponds to the corresponding unit. When the discount type is free, this item is not filled in.

Table 7-12 Discount Strategy Parameter Description

7.4.4.2 Edit

Click a name or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

7.4.4.3 Delete

Select one or more discount policies and click **Delete** at the upper part of the list and click **OK** to delete the selected discount policies. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single discount strategy.

7.4.4.4 Refresh

Click **Refresh** at the upper part of the list to load new discount policies.

7.4.5 Business Management

This paper introduces the operation Steps of merchant management in.

7.4.5.1 Add New

Operating Steps:

Step 1: In the Parking module, select "**Parking Charge Management > Business Management**".

Step 2: In the **Business Management** interface, click **Add New** fill in the corresponding parameters, as shown in figure below. Please refer to Table 10-13 for parameter description.

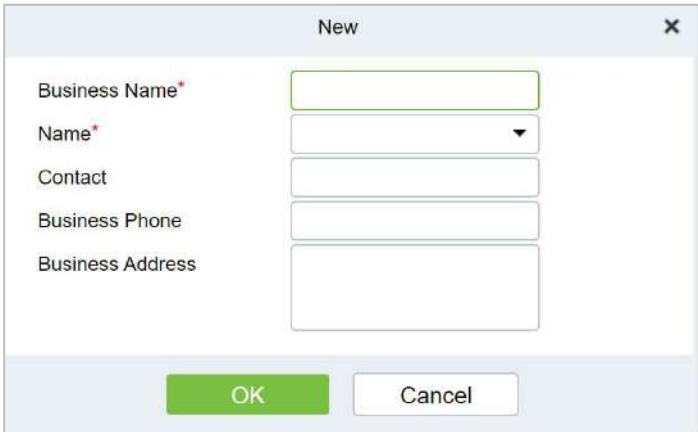


Figure 7- 15 Business Management New Interface

Parameter	Description
Merchant Name	Set the merchant’s name, which cannot be duplicated.
Discount Method	Choose a discount strategy.
Contact Person	Set up merchant contacts.
Merchant Telephone Number	Set the contact number of the merchant.
Merchant Address	Set the merchant contact address.

Table 7-13 Description of Business Management Parameters

7.4.5.2 Edit

Click a name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.4.5.3 Delete

Select one or more vendors and click **Delete** at the upper part of the list and click **OK** to delete the selected vendors. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single vendor.

7.4.5.4 Refresh

Click **Refresh** at the upper part of the list to load new vendors.

7.4.6 Financial Reconciliation

This paper introduces the operation Steps of accounting reconciliation in.

Operating Steps:

Step 1: In the Parking module, select "**Parking Charge Management > Financial Reconciliation**".

Step 2: In the account reconciliation interface, click **Reconciliation**, as shown in figure below. Please refer to Table 10-14 for parameter description

Figure 7- 16 Accounting Reconciliation New Interface

Parameter	Description
Duty Officer Name	Duty officer name
Duty Officer Id	Duty officer ID
Duty Starts Time	Duty starts time
Duty End Time	Duty end time
The Number of Free Release Vehicle	Number of vehicles released free of charge
The Number of Manual Releases	Number of vehicles released manually
Confirmor	Reconciliation personnel
Advance Amount	Amount prepaid to the guard booth (for changes).
Turnover	Paid amount

Parameter	Description
The Total Amount	Advance amount + Turnover
The Actual Amount	Amount entered by the duty officer during the shift change.
Confirm Time:	Current time
Confirm Amount:	Amount confirmed by the reconciliation personnel
Remark	Remark to be added.

Table 7-14 Parameter Description of Accounting Reconciliation

7.5 Vehicle Management

7.5.1 License Plate Registration

This paper introduces the operation Steps of License. Plate Registration.

7.5.1.1 Add New

Operating Steps:

Step 1: In the Parking module, select "**Vehicle Management > License Plate Registration**".

Step 2: In the License. Plate Registration interface, click **Add New**, as shown in figure below. Please refer to Table 10-15 for parameter description

Figure 7- 17 License Plate Registration New Interface

Parameter	Description
Name	Enter the person's name
License Plate	License Plate numbers to be added for registration

Table 7-15 Parameter Description of License Plate Registration

7.5.1.2 Edit

Click **Edit** at the end of each line or click the corresponding Personnel ID and modify personnel license plate registration information in the Edit dialog box.

7.5.1.3 Delete

Select one or more license plate registration information and click **Delete** at the upper part of the list and click **OK** to delete the selected registration information. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single registration information.

7.5.1.4 Download License Plate Import Template

This function will help you to download the licence plate import template.

A	B
License Plate Import Template	
Personnel ID	License plate number (multiple license plates, separated)

Figure 7- 18 License Plate Download Template

7.5.1.5 License Plate Import

This function will help you to upload the licence plate import template.

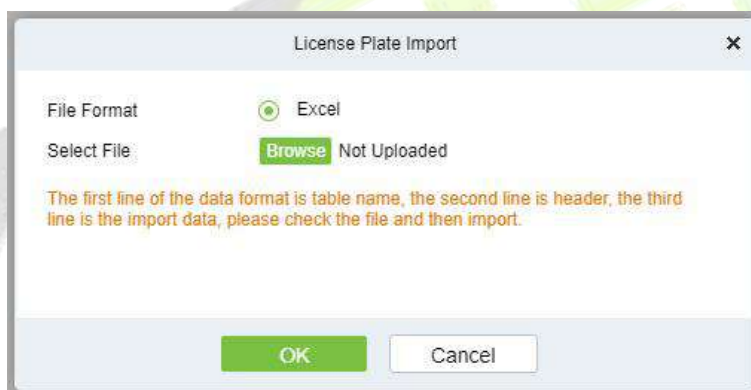


Figure 7- 19 License Plate Registration Import Interface

7.5.2 Vehicle Authorization

This paper introduces the configuration of vehicle authorization Steps in. Only authorized vehicles can normally use the parking module process.

7.5.2.1 Add New

Operating Steps:

Step 1: In the Parking module, select **Vehicle Management > Vehicle Authorization**.

Step 2: Click **Add** and fill in the relevant parameters, as shown in figure below. Please refer to Table 10-16 for parameter description.

New

Name *

Parking Space Number*

Entrance and Exit Area*

Vehicle Type*

Fixed Charge Name*

Start Time*

2022-07-22

End Time*

Fee *

⚠ Authorize the small yard area, must pass the large yard area, the system default authorized corresponding large parking area!

OK

Cancel

Figure 7- 20 Vehicle Authorization Interface

Parameter	Description
Name	In the input box, enter one or more characters contained in the name or number of the owner, and you can find the owner vaguely.
Parking Space Number	Enter the total number of parking spaces in this area
Entrance And Exit Area	Set the Entrance and Exit Area where this license plate can pass. After selecting the parking space number, filter and only display the Entrance and Exit Area of the parking lot area to which the parking space number belongs.
Car Type	Select the vehicle type to which the vehicle belongs.
Fixed Charge Name	Unique name of a fixed vehicle charge
Start Time/End Time	Refers to the time/deadline for authorizing the license plate to take effect. If the fixed car charging standard is enabled, this parameter is filled in by default.
Amount Collected	Record the fees charged for this authorization; If the fixed car charging standard is enabled, this parameter is filled in by default.

Table 7-16 Description of Vehicle Authorization Parameters

Step 3: Click **OK** to complete the setting of vehicle authorization.

7.5.2.2 Fixed vehicle Batch Authorization

On the Vehicle Management page, click Fixed vehicle Batch Authorization. The Fixed vehicle Batch Authorization page is displayed as in the following figure:

Figure 7- 21 Fixed vehicle Batch Authorization New Interface

Select one or more license plates to be authorized from the list on the left. Click > in the middle to add the license plate to the list on the right. Enter the vehicle type, entrance, and exit area, fee, start time and end time in the Authorization area, and click OK to save the information and authorize fixed vehicles in batches.

7.5.2.3 Temporary Vehicle Authorization

On the **Vehicle Management** page, click **Temporary Vehicle Authorization**, the Temporary Vehicle Authorization page is displayed as shown in the following figure. Only the entrance and exit areas to be authorized need to be selected.

Figure 7- 22 Temporary vehicle Authorization Interface

7.5.2.4 Fixed Vehicle Authorization: Delete

Select multiple check boxes in the first column of the license plate list and click Delete to cancel license plates in batches or click Delete at the end of each line to cancel a single license plate.

7.5.2.5 Export

Device information can be exported in EXCEL, PDF, CSV file format.

Export

Encrypt or not: ☐ Yes ☒ No

File Format: EXCEL

Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)

Start Position: 1

Total Records: 100

OK Cancel

Figure 7- 23 Fixed vehicle Authorization Export

7.5.3 Fixed Vehicle Extension

7.5.3.1 Fixed Vehicle Authorization: Delete

Select multiple check boxes in the first column of the license plate list and click **Delete** to cancel license plates in batches or click **Delete** at the end of each line to cancel a single license plate.

7.5.3.2 Batch Extension

Select a fixed license plate for which the valid time needs to be extended and click **Batch Extension** at the end of a fixed license plate. The **Batch Extension** page is displayed.

New

Authorization end time: 2022-04-22 To: 2022-07-29 Vehicle Definition: Small Vehicle A More

Alternative: ☐ First Name Last Name License Plate

Selected(0): ☐ First Name Last Name License Plate

No data

No data

Batch extension

Fixed Charge Name: Fee:

If the parking space number is displayed and the authorization has expired, you need to select the import and export area first, and assign the parking space number.

Confirm Close

Figure 7- 24 Fixed vehicle Authorization Batch Extension

Set Extended Deadline and Fee. Click OK to save and exit.

7.5.4 Block&Allow List Management

7.5.4.1 Add New

●Operating Steps:

Step 1: In the Parking module, select **Vehicle Management > Block&Allow List Management**.

Step 2: Click **Add New** and fill in the relevant parameters, as shown in figure below. Please refer to

Table 10-17 for parameter description.

The image shows a 'New' dialog box for managing Block&Allow lists. It contains four input fields: 'License Plate*' (empty), 'License Plate Type*' (set to 'Allowlist'), 'Start Time*' (set to '2022-07-22'), and 'End Time*' (empty). At the bottom, there are 'OK' and 'Cancel' buttons.

Figure 7- 25 Block&Allow List Management New Interface

Parameter	Description
License Plate	License plate numbers to be added to the blocklist or allowlist
License Plate Type	The value can be block list or allowlist
Start Time/End Time	Time when the allowlist takes effect & expires (This parameter is not available for the blocklist).

Table 7-17 Description of Block&Allow List Management Parameters

7.5.4.2 Edit

Click a **license plate** number or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

7.5.4.3 Delete

Select one or more license plate numbers and click **Delete** at the upper part of the list and click **OK** to delete the selected license plate numbers. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single license plate number.

7.5.4.4 Refresh

Click **Refresh** at the upper part of the list to load the latest blocklist and Allowlist.

7.5.4.5 Synchronize Blocklist

Click **Synchronize Blocklist**, click **OK** to synchronize all blocklists, click **Cancel** to cancel.

When the device is off-line, the device will automatically synchronize blocklist and broadcast voice. It should be noted that the device must be equipped with an SD card.

7.5.4.6 Synchronize Allowlist

Click **Synchronize Allowlist**, click **OK** to synchronize all Allowlists, click **Cancel** to cancel.

When the device is off-line, the device will identify the Allowlist synchronized and automatically open the gate. It should be noted that the device must be equipped with an SD card.

7.6 Report Management

7.6.1 Vehicle Inside

7.6.1.1 Remove

Remove from Device function lets you to remove or eliminate the transmitted Work Codes from the Device.

7.6.1.2 Export

Device information can be exported in EXCEL, PDF, CSV file format.

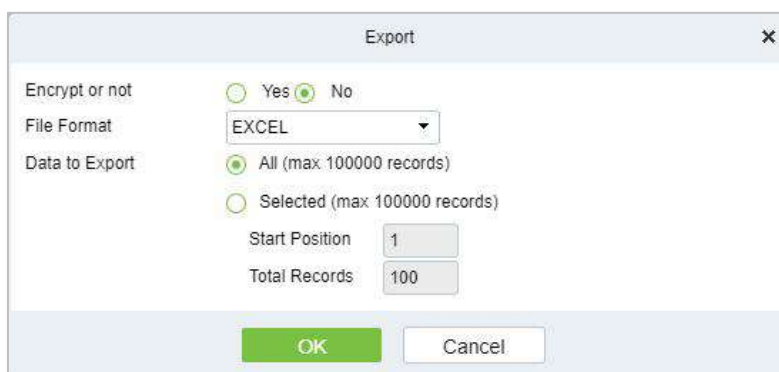


Figure 7- 26 vehicle Inside Export Interface

7.6.1.3 License Plate Correction

Make modifications of the License Plate Number.

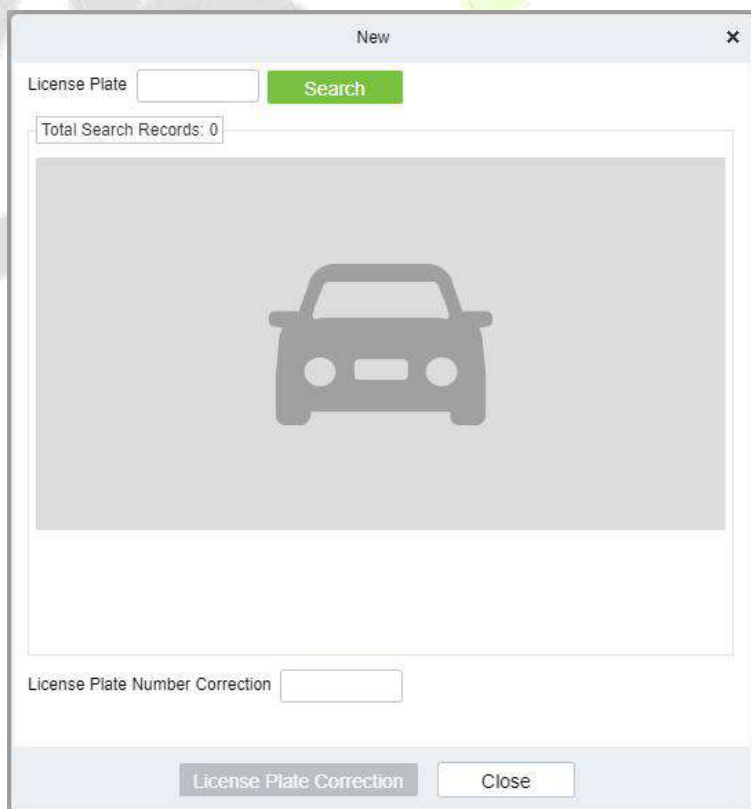



Figure 7- 27 License Plate Correction

7.6.2 Entry Record

It will provide the details of the vehicle which entered into the parking.

Click **Report Management** > **Entry Record**. Select the desired time period, vehicle owner and license plate number, and click  to query Entry records. Click **More** to query based on other conditions.

7.6.2.1 Export

Device information can be exported in EXCEL, PDF, CSV file format.

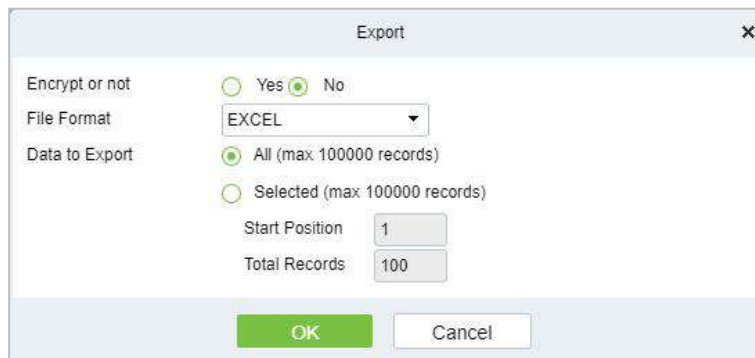



Figure 7- 28 Entry Record of Export Interface

7.6.3 Exit Record

It will provide the details of the vehicle which exited out of the parking.

Click **Report Management** > **Exit Record**. Select the desired time period, vehicle owner and license plate number, and click  to query Exit records. Click **More** to query based on other conditions.

7.6.3.1 Export

Device information can be exported in EXCEL, PDF, CSV file format.

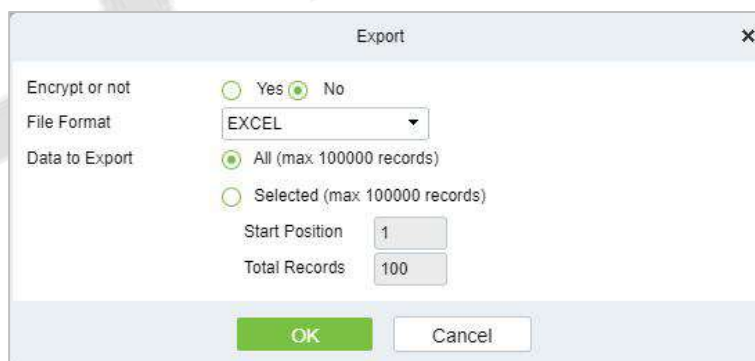



Figure 7- 29 Exit Record of Export Interface

7.6.4 Charge Record

The Charge Record Details module provides reports of charging information of all exit vehicles (records with fee of 0 are also generated for fixed vehicles and charging-free temporary vehicles).

7.6.4.1 Export

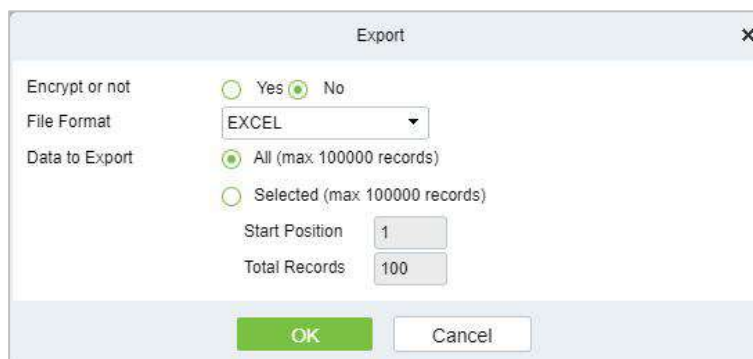Device information can be exported in EXCEL, PDF, CSV file format.



The dialog box titled 'Export' contains the following settings:

- Encrypt or not: ☐ Yes ☒ No
- File Format: EXCEL (dropdown menu)
- Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)
- Start Position: 1 (text input)
- Total Records: 100 (text input)
- Buttons: OK (green), Cancel (white)


Figure 7- 30 Export interface for Charge Record

Choose **Report Management > Charge Details**. Select the desired time period and operator name and click \ to query charging details. Click **More** to query based on other conditions. The page is shown in the following figure.

7.6.5 Expired Vehicle

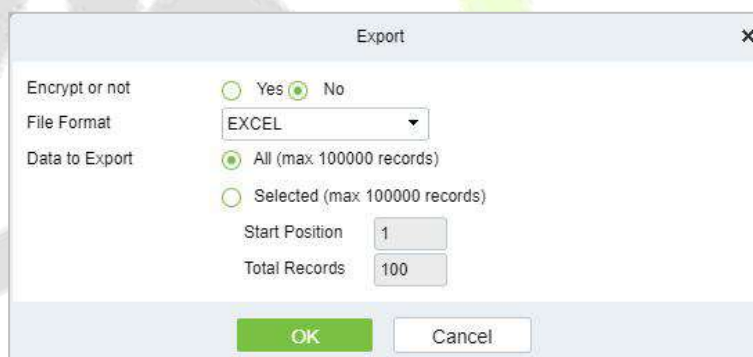
7.6.5.1 Incoming Unusual Vehicles

It will provide the details of the vehicle which incoming unusually of the parking.

Click **Report Management > Incoming Unusual Vehicles**. Select the desired time period, vehicle owner and license plate number, and click  to query Exit records. Click **More** to query based on other conditions.

7.6.5.2 Export

Device information can be exported in EXCEL, PDF, CSV file format.




The dialog box titled 'Export' contains the following settings:

- Encrypt or not: ☐ Yes ☒ No
- File Format: EXCEL (dropdown menu)
- Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)
- Start Position: 1 (text input)
- Total Records: 100 (text input)
- Buttons: OK (green), Cancel (white)

Figure 7- 31 Incoming Unusual Vehicles of Export Interface

7.6.6 Fixed Vehicle Authorization Record

It will provide the details of the vehicle which fixed authorization records of the parking.

Click **Report Management > Fixed vehicle Authorization Record**. Select the desired time period, vehicle owner and license plate number, and click  to query Exit records. Click **More** to query based on other conditions.

7.6.6.1 Export

Device information can be exported in EXCEL, PDF, CSV file format.

Export

Encrypt or not: ☐ Yes ☒ No

File Format: EXCEL

Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)

Start Position: 1

Total Records: 100

OK Cancel

Figure 7- 32 Fixed vehicle Authorization Record of Export Interface

7.6.7 Device Operation Record

IP Address	Device Name	Operating Time	Operation Result	Operation Type	Object	Operations
<input checked="" type="checkbox"/> 192.168.20.254	d	2022-07-18 03:42:11	Turn off the device	The operation success		
<input type="checkbox"/> 192.168.20.254	d	2022-07-13 03:26:44	Connecting device	The operation failed!		
<input type="checkbox"/> 192.168.20.254	d	2022-07-08 03:56:13	Connecting device	The operation failed!		
<input type="checkbox"/> 192.168.20.254	d	2022-07-07 09:04:25	获取设备参数	The operation failed!		
<input type="checkbox"/> 192.168.20.254	d	2022-07-04 12:29:01	Get device parameters	The operation failed!		
<input type="checkbox"/> 192.168.20.254	d	2022-07-04 12:28:51	Connecting device	The operation failed!		
<input type="checkbox"/> 192.168.20.254	LPR-300 Bangalore	2022-07-04 12:17:27	Turn off the device	The operation success		
<input type="checkbox"/> 192.168.20.254	LPR-300 Bangalore	2022-07-04 11:54:35	Synchronize Time	The device is offline, l		
<input type="checkbox"/> 192.168.20.254	LPR-300 Bangalore	2022-07-04 11:54:25	Enable	The device is offline, l		

Figure 7- 33 Device Operation Record Interface

7.6.7.1 Delete

Select one or more device operation record and click **Delete** at the upper part of the list and click **OK** to delete the selected device operation record. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single device operation record.

7.6.8 Handover Statistics

The Handover Record provides reports of handover records.

Choose **Report Management > Handover Statistics**. Select the desired time period and operator name and click \ to query handover records. Click **More** to query based on other conditions. The page is shown in the following figure.

7.6.8.1 Export

Device information can be exported in EXCEL, PDF, CSV file format.

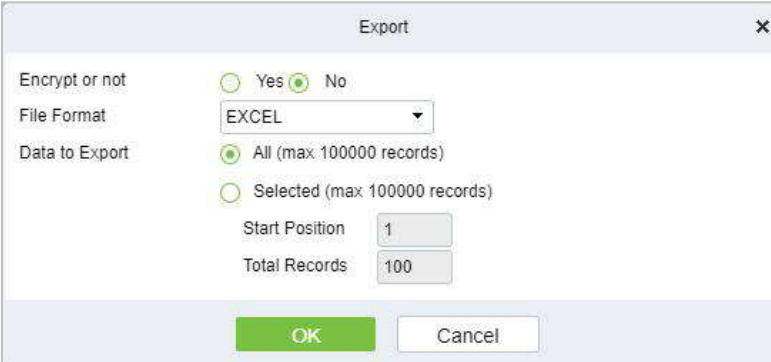
The image shows an 'Export' dialog box with a title bar containing a close button. Inside, there are three sections: 'Encrypt or not' with radio buttons for 'Yes' and 'No' (where 'No' is selected); 'File Format' with a dropdown menu showing 'EXCEL'; and 'Data to Export' with radio buttons for 'All (max: 100000 records)' (selected) and 'Selected (max: 100000 records)'. Below these are two input fields: 'Start Position' with the value '1' and 'Total Records' with the value '100'. At the bottom are 'OK' and 'Cancel' buttons.

Figure 7- 34 Hand Over Statistics of Export Interface

7.6.9 Daily Income Statistics

The Daily Report provides reports of the total amount of charges per day for each shift in each duty guard booth.

Choose **Report Management > Daily Reports**. Select the desired time period and click \ to query the total amount of charges for each shift in each duty guard booth. The page is shown in the following figure.

7.6.9.1 Export

Device information can be exported in EXCEL, PDF, CSV file format.

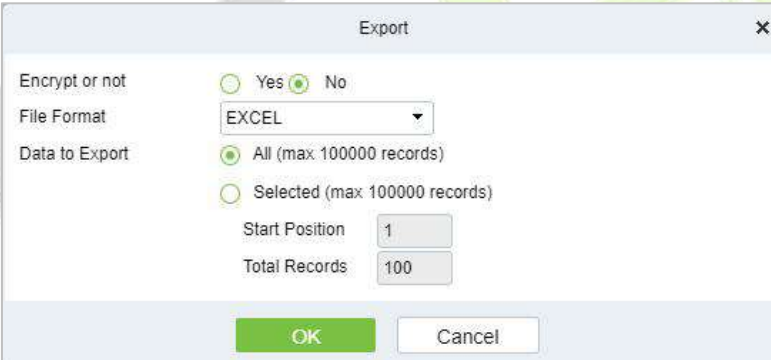
This image shows an identical 'Export' dialog box to the one in Figure 7-34. It has the same settings: 'No' for encryption, 'EXCEL' for file format, 'All' for data export, '1' for start position, and '100' for total records.

Figure 7- 35 Daily Income Statistics of Export Interface

7.6.10 Monthly Income Statistics

The Monthly Report provides statistics of parking fees for each day of the month.

Choose **Report Management > Monthly Reports**. Select the desired time period and click **1A** to query the parking fees the page is shown in the following figure.

7.6.10.1 Export

Device information can be exported in EXCEL, PDF, CSV file format.

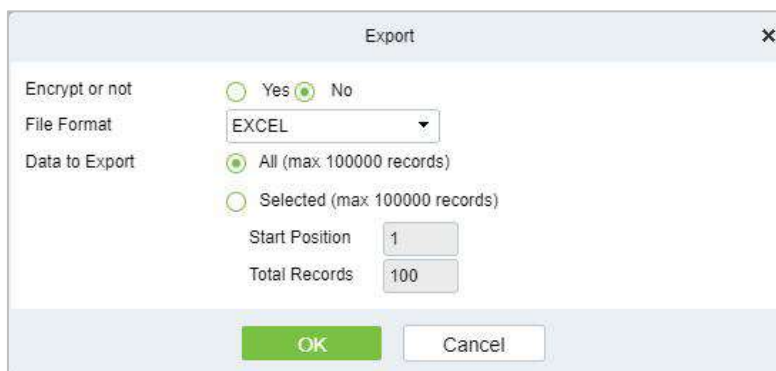


Figure 7- 36 Export Interface of Monthly Income Statistics

7.7 Real-Time Monitoring

This paper introduces the configuration of real-time monitoring in parking module and can view the monitoring dynamics in real time in this interface.

7.7.1 Sentry Booth Monitoring

This paper introduces that the configuration of monitoring related information can be viewed in the booth monitoring interface in, and the administrator can view the monitoring dynamics in the booth monitoring interface.

● Operating Steps:

Step 1: In the Parking module, click "**Parking Real-time Monitoring > Sentry Booth Monitoring**".

Step 2: In the booth monitoring interface, you can view related monitoring videos and events, as shown in figure below.



Figure 7- 37 Guard Booth Monitoring Interface

7.7.1.1 Manual Release

This paper introduces the manual release function of Guard Booth monitoring, and the administrator can operate the vehicle release in this interface.

● Operating Steps:

Step 1: In the Parking module, click "**Parking Real-time Monitoring > Box Monitoring > Manual**".

Release".

Step 2: Under manual release, the administrator can operate vehicle release here, and when the vehicle is not recognized, manual release can be performed, as shown in figure below.



Figure 7- 38 Manual Pass Interface

7.7.1.2 Change Shifts

This paper introduces the information configuration of personnel shift change in, where you can view the data information of shift change handover when exchanging shifts.

●Operating Steps:

Step 1: In the Parking module, click "**Parking Box Monitoring > Shift Change**".

Step 2: Set the relevant shift information, as shown in figure below, and refer to Table 10-18 for parameter description.

Figure 7- 39 Shift Change Interface

Parameter	Description
Name of Duty Officer	Show the name of the person on duty
Working Hours	Show the working hours of the personnel on duty
attendance Checking Hours	Display the attendance checking time of the attendant

Parameter	Description
Number of Vehicles Released Free of Charge	Number of vehicles allowed to be released free of charge
Number of Manual Switches	Number of times of manual release through manual gate opening
Advance Amount	Such as reserve amount, such as reserve for change
Preferential Amount	Amount of parking discount
Turnover	Business amount generated by parking lot charges
Total Amount	Total amount of car park revenue
Actual Amount	Actual amount of parking lot income (net income)

Table 7-18 Description of Shift Change Parameters

Step 3: Enter the account number and password of the shift changer.

Step 4: Click **OK** to complete the setting of booth shift change.

7.7.2 Monitor Room

This paper introduces that the configuration of monitoring related information can be viewed in the monitoring room interface in, and the administrator can view the monitoring dynamics in the monitoring room interface.

● Operating Steps:

Step 1: In the Parking module, click "**Parking Real-Time Monitoring > Monitor Room**".

Step 2: You can view relevant monitoring videos and data statistics in the monitoring room interface, as shown in figure below.

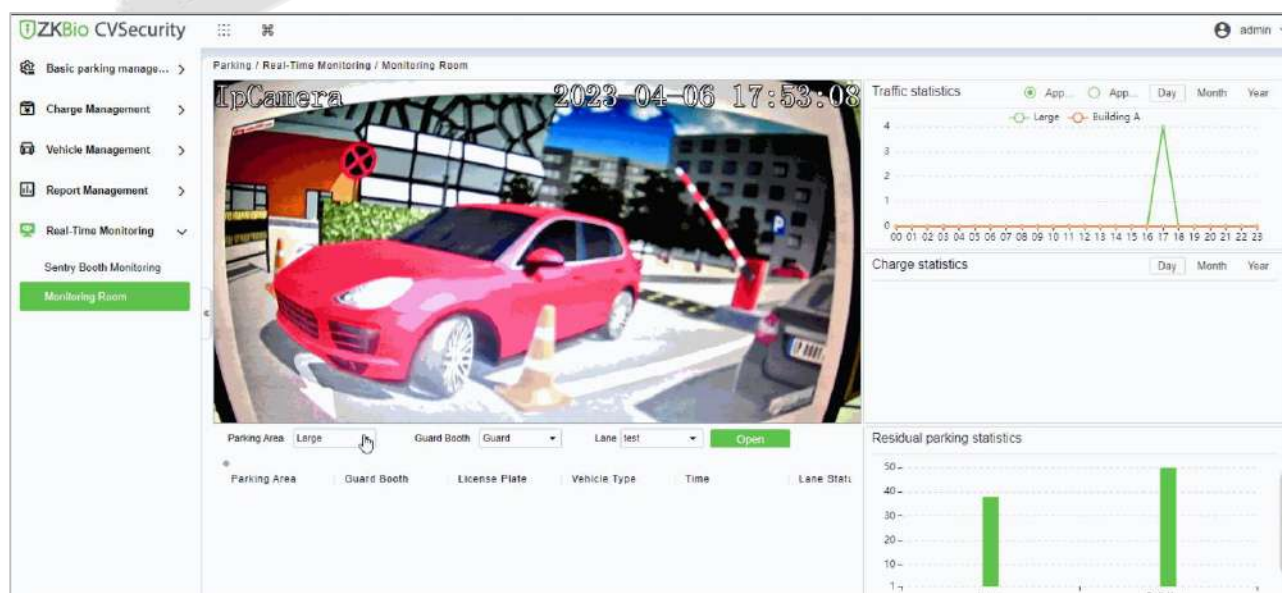


Figure 7- 40 Monitoring Room Interface

7.7.2.1 Manual Barrier Opening

This paper introduces the Step configuration that the administrator can open the Barrier manually, which can be used to open the Barrier manually when the vehicle is not recognized.

● Operating Steps:

Step 1: In the Parking module, click "**Parking Real-time Monitoring > Monitor Room**".

Step 2: In the monitor room interface, click "Open Gate-Enter License Plate Number-Confirm Open Gate", as shown in figure below.

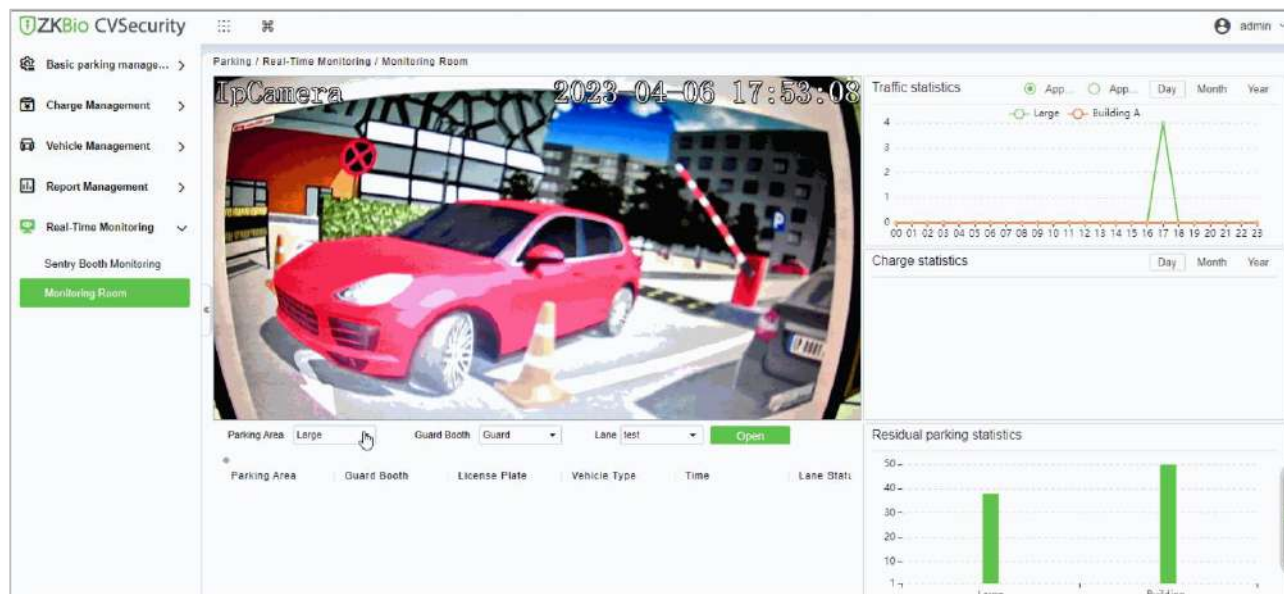


Figure 7- 41 Switch Interface

7.8 Ticket Dispenser Management

A parking lot ticket dispenser is a form of gate that allows pedestrians to pass through a designated area one at a time. They are typically installed in parking areas that are unattended.

7.8.1 Authorized Products (BEST-W Protocol)

Obtain Best-W protocol secret key and upload it to the ticket dispenser for authorization binding.

● Operation:

Step 1: Click **System > Communication Management > Product > New**, Add a product.

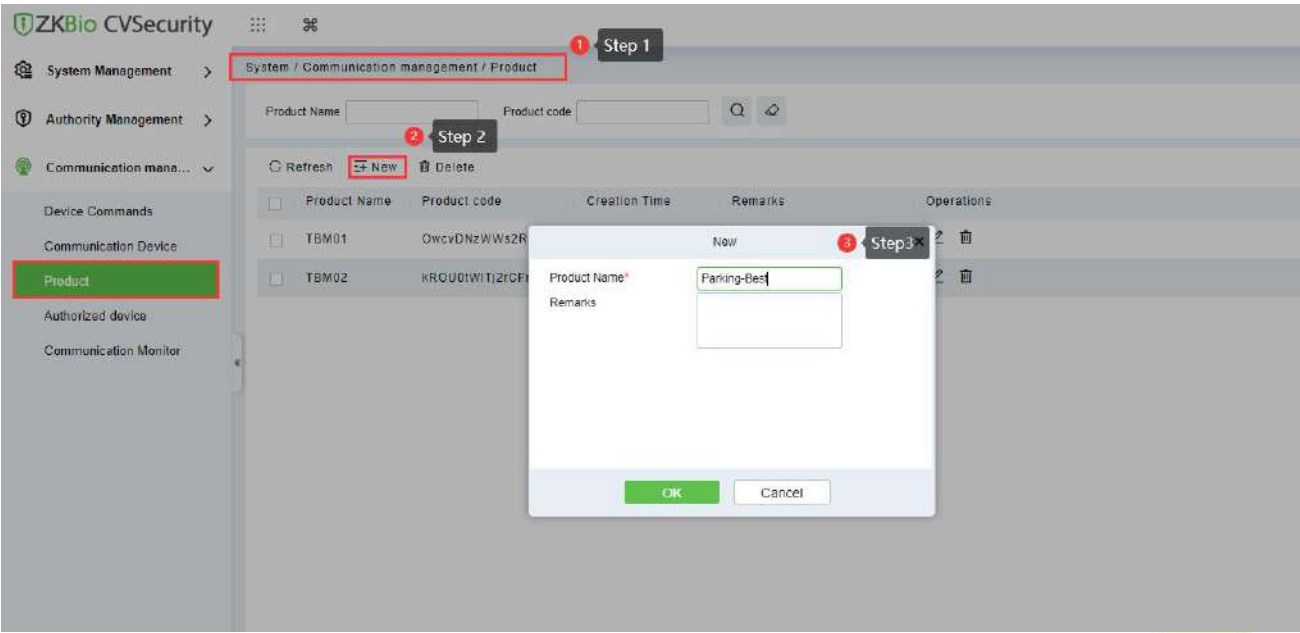


Figure 7- 42 Add a product

Step 2: Click **System > Communication Management > Authorized device > New**, enter the device serial number to generate the secret key.

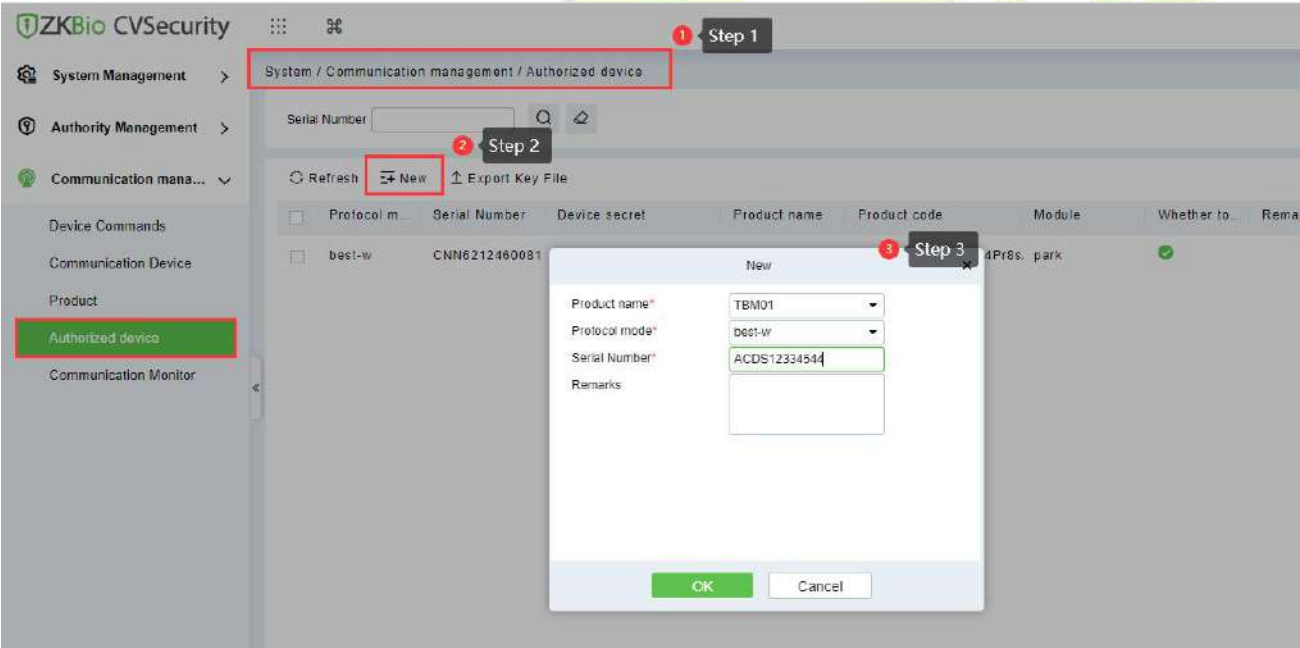


Figure 7- 43 Authorized Device

Select the product, click **Export Key File**, enter the activation time and click **Export**.

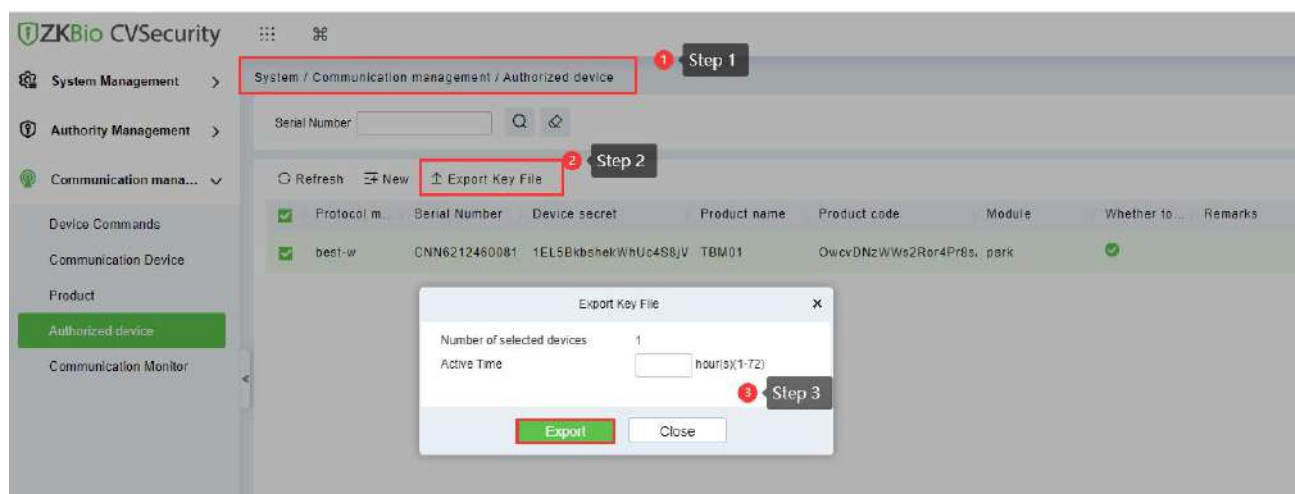


Figure 7- 44 Export Key File

Active Time: The secret key activation time range, after that, the secret key cannot be used again.

Step 3: Login in TBM01 web page, click Setup > Comm Configuration > Best Configuration and Enable Best.

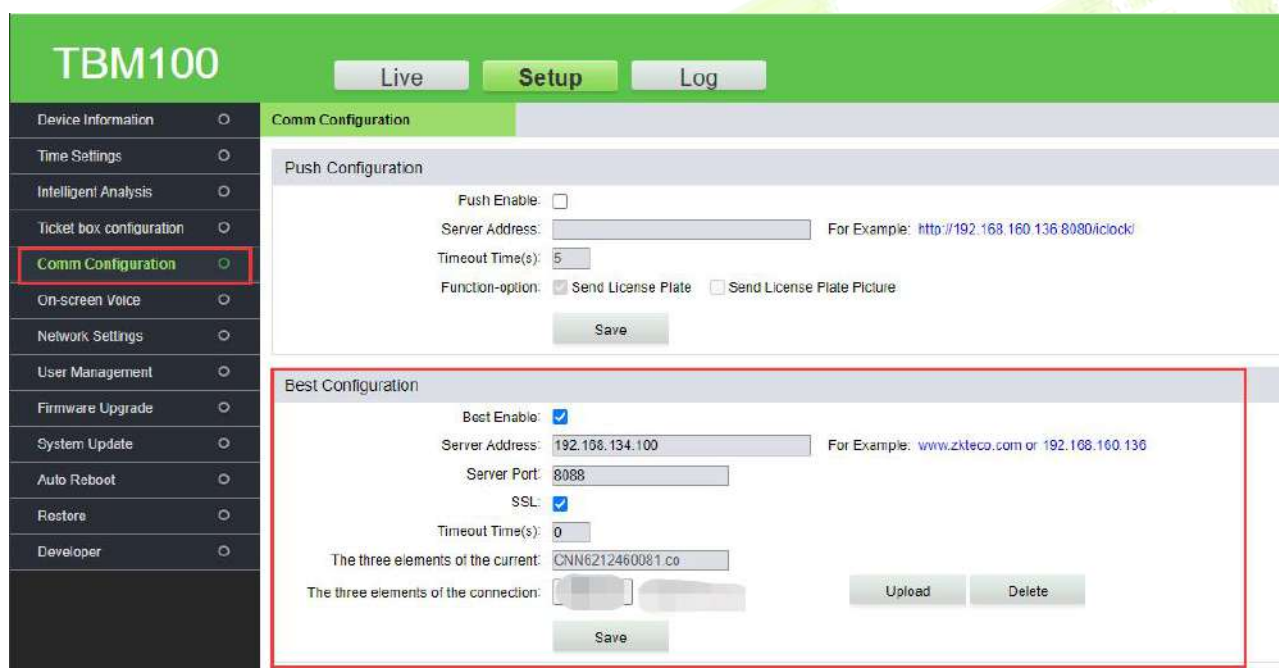


Figure 7- 45 TBM01 Web Page

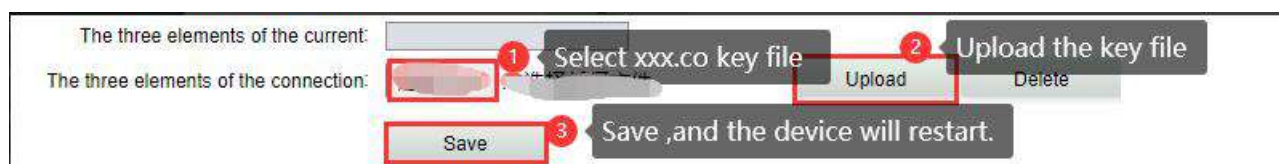


Figure 7- 46 Import Key File

Fields are as follows:

Parameter	Description
Server Address	Server address of the connected ZKBio CVSecurity .
Server Port	The port for the device to communicate with ZKBio CVSecurity, default is 8088.
SSL	Whether the ZKBio CVSecurity server is encrypted or not, and if it is

Parameter	Description
	HTTPS then Enable SSL.
Timeout Time(s)	Communication timeout connection time.
The three elements of the current	The secret key exported from ZKBio CVSecurity and decompressed; the key format is "SNXXXXX.co"
The three elements of the connection	Select the Key of "SN.co", click Upload, then Save and the device will restart.

Table 7-19 Comm setting

Note: The firmware of ticket dispenser should be higher than "V9.2.4.20221223.16".

7.8.2 Set Parking Parameter

Enabling BEST protocol and ticket dispenser for ZKBio CVSecurity.

Step 1: Go to ZKBio CVSecurity Parking Module, click **Parking > Basic Parking Management > Parking Lot Setting > Communication Mode**, select BEST-W.

The screenshot shows the 'Parking Lot Settings' page in the ZKBio CVSecurity interface. The left sidebar lists various settings, with 'Parking Lot Settings' selected. The main area is titled 'Parking Setting' and contains several configuration options:

- Company Name:** A text input field containing 'Parking'.
- Communication Mode:** A dropdown menu with 'BEST-W' selected. This field is highlighted with a red rectangular box.
- Parking Lot Mode:** A dropdown menu with 'One parking space with one car' selected.
- Show parking space number:** A dropdown menu with 'Do not show' selected.
- Video Plug-in:** A dropdown menu with 'Smart Video Plugin' selected.

Below the 'Communication Mode' dropdown, there is a warning message: "To switch the communication mode, you need to add equipment and other related configurations!". Below the 'Parking Lot Mode' dropdown, there is another warning: "Already have an authorized car in responsible space so could not change to multi-vehicle in one space mode. One parking lot with more car does not support offline model". Below the 'Show parking space number' dropdown, there is a third warning: "Cannot switch from Hide to Display when there is an authorized vehicle! Selecting to display the parking space number requires creating the corresponding space number in the parking lot area!". At the bottom of the form is a green 'OK' button.

Figure 7- 47 Enable BEST-W

7.8.2.1 Entrance and Exit Lane Setting

Click **Parking > Basic Parking Management > Parking Lot Setting > Entrance and Exit Lane Setting > Enable Ticket box**.

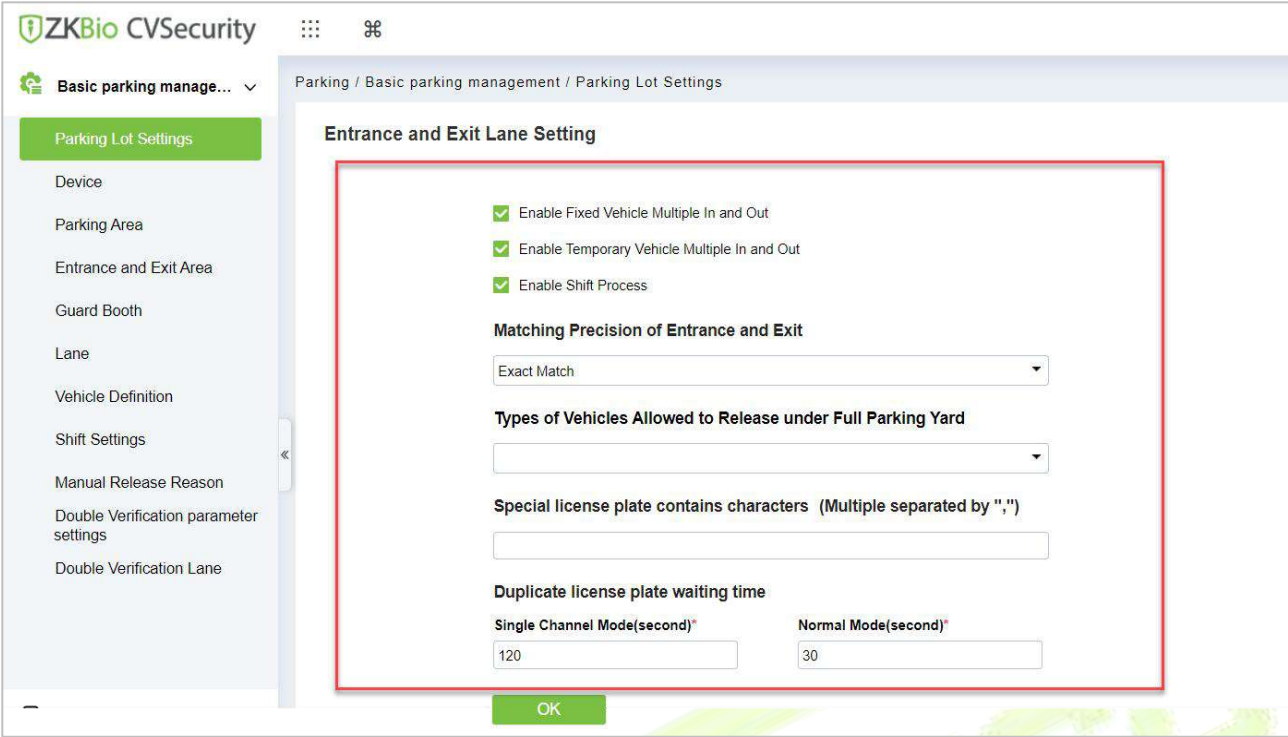


Figure 7- 48

Fields are as follows:

Parameter	Description	Parameter
Entrance and Exit Lane Setting	Enable the fixed or temporary vehicles are multiple In and out.	Allow the fixed or Temporary vehicles to the parking area and vehicles are multiple in and out.
	Matching Precision of Entrance and Exit	vehicles are allowed by exact match and 5 or 6digits registration numbers to the entrance and exit area of the parking.
	Types of Vehicles Allowed to Release under Full parking Yard	vehicles are allowed like small size, larger or medium vehicle.
	Special license plate contains characters	Enter the special license plates contains characters wherever required.
	Duplicate license plate waiting time	In Duplicate license plate waiting time Mention the timings of single channel mode and normal mode

Table 7-20

7.8.2.2 Charge Management Setting

Click **Parking > Basic Parking Management > Parking Lot Setting> Charge Management Setting > Enable Ticket box.**

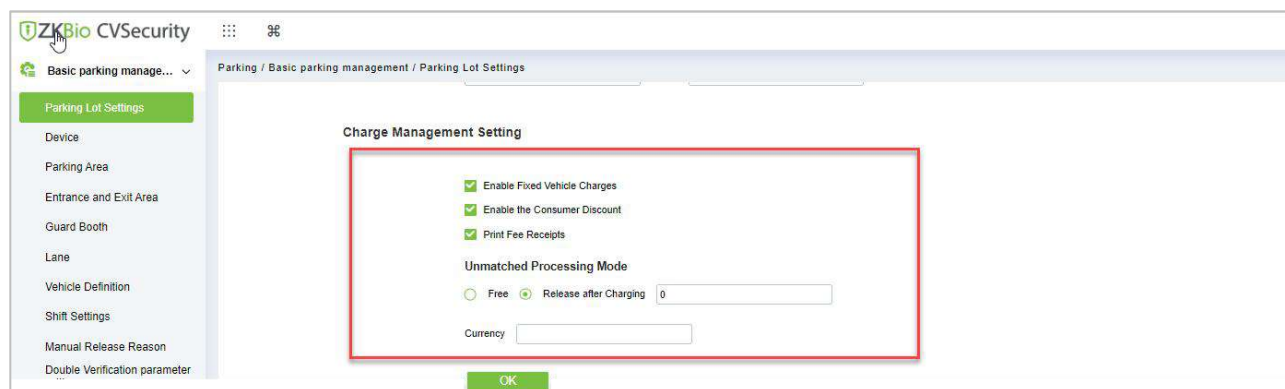


Figure 7- 49

Fields are as follows:

Parameter	Specific Parameters	Parameter Description
Charge Management Settings	Enable the fixed Vehicle charges	If the fixed vehicle charging standard has been set in advance, check this setting, and when the fixed vehicle is authorized and postponed, it will be implemented according to this charging standard; If it is not checked, you can only manually enter the extension time and amount.
	Print the fee receipt	If the receipt printer is set and connected, the corresponding receipt will be printed when the charge is successful.
	Enable consumption discounts	Set the "Discount Strategy" in advance and then check the Enable Consumption Discount System, and the consumption discount will be carried out.
	Unmatched processing mode	There are two existing ways to deal with mismatches: "free release" and "opening the gate after charging fees"; Manual release is to open the gate directly, and when the gate is opened after charging, a charge confirmation box will pop up during manual release (only for temporary vehicles).

Table 7-21

7.8.2.3 Fixed Vehicle Setting

Click **Parking > Basic Parking Management > Parking Lot Setting> Fixed Vehicle Setting > Enable Ticket box**.

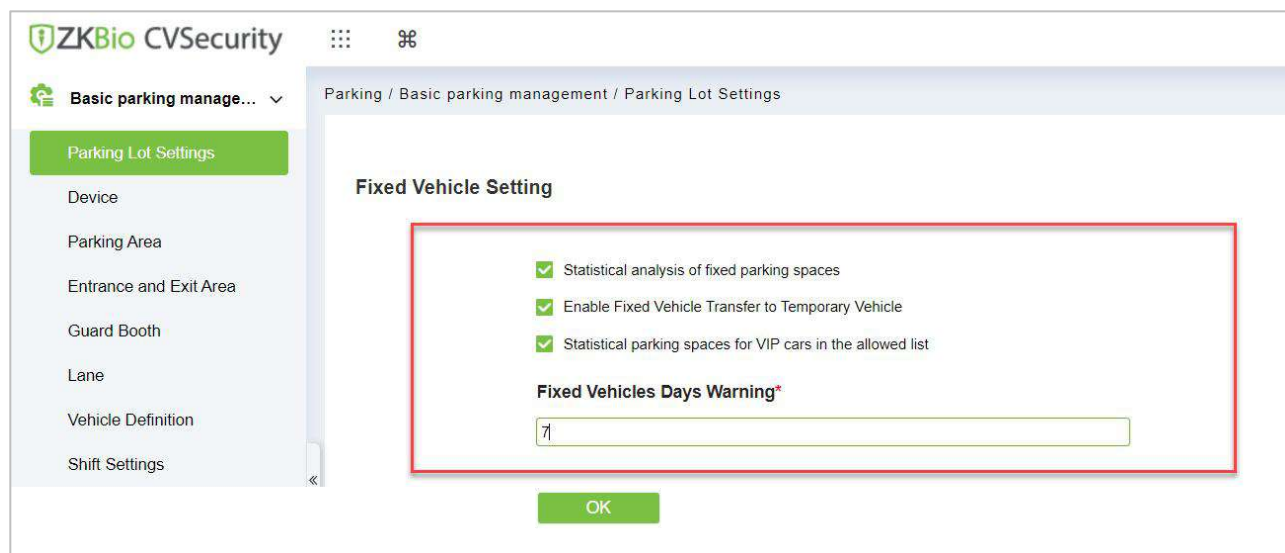


Figure 7- 50

Fields are as follows:

Parameter	Specific Parameters	Parameter Description
Fixed Vehicle Setting	Statistical analysis of fixed parking spaces	If it is checked, the number of vehicles will not be deducted after authorization, and the number of vehicles will be counted in real time when vehicles enter and leave the field. If it is not checked, the number of fixed vehicles will be deducted after authorization.
	Enable fixed vehicle transfer to temporary vehicles	If this option is checked, the fixed vehicles will be automatically converted into a temporary vehicles after it expires, and the charge will be made according to the temporary charging method. If it is not checked, this option will require manual release for the fixed vehicles to come out when it expires.
	Statistical parking spaces for VIP cars in the allowed list	Only for VIP vehicles to park in the allowed specific area space.
	Warning days for fixed vehicles	If the warning days are set to 5 days, it is necessary to prompt the vehicles to postpone the fixed vehicles when entering and leaving the field within 5 days.

Table 7-22

7.8.2.4 Voice and Display Setting

Click **Parking > Basic Parking Management > Parking Lot Setting > Voice and Display Setting > Enable Ticket box.**

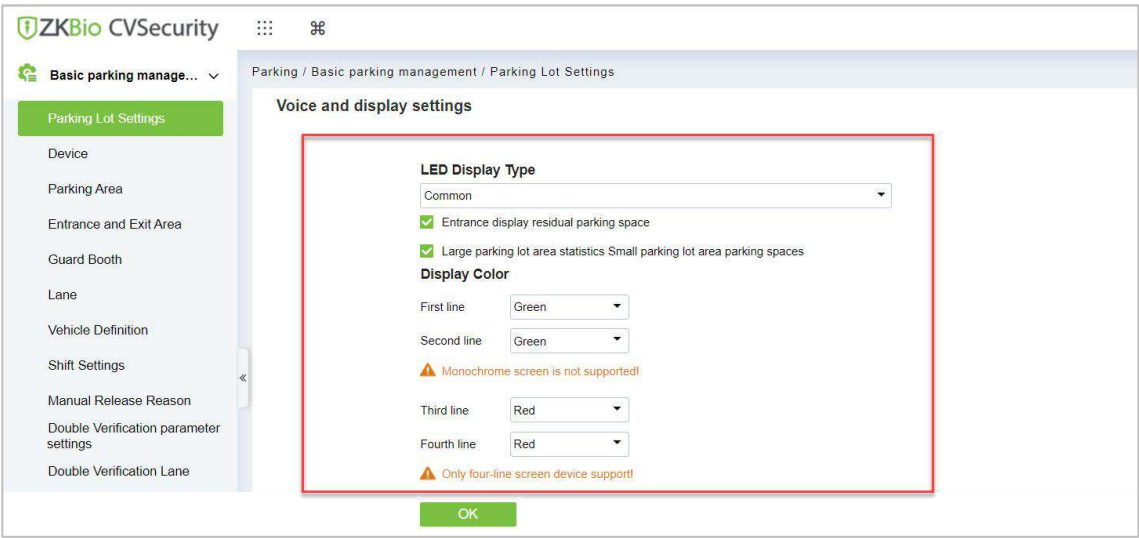


Figure 7- 51

Fields are as follows:

Parameter	Specific Parameters	Parameter Description
Voice and display settings	The entrance shows the remaining parking spaces	Display the remaining parking spaces at the entrance of the parking lot.
	Statistics of car Parking area parking spaces in car Parking area	The statistics of the number of cars in the corresponding booth in the big Parking area include the number of cars in the small Parking area.
	Display color	Set the display color of parking machine.

Table 7-23

Click **Parking > Basic Parking Management > Parking Lot Setting> Ticket Dispenser setting > Enable Ticket box.**

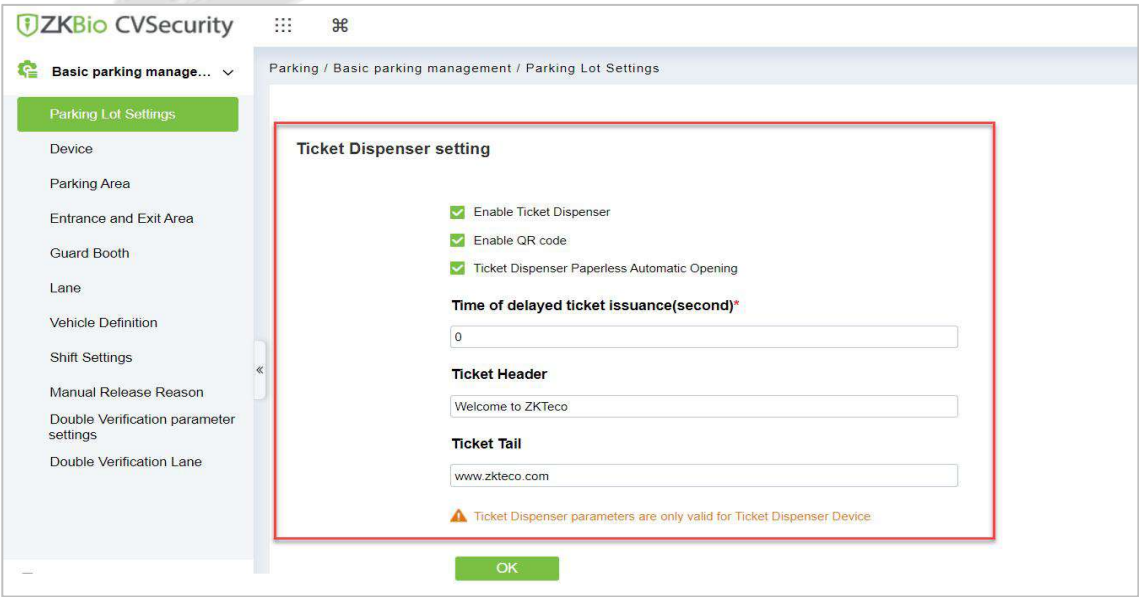


Figure 7- 52 Enable Ticket Dispenser

Fields are as follows:

Parameter	Specific Parameters	Parameter Description
Ticket Dispenser Settings	Enable Ticket Dispenser	Enable the platform's ticket dispenser function.
	Enable QR Code	Enable QR Code function. Print barcode if unchecked.
	Ticket Dispenser Paperless Automatic Opening	After setting, if there is no printing paper in the ticket dispenser, the barrier will open.
	Time of delayed ticket issuance(second)	Ticket dispenser delays printing after the vehicle is detected.
	Ticket Header	What is displayed in the header of the ticket.
	Ticket Tail	What is displayed in the tail of the ticket.

Table 7-24 Enable Ticket Dispenser

7.8.2.5 Protection of Personal Sensitive Information

Click **Parking > Basic Parking Management > Parking Lot Setting> Protection of Personal Sensitive Information > Enable Ticket box.**

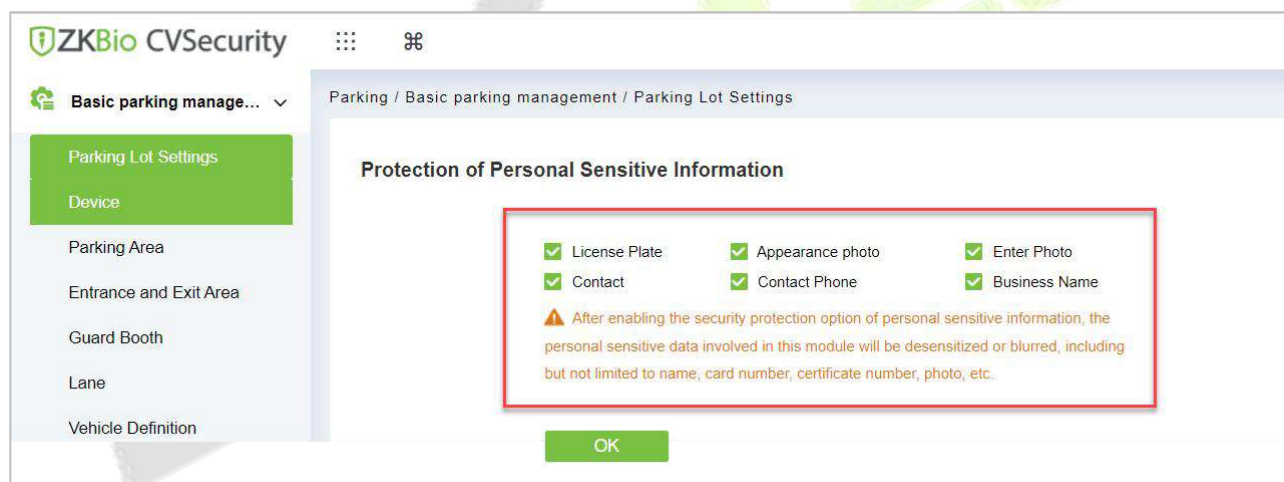


Figure 7- 53

Fields are as follows:

Parameter	Specific Parameters	Parameter Description
Protection of personal sensitive information	Enable personal sensitive information	Enable the License Plate, Appearance photo, Enter photo, Contact/phone, Business Name, for security protection.

7.8.2.6 Other Setting

Click **Parking > Basic Parking Management > Parking Lot Setting> Other Setting > Enable Ticket box.**

Figure 7- 54

Fields are as follows:

Parameter	Specific Parameters	Parameter Description
Other Settings	Maximum parking duration	Set the maximum stay time of on-site vehicles. If the on-site vehicles have not left after this time, the records of on-site vehicles will be displayed in the "On-site Stay Timeout Vehicles" report.
	save days of captured photos	Set captured photos saved more than the set number of days photos will be automatically deleted, if you do not want to delete captured photos will change the parameter set to 0 days.
	captured photos Saving Path	You can customize the path where photos are saved.

Table 7-25

7.8.2.7 Offline Setting

Click **Parking > Basic Parking Management > Parking Lot Setting> Offline Setting > Enable Lifeline Mode.**

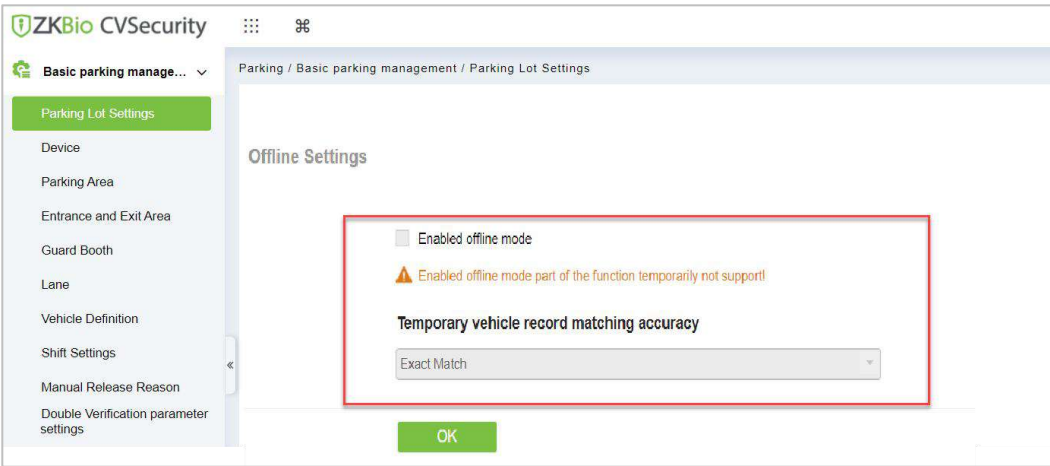


Figure 7- 55

Fields are as follows:

Parameter	Specific Parameters	Parameter Description
Offline Setting	Enable offline mode	Enable the License Plate, Appearance photo, Enter photo, Contact/phone, Business Name, for security protection.
	Temporary vehicle record matching	vehicles are allowed by exact match and 5 or 6digits registration numbers to the entrance and exit area of the parking.

Table 7-26

7.8.3 Add Ticket Dispenser

Add ticket dispenser to ZKBio CVSecurity.

7.8.3.1 Search

Click **Parking > Basic Parking Management > Device > Search**, search and add the ticket dispenser.

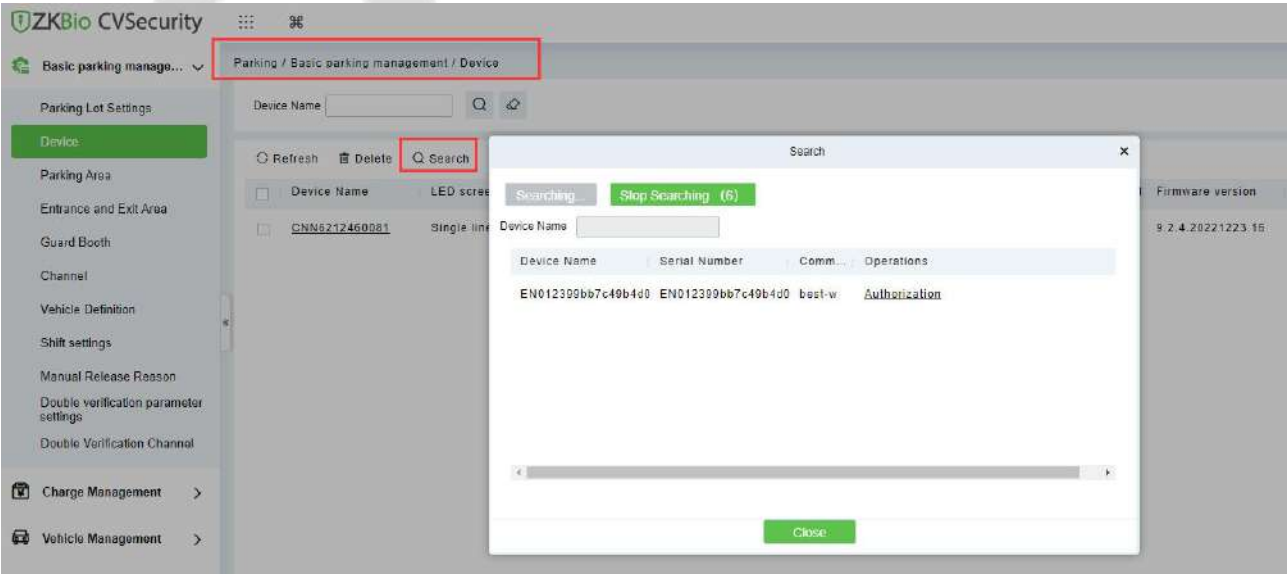


Figure 7- 56 Search device

After searching, click **Authorization**.

Authorization

Device Name*

EN012399bb7c49b4d0ee

Serial Number*

EN012399bb7c49b4d0ee

Device Model*

ZK-LPRC400/300/200

Communication Mode*

best-w

Username*

admin

Password*

LED screen Type*

OK

Cancel

Figure 7- 57 Add device

Fields are as follows:

Parameter	Description
Device Name	The name of your ticket dispenser device
Serial Number	The serial number of devices
Device Model	Select ZK-TBM100
Communication Mode	Use BEST-W Protocol.
Username	Login name, default is admin.
Password	Login password, the default is 123456
LED Screen Type	Types of LED screens for ticket dispenser.

Table 7-27 Add device

7.8.3.2 Add New

Operating Steps:

Step 1: In the Parking module, select **Parking Basic Management > Device**.

Step 2: In the **Device** interface, click **Add New** and fill in the relevant parameters, as shown in figure below.

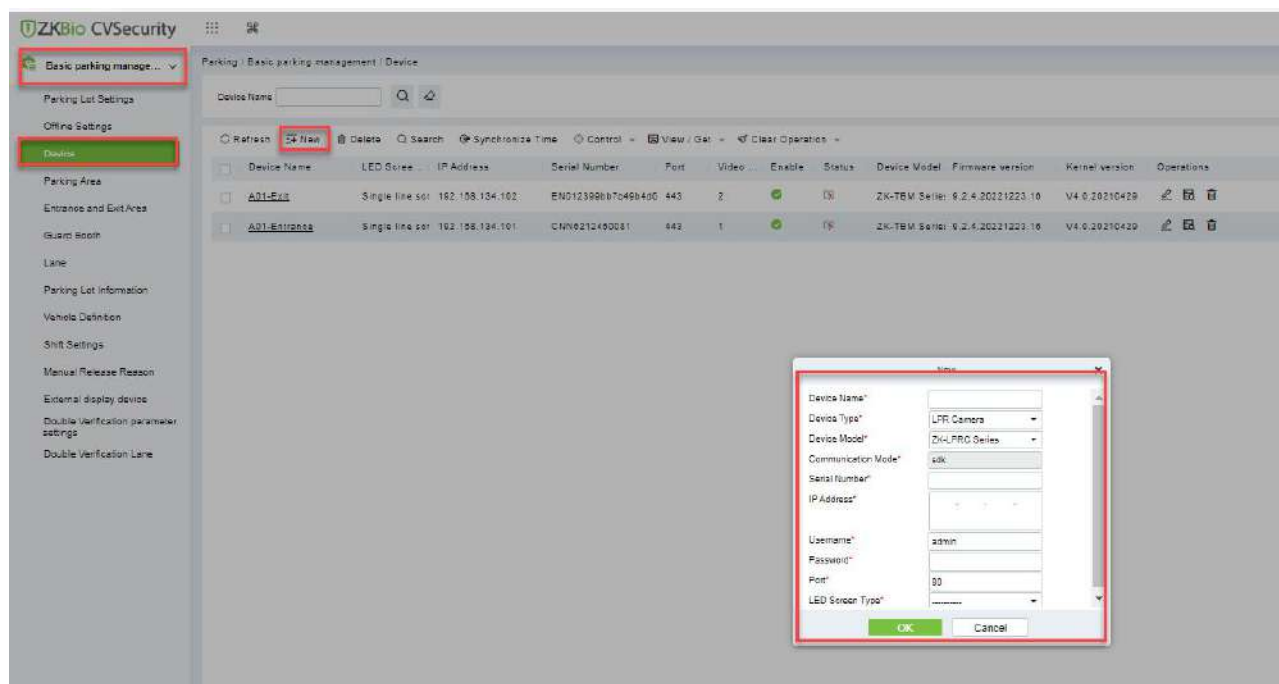


Figure 7- 58

Fields are as follows:

Parameter	Description
Device Name	The name of your ticket dispenser device
Device Type	The type of the device.
Serial Number	The serial number of devices
Device Model	Select ZK-TBM100
Communication Mode	Use BEST-W Protocol.
IP Address	The IP address of your device.
Username	Login name, default is admin.
Password	Login password, the default is 123456
LED Screen Type	Types of LED screens for ticket dispenser.

Table 7-28

Step 3: Click **OK** to complete the setting of the Parking area.

7.8.3.3 Refresh

Refresh the current page.

7.8.3.4 Delete

Select **device**, click **Delete**, and click **OK** to delete the device.

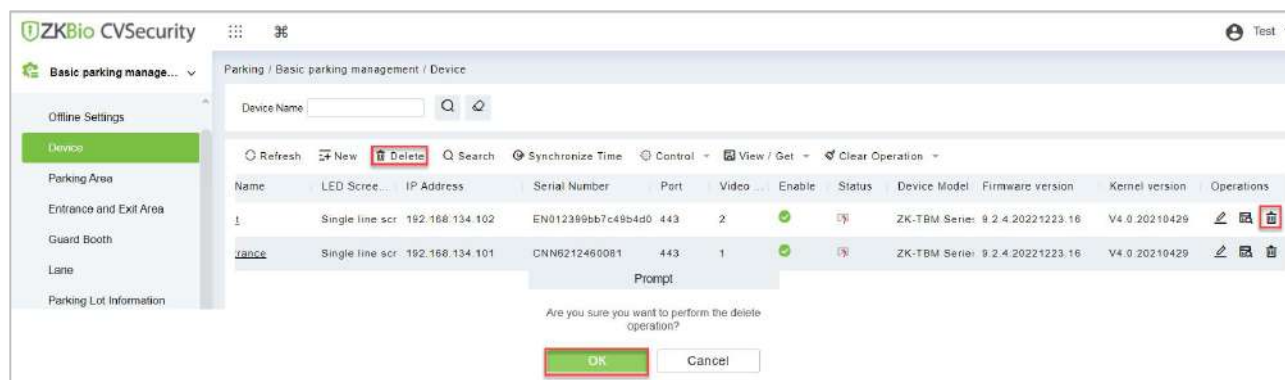


Figure 7- 59 Delete device

7.8.3.5 Synchronize Time

It will synchronize device time with server's current time.

7.8.3.6 Control

Reboot Device: After clicking on it, the device will restart.

7.8.3.7 View/Get

Get device parameters: Get the device parameters, such as IP Address, and video port, etc.

Get device version: Get the firmware version of device.

7.8.3.8 Clear Operation

Clear blocklist: Clear blocklisted license plates.

Clear allowlist: Clear allowlist license plates.

Clear fixed vehicle: Clear the fixed vehicle.

7.8.3.9 Operations



: Edit the selected device.



: View all commands for the device.



: Delete the selected device.

7.8.4 Lane Setting

Preconditions: Refer to 9 Parking Module to configure the parking area, entrance and exit area, guard booth.

Operation Step

Step 1: Click **Parking > Basic parking management > Lane**. Add the ticket dispenser device to the channel.

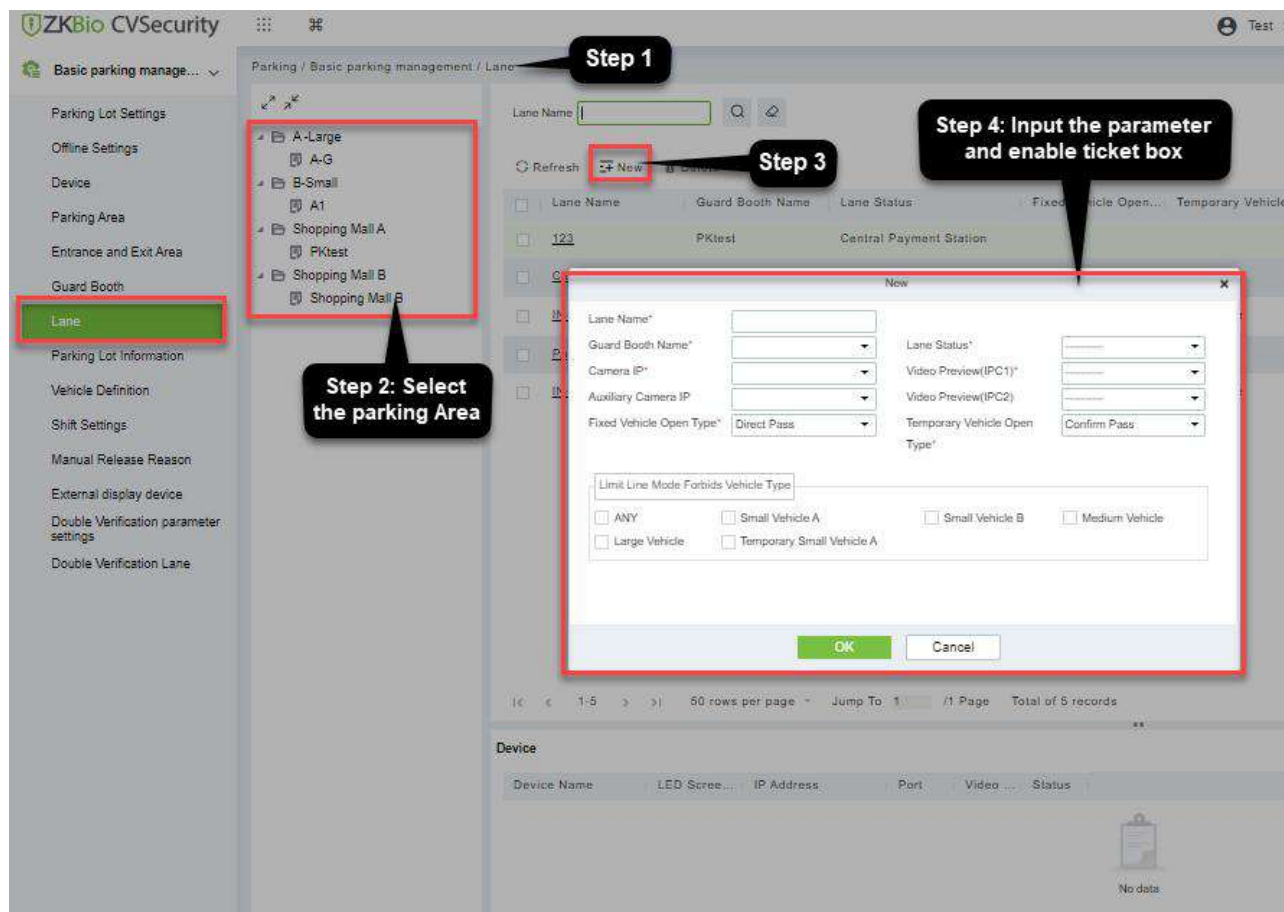


Figure 7- 60 Add channel

Fields are as follows:

Parameter	Description
Lane Name	You can customize the lane name here
Guard Both Name	Select the corresponding booth
Lane Status	Select the channel properties of the entrance and exit of the corresponding booth entrance and exit area
Camera IP	The ip address of device 1, and the corresponding video port position is the monitoring position where the device is located
Auxiliary Camera IP	The ip address of device 2, and the corresponding video port position is the monitoring position where the device is located
Video Preview Windows (IPC)	Windows for real-time monitoring of booth
Fixed Vehicle Open Type	Direct pass: card identification successfully opens the barrier. Confirm pass: after successful card identification, booth confirmation is required before opening the door
Temporary Vehicle Open Type	Direct pass: after Printing ticket open the barrier. Confirm pass: if the temporary vehicle need to charged, select "Confirm pass"

Table 7-29 Lane Setting

Step 3: Click **OK** to complete the lane setting.

7.8.4.1 Edit

Click a channel name or **Edit** in the operation column to go to the Edit page. Modify and click **OK** to save modifications.

7.8.4.2 Delete

Select one or more channels and click Delete at the upper part of the list and click OK to delete the selected channels. Click Cancel to cancel the operation or click Delete in the operation column to delete a single channel.

7.8.5 Vehicle Authorization

7.8.5.1 Fixed Vehicle Authorization

Vehicles for internal personnel in the case of using the ticket box, vehicles of internal personnel must swipe their cards to enter and exit.

Operation Steps:

Step 1: Click **Personnel** > **Personnel** > **Person** > **New**, add a new person, register card and license plate.

Figure 7- 61 Add personnel

Step 2: Click **Parking** > **Vehicle Management** > **Vehicle Authorization** > **Fixed Vehicle Batch Authorization**, select the personnel and authorization.

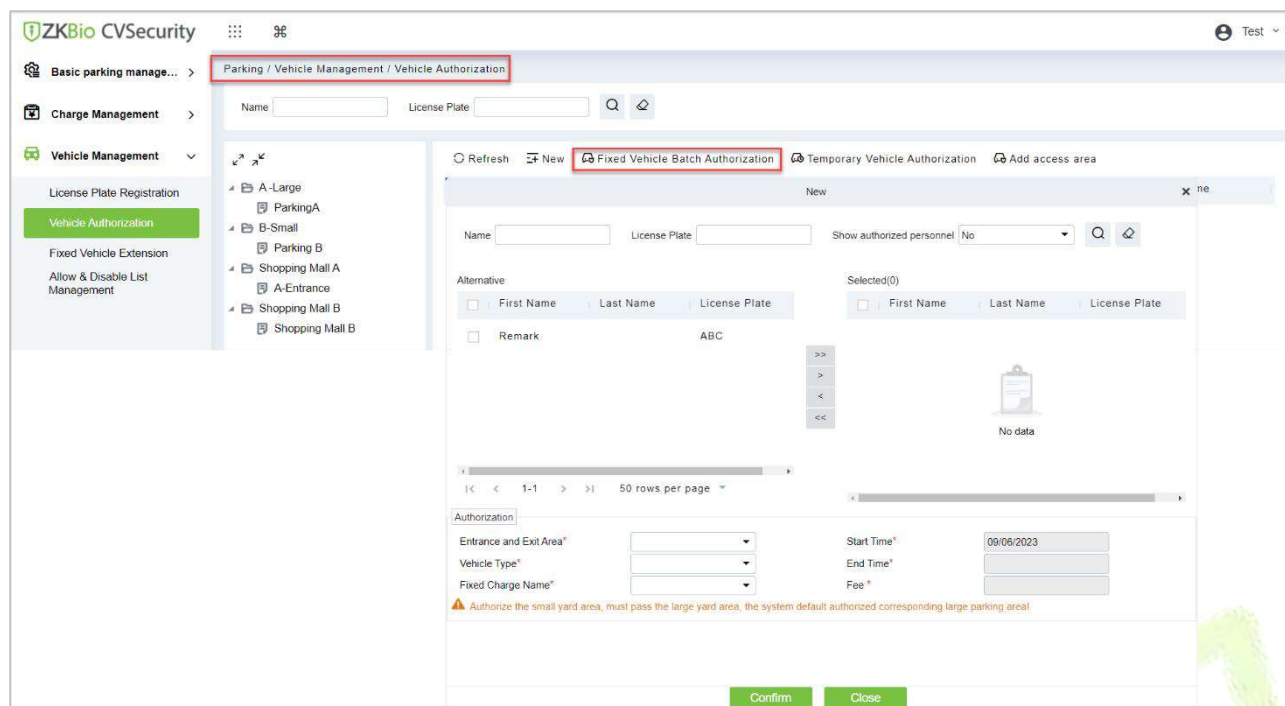


Figure 7- 62 Fixed vehicle Batch Authorization

Step 3: Successfully authorized vehicles will be displayed in the list.



Figure 7- 63 Authorization list

7.8.5.2 Temporary Vehicle Authorization

Temporary cars print tickets at the entrance ticket dispenser and exit after scanning the QR code and charging.

Operation Step:

Step 1: Click **Parking > Vehicle Management > Vehicle Authorization> Temporary Vehicle Authorization**. Authorize access areas for temporary vehicles.

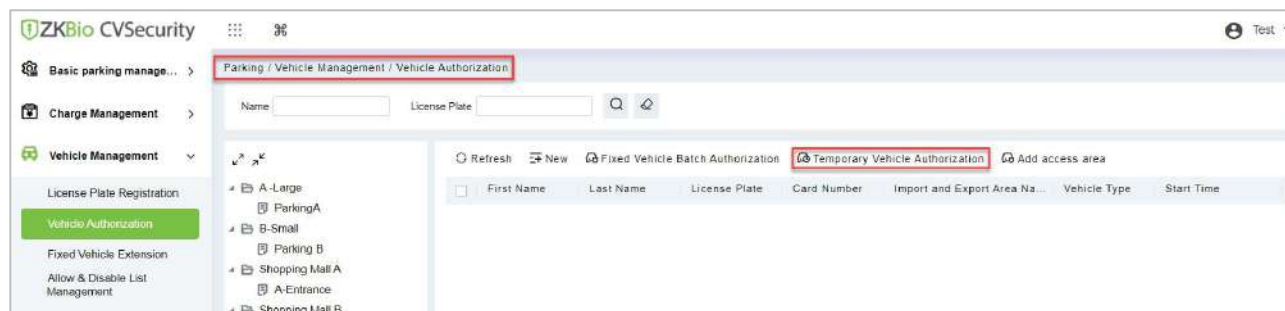


Figure 7- 64 Temporary Vehicle Authorization

Step 2: Successfully authorized vehicles will be displayed in the list.

First Name	Last Name	License Plate	Card Number	Import and Export Area Name	Vehicle Type	Start Time	End Time	Fee
				ParkingA, Parking B	Temporary Small			
		YE45356	751895816	ParkingA, Parking B	Small Vehicle B	2023-01-03 00:00:00	2023-01-31 23:59:59	180
	X**g	Y4535M43	3602395356	ParkingA, Parking B	Small Vehicle B	2023-01-03 00:00:00	2023-01-31 23:59:59	180

Figure 7- 65 Authorization list

7.8.6 Result Verification

7.8.6.1 Vehicle Entrance

Click Parking > Real-time Monitoring > Sentry Booth Monitoring, to check the vehicle access events.

Fixed Vehicle: Fixed vehicle swipe card on the ticket dispenser to enter, the booth real-time monitoring can view the record.

Temporary Vehicle: The vehicle sensor detects the vehicle and activates the ticket dispenser, the temporary vehicle enters after printing the ticket.

License Plate	Vehicle Type	Vehicle Owner	Time	Channel Status	Event Type
Y4535M43	Small Vehicle B	Popy Xiao	2023-01-05 14:49:04	In	Fixed Car Charge
0004A0123XYSKUQI	Temporary Small		2023-01-05 14:48:50	In	General Record

Figure 7- 66 Vehicle Entrance

7.8.6.2 Vehicle Exit

Click Parking > Real-time Monitoring > Sentry Booth Monitoring, to check the vehicle access events.

Fixed Vehicle: Fixed vehicle swipe card on the ticket dispenser to exit, the booth real-time monitoring can view the record.

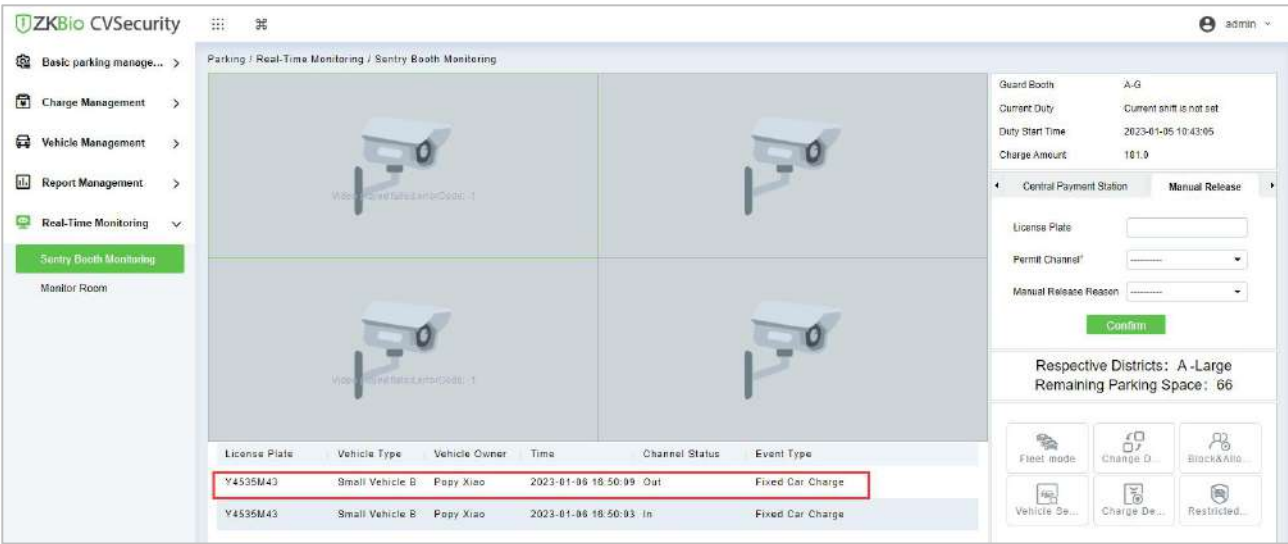


Figure 7- 67 Sentry Booth Monitoring

Temporary Vehicle: At the exit, after the ticket box scans the QR code, the system starts billing, check the picture below;

After charging, you can click **print the bills** or **open** the barrier.

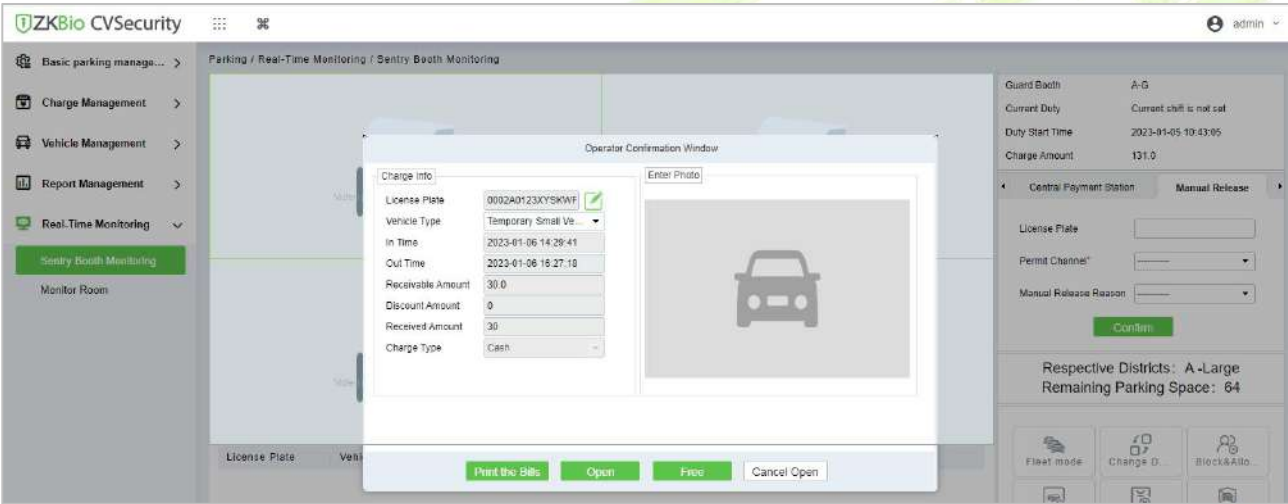


Figure 7- 68 Sentry Booth Monitoring

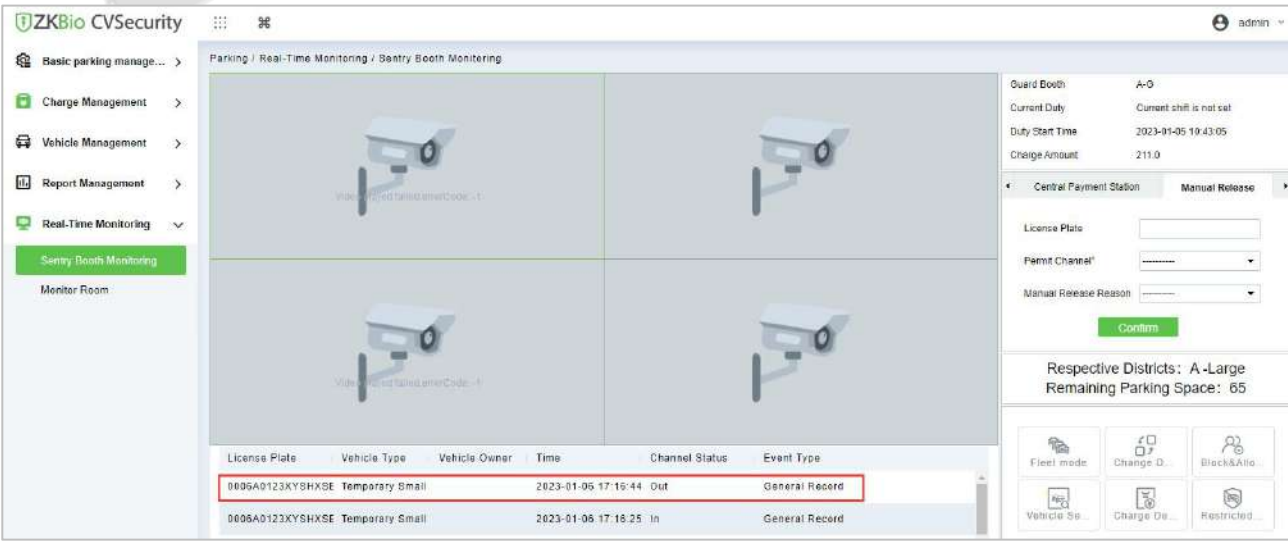


Figure 7- 69 Sentry Booth Monitoring

7.8.7 Central Payment Station

When the exit is far from the post, the central payment station can be activated; when charging at the station, the vehicle can stay for a period before leaving the site.

● Operation Step:

Step 1: Click **Parking > Basic Parking Management > Lane > New**, add a channel and set to “Central Payment Station”.

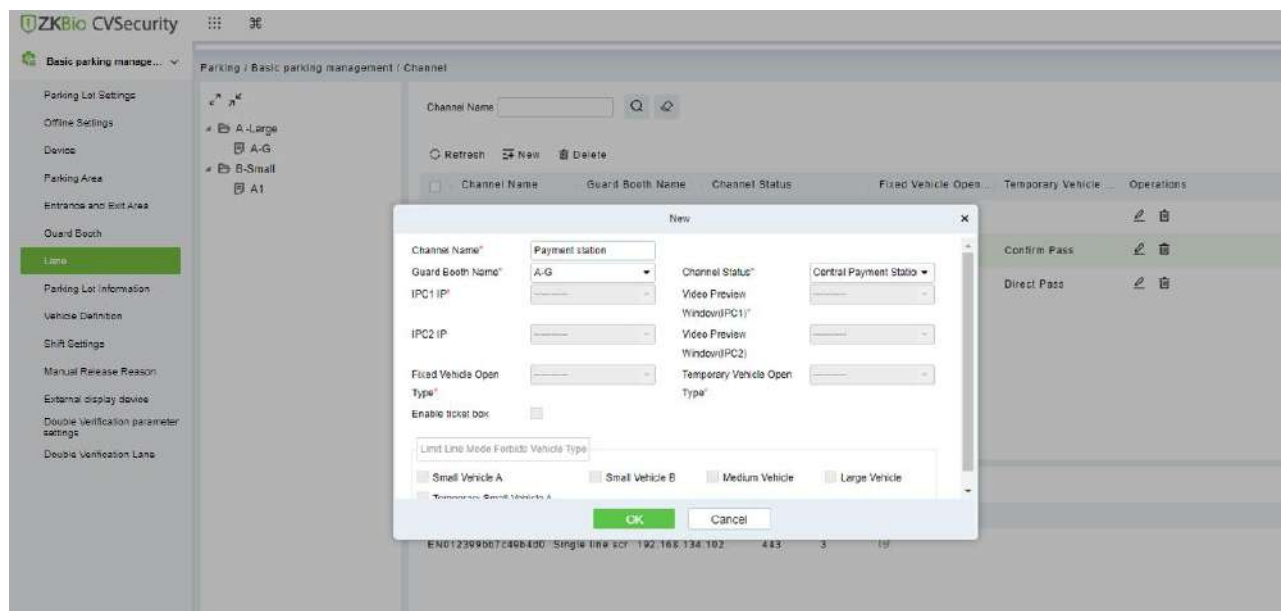


Figure 7- 70 Channel Setting (1)

Step 2: Click **Parking > Basic Parking Management > Lane > New**, add a channel and set to “Central Payment Exit”.

When charging at the central payment station, you need to exit at this designated "central payment exit".

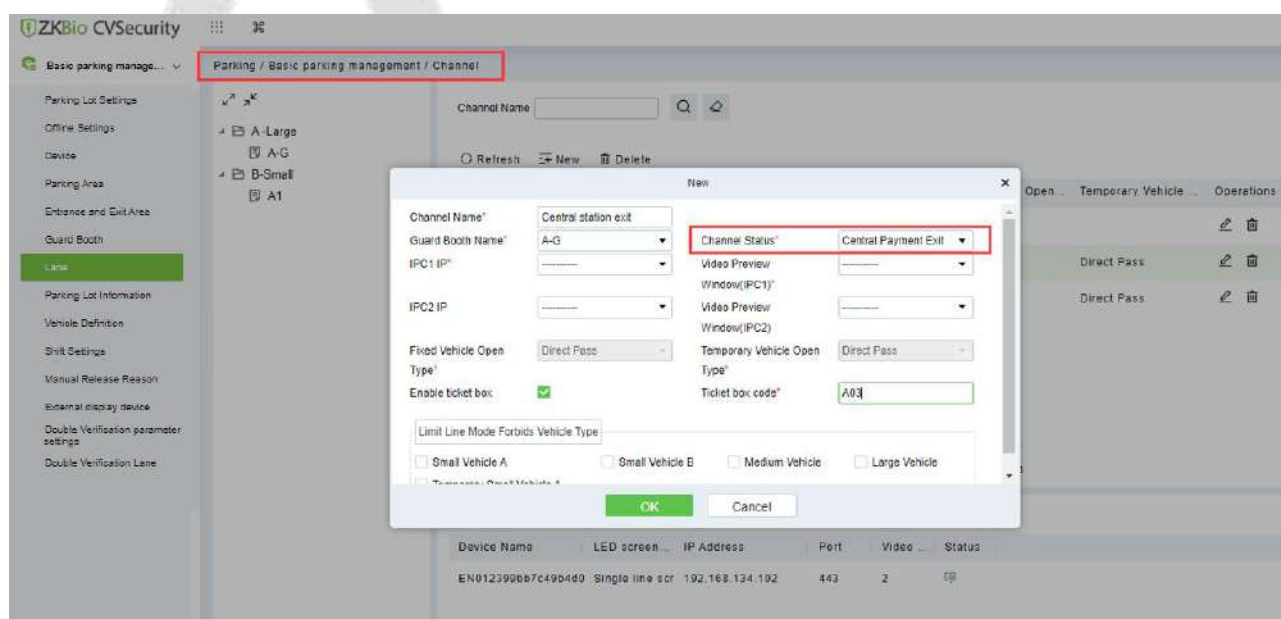


Figure 7- 71 9-65 Channel Setting (2)

Step 3: Click **Parking > Charge Management > Overtime Charge Rules > New**, New vehicle overstay charge rule.

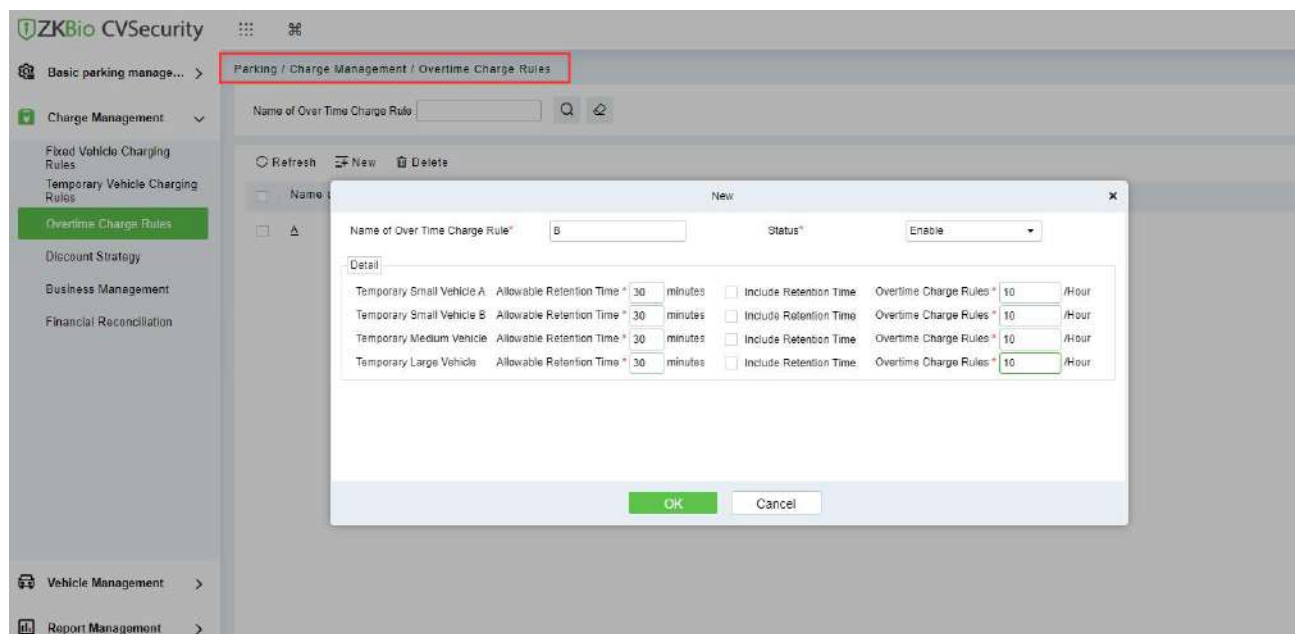




Figure 7- 72 Overstay rule

Edit  : Edit the selected device.

Delete  : Delete the selected device.

Step 4: Click **Parking > Real-time Monitoring > Sentry Booth Monitoring**.

When the vehicle arrives at the central payment station, the administrator uses Barcode Scanner to scan the entrance QR code and the system starts billing.

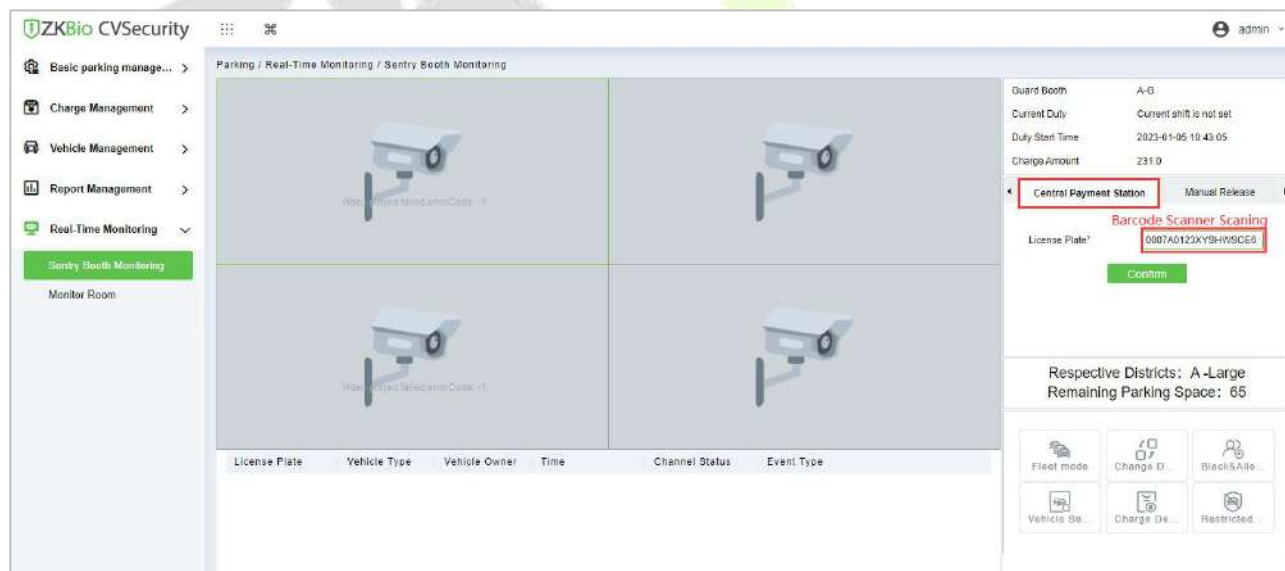


Figure 7- 73 Overstay Rule

After click **Confirm**, the charge window will pop up, after paid,you can click **Print the bills** or **Charge**.

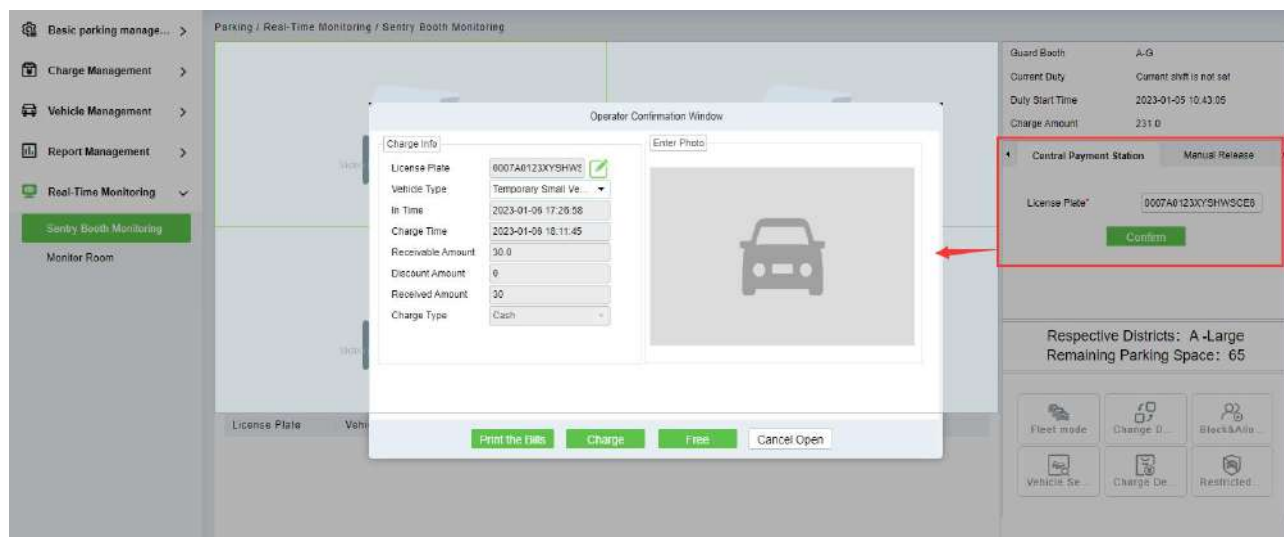


Figure 7- 74 Overstay Rule (2)

After successful payment, the vehicle can continue to stay or exit, overtime stay is charged according to the set rules.

When the time limit is exceeded, ZKBio CVSecurity will prompt "Please go to the central payment station to pay for the overtime stay" when the ticket dispenser at the central payment exit is scanning.

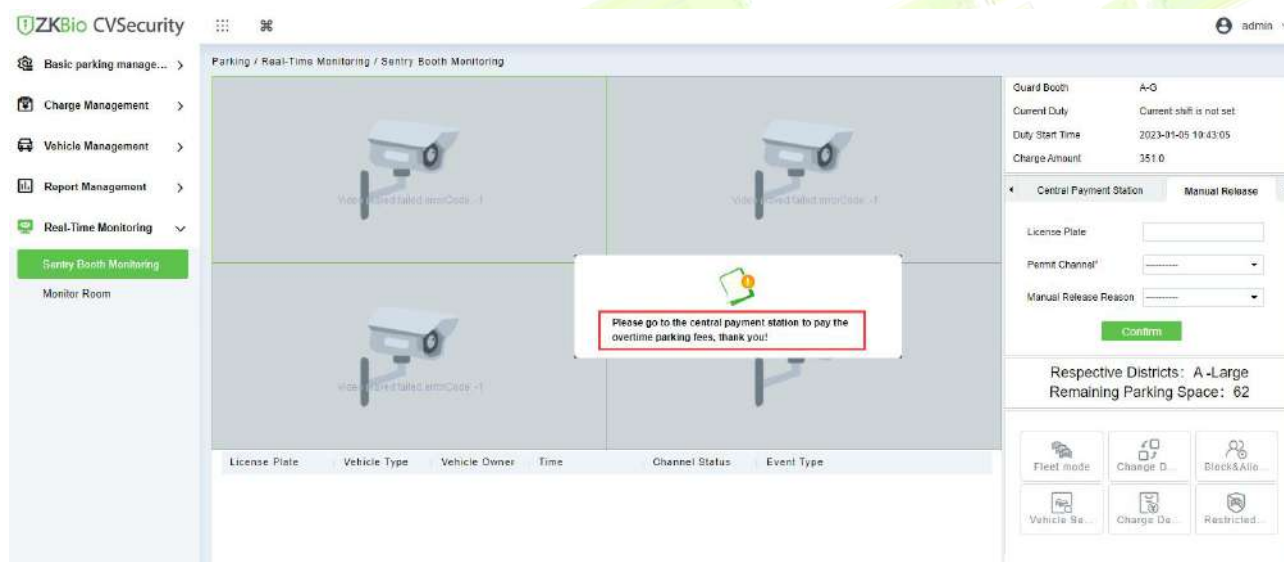


Figure 7- 75 Overstay Fee

7.8.8 Annex 1



Figure 7- 76 Barcode Ticket



Figure 7- 77 QR code Ticket

Bills	
Parking	
2023-01-07 10:35:54	
Guard Booth	A-G
License Plate	0006A0123XYRO VUCE6
In Time	2023-01-07 10:34:59
Out Time	2023-01-07 10:35:54
Parking Time	00:00:55
User	admin
Receivable Amount	10.0
Discount Amount	0
Received Amount	10

Figure 7- 78 Receipts printed at the central payment station

8 Visitor Management

8.1 Operation Scenario

By registering visitor's certificates, photos and other effective ways, and issuing corresponding Access Control/Elevator control/passage/witness authority, visitors can be managed safely and efficiently.

8.2 Operation Flow

Introduces the configuration process of visitor management business.

The business configuration process of the visitor management business is shown configure below.

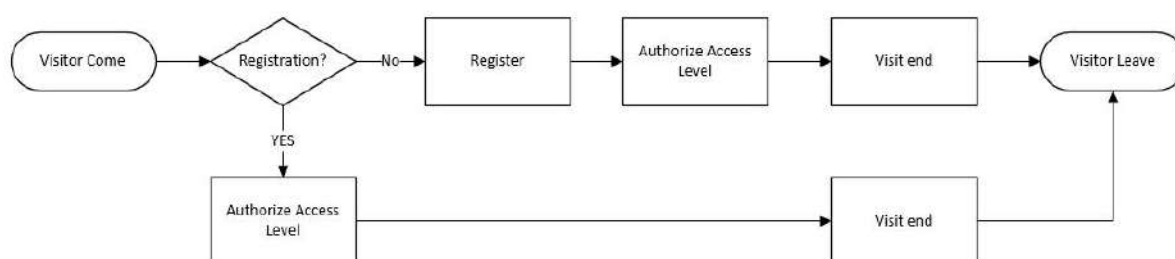


Figure 8- 1 Visitor Configuration Process

8.3 Visitor Registration

8.3.1 Entry Registration

8.3.1.1 Entry Registration

There are two ways to register visitors:

1. PC side (computer)
2. Visiting the passenger plane (ZKBio CVSecurity visits and logs in)

PC-Side Registration (Direct Registration)


This paper introduces the configuration Steps of PC registration (Direct registration) in.

● Operating Steps:

Step 1: In the Visitor module, select **Visitor Registration > Entry Registration**.

Step 2: In the Entry registration interface, click **Visit Registration** to enter the registration interface for visitor registration, as shown in figure below.

Figure 8- 2 Direct Register Visitor Interface

Parameter	Description
Host/Visited	Select the visited personnel. Click the input box to filter the query according to the input characters or click the query button to pop up the list of the visited personnel to select the visited personnel.
Visit Department	Select the department the visitor will visit.
Visit Reason	Select the visit reason. You can also input a new reason, and the reason will be added in the Visit Reason list in the Visit Reason of Basic Management .
Certificate Type	Passport, Driving License, ID Card, and Others are available to choose from the drop-down list. If the ID Scan OCR function is activated, visitor information will display automatically after clicking  icon.
Entrance	Select the entry place for the visitor. You can add an entry place in the Entry Place of Basic Management .
Certificate No.	The numbers and letters are legal; the max length is 20.
First Name	Enter the first name of the visitor.
Visitor Quantity	Enter the number of visitors.
Start and End Time	Enter the start and end times of the visit.


Parameter	Description
Personnel Details	Enter the personnel details.
Capture	The captured photo and certificate photo can be taken separately or at the same time (which can be set in Parameter Settings). If there is a camera (High-Speed Portable HD Doc Scanner) connected to the server, you can click Capture to take the visitors' photos. The browser may block the camera to access, please click  in the IP address bar to select the camera and change the setting to allow access to this page.

Table 8- 1 Description of Parameters of Entry Registration

PC Registration (Second-Generation Id Card Reservation Registration)

This paper introduces the configuration Steps of Registration through the Visitor Reservation.

● Operating Steps:

Step 1: In the Visitor module, select **Visitor Reservation > Visitor Reservation**.

Step 2: In the visitor reservation interface, click **New** to complete the reservation registration before visitors visit, as shown in figure below.

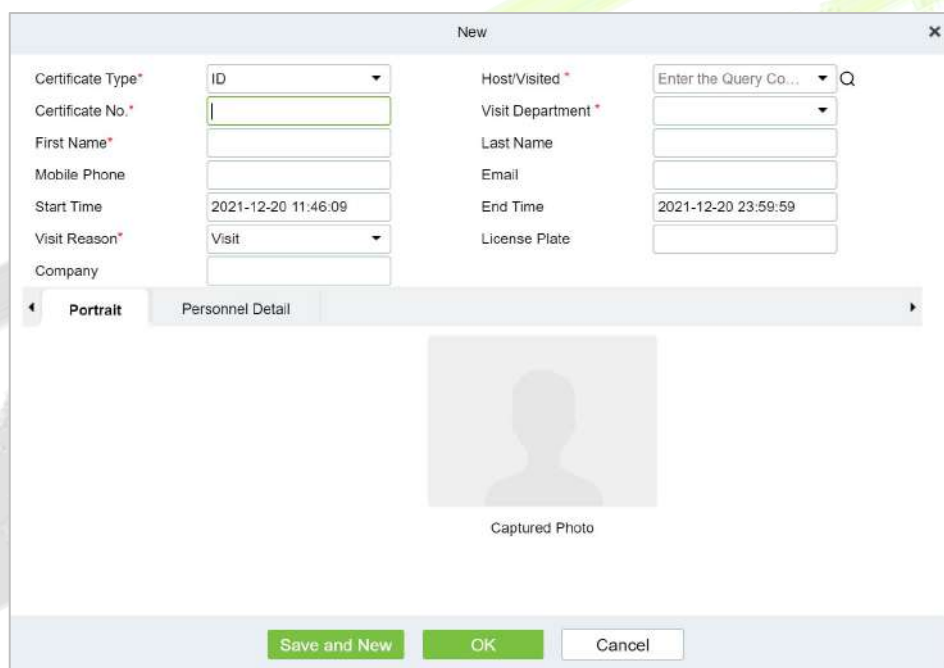


Figure 8- 3 Reservation Interface

Parameter	Description
Host/Visited	Select the visited personnel. Click the input box to filter the query according to the input characters or click the query button to pop up the list of the visited personnel to select the visited personnel.
Visit Department	Select the department the visitor will visit.
Visit Reason	Select the visit reason. You can also input a new reason, and the reason will be added in the Visit Reason list in the Visit Reason of Basic Management .



Parameter	Description
Certificate Type	Passport, Driving License, ID Card, and Others are available to choose from the drop-down list. If the ID Scan OCR function is activated, visitor information will display automatically after clicking  icon.
Certificate No.	The numbers and letters are legal; the max length is 20.
First Name	Enter the first name of the visitor.
Start and End Time	Enter the start and end times of the visit.
Personnel Details	Enter the personnel details.
Portrait	The captured photo and certificate photo can be taken separately or at the same time (which can be set in Parameter Settings). If there is a camera (High-Speed Portable HD Doc Scanner) connected to the server, you can click Capture to take the visitors' photos. The browser may block the camera to access, please click  in the IP address bar to select the camera and change the setting to allow access to this page.

Table 8- 2 Description of Parameters Reservation

Step 3: Select **Visitor Registration > Entry Registration > Entry Registration** to enter the registration interface for visitor registration. Enter the **First Name** to directly obtain the ID number, thus displaying the visitor information of reservation registration, then select the visitor authority, and click **OK** to complete the visit registration, as shown in figure below.

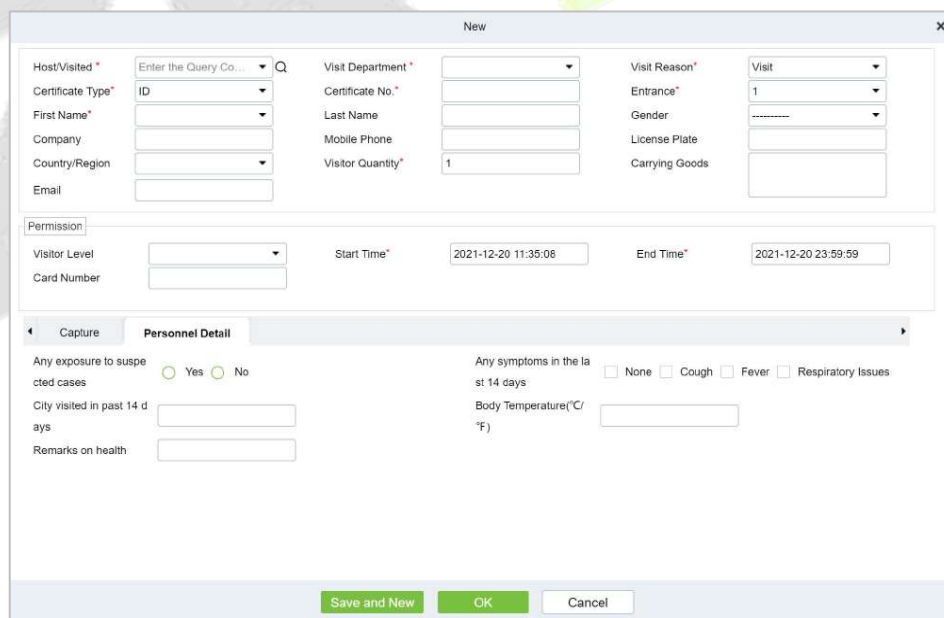


Figure 8- 4 Second Generation Identity Registration Interface

Parameter	Description
Host/Visited	Select the visited personnel. Click the input box to filter the query according to the input characters or click the query button to pop up the list of the visited personnel to select the visited personnel.



Parameter	Description
Visit Department	Select the department the visitor will visit.
Visit Reason	Select the visit reason. You can also input a new reason, and the reason will be added in the Visit Reason list in the Visit Reason of Basic Management .
Certificate Type	Passport, Driving License, ID Card, and Others are available to choose from the drop-down list. If the ID Scan OCR function is activated, visitor information will display automatically after clicking  icon.
Entrance	Select the entry place for the visitor. You can add an entry place in the Entry Place of Basic Management .
Certificate No.	The numbers and letters are legal; the max length is 20.
First Name	Enter the first name of the visitor.
Visitor Quantity	Enter the number of visitors.
Start and End Time	Enter the start and end times of the visit.
Personnel Details	Enter the personnel details.
Capture	The captured photo and certificate photo can be taken separately or at the same time (which can be set in Parameter Settings). If there is a camera (High-Speed Portable HD Doc Scanner) connected to the server, you can click Capture to take the visitors' photos. The browser may block the camera to access, please click  in the IP address bar to select the camera and change the setting to allow access to this page.

Table 8- 3 Description of Parameters of Second Generation Identity Registration

Notes:

For different browsers, the contents of tips are different, the actual browser display prevails, just choose the shared camera, and allow the system to access the camera.

If the entry place supports a network camera, scanner, high camera, it will not pop up this tip.

You can select card number, fingerprint, password, or code scanning for registration (set in the parameter setting).

8.3.1.2 Visitor Cloning


Application scenario: Similar to an entourage copying some information from the previous person, visitors only need to show their credentials and snap photos to complete the registration. It mainly includes the following attributes: Host, visit department, visit reason, Entrance, company, country, visitor level, start time, end time.

●Operating Steps:

Step 1: In the Visitor module, select **Visitor Registration > Entry Registration**.

Step 2: In the visitor registration interface, click **Visitor Cloning** to enter the registration interface for visitor cloning.

Figure 8- 5 Visitor Cloning interface

Parameter	Description
Host/Visited	Select the department the visitor will visit.
Visit Department	Select the department the visitor will visit.
Visit Reason	Select the visit reason. You can also input a new reason, and the reason will be added in the Visit Reason list in the Visit Reason of Basic Management .
Certificate Type	Passport, Driving License, ID Card, and Others are available to choose from the drop-down list. If the ID Scan OCR function is activated, visitor information will display automatically after clicking  icon.
Entrance	Select the entry place for the visitor. You can add an entry place in the Entry Place of Basic Management .
Certificate No.	The numbers and letters are legal; the max length is 20.
First Name	Enter the first name of the visitor.
Visitor Quantity	Enter the number of visitors.
Start and End Time	Enter the start and end times of the visit.


Parameter	Description
Personnel Details	Enter the personnel details.
Capture	The captured photo and certificate photo can be taken separately or at the same time (which can be set in Parameter Settings). If there is a camera (High-Speed Portable HD Doc Scanner) connected to the server, you can click Capture to take the visitors' photos. The browser may block the camera to access, please click  in the IP address bar to select the camera and change the setting to allow access to this page.

Table 8- 4 Description of New Parameters for Positions

8.3.1.3 Batch

Batch option will help you to do multiple check-in and check-out at a time.

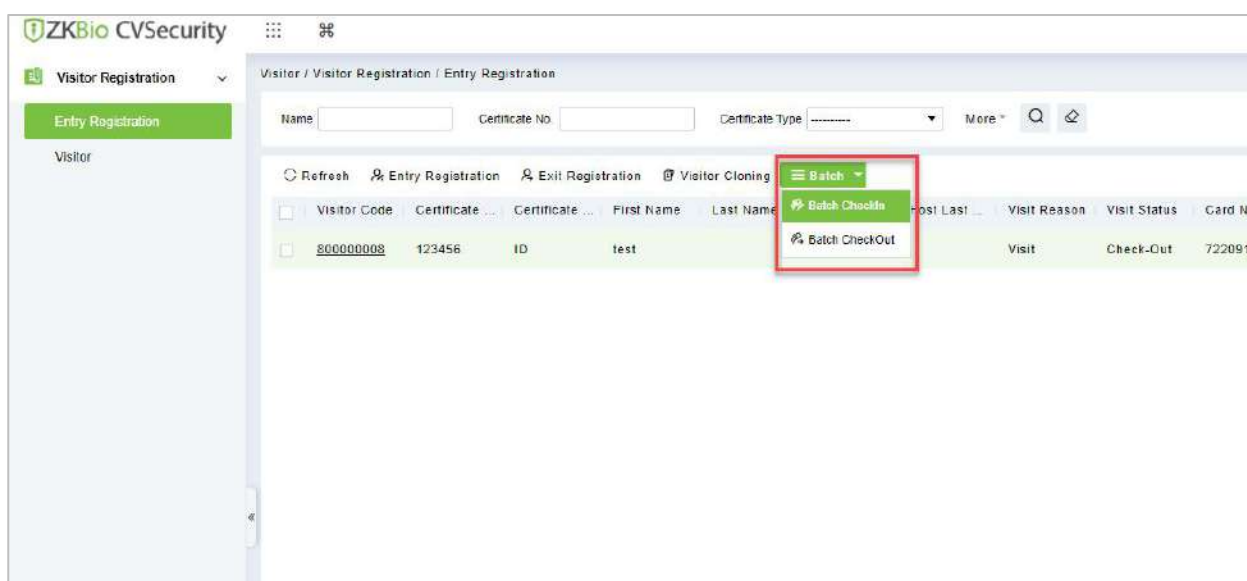


Figure 8- 6 Batch Interface

Batch Check-in

Batch Check-in option will help you to do multiple check-in at a time. For that you need to create a reservation for the visitors. Then you can be able to see details in the **Batch Check in** option for multiple check-ins at a time.

● Operating Steps:

Step 1: In the **Visitor** module, select **Visitor Reservation > Visitor Reservation**. In the reservation interface, click **New** to complete the reservation registration.

Step 2: In the Visitor module, select **Visitor Registration > Entry Registration**.

Step 3: In the Entry Registration interface, select the visitor to do the check-ins and click **Batch > Batch check in** to do multiple check-in of visitors at a time.

Figure 8- 7 Batch Check in interface

Step 3: Click **OK** to check in the selected visitors.

Batch Check Out

Batch check in option will help you to do multiple check out of visitors at a time.

● Operating Steps:

Step 1: In the Visitor module, select **Visitor Registration > Entry Registration**.

Step 2: In the Entry Registration interface, select the visitor to do the checkouts and click **Batch > Batch checkout** to do multiple checkouts of visitors at a time.

Figure 8- 8 Batch Check out interface

Step 3: Click **OK** to check-out the selected visitors.

8.3.2 Visitor

Visitor interface provides the complete details about the registered visitors such as Visitor Code, First Name, Last Name, Certificate Type, Certificate No., Company etc. You can delete, disable or enable and export the selected visitor.

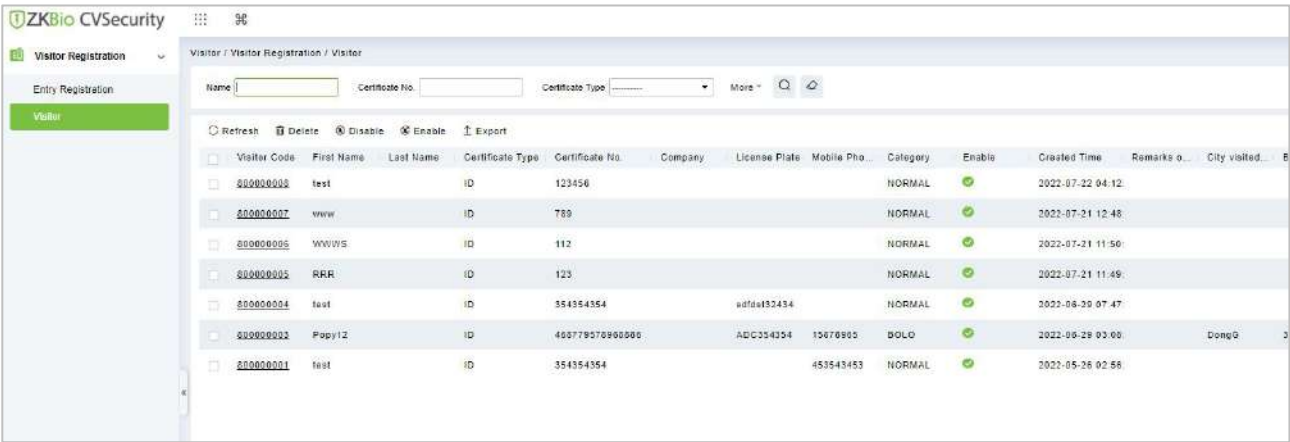


Figure 8- 9 Visitor Interface

8.3.2.1 Deleting a Visitor (Delete)

In **Visitor** module click **Visitor Registration > Visitor**, select a visitor, and click **Delete**.

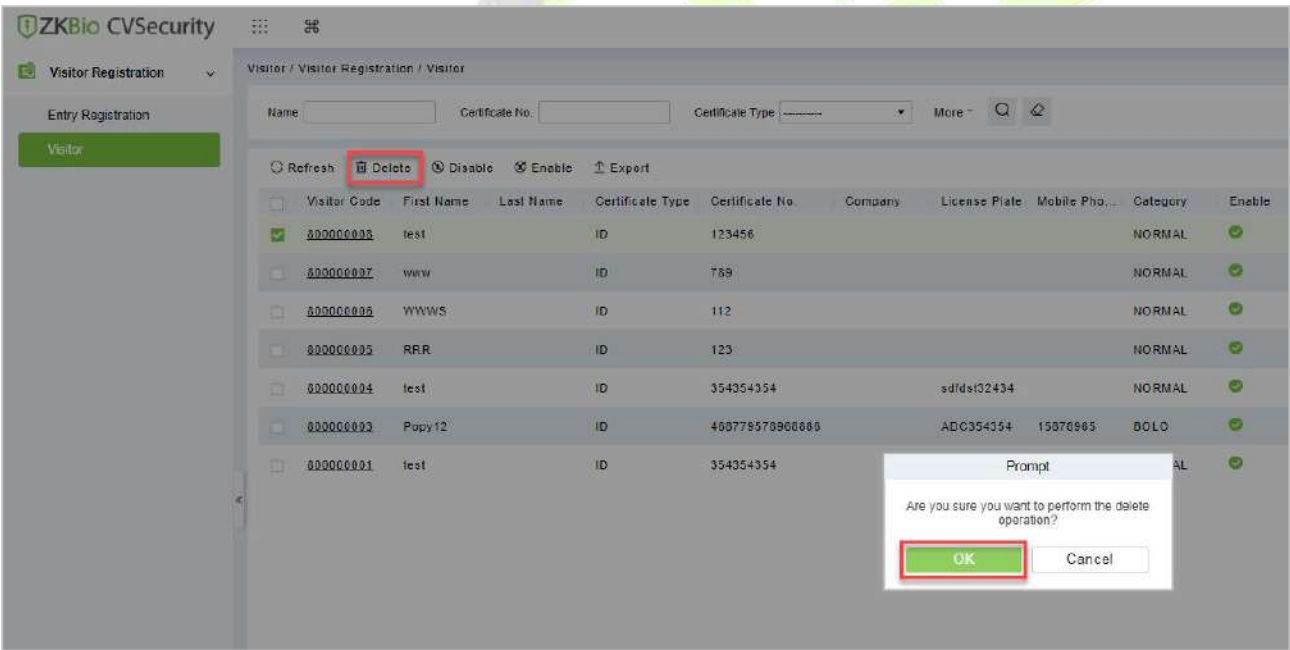


Figure 8- 10 Deleting Visitor

Click **OK** to delete the selected visitor.

8.3.2.2 Disabling a Visitor (Disable)

In **Visitor** module Click **Visitor Registration** > **Visitor**, select a visitor, and click **Disable**.

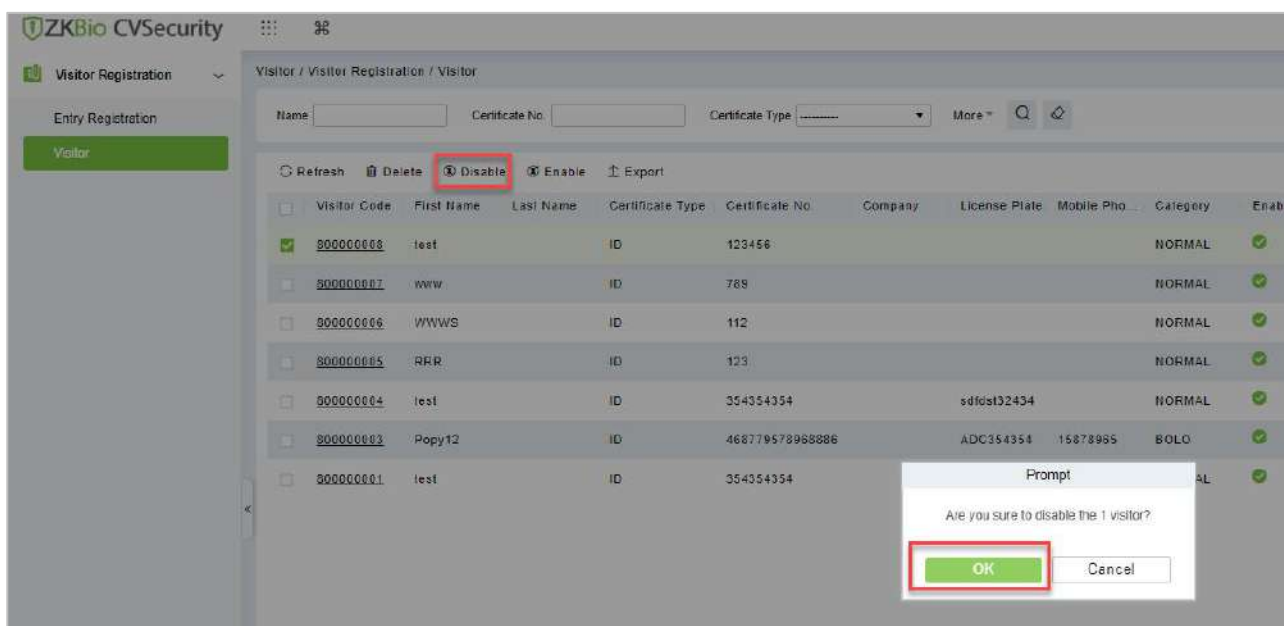



Figure 8- 11 Disabling Visitor

Click **OK** to block the visitor. The enable entry for the corresponding selected visitor will show  indicates the visitor is blocked.

8.3.2.3 Enabling a Visitor (Enable)

In **Visitor** module click **Visitor Registration** > **Visitor**, select a blocked visitor, and click **Enable**.

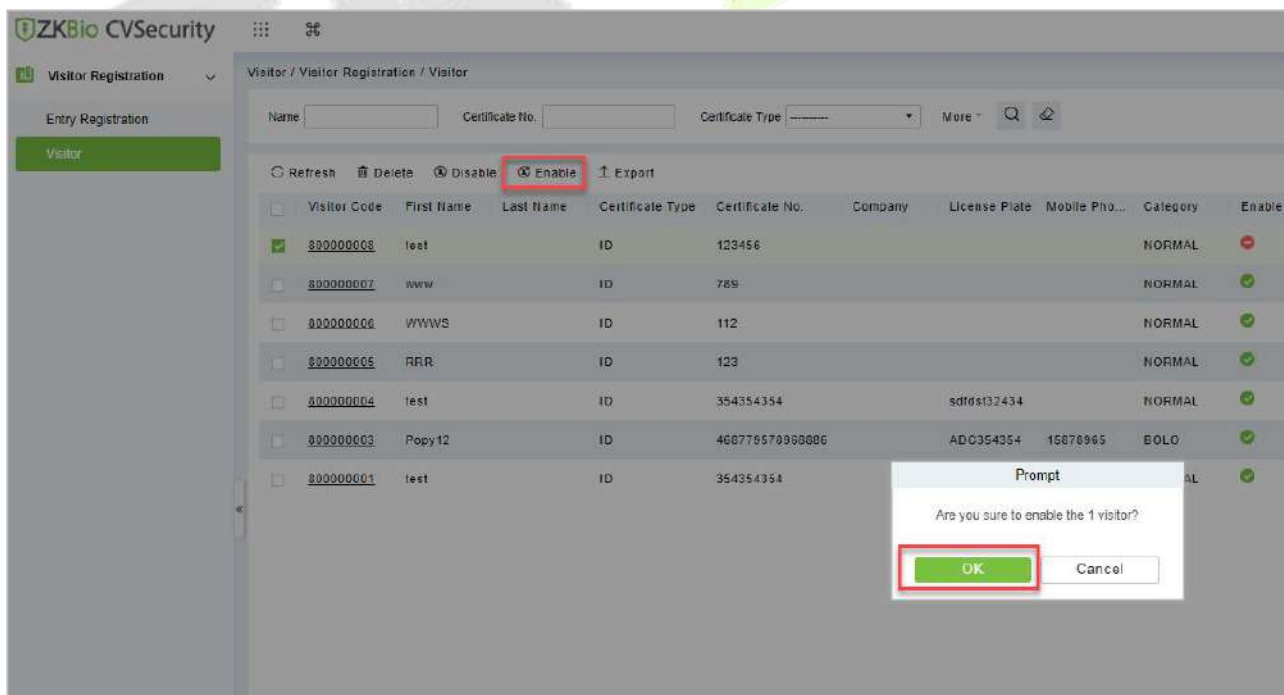



Figure 8- 12 Enabling Visitor

Click **OK** to enable the visitor. The enable entry for the corresponding selected visitor will show  indicates the visitor is enabled.

8.3.2.4 Export

You can export visitor details into an Excel, PDF, or CSV file. See the following figure10-20.

● Operating Steps:

Step 1: In **Visitor** module click **Visitor Registration > Visitor > Export** to export the visitor records to Excel sheet or PDF or CSV. Enter the User password in the prompt.

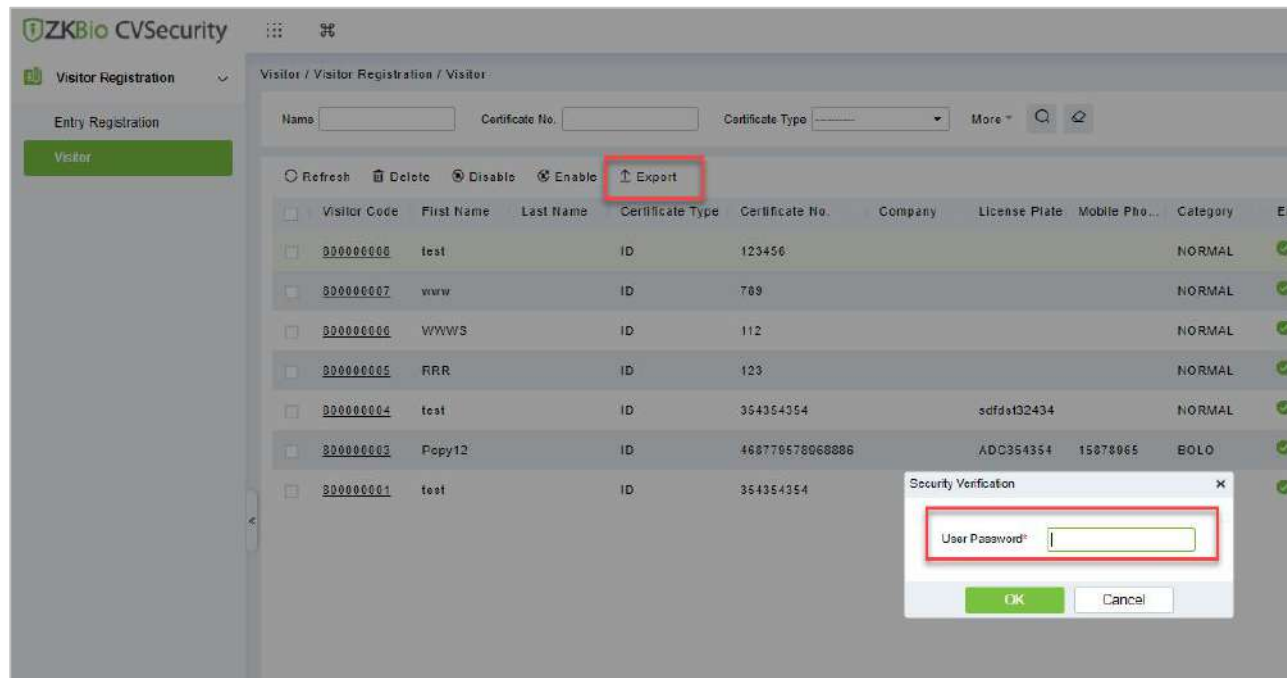


Figure 8- 13 Export Interface

Step 2: Select the file format and click **OK**.

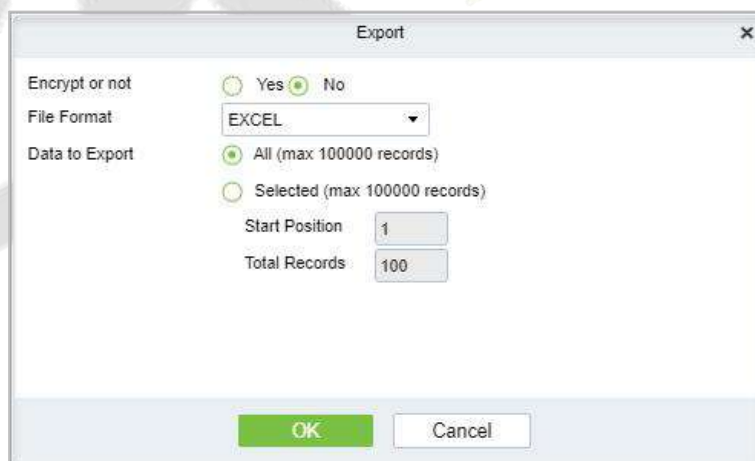


Figure 8- 14 Export Interface

8.4 Visitor Reservation

8.4.1 Visitor Reservation

Visitor Reservation helps you to do reservations before the visitor’s visit.

8.4.1.1 Adding a Visitor Reservation (New)

Creating new Reservations for Visitors.


●Operating Steps:

Step 1: In the Visitor module, select **Visitor Reservation > Visitor Reservation**.

Step 2: In the reservation interface, click **New** to complete the reservation registration before the visitor’s visit.

The screenshot shows a 'New' window for creating a visitor reservation. It contains two columns of form fields. The left column includes 'Certificate Type' (a dropdown menu set to 'ID'), 'Certificate No.' (a text input), 'First Name' (a text input), 'Mobile Phone' (a text input), 'Start Time' (a date and time picker showing '2021-12-20 11:46:09'), 'Visit Reason' (a dropdown menu set to 'Visit'), and 'Company' (a text input). The right column includes 'Host/Visited' (a search box with the placeholder 'Enter the Query Co...'), 'Visit Department' (a dropdown menu), 'Last Name' (a text input), 'Email' (a text input), 'End Time' (a date and time picker showing '2021-12-20 23:59:59'), and 'License Plate' (a text input). Below the form fields are two tabs: 'Portrait' and 'Personnel Detail'. Under the 'Portrait' tab is a placeholder for a 'Captured Photo'. At the bottom of the window are three buttons: 'Save and New' (in green), 'OK' (in green), and 'Cancel' (in white).

Figure 8- 15 Reservation Interface

Parameter	Description
Host/Visited	Select the visited personnel. Click the input box to filter the query according to the input characters or click the query button to pop up the list of the visited personnel to select the visited personnel.
Visit Department	Select the department the visitor will visit.
Visit Reason	Select the visit reason. You can also input a new reason, and the reason will be added in the Visit Reason list in the Visit Reason of Basic Management .
Certificate Type	Passport, Driving License, ID Card, and Others are available to choose from the drop-down list. If the ID Scan OCR function is activated, visitor information will display automatically after clicking  icon.


Parameter	Description
Certificate No.	The numbers and letters are legal; the max length is 20.
First Name	Enter the first name of the visitor.
Start and End Time	Enter the start and end times of the visit.
Personnel Details	Enter the personnel details.
Portrait	The captured photo and certificate photo can be taken separately or at the same time (which can be set in Parameter Settings). If there is a camera (High-Speed Portable HD Doc Scanner) connected to the server, you can click Capture to take the visitors' photos. The browser may block the camera to access, please click  in the IP address bar to select the camera and change the setting to allow access to this page.

Table 8- 5 Description of Parameters of Adding a Visitor Reservation

After the reservation visitors can complete the visit registration using Entry Registration option to know more about the registration process.

8.4.1.2 Deleting a Visitor Reservation (Delete)

In the **Visitor** module, select **Visitor Reservation > Visitor Reservation**, select a visitor reservation and click **Delete**.

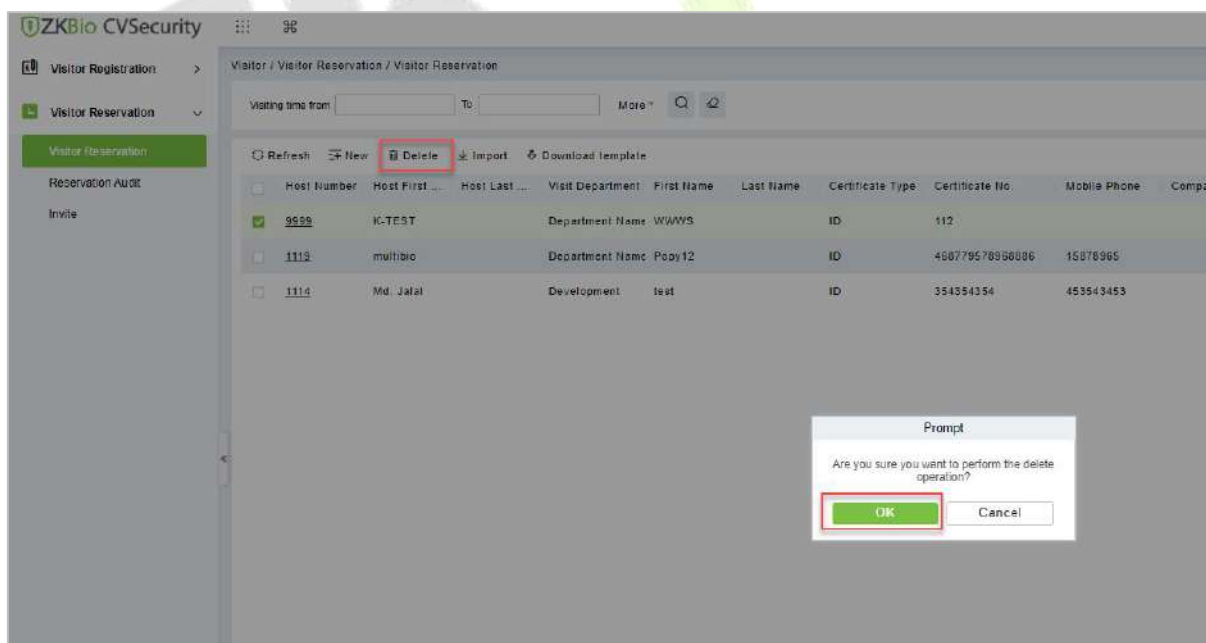


Figure 8- 16 Deleting Visitor Reservation

Click **OK** to delete the selected visitor reservation.

8.4.1.3 Import

You can import visitor reservation details into the software as in Excel format. See the following Figure10-17.

● Operating Steps:

Step 1: In the **Visitor** module, select **Visitor Reservation > Visitor Reservation**, select a visitor reservation and click **Import**.

Step 2: Click the **Browse** button to import the visitor reservation template data (You can download the template from the software by clicking **Download Template**) into the system, as shown in figure below.

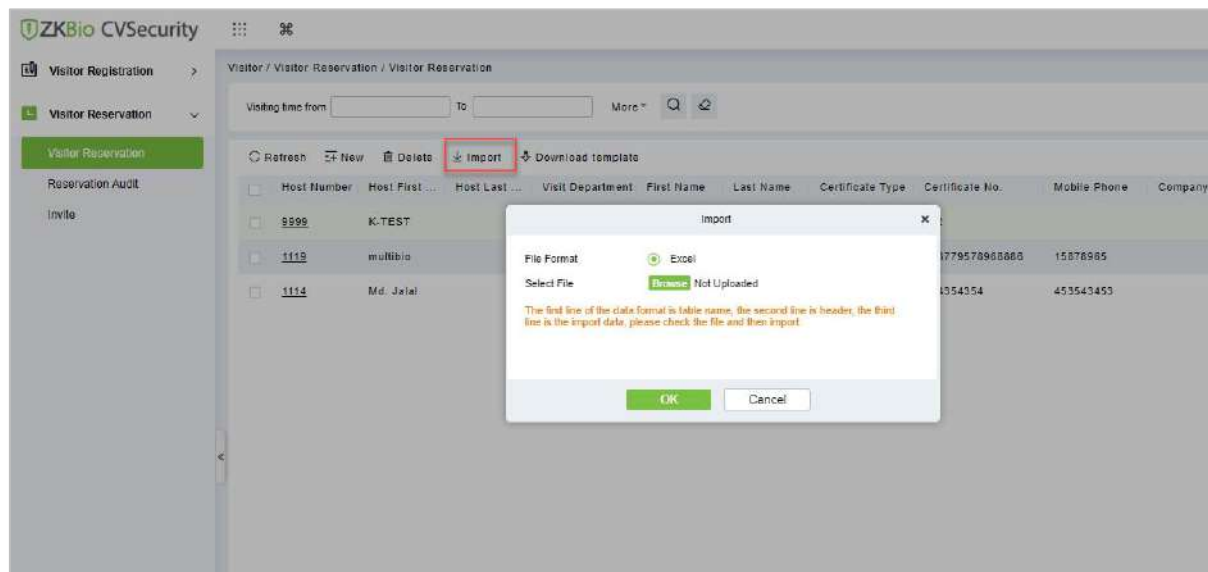


Figure 8- 17 Import Visitor Reservation

Step 3: Click **OK**, and the interface displays the result of importing and adding visitor reservations.

Step 4: Click **Close** to complete the import and addition of visitor reservations.

8.4.1.4 Download Template

You can download template visitor reservation details into the software as in Excel format.

● Operating Steps:

Step 1: In the **Visitor** module, select **Visitor Reservation > Visitor Reservation** select a visitor reservation and click **Download Template**.

Step 2: Click **OK**, and the interface displays the result of importing and adding visitor reservations.

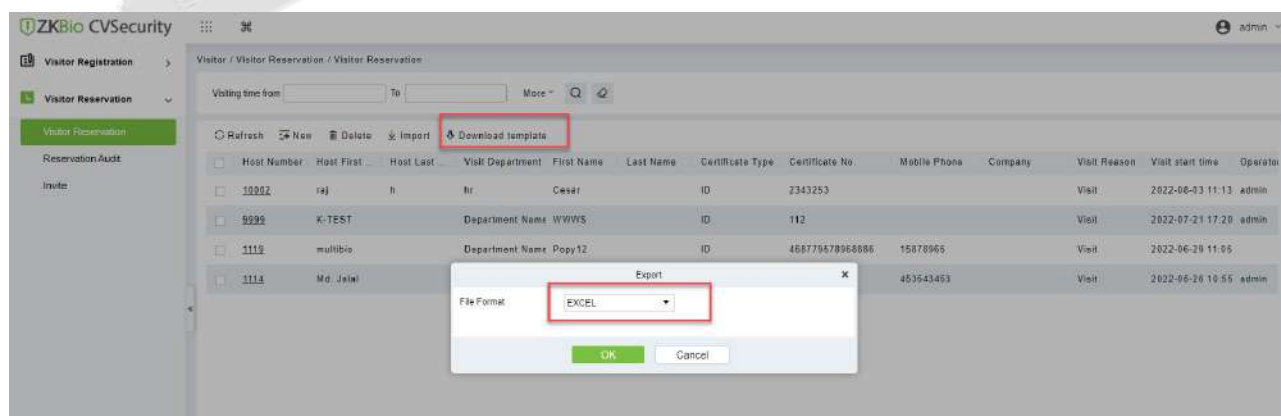


Figure 8- 18 Import Visitor Reservation

8.4.2 Reservation Audit

Allow the administrator to review and block the employee's self-reservation visitors.

8.4.2.1 Review

Allow the administrator to review the employee's self-reservation visitors.

● Operating Steps:

Step 1: In the Visitor module, select **Visitor Reservation > Reservation Audit**.

Step 2: In the **Reservation** interface, select the visitor to be reviewed and click **Review** to review the visitor.

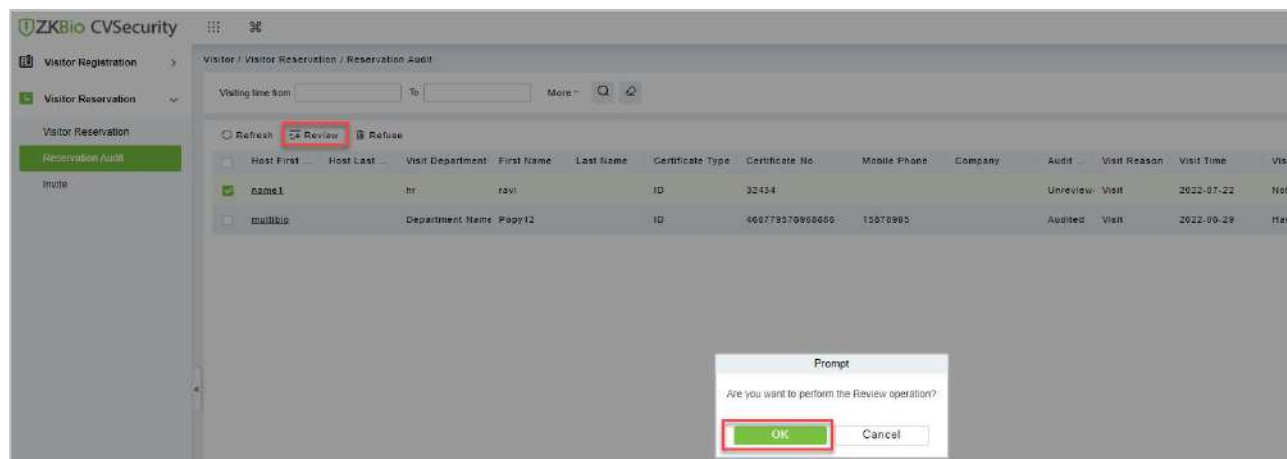


Figure 8- 19 Review Visitor Reservation

Step 3: Click **OK** to perform the review operation.

8.4.2.2 Refuse

Allow the administrator to block the employee's self-reservation visitors.

● Operating Steps:

Step 1: In the Visitor module, select **Visitor Reservation > Reservation Audit**.

Step 2: In the **Reservation** interface, select the visitor to be reviewed and click **Refuse** to block the visitor.

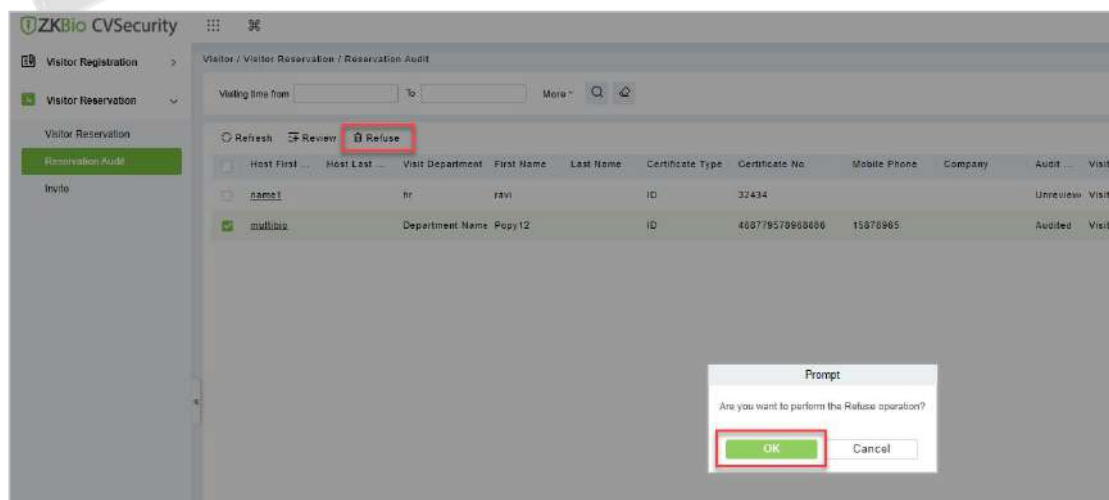


Figure 8- 20 Refuse Visitor Reservation

Step 3: Click **OK** to perform the refuse operation.

8.4.3 Invite

8.4.3.1 Sending Invitations (New)

You can send invitations to the needed visitors by using this option.

●Operating Steps:

Step 1: In the Visitor module, select **Visitor Reservation > Invite**.

Step 2: In the **Invite** interface, click **New** to send the invitation to the visitors and the details as shown in figure below.

Step 3: Click **OK** to send the invitation.

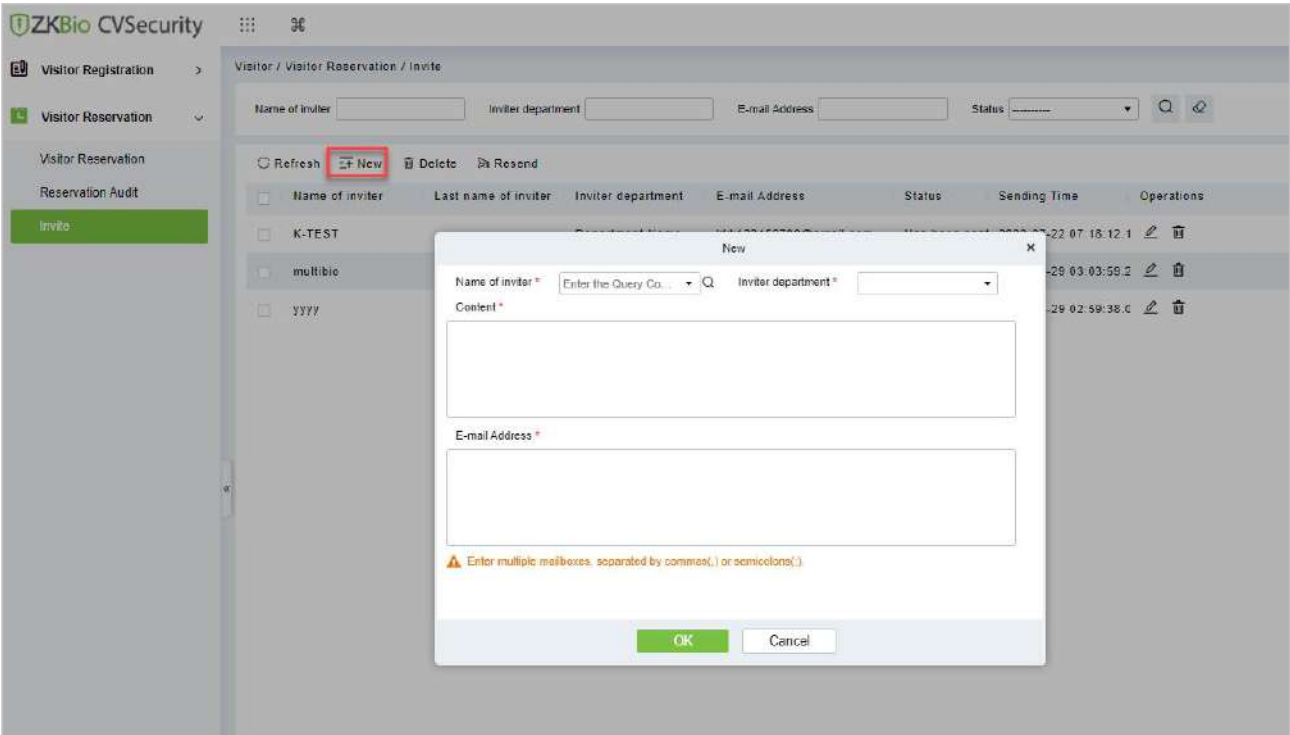


Figure 8- 21 Invite Interface

Parameter	Description
Name of the Inviter	Select the visited personnel. Click the input box to filter the query according to the input characters or click the query button to pop up the list of the visited personnel to select the visited personnel.
Inviter Department	Select the department of the inviter.
Content	Enter the content or reason of the invitation.
Email Address	Enter the Email address.

Table 8- 6 Description of Parameters of Invite Visitors

●Results Validation:

Visitors will receive an email and can scan the QR code to complete the appointment.

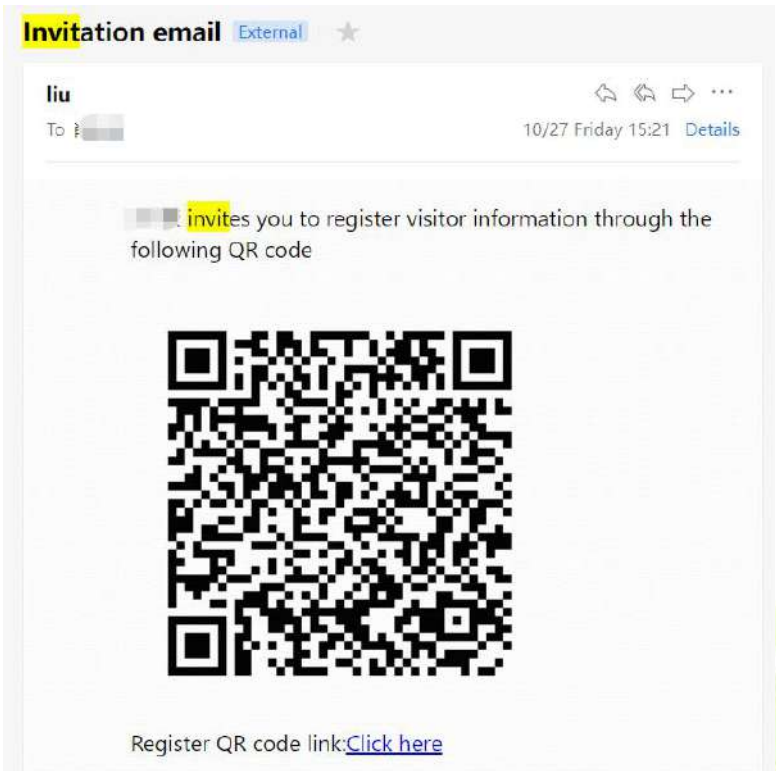


Figure 8- 22 Invitation Email

A screenshot of a mobile application interface for 'Visitor Autonomous Registration'. The page has a green header with the title 'Visitor Autonomous Registration'. Below the header is a camera icon for scanning. The form contains several fields: 'First Name*' with the value 'test', 'Last Name' with the value 'Last Name', 'Mobile Phone' with the value 'Mobile Phone', 'Email' with the value 'popy.xiao@zkteco.com', 'Gender', 'Host/Visited' with a dropdown menu, and 'Host Number' with the value '1'. On the right side, there are fields for 'Visit Department' with the value 'Department Name', 'Certificate Type*' with the value 'Certificate No.', 'License Plate' with the value 'License Plate', 'Visit Reason', 'Remarks', 'Start Time*' with the value '2023-11-15 16:53', and 'End Time*' with the value '2023-11-15 23:59'. At the bottom, there is a section for 'Peers' with the value 'Number of people added:0' and a green 'Complete' button.

Figure 8- 23 Visitor Pre -registration page

8.4.3.2 Delete Invitations

To delete the visitor invitations.

●Operating Steps:

Step 1: In Visitor module click **Visitor Reservation > Invite**.

Step 2: In the invite interface select the invitation to be deleted and click **Delete**.

Step 3: Click **OK** to delete the invitation.

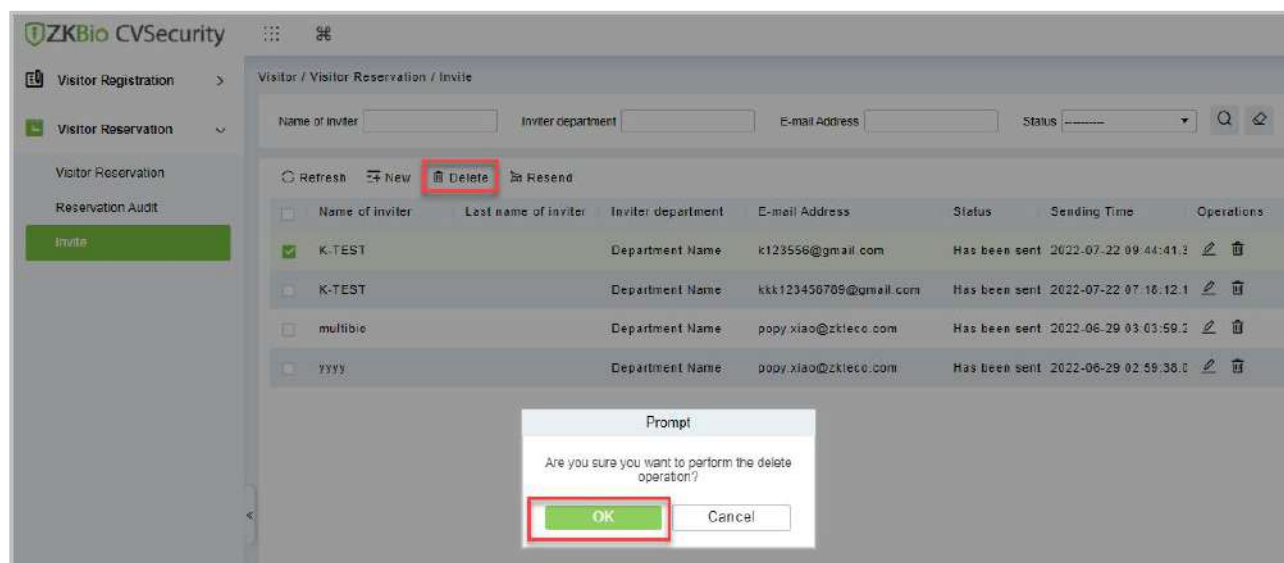


Figure 8- 24 Delete Invitations

8.4.3.3 Resend Invitation

To Resend the visitor invitations.

● Operating Steps:

Step 1: In Visitor module click **Visitor Reservation > Invite**.

Step 2: In the invite interface select the invitation to be resend and click **Resend**.

Step 3: Click **OK** to resend the invitation.

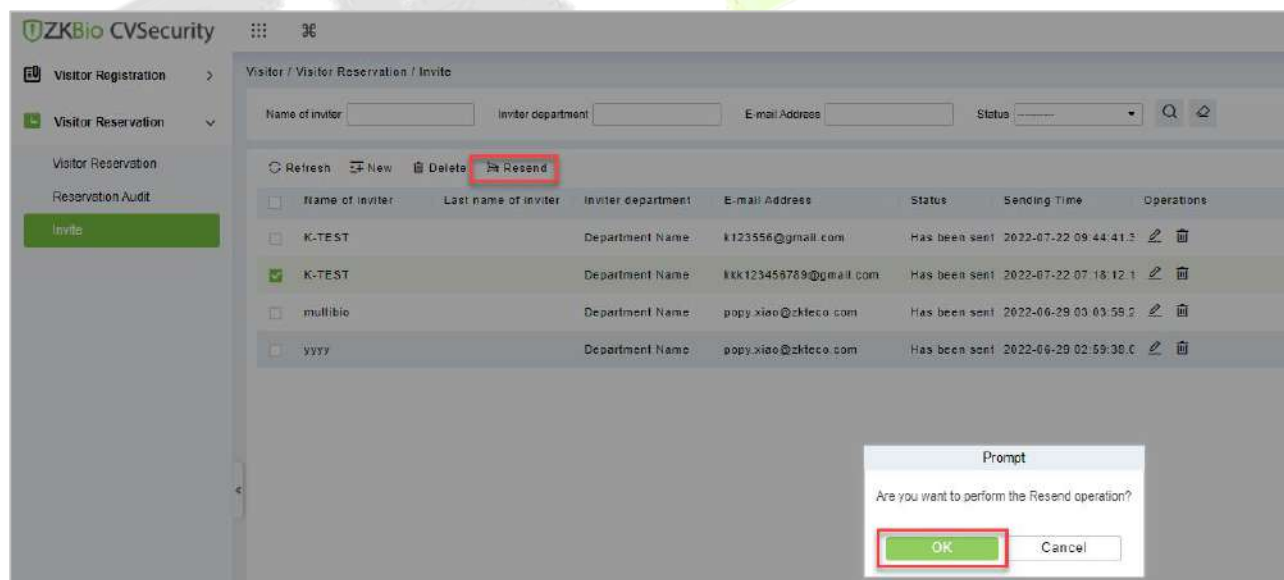


Figure 8- 25 Resend Invitations

8.4.4 Respondent Self-Approval

Optimize the visitor process, after sending the visitor invitation email, ZKBio CVSecurity will send an audit email to the host. The host can complete the operation of "Review or Reject" by clicking on the audit link of the email, then quickly complete the review.

●Set the Outgoing Mail Server Settings:

Step 1: In System Management module, click **Email Management > Outgoing Mail Server Settings**:

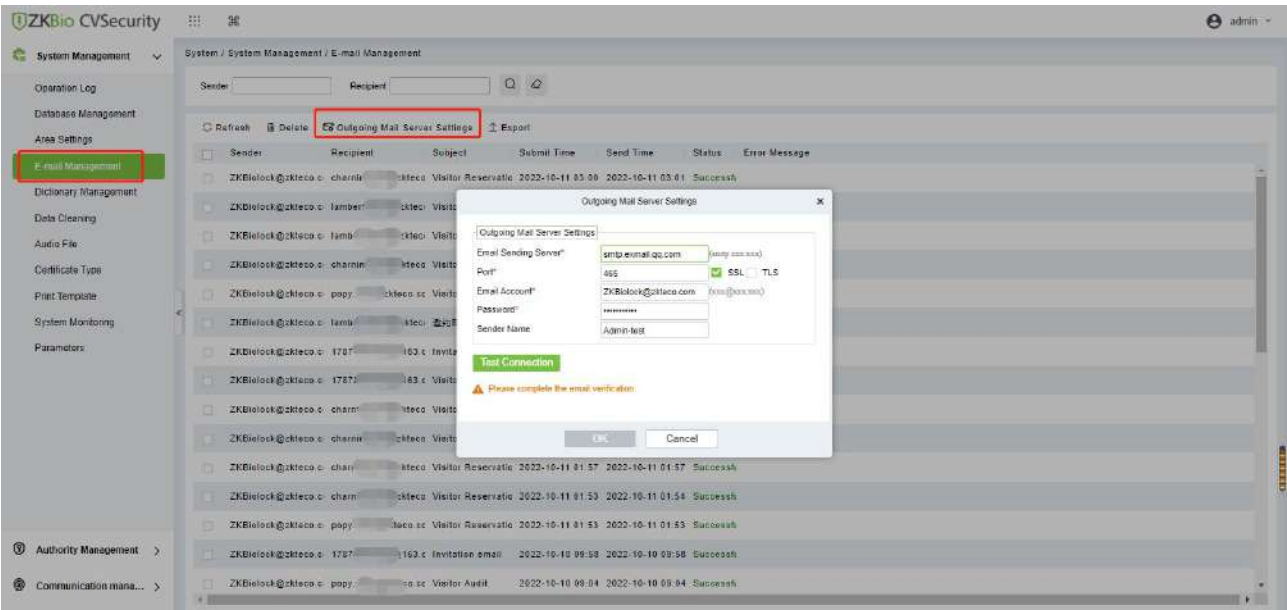


Figure 8- 26 Outgoing Mail Server Settings

Step 2: Set the Outgoing Mail Server Settings as Table 2.5-1.

Parameter	How to set up
Email server address/port	You can customize the email server address and port. The email products that provide the SMTP server can be used
Email username and password	Enter the user's name and password for the mailbox.
Name of sender	Sets the name of the sender on the received message.

Table 8- 7 Outgoing Mail Server Settings

Step 3: After setting, click **Test Connection** to receive the email, indicating that the test has passed.

Step 4: Click **OK** to finish setting email parameters.

✉ **Note:** The domain name of E-mail address and E-mail sending server must be identical. For example, the Email address is test@gmail.com, and the E-mail sending server must be smtp.gmail.com.

●Set Visitor Parameters:

Step 1: In Visitor module, Click **Basic Management > Parameters**.

Step 2: Select **No** for the **Enable automatic review of guest appointments**, so that the visitors' reservations need to be approved.

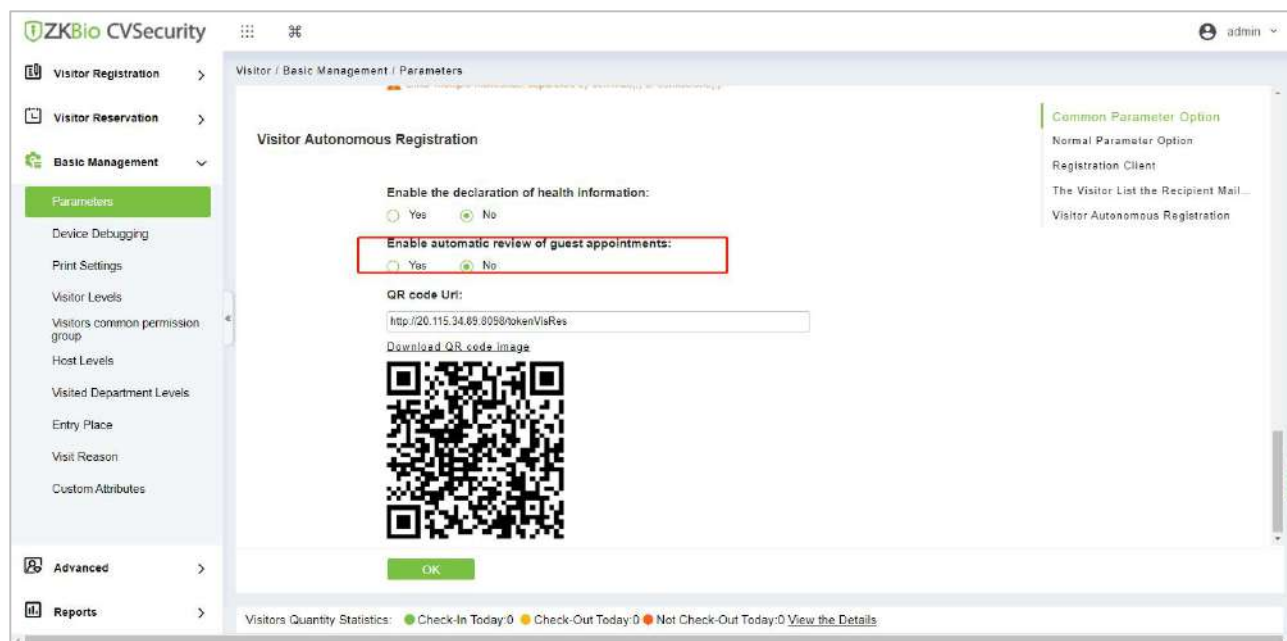


Figure 8- 27 Enable automatic review of guest appointments

● Set the Host Levels:

In the **Visitor** module, click **Visitor > Host Levels > +New**, select the corresponding personnel, click **>**, set the host Level for the corresponding personnel.

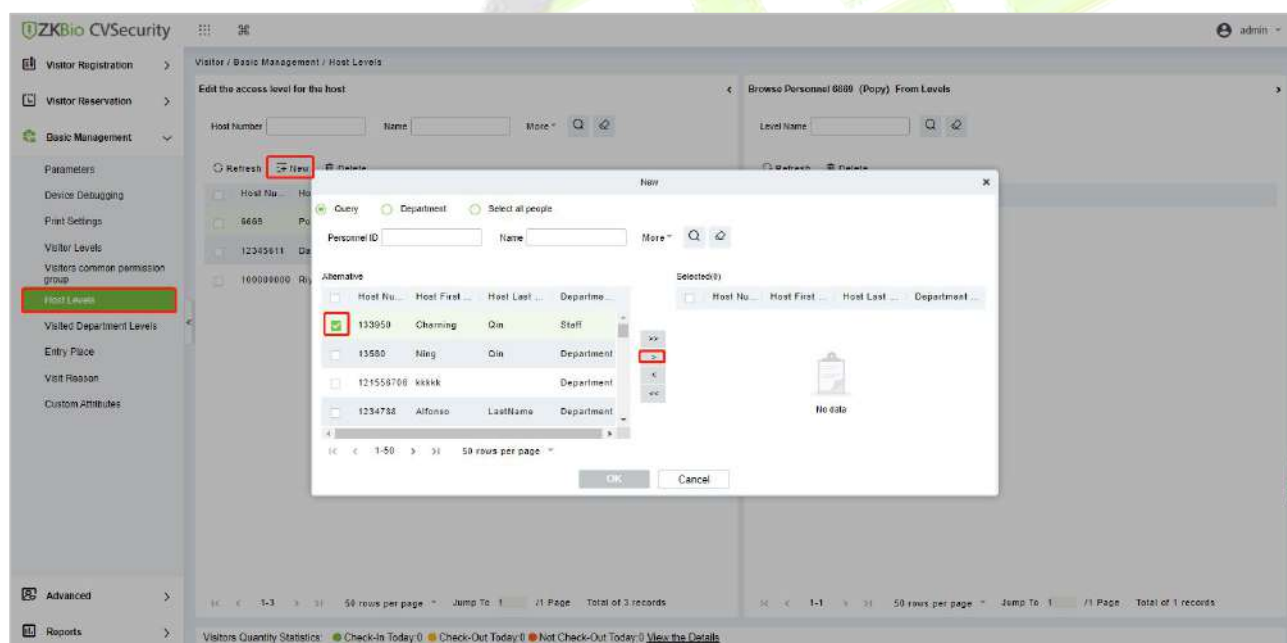


Figure 8- 28 Adding Host Levels 1

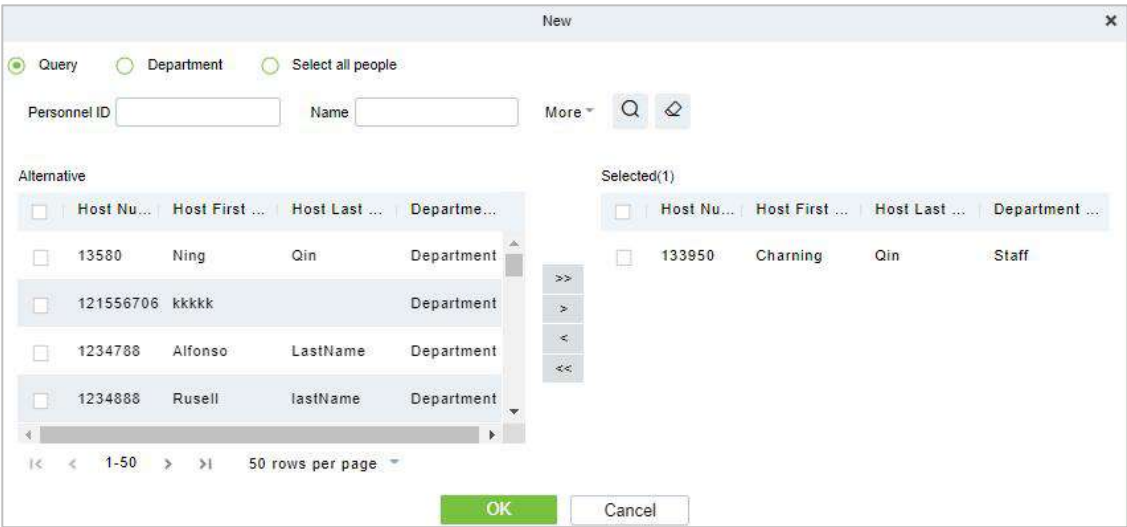


Figure 8- 29 Adding Host Levels 2

●Set the Linkage:

Step 1: Add an alert template.

Click **Visitor > Advanced > Alert Template > +New**, and fill in the template information.

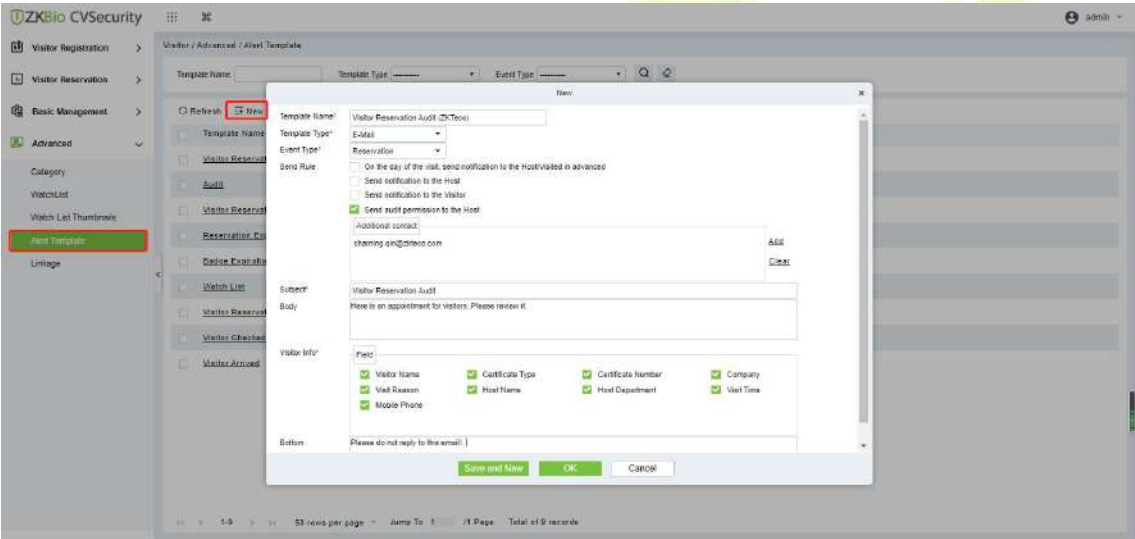


Figure 8- 30 Add an Alert Template.

Parameter	How to set up
Template Type	E-Mail
Event Type	Reservation
Send Rule	Select Send audit permission to the Host Fill in the Additional Contact with the host email.
Subject	Fill in the subject and the body content.
Visitor Info	Select the visitor content to be audited.

Table 8- 8 Add an Alert Template.

Step 2: Add a linkage.

Click **Visitor > Advanced > Linkage > +New**, and here we select the E-mail template *Visitor Reservation Audit(ZKTeco)* added in Step 1.

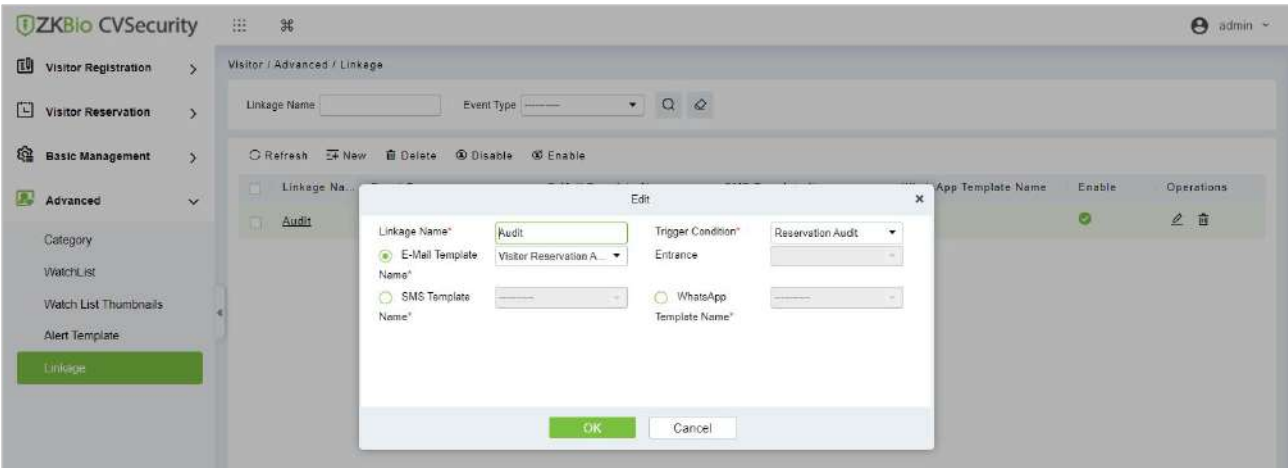


Figure 8- 31 Add a Linkage

● Send an invitation E-mail:

Step 1: Click **Visitor > Visitor Reservation > Invite > +New**, fill in the correct information and save.

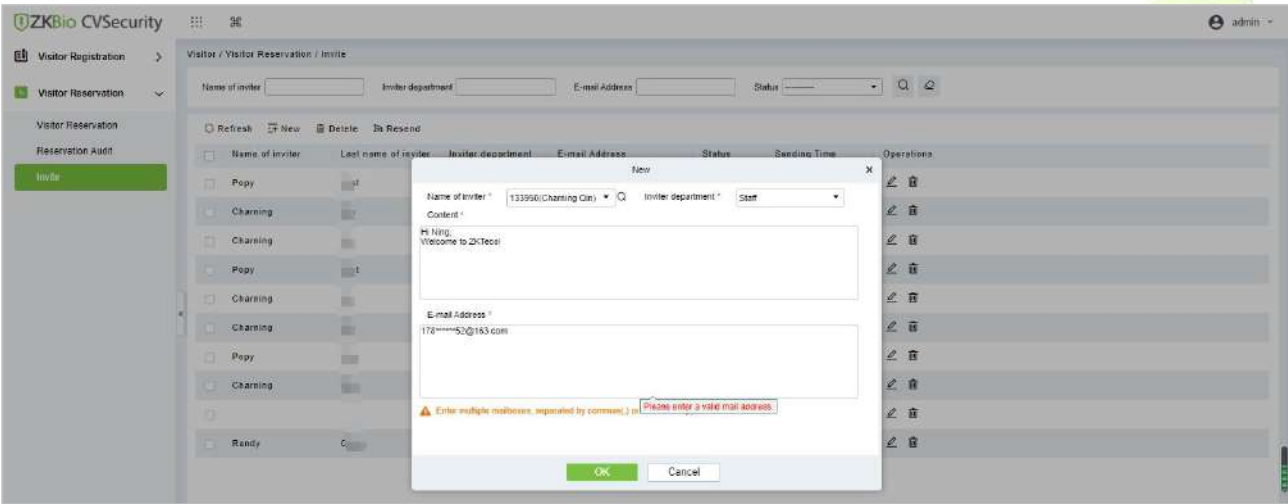


Figure 8- 32 Send an invitation E-mail 1

Step 2: We can view the record of this invitation email. If the status of the email is Has been sent, the email is sent successfully.

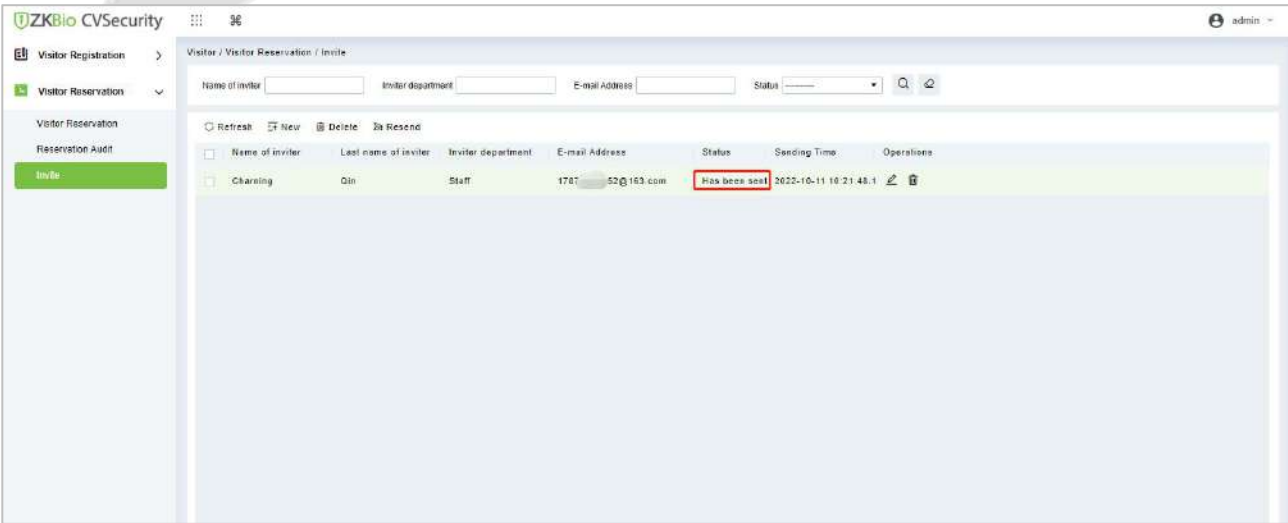


Figure 8- 33 Send an invitation E-mail 2

● Visitor Registration:

Visitors who have received the invitation will receive an email as follows, then the visitor click **Click here** to register as a visitor.



Figure 8- 34 Invitation E-mail

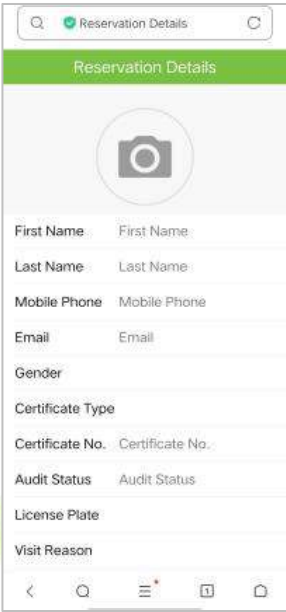


Figure 8- 35 Visitor Registration

● Visitor Reservation Audit:

When a visitor submits registration information, host will receive a review email as shown below:

Click **Review** if you agree to make an appointment;

Click **Refuse** if you refuse the appointment.

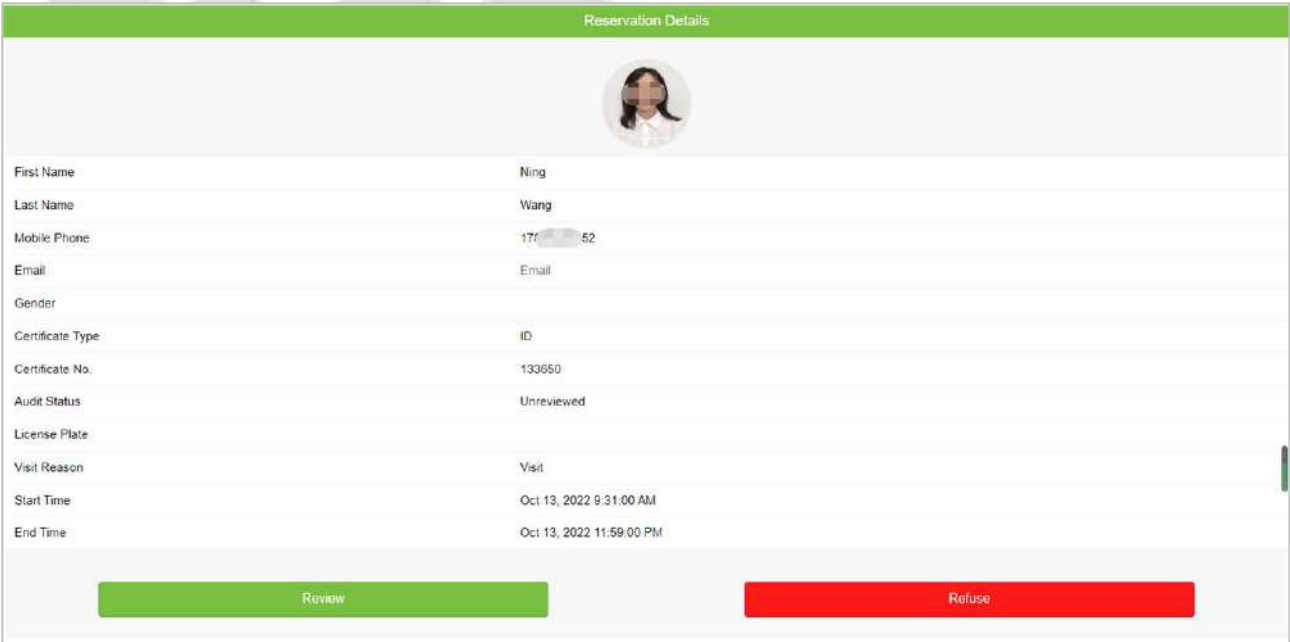


Figure 8- 36 Visitor Reservation Audit

8.5 Basic Management

8.5.1 Parameters

In **Visitor** module Click **Basic Management** > **Parameter** to set the parameters.

Common Parameter Option

Carrying Goods Capture
☐ Carrying Goods Capture Photo

Exit Registration
☒ Open the Visitor Exit Function
☐ Automatic Sign-Out [Set Automatic Sign-Out Place](#)
 Visitor exiting from the exit channel, not be automatically checked out.
☒ Sign Out Expired Visitor
 The visitor's visitor's first exiting has been checked out manually, not automatically be checked out(performed every 30 minutes)

Sign Up
☐ Enable automatic sign-in function [Set automatic search location immediately](#)
 Scan the QR code (face) from the webmaster to sign in, and sign in will be performed automatically.

Permission
☐ Without Permission
☒ Permission is Required
☐ Whether to Issue Card ☒ Password is Required
☒ Biometric Template Registration is Required ☒ Scan Code is Required

Select the Required Field
☒ Not Visited ☒ Visit Department

Visitor Vehicle Authorization Mode
☐ Temporary Vehicle ☒ Allowed

Normal Parameter Option

Capture
☒ Capture the Portrait and Certificate Photo Together
☐ Capture the Portrait and Certificate Photo Separately

Visitor History Information
☒ Open the Pop-Up Box to Display Visitor History Information
☒ Scan Visitor Bio Template ☒ Scan Visitor Photo

Copy ID Number as Card Number Automatically
☐ Copy ID Number as Card Number

WatchList Option
☒ On Entry Prompt if Name Match
 Match Type: Fullname Only
☒ On Entry Match by Certificate
☒ On Entry Match by Country/Region
☒ On Entry Match by Company

Maximum visitor check
☒ Open single-day maximum visitor visits monitoring
 Maximum number of visits:
☒ Open single-day single-person maximum visitor visits monitoring
 Maximum number of visits:

Registration Client

Device Driver
 Certificate Recognition Device Installation Status: Default Certificate Recognition Driver is not installed

Certificate Recognition
☒ OCR ☐ iDReader

Registration Code*

Certificate No. Automatic Backfill Type
☒ Download No ☐ Personal No

The Visitor List the Recipient Mailbox

Send the visitors information during the day by email. Sending Time:
 :
 Example: 123@xxx.com; 456@xxx.com

 Enter multiple mailboxes, separated by commas(,) or semicolons(,)


Visitor Autonomous Registration

Enable the declaration of health information:
☐ Yes ☒ No

Enable automatic review of guest appointments:
☐ Yes ☒ No

QR code URL:

[Download QR code image](#)



Visitors Quantity Statistics ● Check-In Today:3 ● Check-Out Today:3 ● Not Check-Out Today:0 [View the Details](#)

Figure 8- 37 Parameter

- Common Parameter Option:

Enable automatic review of guest appointments:After selecting "Yes," the system automatically approves the visitor's reservation information.

Sign Up:

- Enable software automatic check-in function: After selecting the checkbox, visitors can use the issued check-in QR code to complete their check-in and gain access on designated devices.
- Click Set automatic sign-in location immediately, to Configurable access control, parking, or passageway devices can be used as automatic check-in points.
- Click Set Automatic Sign-In Location Immediately to configure access control, parking, or passageway devices as automatic check-in points.

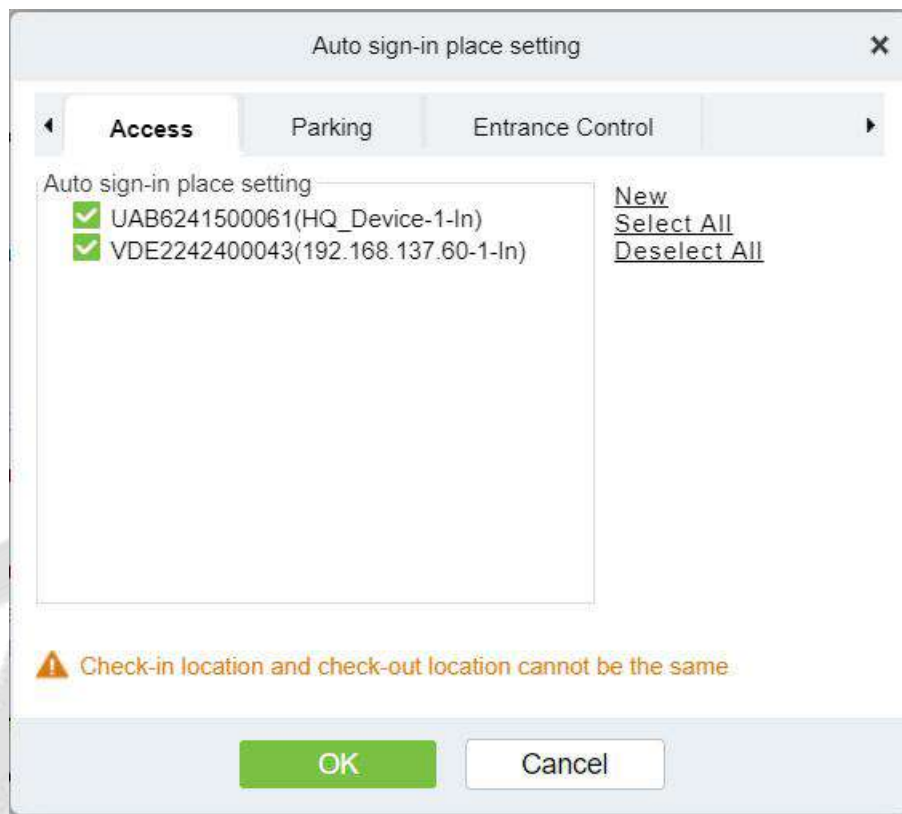


Figure 8- 38 Auto Check-in Point

Exit Registration: Enable or disable the auto sign-off function. Auto sign-out means a visitor leaves by directly punching a card or using his/her fingerprint at the preset auto sign-out place, without performing the Exit Registration operation in the software. Setting automatic sign-out place means specifying some readers as the auto sign-out place. Click **Set Automatic Sign Out Place**. Then click **OK** to finish.

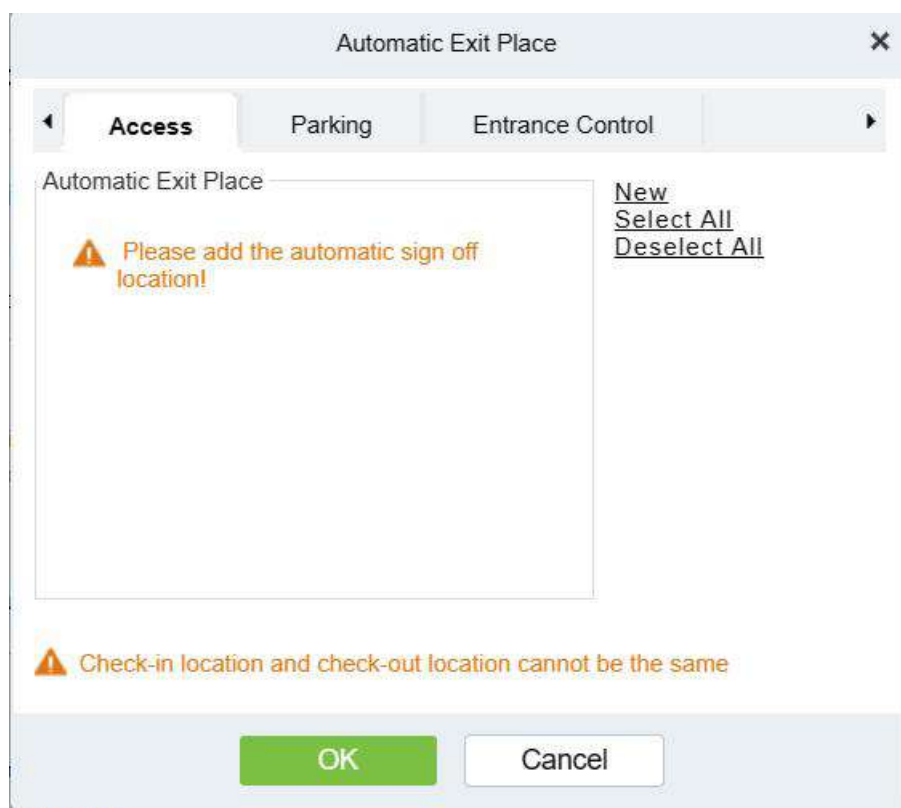


Figure 8- 39 Automatic Exit Place

- **Sign Out Expired Visitors:** Expired visitors who have not been manually signed out will be automatically signed out after a specified interval.
- **Visitor Vehicle Authorized Mode :** Define the attributes of visitor vehicles, with options for temporary vehicles or the allowed list. Different vehicle attributes need to comply with the vehicle management rules of the Parking module.

Visitor Vehicle Authorization Mode

☒ Temporary Vehicle ☐ Allowlist

● Permission:

- **Without permission :** There is no need to grant access control permissions to visitors.
- **Permission is required:** Grant access control permissions to visitors, and further select the method for visitor verification as shown below.

Whether to Issue Card: Whether to issue card for the visitor.

Password is required: If selected, it will make password mandatory.

Biological Template Registration is Required: Whether to register the fingerprint/palm/finger vein for the visitor.

Scan Code is Required: If selected, it will code scan mandatory

Enable Visitor Defense: If "Yes" is selected, the visitor's registered information will be automatically added to the allowed list database for camera recognition.

● Device and Page Parameter Setting:

- **Select the Required Field:** You can set whether the Host (Personnel) and visited departments would be required in the registration page and the reservation page.

- **Carrying Goods Capture:** When enabled, visitors will be required to take photos of the goods, upload them, and save them during registration.

Capture: Whether to capture the portrait and certificate photo simultaneously during visitor registration.

Capture

- ☐ Capture the Portrait and Certificate Photo Together
- ☒ Capture the Portrait and Certificate Photo Separately

Visitor History Information: You can select the display parameters of the visitor history. Selecting the Open the Pop-Up Box to Display Visitor History Information check box displays the visitor information with photo and fingerprint of the visitor (These two will be auto-selected).

Visitor History Information

- ☒ Open the Pop-Up Box to Display Visitor History Information
- ☒ Backfill Visitor Bio Template ☒ Backfill Visitor Photo

Copy ID Number as Card Number Automatically: Enable this if you want to use the same ID number as the Card number.

Watch List Option: Select the matching rules for the Watch List. If a match is successfully made according to the set rules, a reminder will be given for the Watch List after the reception desk registers the visitor. The optional matching rules are shown in the figure below.

WatchList Option

- ☒ On Entry Prompt if Name Matche
- Match Type
- ☒ On Entry Match by Certificate
- ☒ On Entry Match by Country/Region
- ☒ On Entry Match by Company

Maximum visitor check: You can define the parameters to limit the number of visitors and the number of visit times.

Maximum visitor check

- ☒ Open single-day maximum visitor visits monitoring
- Maximum number of visits
- ☒ Open single-day single-person maximum visitor visits monitoring
- Maximum number of visits

Note: When the number of visitors reaches the default upper limit set on the day, a prompt will pop up when entering the registration page:

- Registration Client:

Step 1: If there is no driver installed in the system, the **Download Driver** link is displayed. Click the link

to download and install the driver.

Registration Client

Device Driver

Certificate Recognition Driver Installation Status: Detected Certificate Recognition Driver is not installed

Card Printer Driver Installation Status: Detected Card Printer Driver is not installed

Signature drive installation: Detected Signature drive is not installed

Certificate Recognition

☒ OCR ☐ IDReader

Registration Code*

Register

☐ Download OCR V1.0 Driver ☒ Download OCR V2.0 Driver

Certificate No. Automatic Backfill Type

☒ Document No. ☐ Personal No.

Card Printing

Registration Code*

Register

Download Driver

Signature

Registration Code*

Register

Download Driver

Figure 8- 40 Registration Client

Step 2: Enter the corresponding registration code and click **Register**.

Note: The Registration code can only be obtained after purchasing the corresponding license. After activating the license, you can check it at **System > Authority Management > Client Register** to view the **registration code**.

●The Visitor List the Recipient Mailbox:

Configure the recipient's mailbox and the time for system to send the list of visitors.

The Visitor List the Recipient Mailbox

Send the visitors information during the day by email. Sending Time:

15

:

30

Example:123@xxx.com;456@xxx.com

Enter multiple mailboxes, separated by commas(,) or semicolons(,).

Figure 8- 41 Visitor List the Recipient Mailbox

●Visitor Autonomous Registration:

Visitors can use the self-service registration link. If you have already installed and activated the

ZKBio CVConnect Client, you can click on "use cloud visitor link," and it will automatically fill in the cloud visitor link.

Note: You can download the ZKBio CVConnect Client and enable cloud settings under System -> System Management -> Cloud Settings.

Visitor Autonomous Registration

QR code Url:

<https://hybrid.minervaiot.com/cvapp/visRes/8a8882df8ced0f62018d5876fa571246>

[Use cloud registration link](#)

[Download QR code image](#)



8.5.1.1 Device Debugging

Device Debugging option will provide information about Entry Place, Print installation, Device Driver installation, and USB Camera.

In **Visitor** module Click **Basic Management** > **Device Debugging** to know about the current location details (including IP address), Printer-driver installation information, device driver installation, calibrate the scanners, and USB camera information.

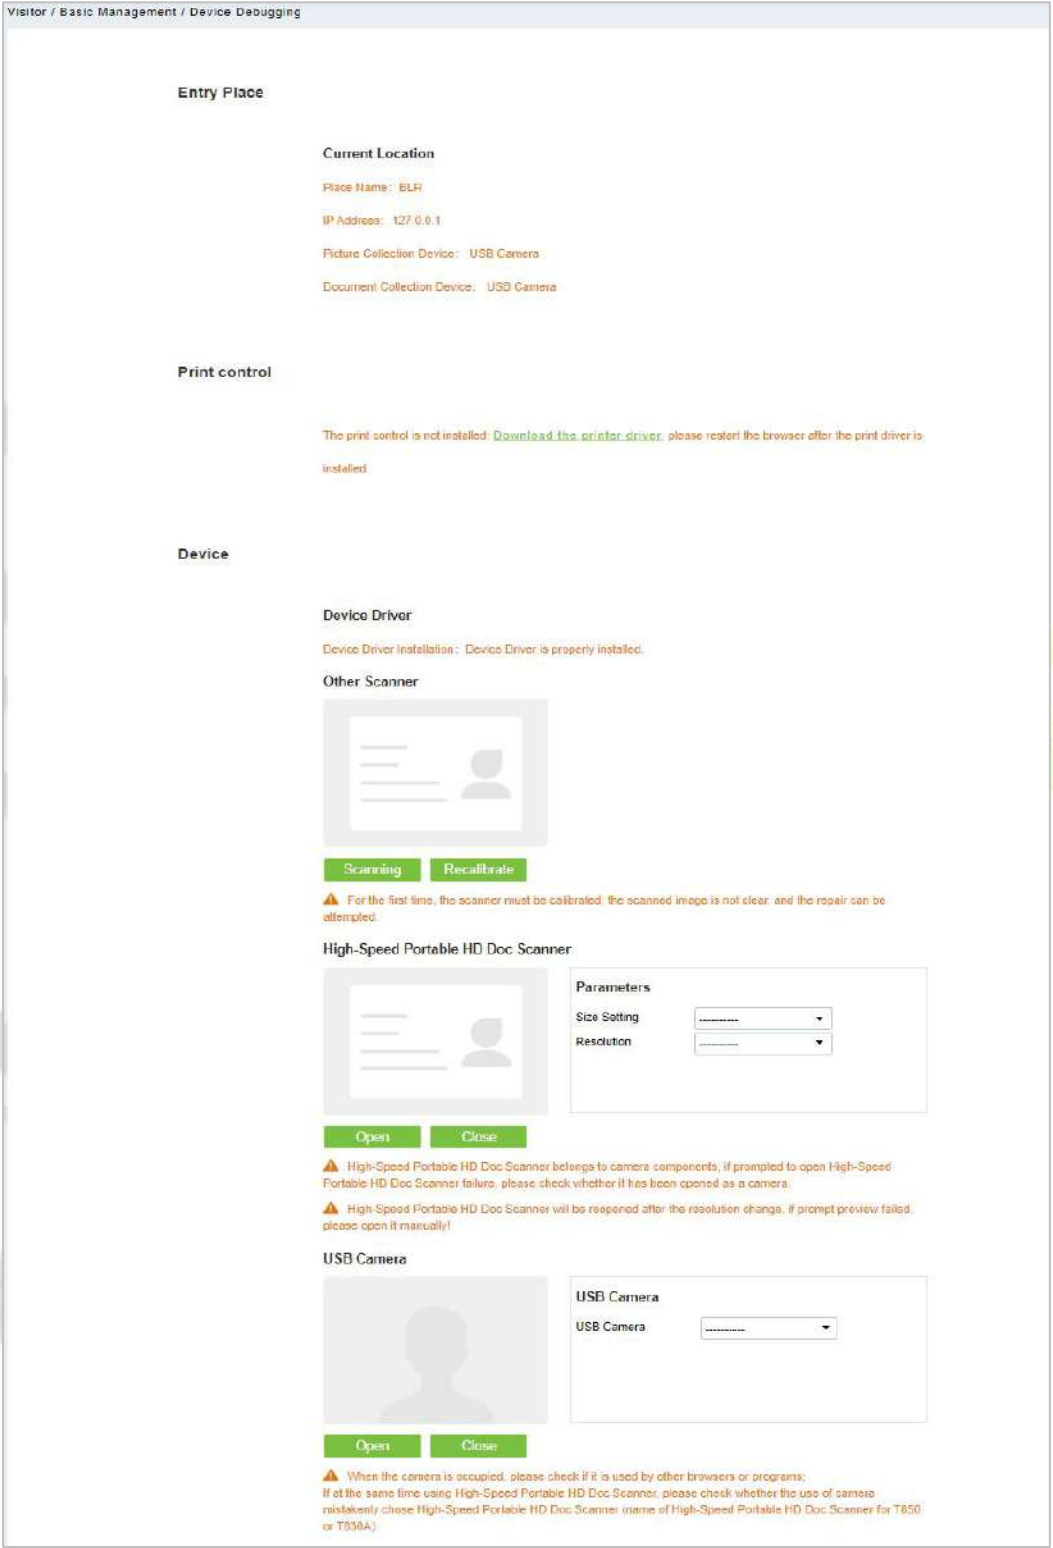


Figure 8- 42 Device Debugging Interface

Parameter	Description
Entry Place	Displays the information of the current entry place, such as the name of the entry place, IP, Mode of picture/document collection.
Print Control	It shows the Printer-driver installation information

Parameter	Description
Device	Display device driver installation, you can debug, calibrate the scanner. Set the High-Speed Portable HD Doc Scanner parameters, and information of USB camera. (IE browser does not display USB device debugging).

Table 8- 9 Description of Parameters of Device Debugging

8.5.1.2 Print Settings

In **Visitor** module Click **Basic Management** > **Print Setting** to go to the printer settings.

●Global Settings (Receipt Printer):

Select **Receipt Printer** to set the global setting of the printer.

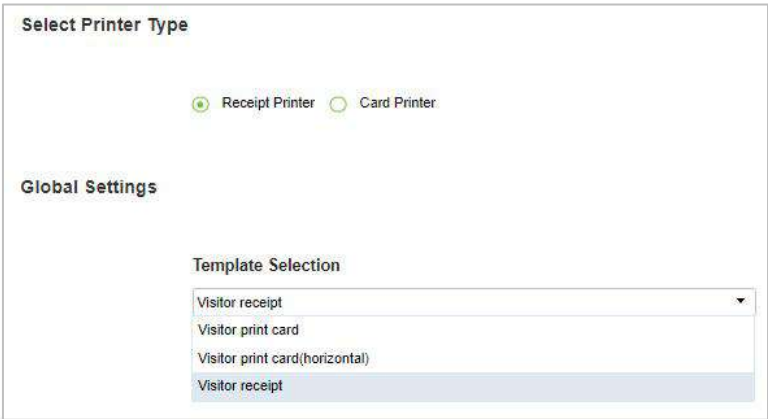


Figure 8- 43 Global Settings of Printer

Parameter	Description
Template Selection	Select a template to print the template, if the template does not meet the print content, you can add or edit the template (the default template cannot be edited, deleted). Available Templates are Visitor Receipt, Visitor Print Card and Visitor Print Card (Horizontal).

Table 8- 10 Description of Parameters of Printer Setting

●Local Settings (Receipt Printer):

You can set the options for the printer, the type of paper to be printed, or the custom paper size, and view the effect by clicking Print Preview / Direct Print. At last, you can save the current setting for the printout of the visitor badge.

Local Settings

Print control

The print control is not installed: [Download the printer driver](#), please restart the browser after the print driver is installed

Use Printer

☐ Select Paper Type

Paper Type

⚠ The paper type can only use the system default types. Please check in the print preview to see if it will work.

☐ Custom Paper Size

Custom Paper Width

71

mm

Custom Paper Height

140

mm

☒ Custom Paper Width, Highly Adaptive

Custom Paper Width

71

mm

⚠ The setting width of the paper is greater than the actual width of the paper, will affect the print effect.

Figure 8- 44 Local Settings of Printer

Parameter	Description
Use Printer	Select the printers from the available list of printers.
Paper Type	Select the Paper Type
Custom Paper Size	You can customize the paper size like paper height and width.

Table 8- 11 Description of Parameters of Local Settings of Printer

●Card Printing:

In the parameter setting interface, you can set the parameters of card. Initially, define the template (refer to personnel card printing), and then set the card printing function. If the automatic card printing is selected, printer connection is required. After the visitor registration is completed, user can print the card directly.

Figure 8- 45 Printer Setting of Card Printer

Parameter	Description
Template Selection	Select a template to print the template, if the template does not meet the print content, you can add or edit the template (the default template cannot be edited, deleted). Available Templates are Visitor Receipt, Visitor Print Card and Visitor Print Card (Horizontal).
Visitor Card Printing Setting	Select the visitor card printing settings (like after visitor check in)
Use Printer	Select the printer from the available list of printers.

Table 8- 12 Description of Parameters of Printer Setting of Card Printer

8.5.1.3 Visitor Levels

The visitor can be allocated Access or Elevator levels within registration after the visitor level has been set.

In Visitor interface Click **Basic Management > Visitor Levels:**

Figure 8- 46 Visitor Level Interface

8.5.1.3.1 Add Permission Group

In this option you can give access, elevators, and entrance control permissions to the visitors

Add Access Levels

To add Access Levels.

●Operating Steps:

Step 1: In the Visitor Module, click **Basic Management > Visitor Levels > Add Access Levels**

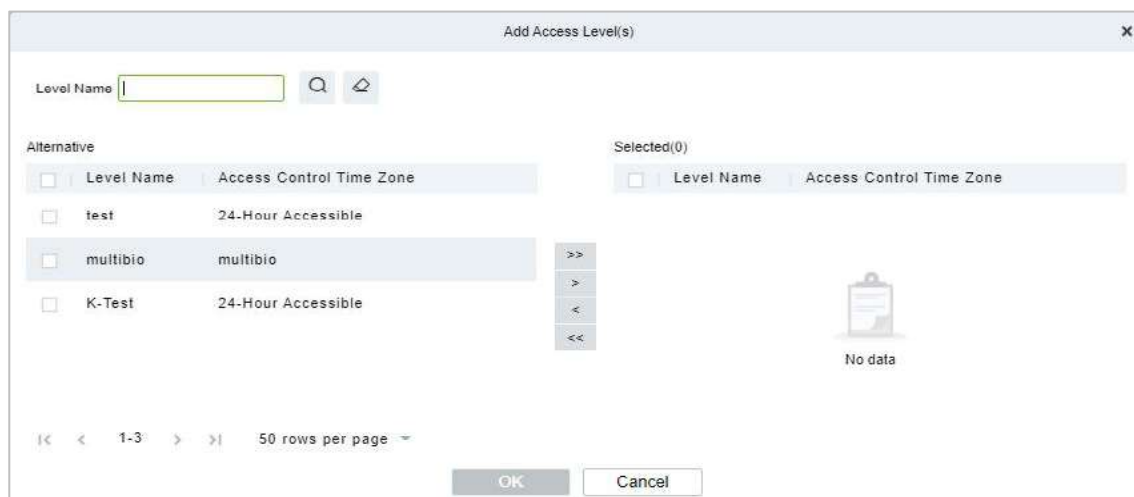


Figure 8- 47 Add Access Level Interface

Step 2: Set a visitor level name, select one or more access levels, click **>** or **>>** to move into the Selected menu. Click **OK**.

Step 3: Allocate the Access levels for the visitor when registering.

Add Elevator Levels

To add Elevator Levels.

●Operating Steps:

Step 1: In the Visitor Module, click **Basic Management > Visitor Levels > Add Elevator Levels**.

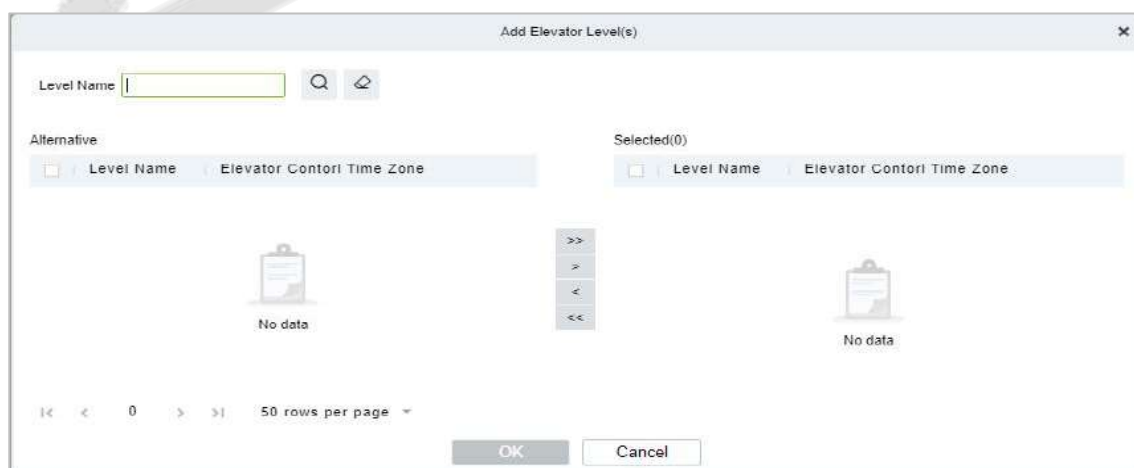


Figure 8- 48 Add Elevator Level Interface

Step 2: Set a visitor level name, select one or more access levels, click **>** or **>>** to move into the Selected menu. Click **OK**.

Step 3: Allocate the Elevator levels for the visitor when registering.

Add Entrance Control Level

To add Entrance Control Levels.

● Operating Steps:

Step 1: In the Visitor Module, click **Basic Management > Visitor Levels > Add Entrance Control Level**

Step 2: Set a visitor level name, select one or more access levels, click **>** or **>>** to move into the Selected menu. Click **OK**.

Step 3: Allocate the Elevator levels for the visitor when registering.

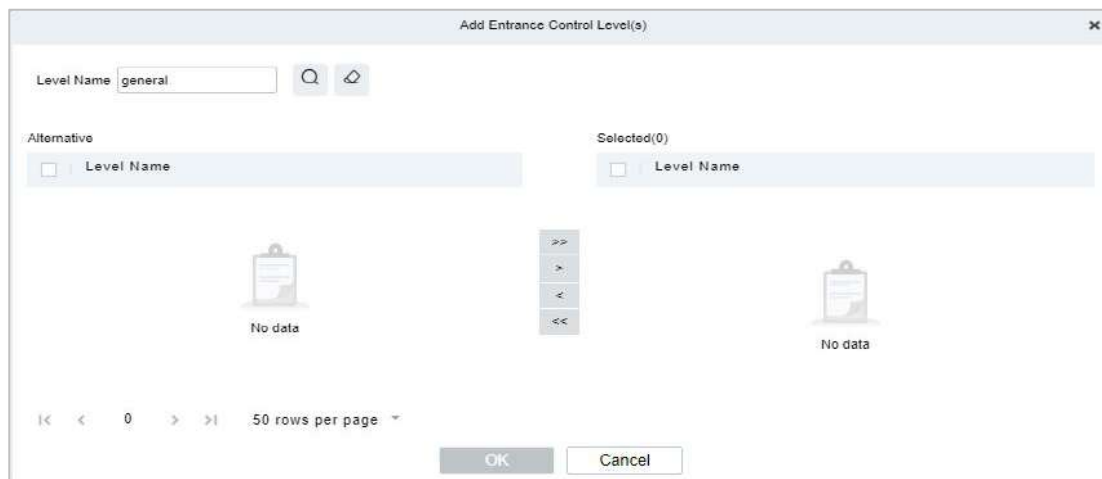


Figure 8- 49 Add Entrance Control Level Interface

8.5.1.3.2 Delete Levels

In the **Visitor** module, click **Basic Management > Visitor Levels**, select a visitor level and click **Delete** to delete the visitor level.

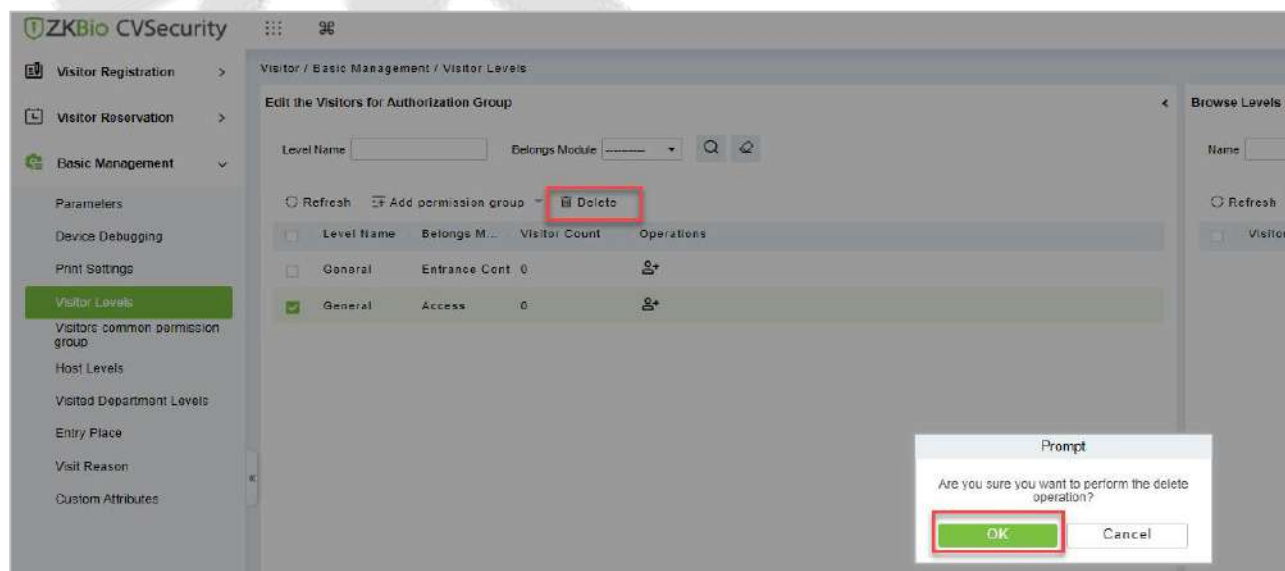


Figure 8- 50 Delete Level Interface


Click **OK** to perform the delete operation.

8.5.1.3.3 Add Visitors to Levels (Browse Level)

Adding visitors to levels

Operating Steps

Step 1: In the Visitor module, click **Basic Management > Visitor Levels**.

Step 2: Select the Visitor name click on the icon  under the operation categories.

Step 3: Select one or more visitors, click  or  to move into the Selected menu. Click **OK**.

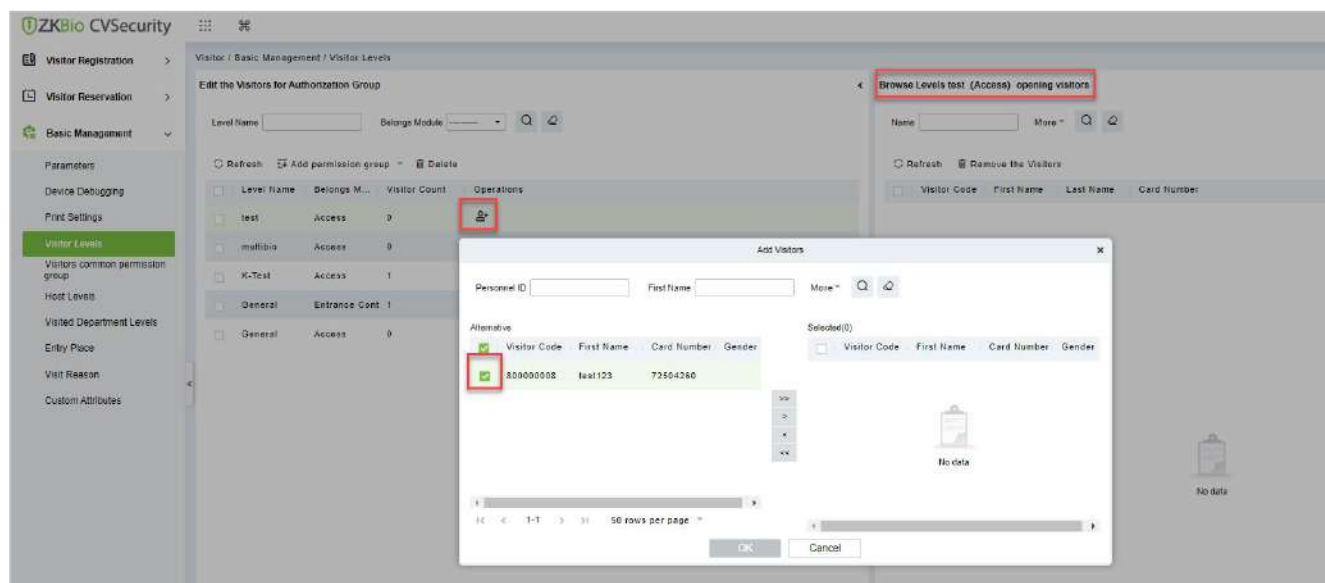


Figure 8- 51 Add Visitor Interface

Step 4: After clicking **OK** the processing window will appear like figure below shows below.

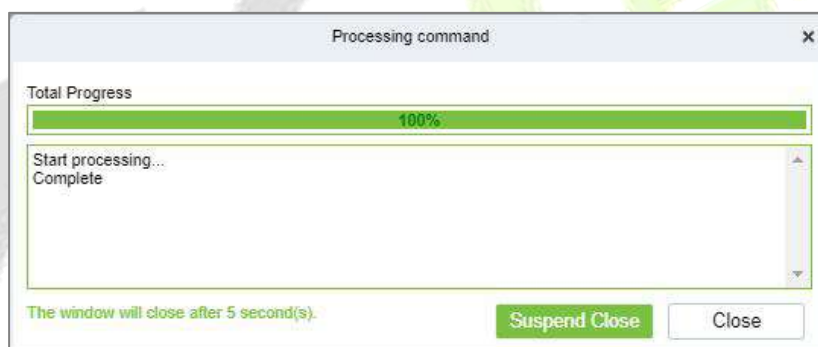


Figure 8- 52 Processing Command Interface

8.5.1.3.4 Remove Visitors from Browse Level

Removing visitors from the levels.

● Operating Steps:

Step 1: In the Visitor Module, click **Basic Management > Visitor Levels**

Steps 2: Select the visitor details to be deleted, Click **Remove the Visitor** as shown in figure below.

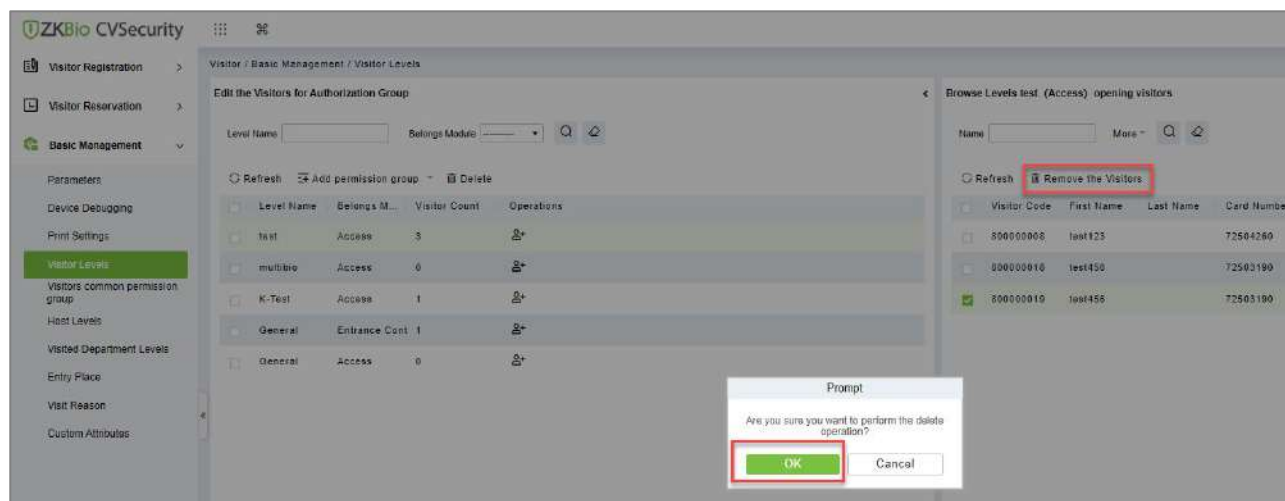


Figure 8- 53 Remove Visitors from Browse Level

Step 3: Click **OK** to perform the delete operation.

8.5.1.4 Visitor Common Permission Group

This interface displays a list of all visitor permission groups in the visitor system. After setting up the visitor permission group, you can assign access control/passage/witness permission to visitors when registering visitors.

8.5.1.4.1 Add Permission Group

In this option you can give access, elevators, and entrance control permissions to the visitors.

Add Access Level

To add Access Level Group

● Operating Steps:

Step 1: In the Visitor module, select **Basic Management > Visitor Common Permission Group**.

Step 2: In the Visitor Permission Group interface, click **Add Permission Group**, select **Add Access Level**, and then add the corresponding permissions.

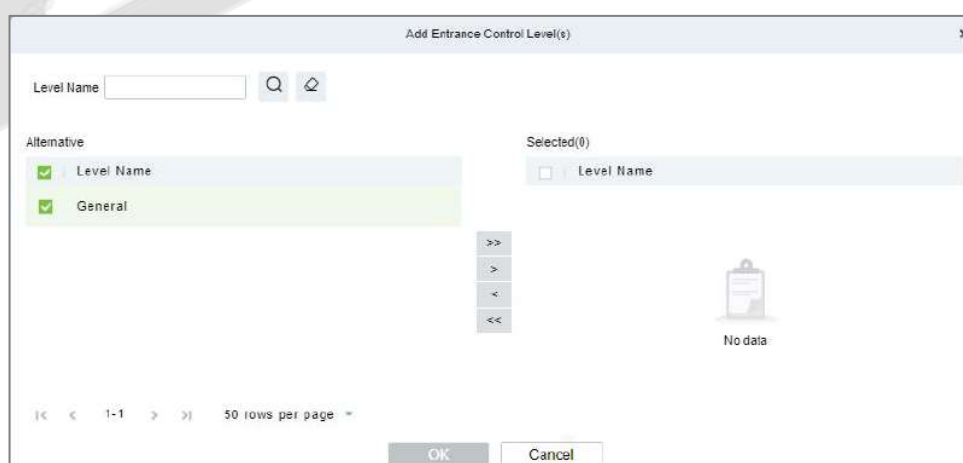


Figure 8- 54 Visitor Permission Group Adding Interface

Set a visitor level name, select one or more access levels, click **>** or **>>** to move into the Selected menu. Click **OK**.

Step 3: In the **Visitor** module, select **Visitor Registration > Entry Registration** interface, and click **Entry Registration** to assign personnel visitor permissions.

New

Host/Visited *
Certificate Type *
First Name *
Company
Country/Region
Email

Enter the Query Co...

ID

Visit Department *
Certificate No. *
Last Name
Mobile Phone
Visitor Quantity *

1

Visit Reason *
Entrance *
Gender
License Plate
Carrying Goods

Visit

1

Permission

Visitor Level
Card Number

Start Time *
End Time *

2021-12-20 11:35:08

2021-12-20 23:59:59

Capture

Personnel Detail

Any exposure to suspected cases
City visited in past 14 days
Remarks on health

Yes

No

Any symptoms in the last 14 days
Body Temperature(°C/°F)

None

Cough

Fever

Respiratory Issues

Save and New

OK

Cancel

Figure 8- 55 Visitor Add Visitor Permission Interface

Add Elevator Level

To add Access Level Group

●Operating Steps:

Step 1: In the Visitor module, select **Basic Management > Visitor Common Permission Group**.

Step 2: In the Visitor Permission Group interface, click **Add Permission Group**, select **Add Elevator Level**, and then add the corresponding permissions.

Add Elevator Level(s)

Level Name

Alternative

Level Name

Elevator Control Time Zone

Selected(0)

Level Name

Elevator Control Time Zone

No data

>>

>

<

<<

No data

<<

<

0

>

>>

50 rows per page

OK

Cancel

Figure 8- 56 Visitor Permission Group Adding Interface

Set a visitor level name, select one or more access levels, click **>** or **>>** to move into the Selected menu. Click **OK**.

Add Entrance Control Level

To add Access Level Group

Page | 405

Copyright © 2024 ZKTECO CO., LTD. All rights reserved.

● Operating Steps:

Step 1: In the Visitor module, select **Basic Management > Visitor Common Permission Group**.

Step 2: In the Visitor Permission Group interface, click **Add Permission Group**, select **Add Entrance Control Level**, and then add the corresponding permissions.



Figure 8- 57 Visitor Permission Group Adding Interface

Set a visitor level name, select one or more access levels, click **>** or **>>** to move into the Selected menu. Click **OK**.

8.5.1.4.2 Delete Levels

In the **Visitor Module**, click **Basic Management > Visitor Common Permission Group**, select a visitor level and click **Delete** to delete the visitor level.

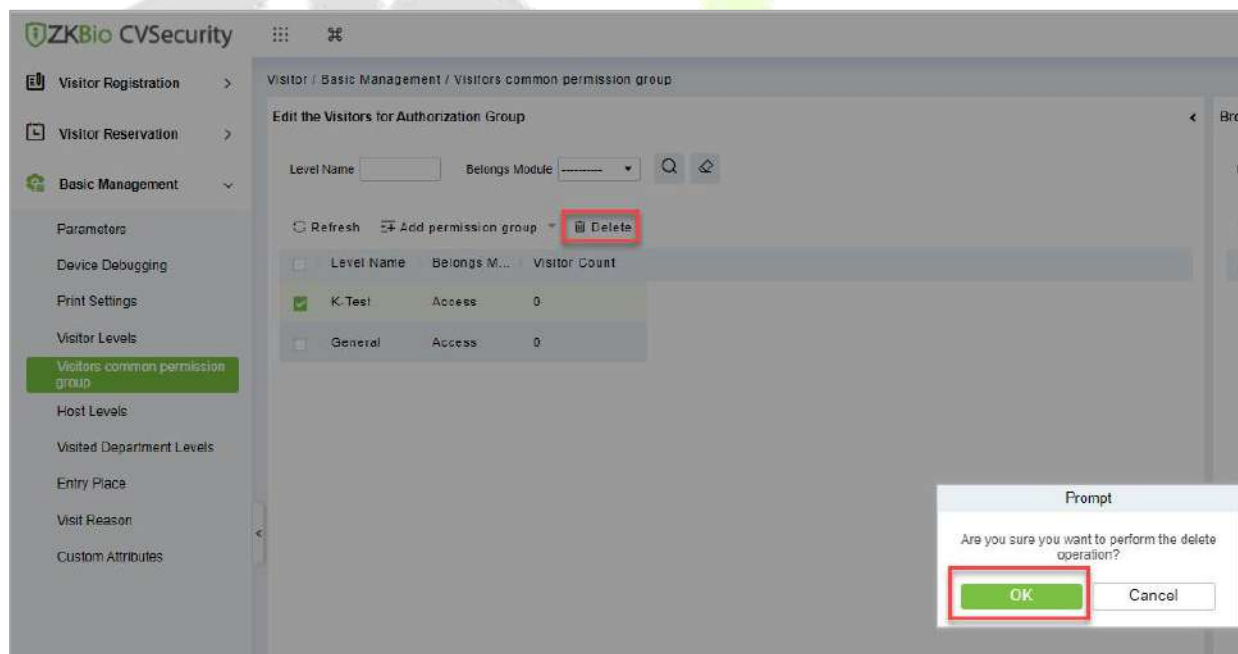


Figure 8- 58 Delete Level Interface

Click **OK** to perform the delete operation.

8.5.1.4.3 Remove Visitors from Browse Level

● Operating Steps:

Step 1: In the Visitor Module, click **Basic Management > Visitor Common Permission Group**.

Step 2: Select the visitor details to be deleted, Click **Remove the Visitor**.

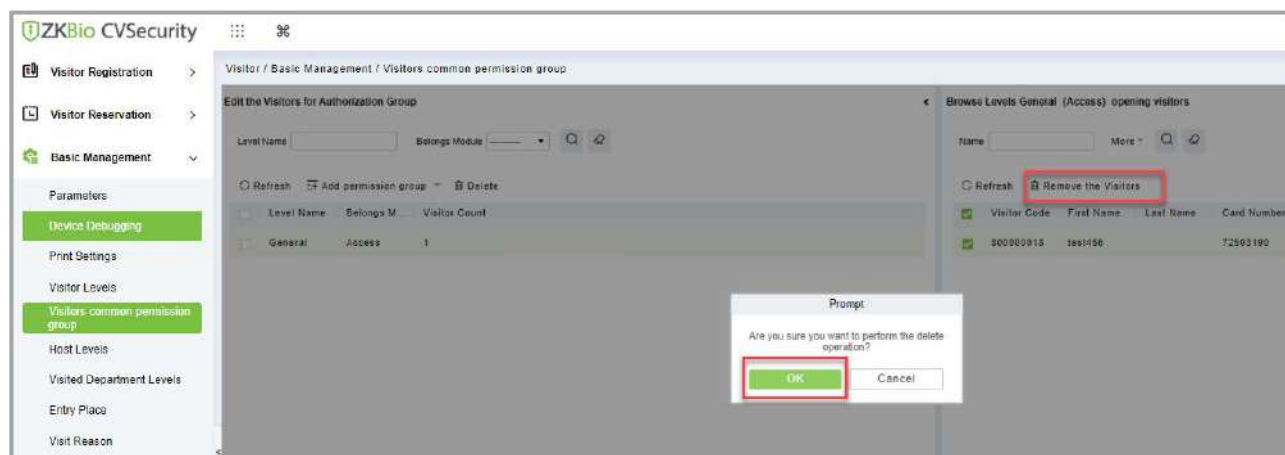


Figure 8- 59 Remove Visitors from Browse Level

Step 3: Click **OK** to perform the delete operation.

8.5.1.5 Host Level

After setting up the visitor permission group, you can set the visitor permission group according to the visited person or department in the Personnel module. After setting up, visitors who visit the visited person or department have this assigned permission by default.

8.5.1.5.1 Set Up Permission Groups by Interview (New)

This paper introduces the configuration Steps of setting permission groups according to the interview in.

● Operating Steps:

Step 1: In the Visitor module, select **Basic Management > Host Level**.

Step 2: In the Setting Permission Group by Interviewee interface, click **New** to add interviewee information.

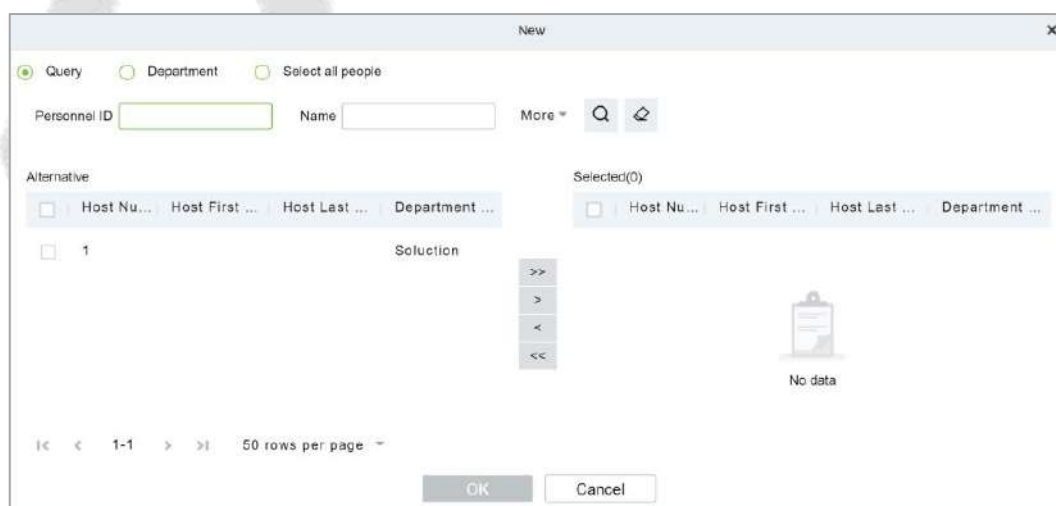



Figure 8- 60 New Interface for Interviewee

Step 3: After the new information is successfully added, click **Add Visited Levels**  under operations. After the respondent adds the corresponding permissions, this permission group will be distributed to the visitor when the visitor registers, and the visitor will have the permissions possessed by this permission group.

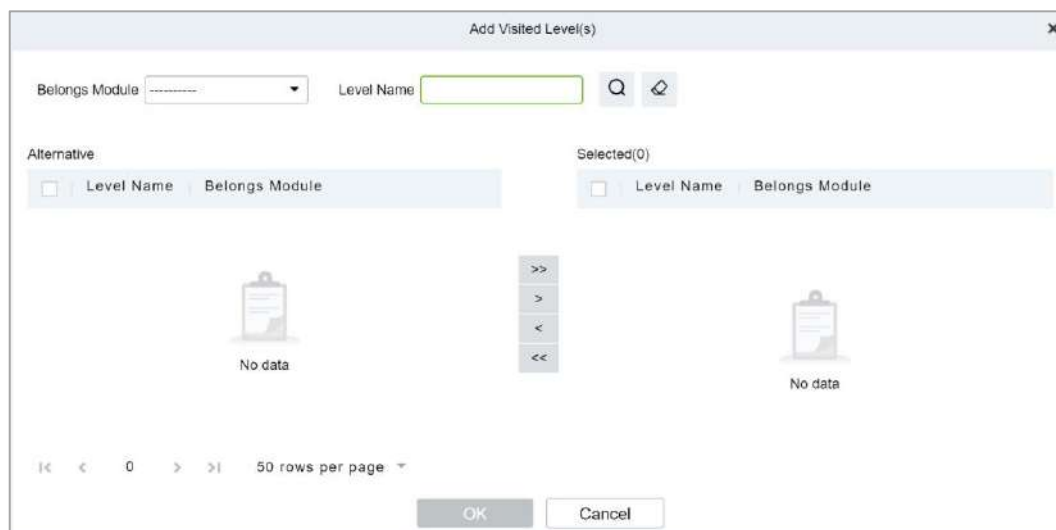


Figure 8- 61 Add Visitor Permissions Interface

8.5.1.5.2 Delete Levels

In the **Visitor** module, click **Basic Management > Host Level**, select a Host and click **Delete** to delete the Host level.

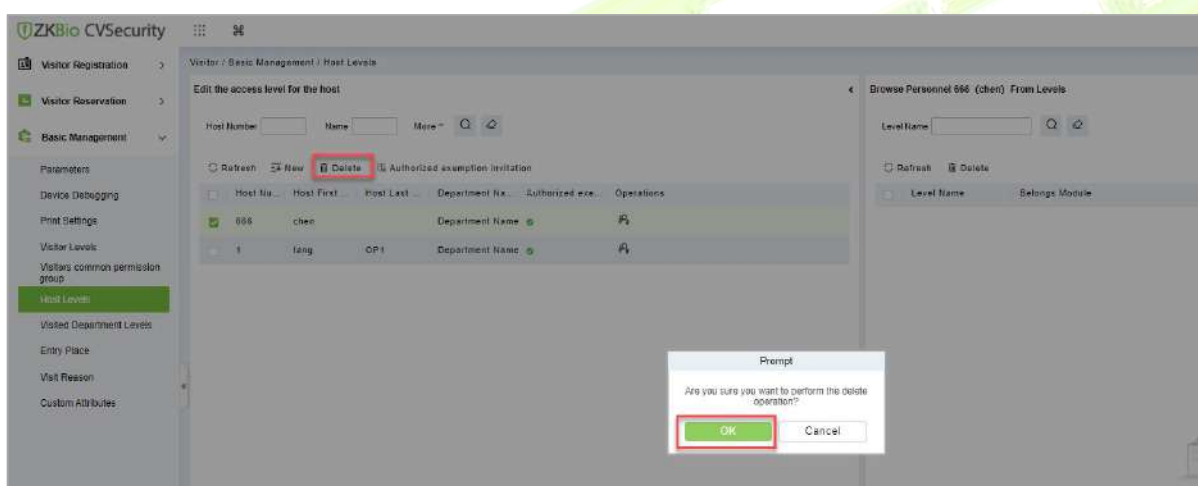


Figure 8- 62 Delete Level Interface

Click **OK** to perform the delete operation.

8.5.1.5.3 Authorized Exemption Invitation

To send authorized exemption invitation to the interviewee.

● Operating Steps:

Step 1: In the **Visitor** module, click **Basic Management > Host Level**, select Interviewee

Step 2: Click **Authorized Exemption Invitation** and select **Yes** or **No** from the drop-down list as shown in figure below.

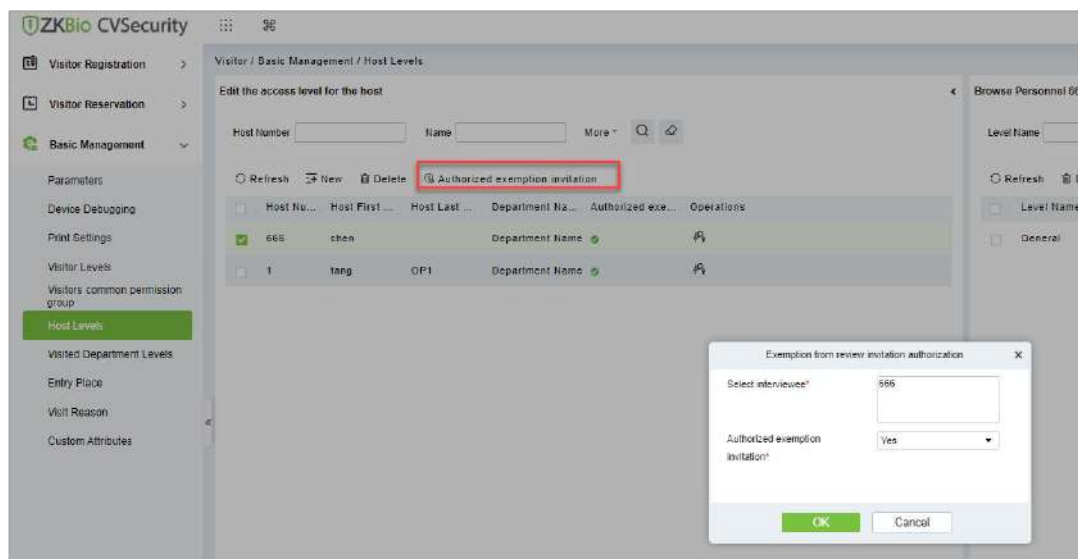


Figure 8- 63 Authorized Exemption Invitation Interface

Step 3: Click OK to send authorized exemption invitation to the interviewee.

8.5.1.6 Remove Visited Host Level from Browse Level (Delete)

Removing visitors from the levels.

● Operating Steps:

Step 1: In the Visitor module, click **Basic Management** > Host Level.

Step 2: Select the visited level details to be deleted, click **Delete**.

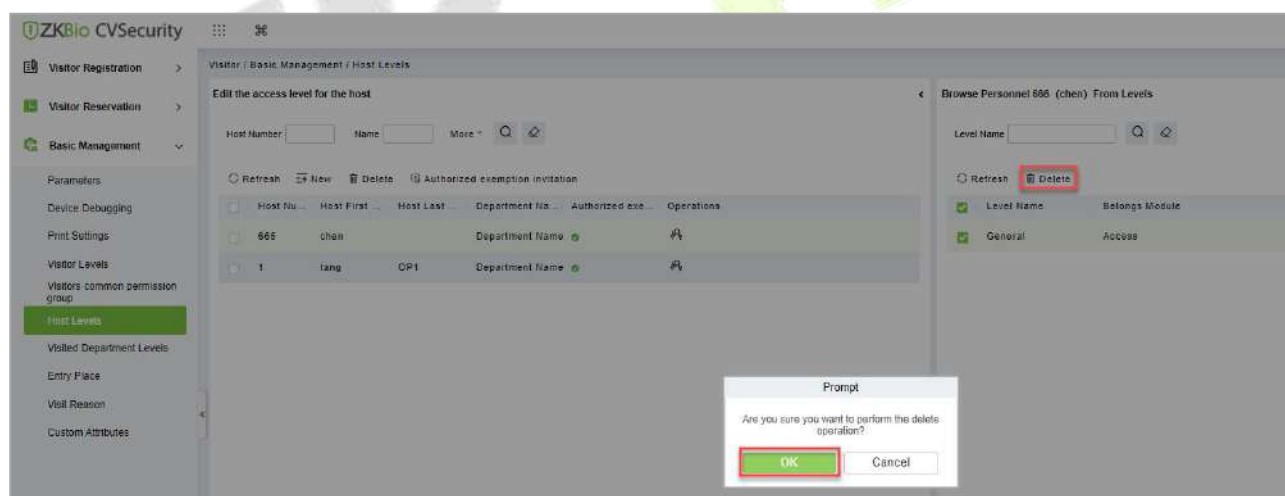


Figure 8- 64 Remove Visited Level from Browse Level

Step 3: Click **OK** to perform the delete operation.

8.5.2 Set Up Permission Groups by Visited Department (Visited Department Level)

This paper introduces the configuration Steps of setting permission groups by department in.

8.5.2.1 Add Permission Group by Visited Department (New)

● Operating Steps:

Step 1: In the Visitor module, select **Basic Management** > **Visited Department**.

Step 2: In the Setting Permission Group by Visited Department interface, click **New** to add the visited department.

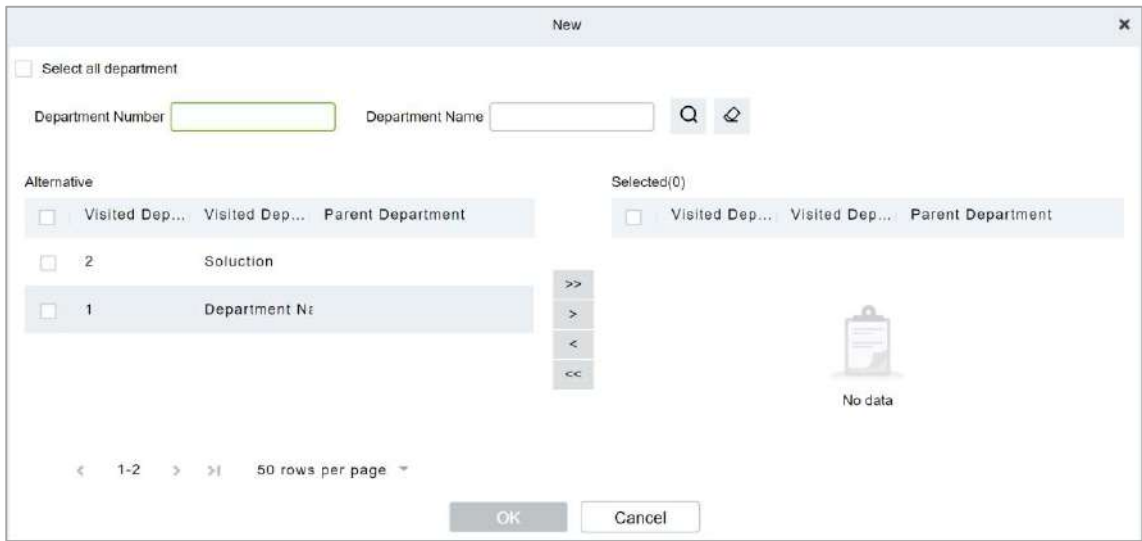


Figure 8- 65 Add Department Interface

Step 3: In the interface of editing permission group for visited department, click **Add Visited Level** under Operation. After adding the corresponding permission, when the visitor registers, this permission group will be distributed to the visitor, and the visitor will have the permission of this permission group.

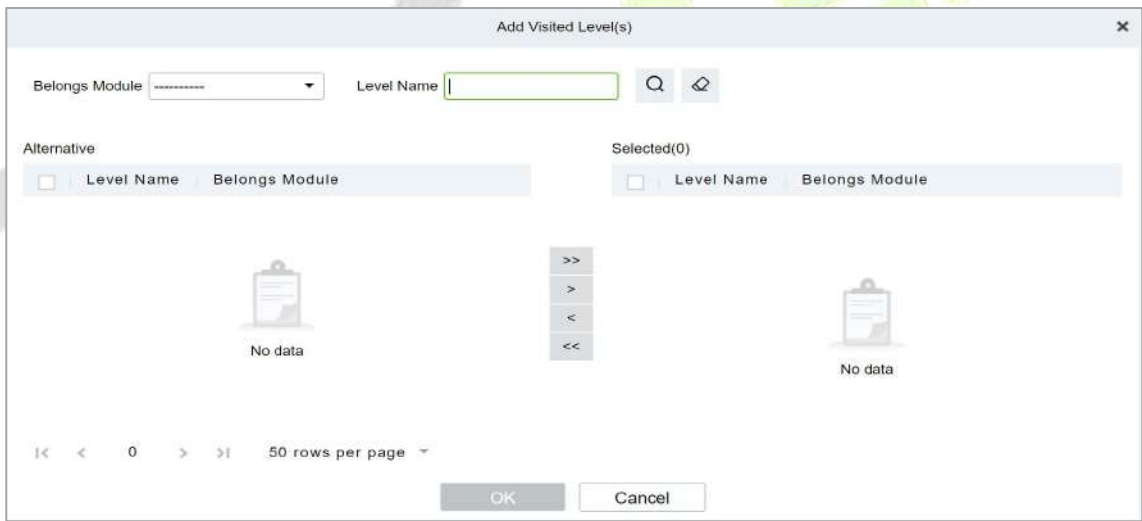


Figure 8- 66 Add Department Permission Interface

8.5.2.2 Delete Levels

In the **Visitor** module, click **Basic Management > Host Level**, select a visited department and click **Delete** to delete the Host level.

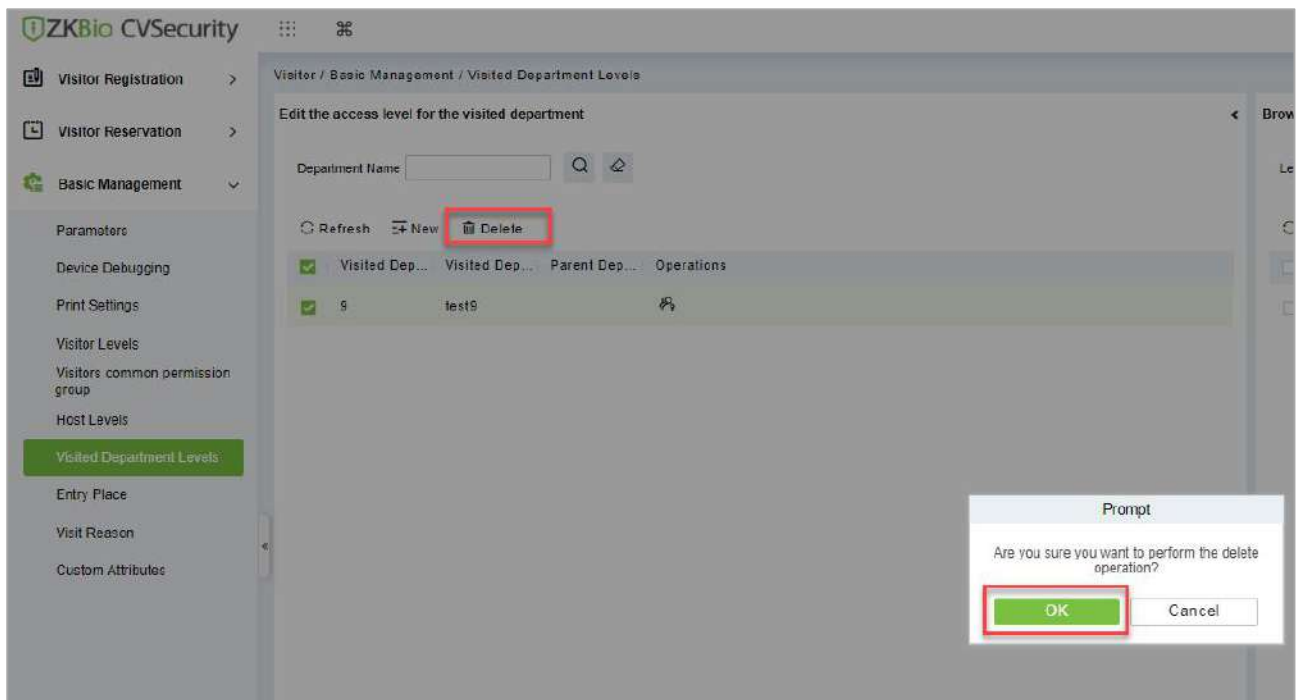


Figure 8- 67 Delete Visited Department Interface

Click **OK** to perform the delete operation.

8.5.2.3 Remove Visited Department Level from Browse Level (Delete)

Removing visitors from the levels.

Operating Steps

Step 1: In the Visitor module, click **Basic Management > Host Level**.

Steps 2: Select the visited Level details to be deleted, click **Delete**.

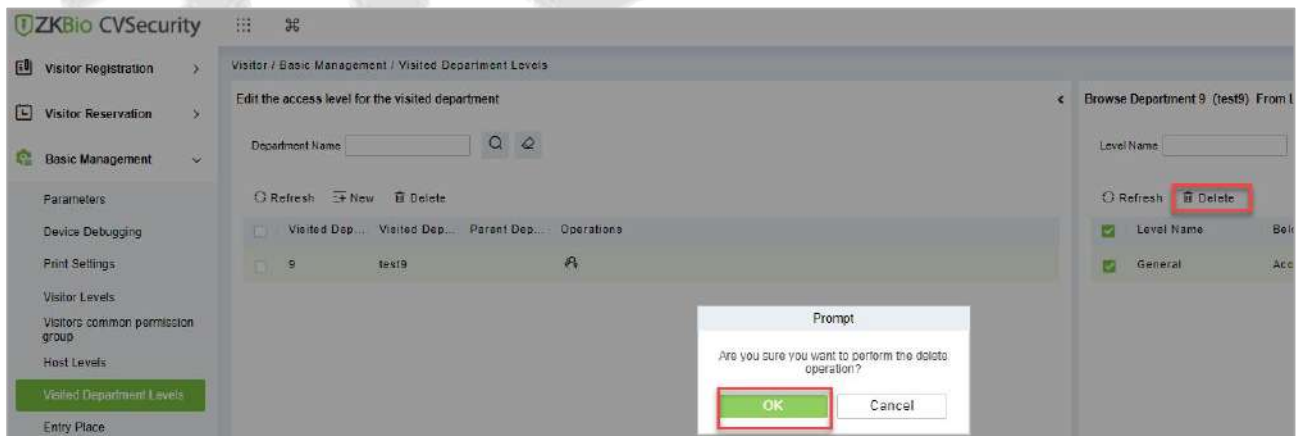


Figure 8- 68 Remove Visited Level from Browse Level

Step 3: Click **OK** to perform the delete operation.

8.5.3 Entry Place

Only the registered platform (including PC platform and visitor plane) can register and sign off visitors.

This interface displays a list of all registered places in the visitor system. Displays fields such as enlistment location name, IP address, area name, and so on.

8.5.3.1 Entry Place (New)

Introduces the configuration Steps of registering locations in ZKBio CVSecurity.

●Operating Steps:

Step 1: In the Visitor module, select **Basic Management > Entry Place**.

Step 2: In the registration location interface, click **New** and select **Ordinary Computer** as the visitor machine type, as shown in figure below. Please refer to Table 10-12 for parameter description.

The screenshot shows a 'New' dialog box with the following fields and values:

- Place Name*: [Empty text box]
- IP Address*: 127 . 0 . 0 . 1
- Physical information*: QkZFQkZCRkYwMDA5ME
- Visitor Machine Type: Ordinary Computer (dropdown)
- Photo Collection: USB Camera (dropdown)
- Document Collection: USB Camera (dropdown)
- Default permissions: [Empty dropdown]
- Area Name*: [Empty dropdown]

Buttons: Test Connection, Save and New, OK, Cancel.

Figure 8- 69 Ordinary Computer Entry Place Interface

Parameter	Description
Name of Registration Place	Any character, no more than 50, not repeatable.
IP Address	Register the IP address of the computer used by the platform of visitor information and read the IP address of the local computer by default, which can be edited.
Physical Information	The physical information of the computer used by the platform for registering visitor information is automatically filled in by default and cannot be edited.
Type of Visitor Machine	By default, it is an ordinary computer. When connecting the visitor machine, select the visitor machine type: desktop visitor machine second generation, ID2000.
Photo Collection	Select the type of camera installed by customers, which is divided into USB camera, webcam, and dual-camera altimeter. Description: The server side of the box does not currently support external "dual camera high camera".
Certificate Collection	Select the certificate collection equipment installed by customers, which is divided into USB camera, altimeter, scanner, and dual-camera altimeter. Description: The box server does not support external "altimeter, scanner and dual-camera

Parameter	Description
	altimeter" for the time being.
Default Permissions	Select the default access rights for visitors registered at this level of location.
Area Name	Add the name of the area to which the registration place belongs, and the visiting registration record of each registration place will be filtered according to the area of the registration place

Table 8- 13 Description of Entry Place Parameters

8.5.3.2 Use of Visitor Machine

Introduces the configuration Steps of registering locations in ZKBio CVSecurity.

●Operating Steps:

Step 1: In the Visitor module, select **Basic Management > Entry Place**.

Step 2: In the registration location interface, click **New**, and select the visitor type as **Desktop Visitor Second Generation, ID2000**, as shown in figure below. Please refer to Table 10-12 for parameter description.

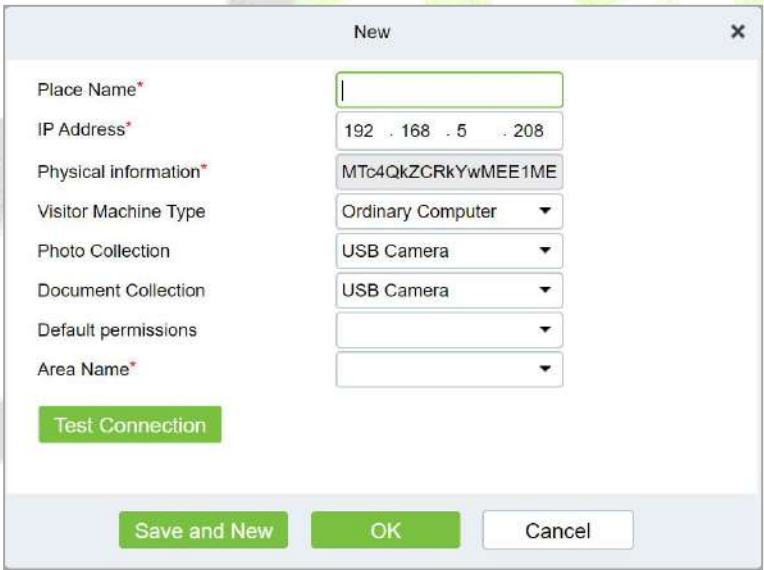


Figure 8- 70 Interface of Visiting Passenger Airline Entry Place

Parameter	Description
Name of Registration Place	Any character, no more than 50, cannot repeat.
IP Address	Register the IP address of the computer used by the platform of visitor information and read the IP address of the local computer by default, which can be edited.
Physical Information	The physical information of the computer used by the platform for registering visitor information is automatically filled in by default and cannot be edited.

Parameter	Description
Type of Passenger Plane	By default, it is an ordinary computer. When connecting the visitor, select the visitor type: desktop visitor second generation, ID2000.
Photo Collection	Select the type of camera installed by customers, which is divided into USB camera, webcam, and dual-camera altimeter. Description: The server side of the box does not support the external "dual-camera altimeter" equipment for the time being.
Certificate Collection	Select the certificate collection equipment installed by customers, which is divided into USB camera, altimeter, scanner, and dual-camera altimeter. Description: The box server does not support external "altimeter, scanner and dual-camera altimeter" for the time being.
Default Permissions	Select the default access rights for visitors registered at this level of location.
Area Name	Add the name of the area to which the registration place belongs, and the visiting registration record of each registration place will be filtered according to the area of the registration place

Table 8-12 Description of Registration Location Parameters

8.5.3.3 Delete

● Operation Steps:

Step 1: In the Visitor Module, click **Basic Management > Entry Place**, select the place name to be deleted.

Step 2: Click **Delete** to delete the selected place.

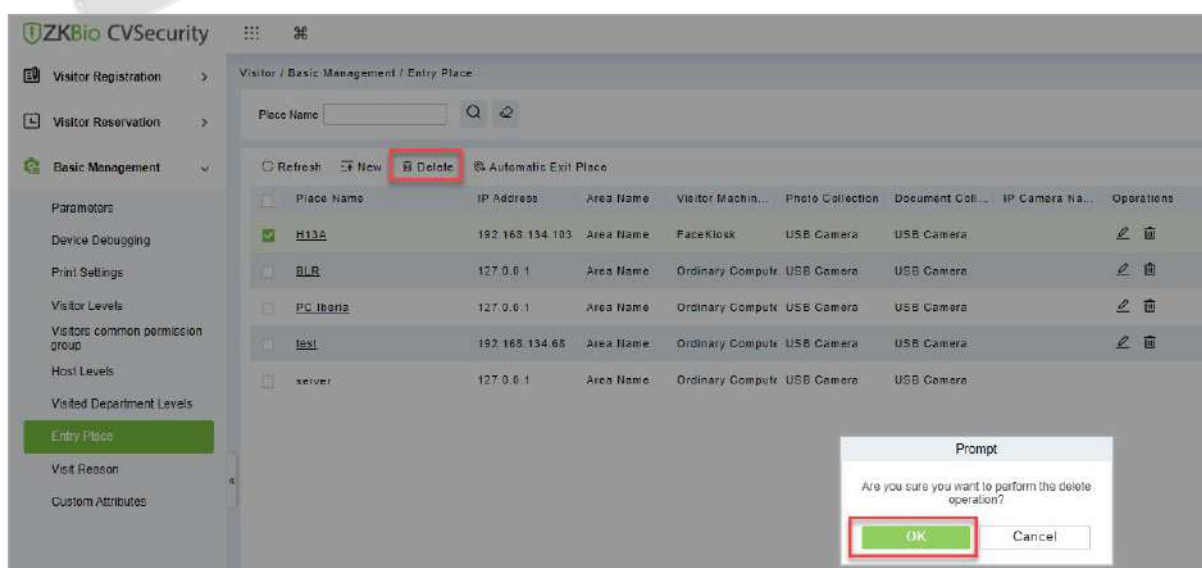


Figure 8-71 Interface of Visiting Passenger Airline Entry Place

Step 3: Click **OK** to perform the delete operation.

8.5.3.4 Automatic Exit Place

To set automatic Exit place.

● Operation Steps:

Step 1: In the Visitor Module, click **Basic Management > Entry Place**, click Automatic Exit Place option.

Step 2: Select the place to be set as automatic exist place and click **OK**.

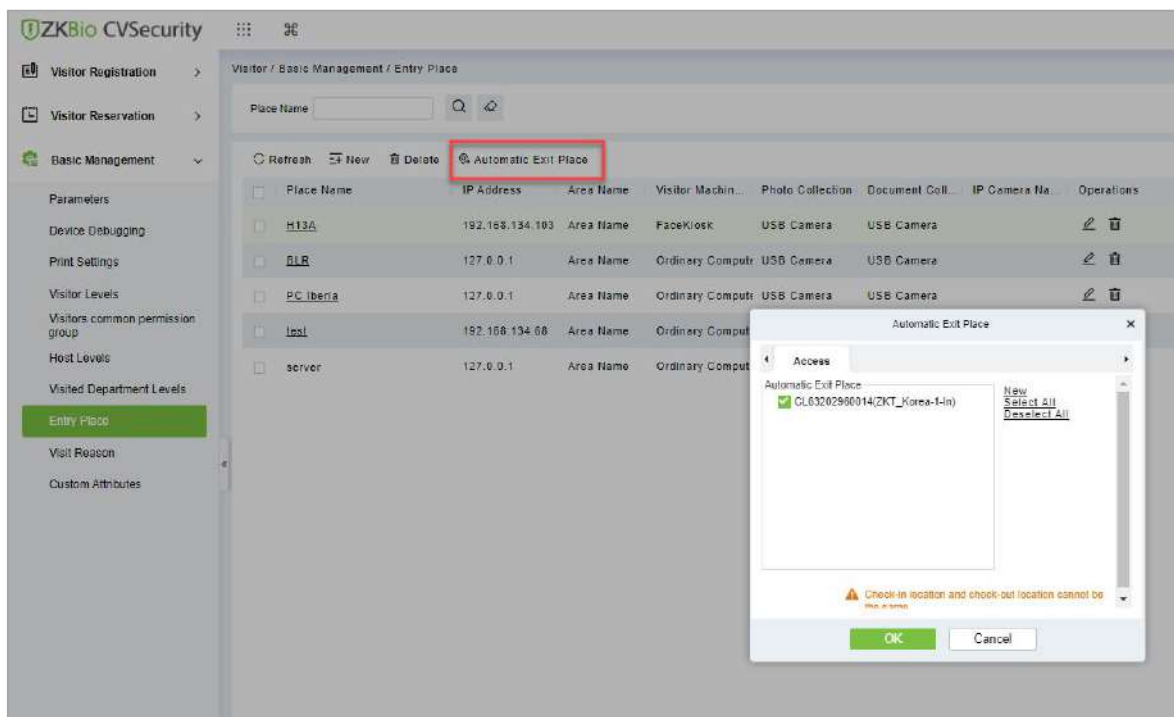


Figure 8- 72 Automatic Exit Place Interface

Step 3: Click **New** to add place as automatic exit place and select the place reader name (Device place) from the appeared window. Click **OK** to save the data.

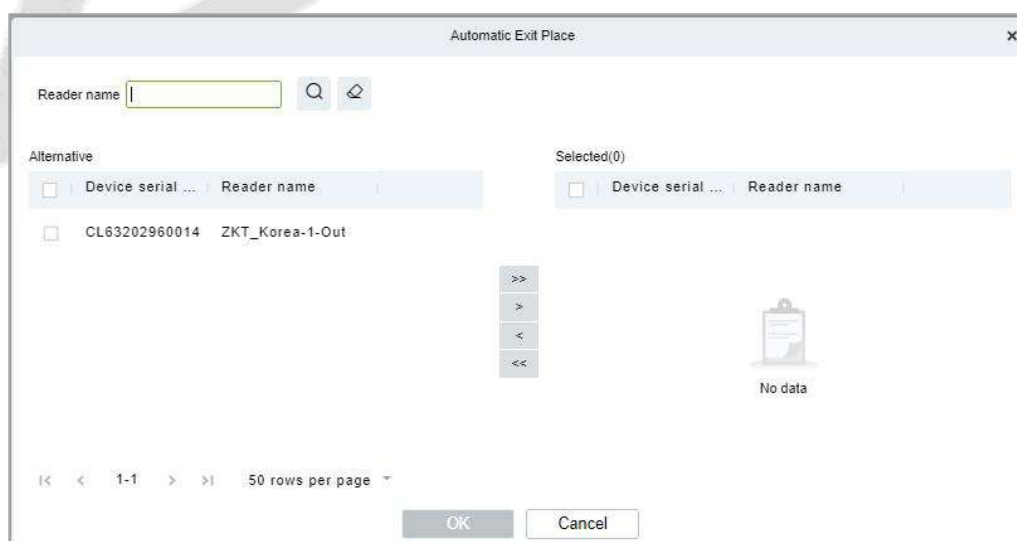


Figure 8- 73 Add Place as Automatic Exit Place

Step 4: Repeat the step 2 to set the newly added place as automatic exit place.

8.5.4 Visit Reason

You can Add, Delete or Edit visit reason in this interface, so that you can select either from them at the entry registration page.

8.5.4.1 To Add Visit Reason (New)

● Operation Steps:

Step 1: In the Visitor module, click **Basic Management > Visit Reason > New**.



The screenshot shows a 'New' dialog box with a text input field labeled 'Visit Reason*'. Below the input field are three buttons: 'Save and New' (green), 'OK' (green), and 'Cancel' (white).

Figure 8- 74 Add Place as Automatic Exit Place

Step 2: Click **OK** to finish.

8.5.4.2 Delete

● Operation Steps:

Step 1: In the **Visitor** module, click **Basic Management > Visit Reason**, select visit reason to be deleted.

Step 2: Click **Delete** to delete the selected visit reason.

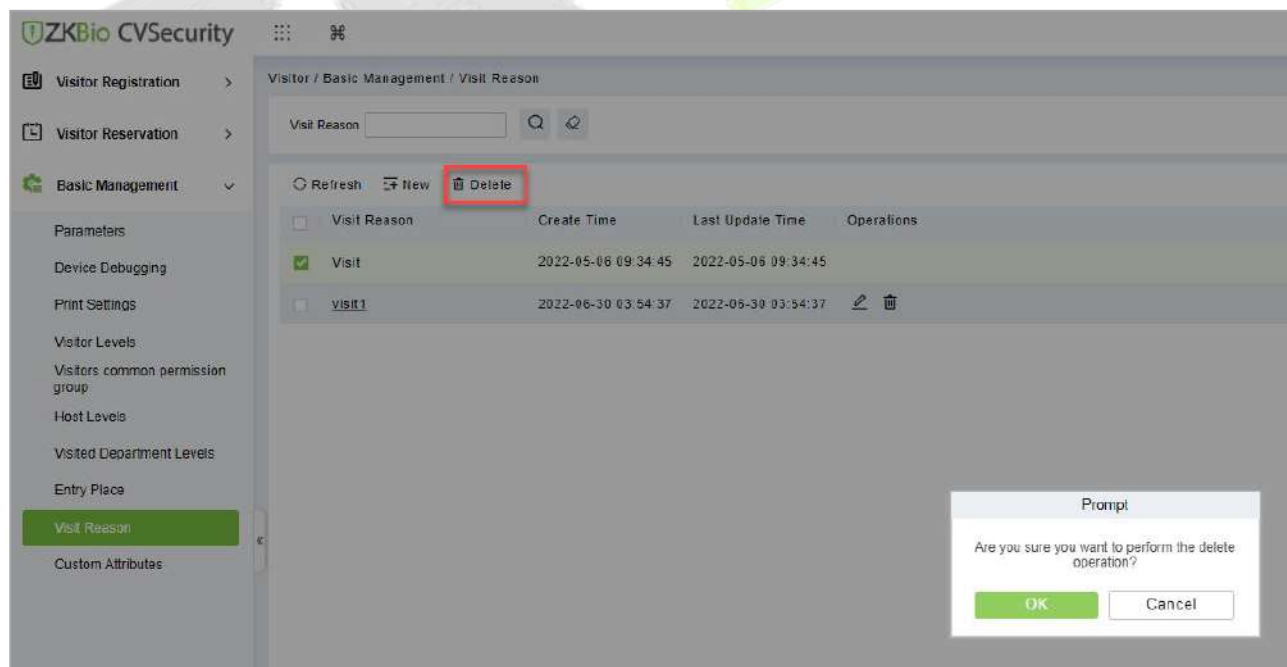


Figure 8- 75 Delete Visit Reason

Step 3: Click **OK** to perform the delete operation.

8.5.5 Custom Attributes

If you want to add or delete a specific field on the registration page, then you can use this function.

8.5.5.1 To Add Custom Attributes (New)

In this interface you can add any specific field on the registration page.

● Operation Steps:

Step 1: In the **Visitor Module**, click **Basic Management > Custom Attributes**, click **New** to add a specific field on the registration page.

Step 2: Enter the Attribute name, select the field type as Pull down, Multiple Choice, Single Choice or Text.

If you select any of the type except Text, then you have to mention the attribute value(s). Use a semicolon to separate the values. Enter Row and Column as required and choose Yes or No according with requirement.

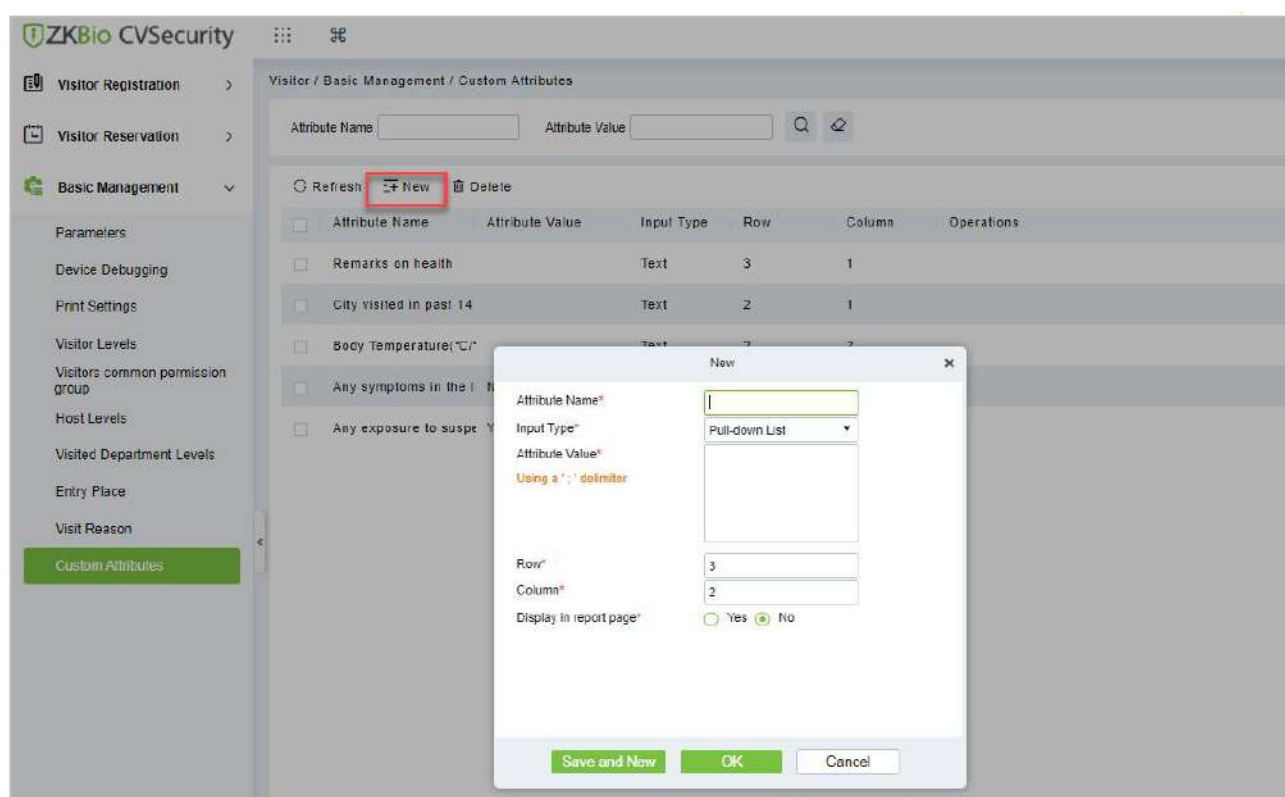


Figure 8- 76 Custom Attribute Interface

Step 3: Click **OK** to add the attribute.

Parameter	Description
Attribute Name	Enter the attribute name.
Input Type	Select the input type from the drop-down list such as Pull down, Multiple Choice, Single Choice or Text.
Attribute Value	Enter the attribute value. n attribute has multiple values, you can separate them with a semicolon.

Parameter	Description
	If you select text as input type of the attribute, then no need to add the attribute value.
Row	Enter the row number as required.
Column	Enter the column number as required.
Display in Report Page	If an attribute should be displayed on report pages, select Yes . Otherwise select No .

Table 8- 14 Description of Entry Place Parameters

8.5.5.2 Delete Custom Attributes

To delete customized attributes.

● Operation Steps:

Step 1: In the **Visitor** module, click **Basic Management > Custom Attributes** and select the attribute to be deleted.

Step 2: Click **Delete** to delete a specific field on the registration page.

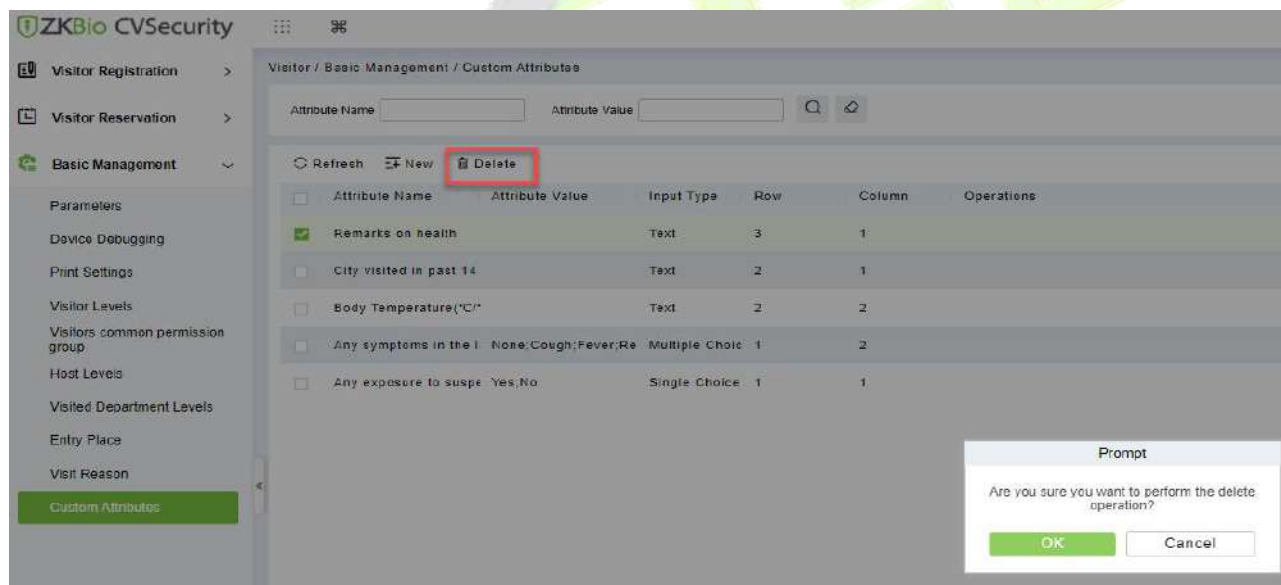


Figure 8- 77 To Delete Custom Attribute

Step 3: Click **OK** to perform the delete operation.

8.6 Advanced

8.6.1 Category

This interface allows you to add or delete the visitor category.

8.6.1.1 To Add New Visitor Category

●Operation Steps:

Step 1: In the **Visitor** module, click **Advanced > Category** and click **New** to add a new category.

Step 2: Enter the type of category and remarks as shown in figure below.

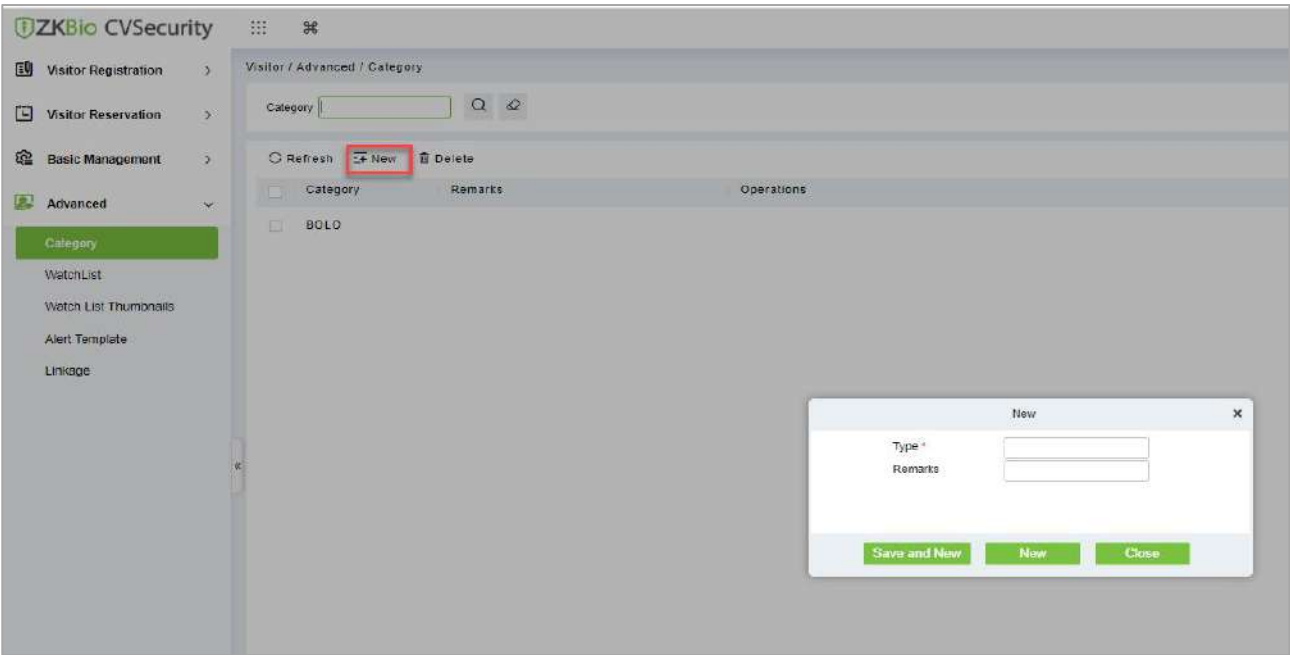


Figure 8- 78 Category Interface

Step 3: Click **OK** to save the data.

Parameter	Description
Type	Enter the type of category.
Remarks	Enter the remarks about the category (Optional).

Table 8- 15 Description of Category Parameters

8.6.1.2 To Delete Category

●Operation Steps:

Step 1: In the **Visitor** module, click **Advanced > Category** and select the category to be deleted.

Step 2: Click **Delete** and then click **OK** to perform the delete operation.

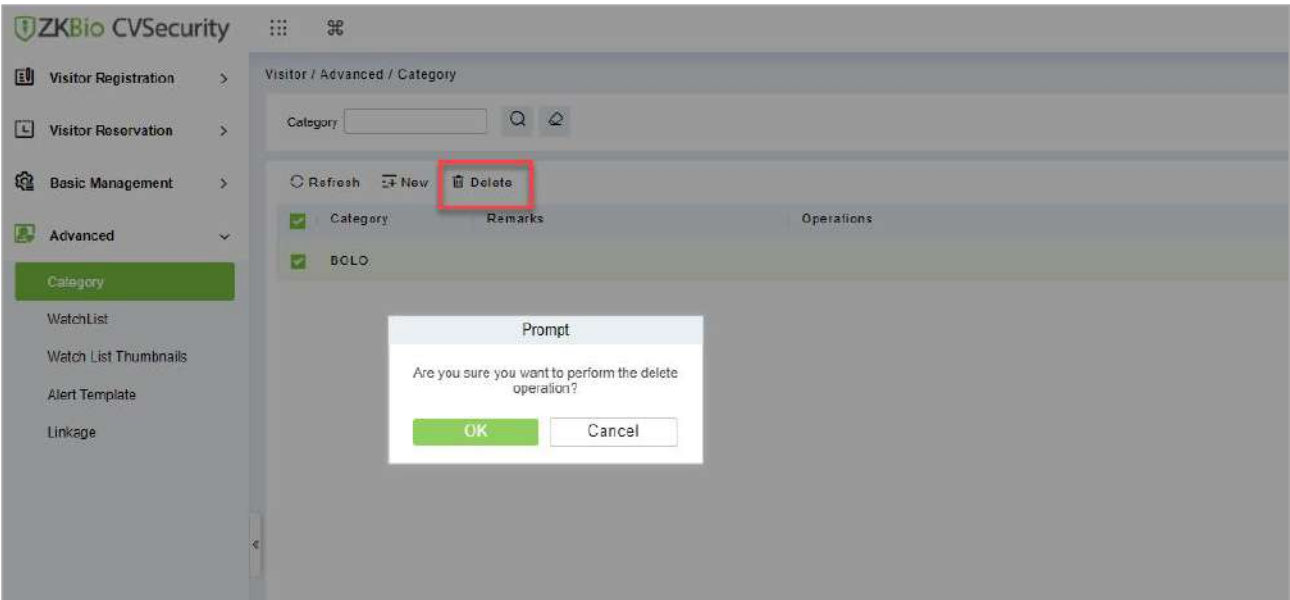


Figure 8- 79 To Delete Category

8.6.2 WatchList

Watch List interface displays the list of visitor information, and you can Add, Delete, Enable, or Disable the visitors.

8.6.2.1 To Add Visitor (New)

Step 1: In the **Visitor** module, click **Advanced > WatchList** and click **New** to add visitor.

Step 2: Enter the Visitor details such as Type, Full Name, Category, Certificate Type and Certificate Number.

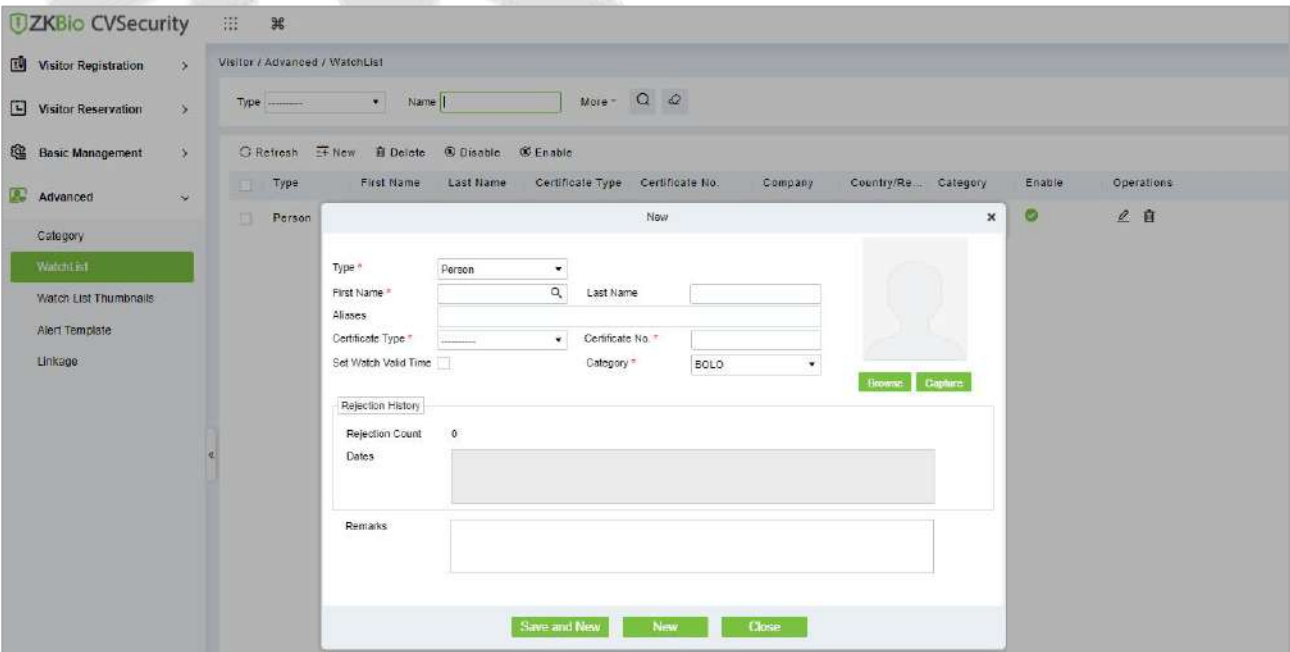


Figure 8- 80 Watchlist Interface

Step 3: Click **Save and New** to save the details.

Parameter	Description
Type	Select type from the drop-down list; Available types are Person, Company,


Parameter	Description
	Category/Country.
First and Last Name	Select visitor name using search icon. If you selected company as type, then enter the company name.
Aliases	You can enter the more familiar name of visitor if it needed.
Certificate Type	Passport, Driving License, ID Card, and Others are available to choose from the drop-down list. If the ID Scan OCR function is activated, visitor information will display automatically after clicking  icon.
Certificate No.	The numbers and letters are legal; the max length is 20.
Category	Select the visitor category from the drop-down list.
Set Watch Time	You can set watch time for the selected visitor by clicking on the check box. Then enter the Start Date and end Date.
Rejection counts and Dates	Displays how many times the business rejected the visitor and rejected dates.

Table 8- 16 Description of WatchList Parameters

8.6.2.2 Delete WatchList

● Operation Steps:

Step 1: In the **Visitor** module, click **Advanced > WatchList** and select the visitor watch list to be deleted.

Step 2: Click **Delete** to delete the selected watch list.

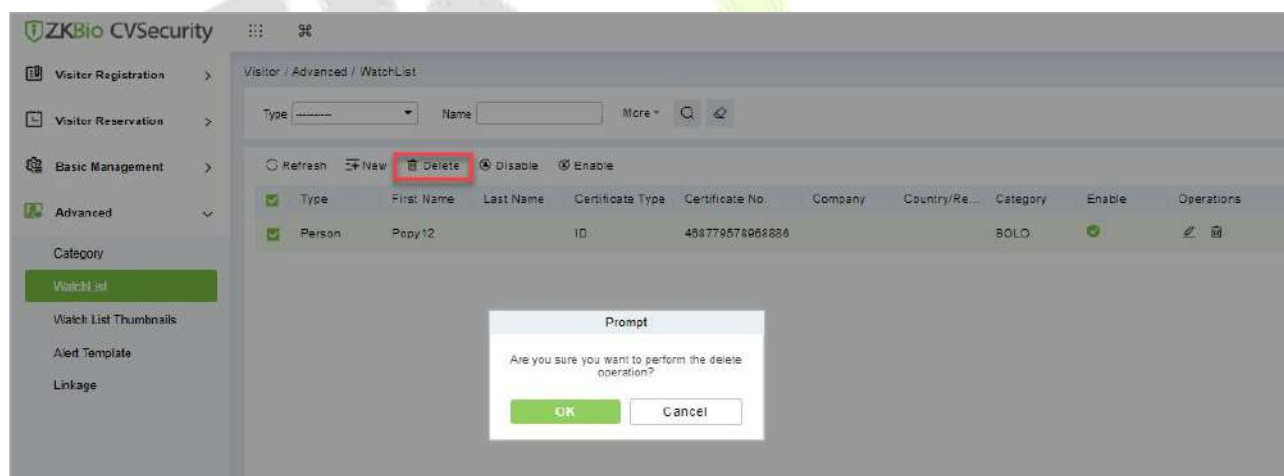


Figure 8- 81 To Delete WatchList

Step 3: Click **OK** to perform the delete operation.

8.6.2.3 Enable WatchList

In **Visitor** module Click **WatchList > Advance**, select a blocked visitor, and click **Enable**.

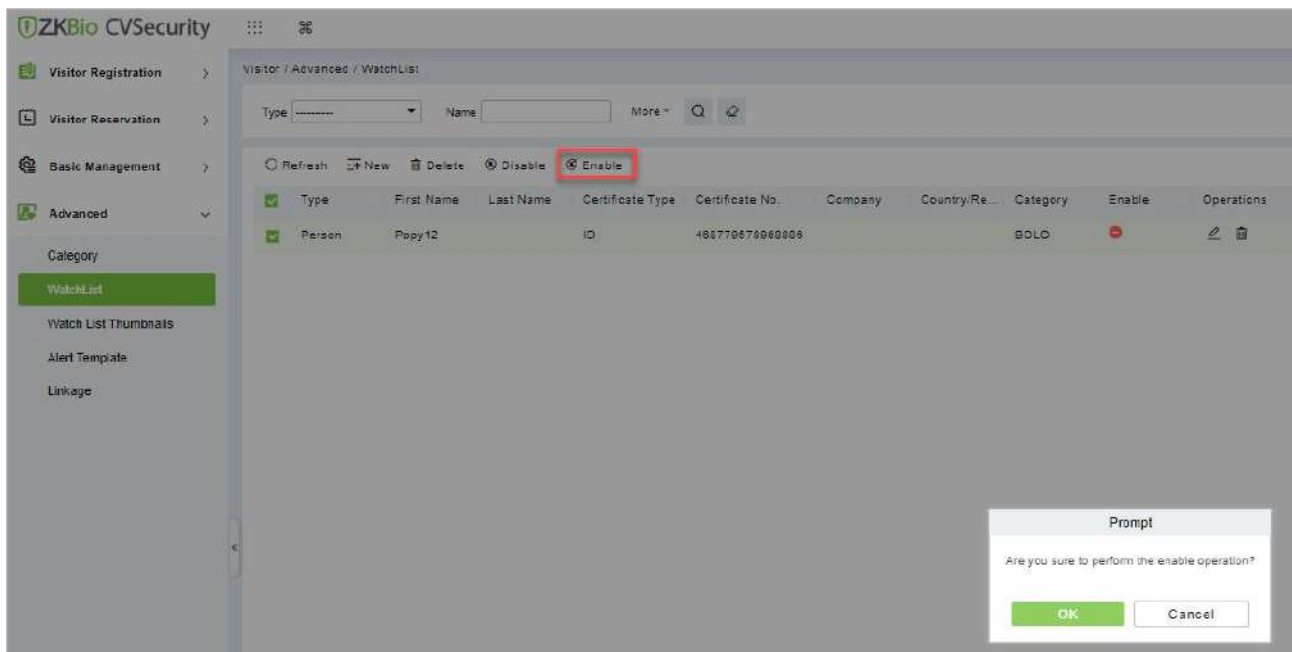


Figure 8- 82 Enabling WatchList

Click **OK** to enable the visitor. The enable entry for the corresponding selected visitor will show  indicates the visitor's Watch list is enabled.

8.6.2.4 Disable WatchList

In **Visitor** module Click **WatchList** > **Advance**, select a visitor, and click **Disable**.

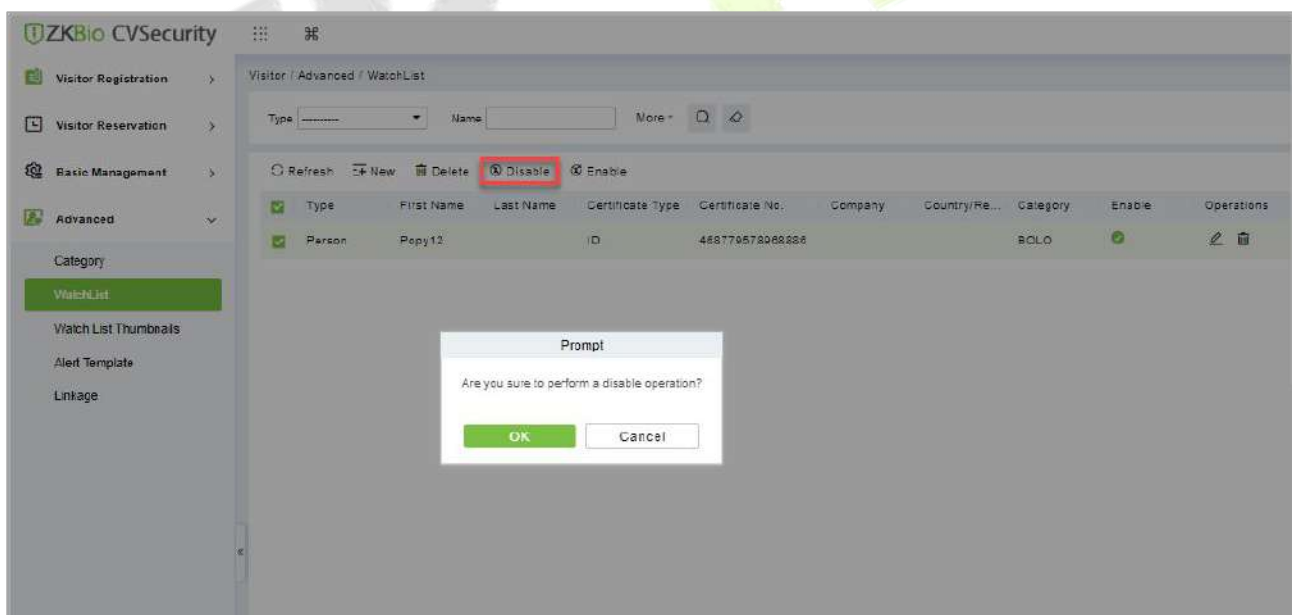



Figure 8- 83 Disabling WatchList

Click **OK** to block the visitor. The enable entry for the corresponding selected visitor will show  indicates the visitor's Watch list is blocked.

8.6.3 Watch List Thumbnails

Displays the thumbnail of watchlist person's image.

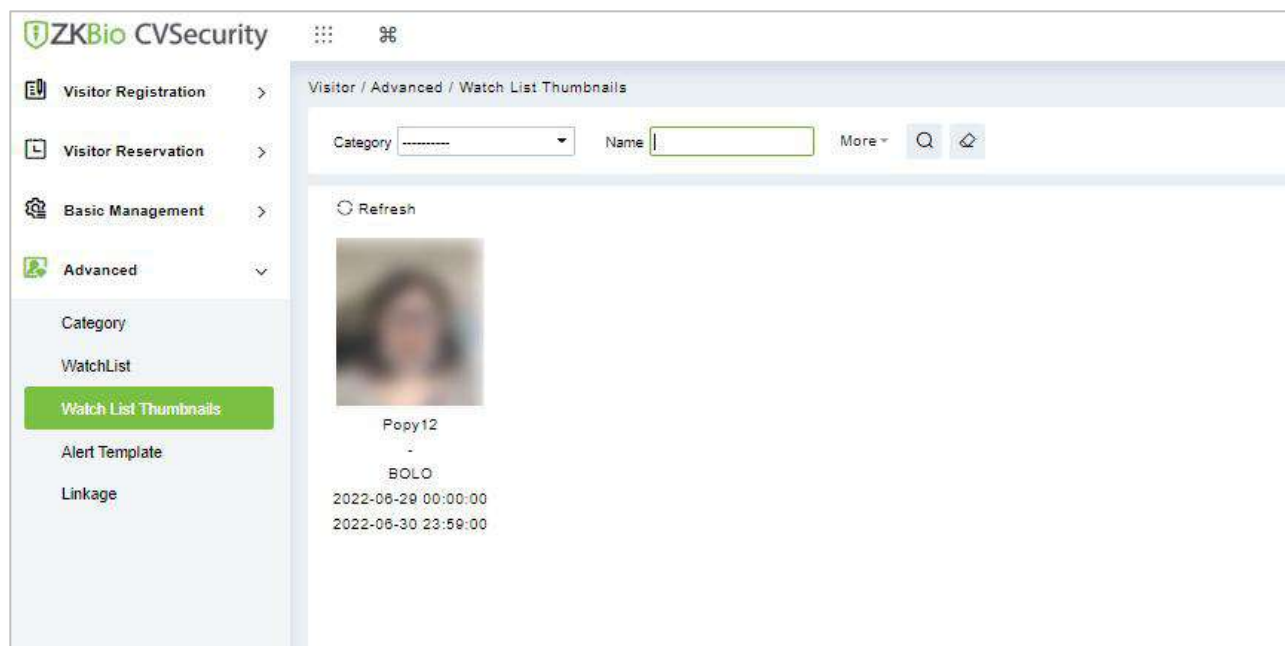


Figure 8- 84 WatchList Thumbnails Interface

8.6.4 Alert Template

This feature can add, edit the message templates. Different events have different template types. When a visitor reserved, checked in, checked out, reserved timeout, and visited timeout, the system will alert the visitor and the host via email or SMS.

8.6.4.1 To Add Alert Template (New)

● Operation Steps:

Step 1: In the **Visitor** module, click **Advanced > Alert Template** and click **New** to add Alert Template.

Step 2: Enter the Details such as Template Name, Template Type, Event Type and Visitor Information.

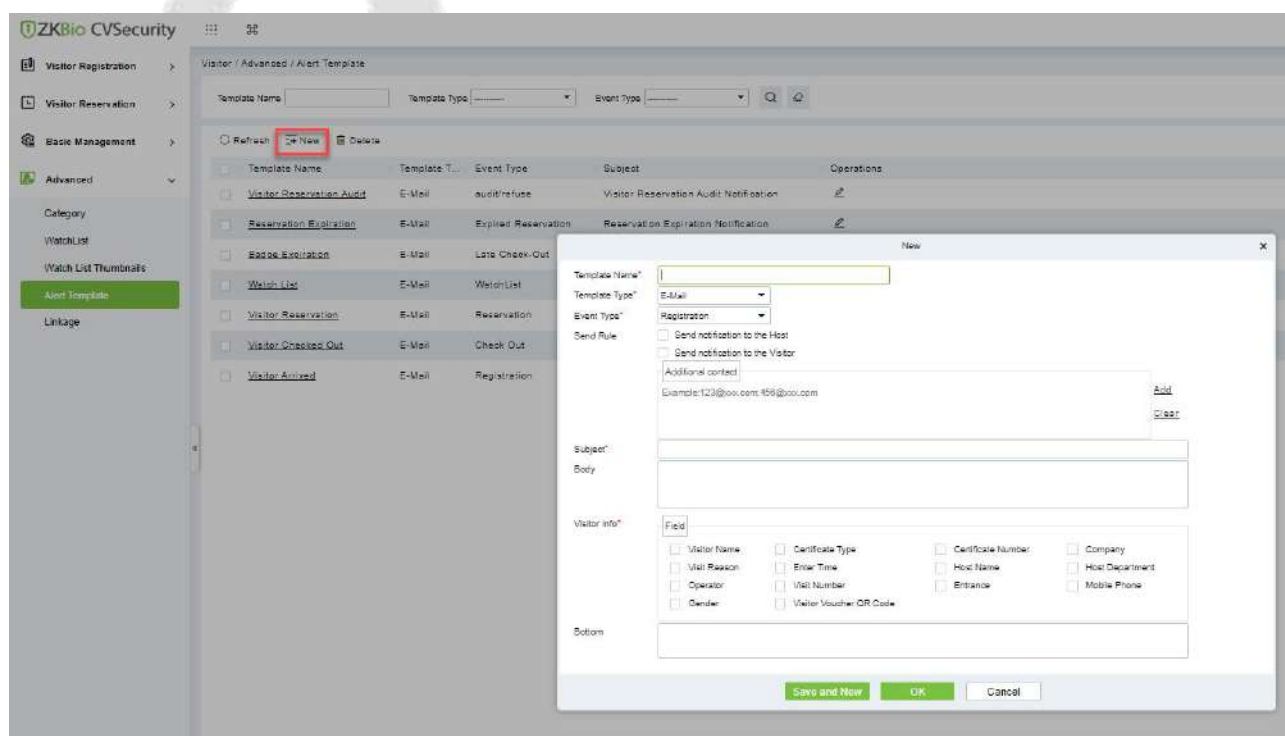


Figure 8- 85 Alert Template Interface

Step 3: Click **Save** and New to save the alert template.

Parameter	Description
Template Name	Enter the Template Name
Template Type	Select template type such as E-mail or SMS.
Event Type	Select the event type from the drop-down list such as Registration, Reservation, Check-out, Watch List etc.
Send Rule	You can set the send rule by clicking on check boxes. By using this option admin can send notification to the Host as well as visitor about the events (like Registration, Check Out Timing, etc.). Admin can add additional Email in Additional Contact column.
Subject And Body	Enter the template's subject and message to send to the host or visitor.
Visitor Info	Admin can add visitor information like Visitor Name, Visit Reason, Certificate Type etc. by clicking on the check boxes.

Table 8- 17 Description of Alert Template Parameters

8.6.4.2 Delete Alert Template

● Operation Steps:

Step 1: In the **Visitor Module**, click **Advanced > Alert Template** and select the template to be deleted.

Step 2: Click **Delete** to delete the selected template.

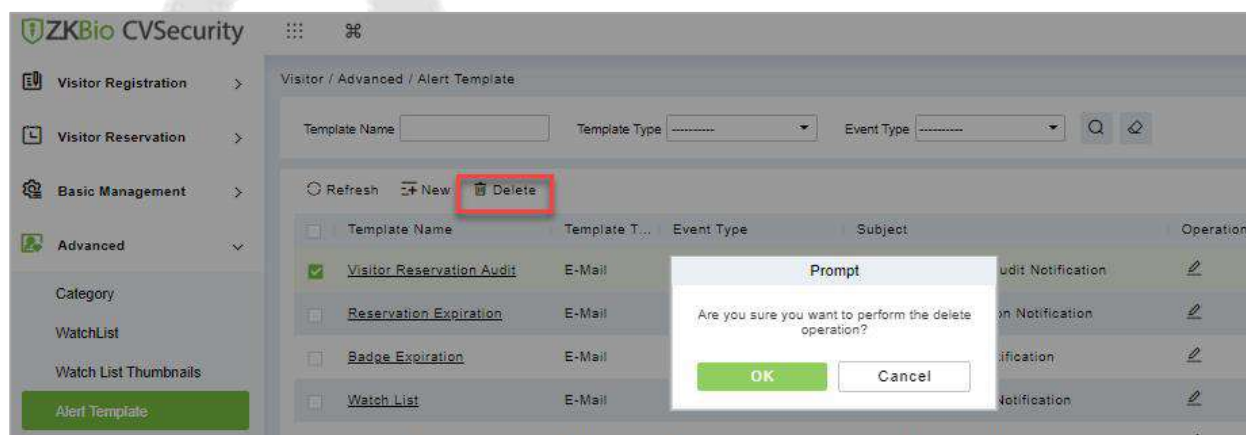


Figure 8- 86 To Delete Alert Template

Step 3: Click **OK** to perform the delete operation.

8.6.5 Linkage

This feature allows you to create a linkage function for each event. You can select the event, entrance and the Email template.

8.6.5.1 To Add Linkage

●Operation Steps:

Step 1: In the **Visitor** module, click **Advanced > Linkage** and click **New** to add linkage.

Step 2: Enter Linkage name and select Entrance, SMS Template and E-mail Template.

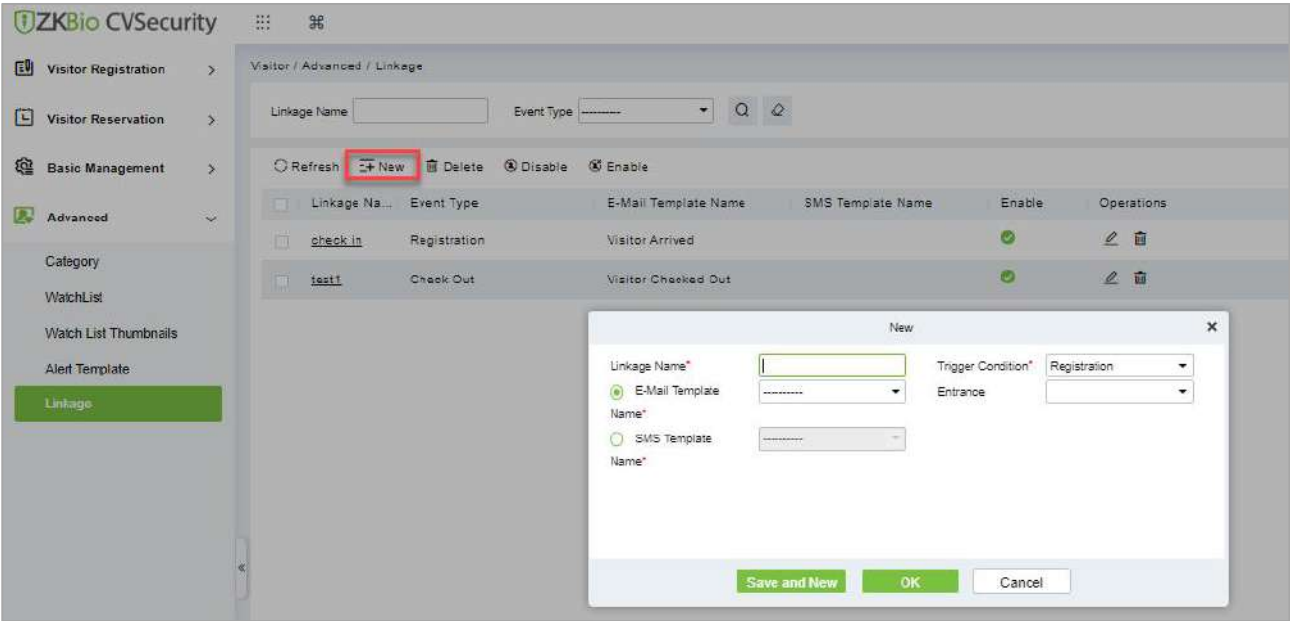


Figure 8- 87 Linkage Interface

Step 3: Click **Save and New** to save the details.

Parameter	Description
Linkage Name	Enter the Linkage Name.
Trigger Condition	Select trigger condition such as registration, reservation, check out etc.
Email Template	Select E-mail template from drop-down list.
SMS Template	Select SMS template from drop-down list.
Entrance	Select the Entry place.


Table 8- 18 Description of Linkage Parameters

8.6.5.2 Delete Linkage

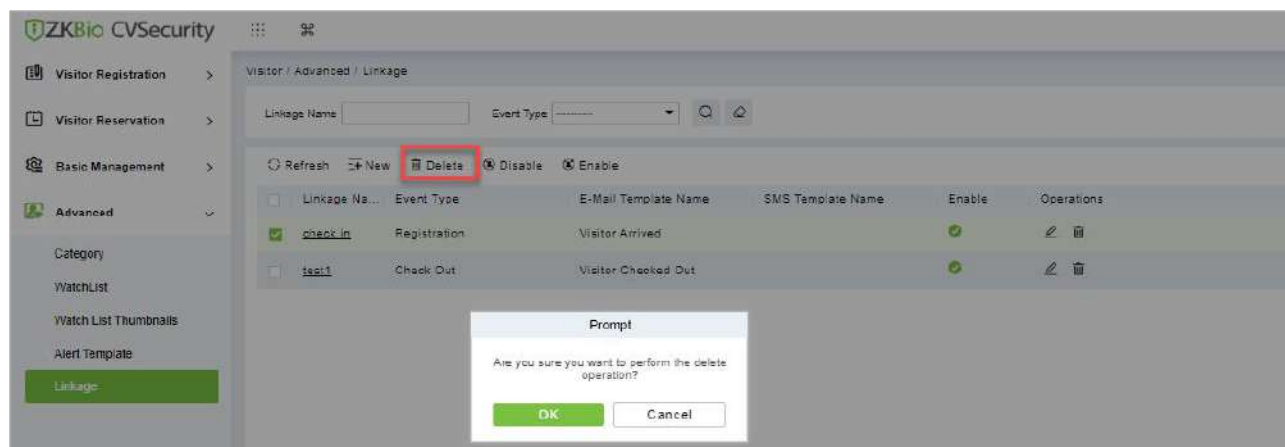●Operation Steps:

Step 1: In the **Visitor** module, click **Advanced > Linkage** and select the linkage to be deleted.

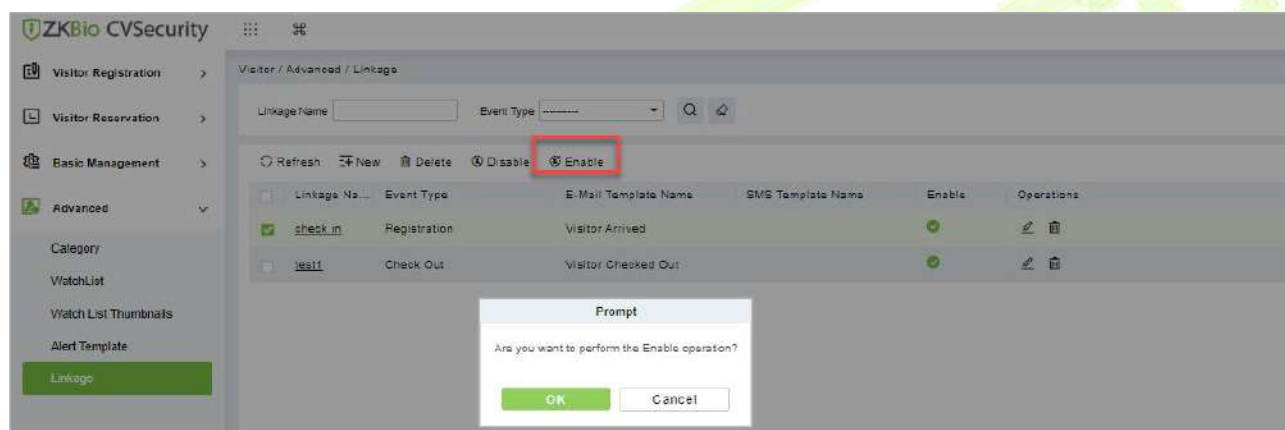
Step 2: Click **Delete** to delete the selected linkage.


**Figure 8- 88 To Delete Linkage**

Step 3: Click **OK** to perform the delete operation.

8.6.5.3 Enable Linkage

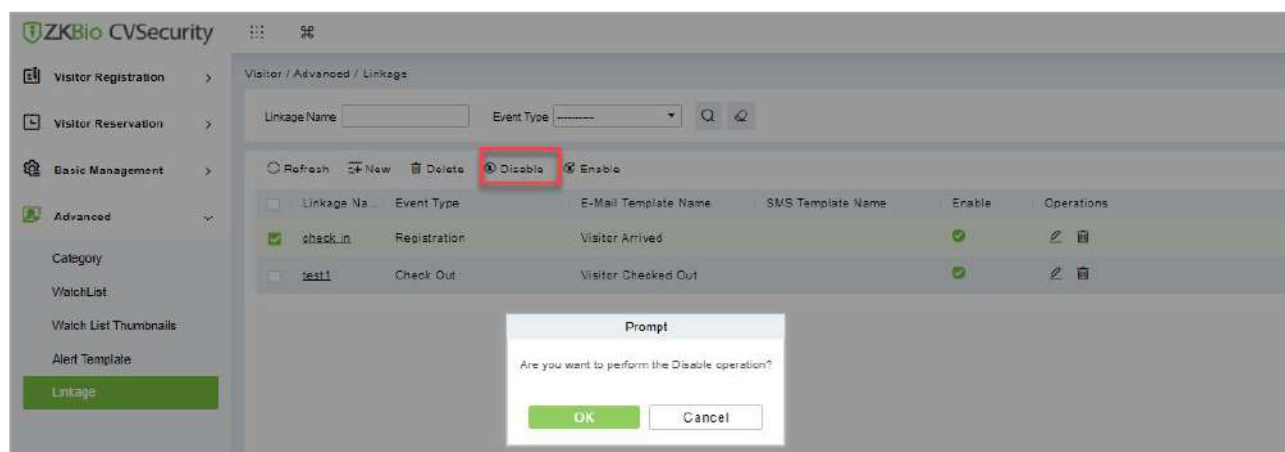
In the **Visitor** module, click **Advanced > Linkage**, select a blocked Linkage to enable that, and click **Enable**.


**Figure 8- 89 Enabling Linkage**

Click **OK** to enable the linkage. The enable entry for the corresponding selected linkage will show  indicates the linkage is enabled.

8.6.5.4 Disable Linkage

In the **Visitor** module, click **Advanced > Linkage**, select linkage to be disable, and click **Disable**.

**Figure 8- 90 Disabling Linkage**

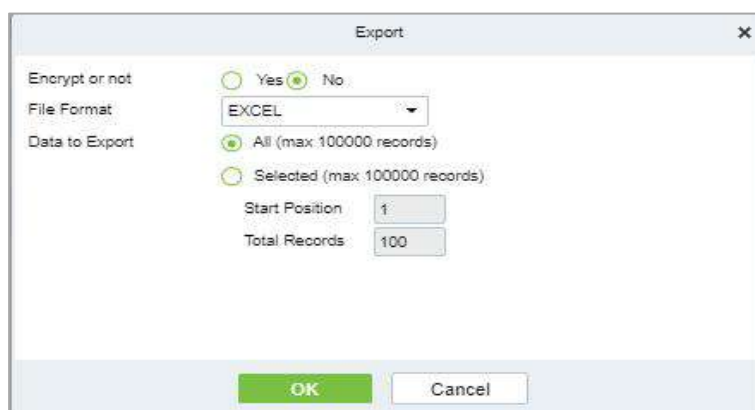
Click **OK** to block the linkage. The enable entry for the corresponding selected linkage will show  indicates the linkage is blocked.

8.7 Visitor Reports

8.7.1 Last Visited Location

In the **Visitor** module, click **Reports** > **Last Visited Location** to view the reports. The reports can be filtered by different conditions.

You can export the data into an Excel, PDF, or CSV file. See the following figure by clicking **Export** option.



The 'Export' dialog box contains the following options:

- Encrypt or not:** Radio buttons for 'Yes' and 'No' (selected).
- File Format:** A dropdown menu showing 'EXCEL'.
- Data to Export:** Radio buttons for 'All (max 100000 records)' (selected) and 'Selected (max 100000 records)'.
- Start Position:** A text input field with the value '1'.
- Total Records:** A text input field with the value '100'.
- Buttons:** 'OK' and 'Cancel' buttons at the bottom.

Figure 8- 91 Export Option


Select file format and data to be export, then click **OK**.

Last Visited Location										
Visitor Code	First Name	Last Name	Event Date	Enter Time	Event Point	Event Description	Reader Name	Verification Mode	Area	Stay Time
800000020	usuop	sss	2022-07-27 09:42:13	2022-07-27 09:41:24	10.10.20.73-1	Normal Verify Open	10.10.20.73-1-In	Only Pin	Area Name	00:00:48

Figure 8- 92 Last Visited Location Record

8.7.2 Visitor History Record

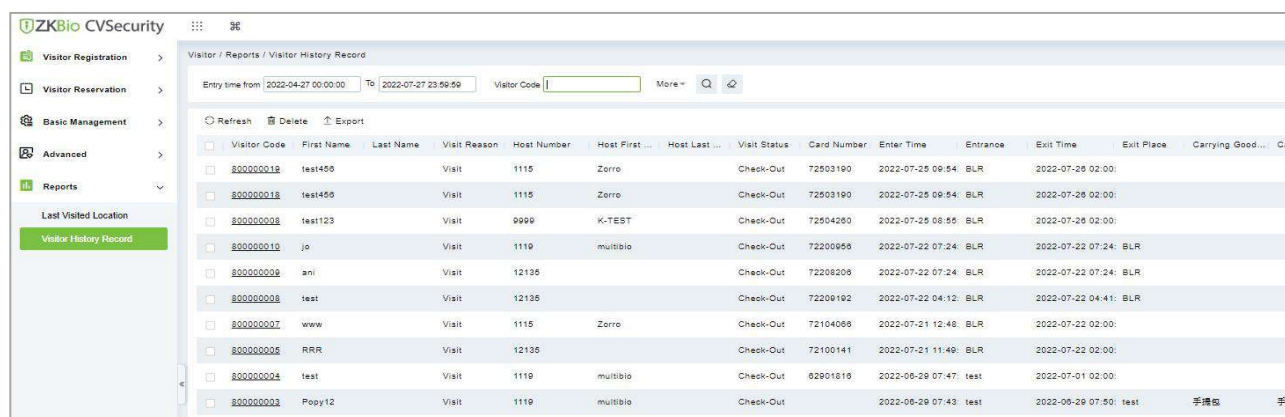In the **Visitor Module**, click **Reports** > **Visitor History Record** to view the reports. The reports can be filtered by different conditions.



The interface shows a table of visitor history records with the following columns:

Visitor Code	First Name	Last Name	Visit Reason	Host Number	Host First ...	Host Last ...	Visit Status	Card Number	Enter Time	Entrance	Exit Time	Exit Place	Carrying Good...	Car
800000019	test450		Visit	1115	Zorro		Check-Out	72503190	2022-07-25 09:54	BLR	2022-07-25 02:00			
800000018	test450		Visit	1115	Zorro		Check-Out	72503190	2022-07-25 09:54	BLR	2022-07-25 02:00			
800000008	test123		Visit	9999	K-TEST		Check-Out	72504250	2022-07-25 08:55	BLR	2022-07-25 02:00			
800000010	jo		Visit	1119	multibio		Check-Out	72200955	2022-07-22 07:24	BLR	2022-07-22 07:24	BLR		
800000009	ani		Visit	12135			Check-Out	72208205	2022-07-22 07:24	BLR	2022-07-22 07:24	BLR		
800000008	test		Visit	12135			Check-Out	72209192	2022-07-22 04:12	BLR	2022-07-22 04:41	BLR		
800000007	www		Visit	1115	Zorro		Check-Out	72104055	2022-07-21 12:48	BLR	2022-07-22 02:00			
800000006	RRR		Visit	12135			Check-Out	72100141	2022-07-21 11:49	BLR	2022-07-22 02:00			
800000004	test		Visit	1119	multibio		Check-Out	82901615	2022-06-29 07:47	test	2022-07-01 02:00			
800000003	Popy12		Visit	1119	multibio		Check-Out		2022-06-29 07:43	test	2022-06-29 07:50	test	手提包	手提

Figure 8- 93 Visitor History Record Interface

8.7.2.1 Export

You can export the records into an Excel, PDF, or CSV file. See the following figure by clicking **Export**.

The 'Export' dialog box contains the following settings:

- Encrypt or not: ☐ Yes ☒ No
- File Format: EXCEL (dropdown menu)
- Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)
- Start Position: 1
- Total Records: 100

Buttons: OK, Cancel

Figure 8- 94 Export Option

Select file format and data to be export, then click **OK**.

Visitor Code	First Name	Last Name	Visit Reason	Host Number	Host First Name	Host Last Name	Visit Status	Card Number	Enter Time	Entrance	Exit Time	Exit Place	Carrying Goods In	Carrying Goods Out	Remarks on health	City visited in past 14 days	Body Temperature (C/F)	Any symptoms in the last 14 days	Any exposure to suspected cases
80000019	test456		Visit	1115	Zorro		Check-Out	72503190	2022-07-25 09:54:03	BLR	2022-07-26 02:00:02								
80000018	test456		Visit	1115	Zorro		Check-Out	72503190	2022-07-25 09:54:01	BLR	2022-07-26 02:00:02								
80000008	test123		Visit	9999	K-TEST		Check-Out	72504260	2022-07-25 08:55:34	BLR	2022-07-26 02:00:02								
80000010	jo		Visit	1119	multibio		Check-Out	72200956	2022-07-22 07:24:36	BLR	2022-07-22 07:24:49	BLR							
80000009	ani		Visit	12135			Check-Out	72208206	2022-07-22 07:24:18	BLR	2022-07-22 07:24:49	BLR							
80000008	test		Visit	12135			Check-Out	72209182	2022-07-22 04:12:48	BLR	2022-07-22 04:41:36	BLR							

Figure 8- 95 Visitor History Record

8.7.2.2 Delete Visitor History

● Operation Steps:

Step 1: In the **Visitor** module, click **Reports > Visitor History Record** and select the visitor's history to be deleted.

Step 2: Click **Delete** to delete the visitor history.


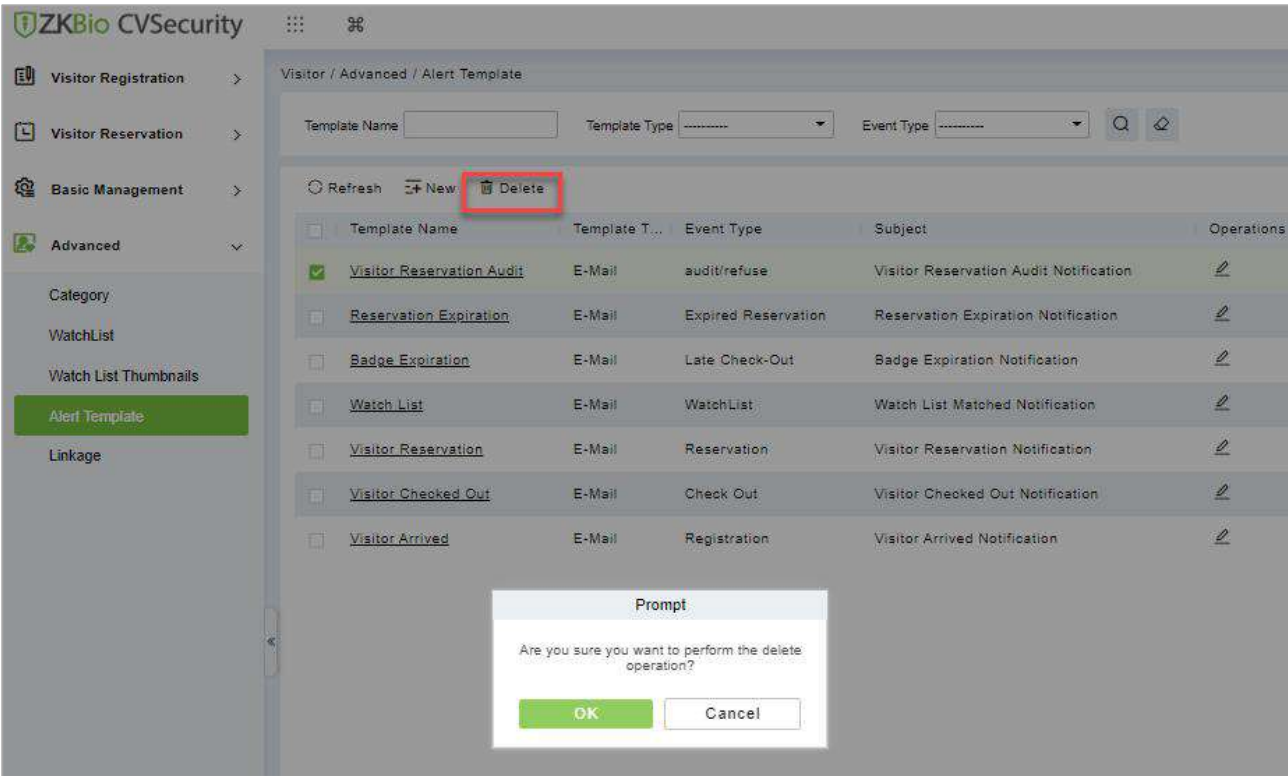


Figure 8- 96 To Delete Alert Template

Step 3: Click **OK** to perform the delete operation.


8.7.3 Visitor Daily Visit Report

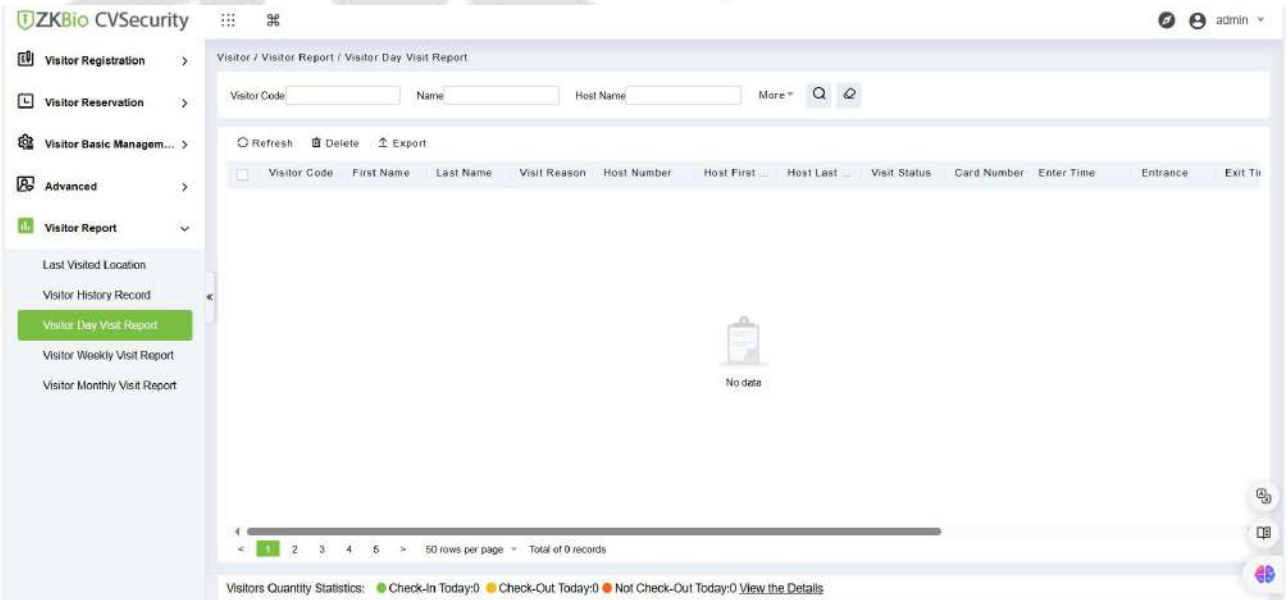View and export today's visitor visit history.




8.7.4 Visitor Weekly Visit Report

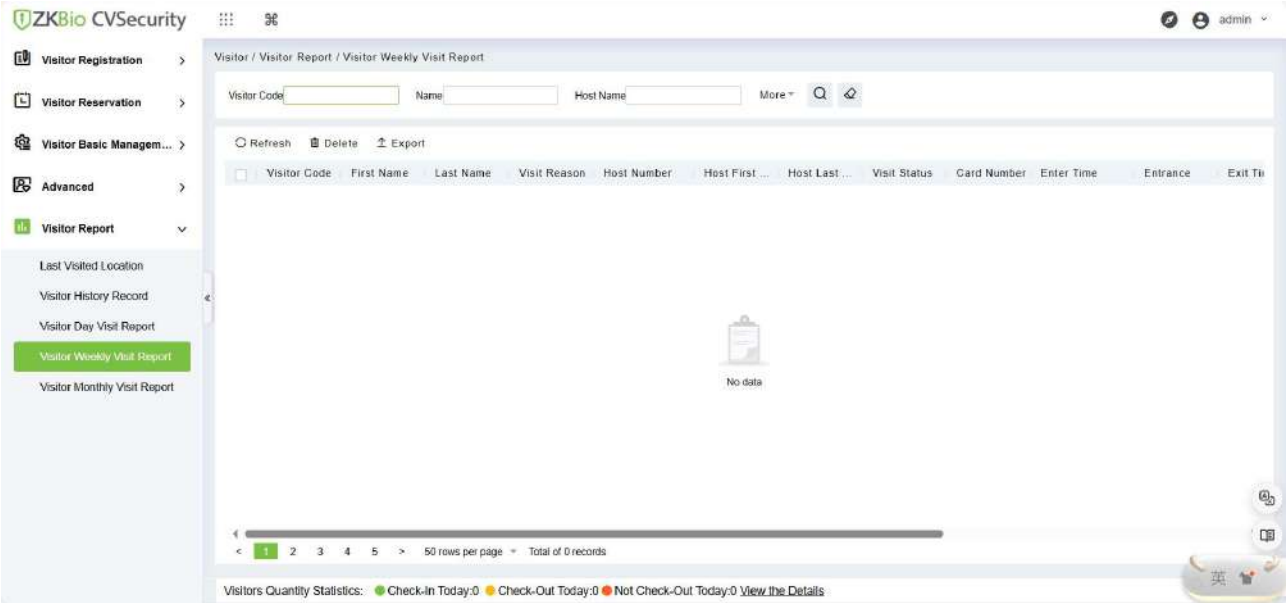View and export this week's visitor visit history.



8.7.5 Visitor Monthly Visit Report

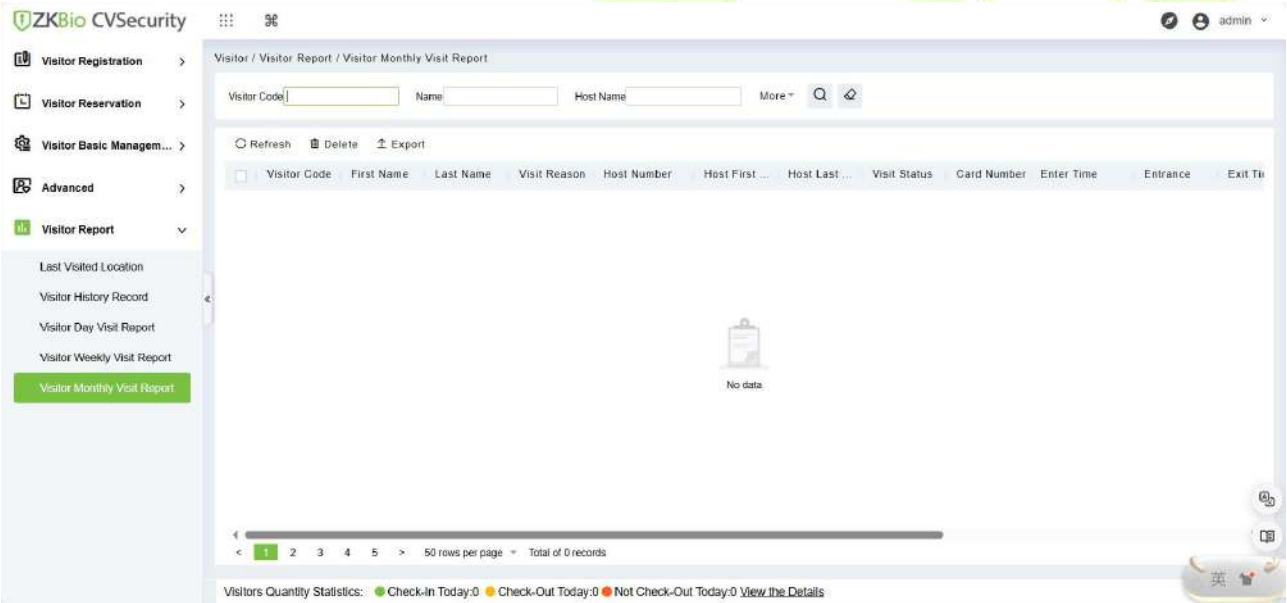View and export this monthly's visitor visit history.




9 Space Management

The ZKBio CVSecurity Space Management Module is a comprehensive space management platform designed to help users efficiently manage space resources, including meeting rooms, Rest rooms, rehearsal rooms, etc. Through this module, users can manage devices, manage spaces, manage reservations, and view statistical reports, as well as make space reservations and manage them through the APP.

The ZKBio CVSecurity Space Management Module is a comprehensive platform for efficiently managing space resources, such as meeting rooms, restrooms, and rehearsal spaces. It allows users to manage devices, spaces, reservations, and view reports, as well as make and manage reservations via the app.

9.1 Device Management

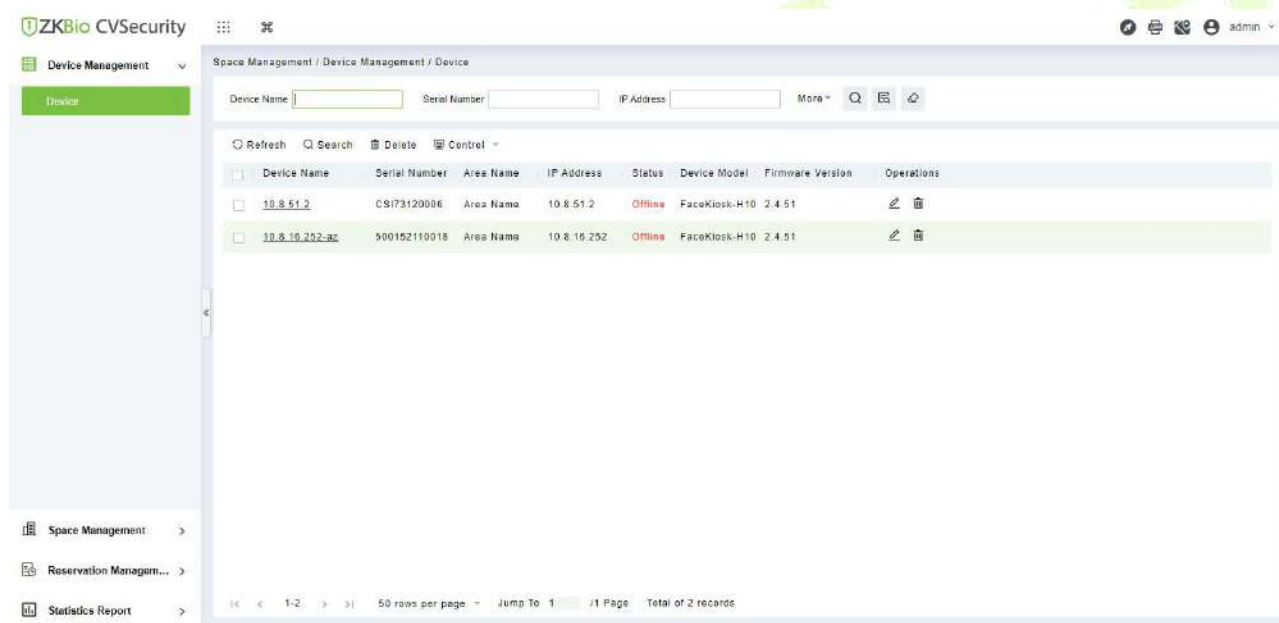The Device Management module allows user can manage devices effectively.




9.1.1 Search and Add Device

The module enables the search and registration of Facekiosk-H10A devices.


Prerequisites:

- 1) Facekiosk-H10A devices. (Device version requirement: ZKBio Meet Version 2.4.51 or higher)
- 2) **Device Authorization:** Before use, user must authorize the Facekiosk-H10A device. Follow these steps to complete the authorization process:

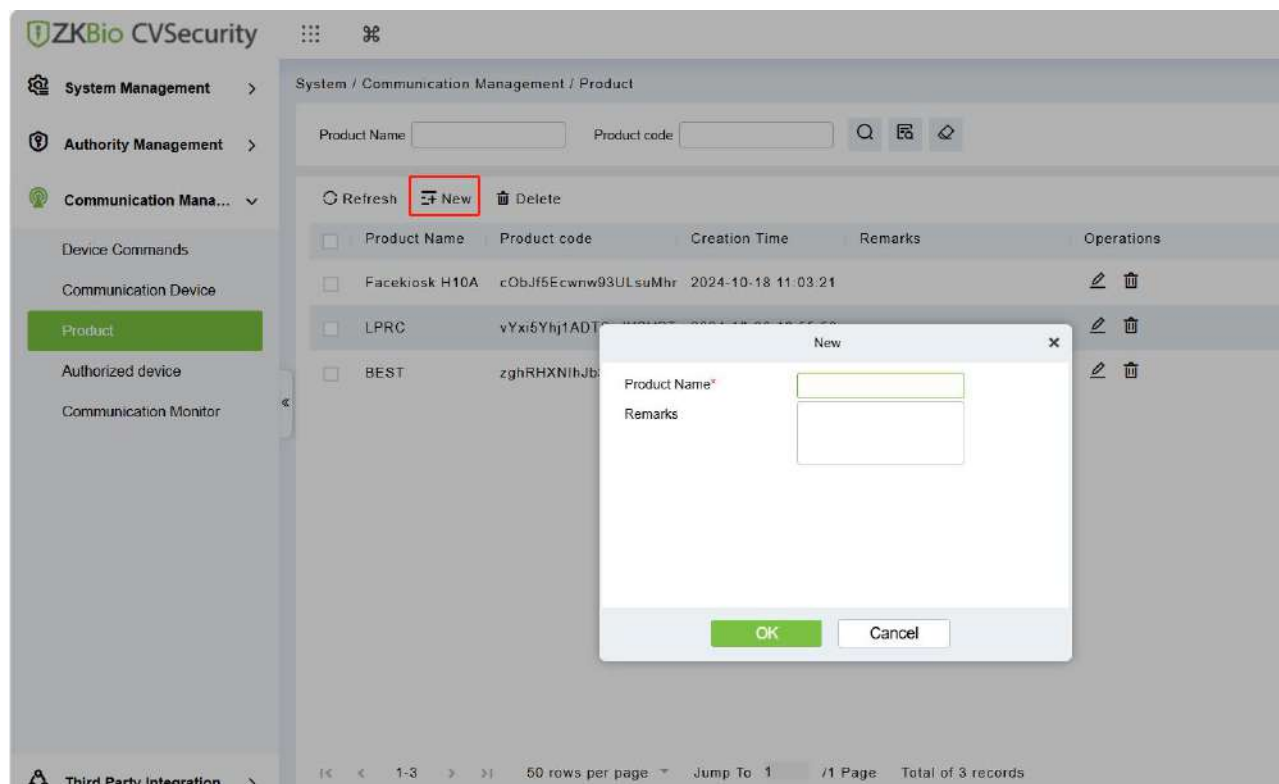Step 1: Click on **System -> Communication Management -> Product menu** and click **New** to add a new product type, you can customize the product name.



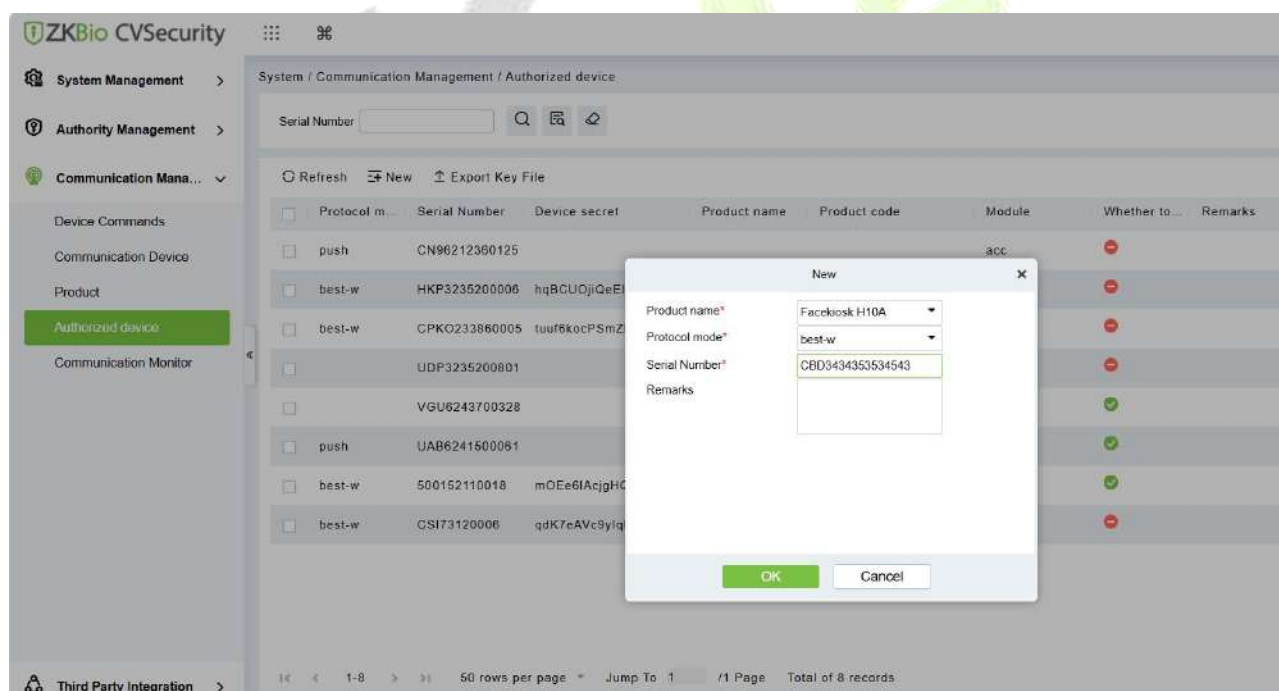Step2: Click on System -> Communication Management -> Authorized Device ,and click New to authorized device.



Enter the required information and then click **OK** to finish authorizing the device.

Product Name: Select the product type you have defined.

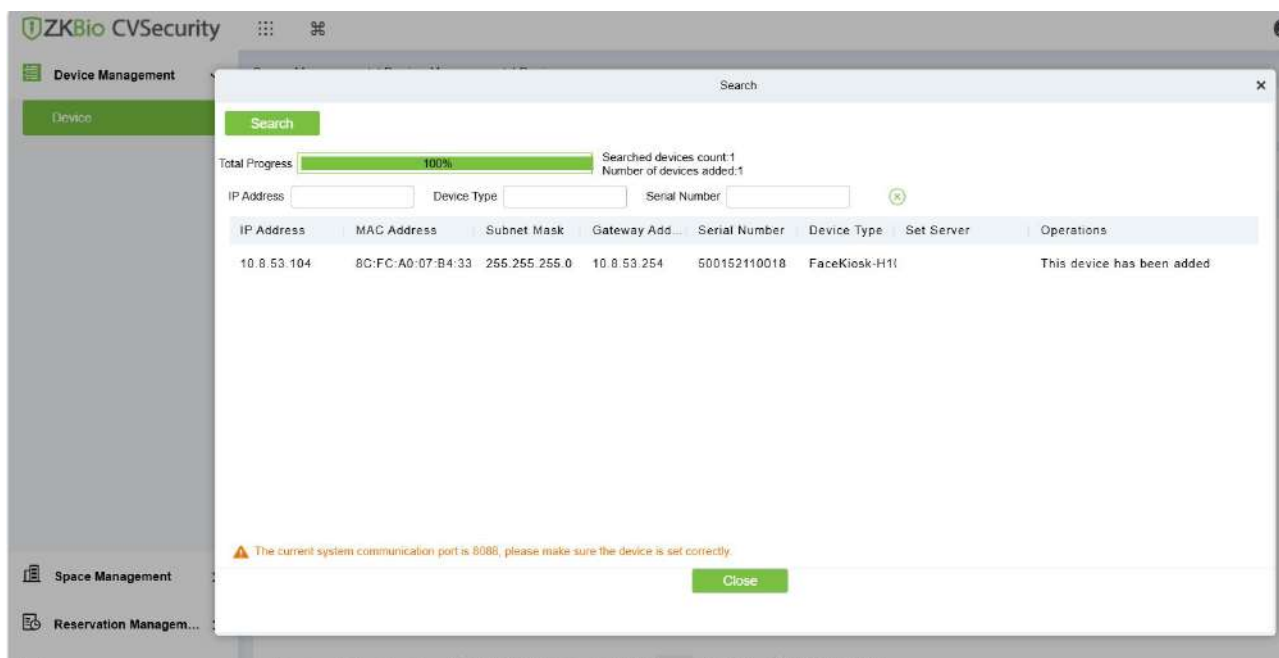
Product Mode: Choose BEST-W.

Serial Number: Enter the serial number of the device.

Step 3: For Facekiosk H10A, go to **Communication Setting -> Cloud Server Setting** to configure the ZKBio CVSecurity server address. Please ensure that the **Domain Name** is enabled, and then enter the correct ZKBio CVSecurity server address in the format shown in the figure below.

Once the prerequisites are met, you can proceed to search for and add devices.

Go to **Space Management -> Device Management -> Device**, click Search, and after the search, click Add Device to add the device to your system.



9.1.2 Delete

Click to delete the device.

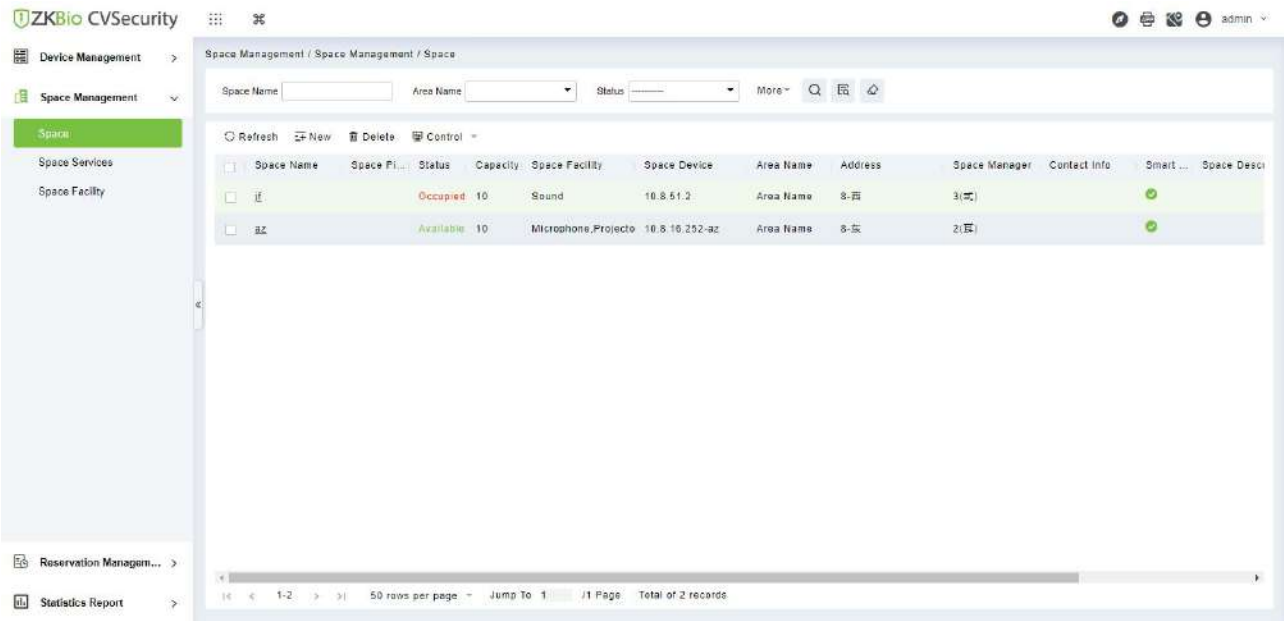
9.1.3 Control

Includes operations such as Synchronize Time, Reboot Device, and Clear Information.

9.2 Space Management

9.2.1 Space

Click on the **Space Management > Space**, you can start creating spaces and space usage rules.



9.2.1.1 Add Space

Click **[Space Management]** > **[Space]** > **[+New]** to add new devices to the Space Management Module.

New

Space Name*

F601

Space Picture

Browse

Not Uploaded

Capacity*

50

Space Facility

Projector,Electronic ...

Area*

Tower A Gate

Space Device*

Address

No.188 Street,Dongguan C

Space Manager*

678(Poppy Test)

Contact Info

1354524531264

Space Description

Space Rule:
1.xxxxxxxxxx
2.xxxxxxx
3.any problem ,please

Retention Time (Minutes)

15 Minutes

Smart Space

☒

If this space has been configured with smart IoT devices and needs to support the scenario-linkage function, you can set it as a smart space for quick identification and screening.

OK

Cancel


Fields are as follows:

Parameter	Description
Space Name	Enter the name of the Space

Parameter	Description
Space Picture	Upload the Image of the Space
Capacity	Define the capacity of the space to indicate the number of people it can accommodate, facilitating filtering during the reservation process.
Space Facility	List the amenities available in the space to provide information that can aid in the reservation process.
Area	Choose the area, as the area is linked to the space.
Space Device	Select the device to be associated with the space within the space management module.
Address	Address of the Space
Space Manager	Person in Charge of the Space
Contact Info	Fill in the contact information of the space manager.
Space Description	Description of the Space
Retention (Minutes)	Time Reservation Retention Time; for example, if a meeting is scheduled from 9:00-12:00 and the retention period is set to 30 minutes, the system will automatically end the meeting if no one checks in after 9:30.
Smart Space	You can choose whether to enable Smart Spaces, which can be used for quick filtering during the reservation process.


9.2.1.2 Delete

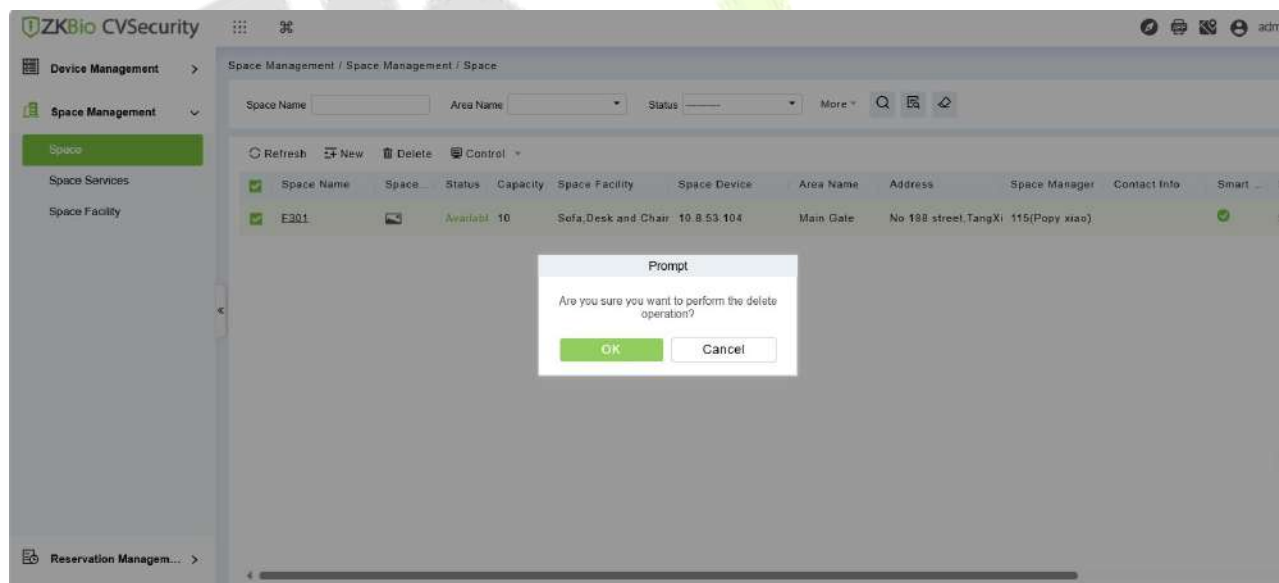To delete a selected space, click **[Space Management] > [Space] > [Delete]**.




9.2.1.3 Control

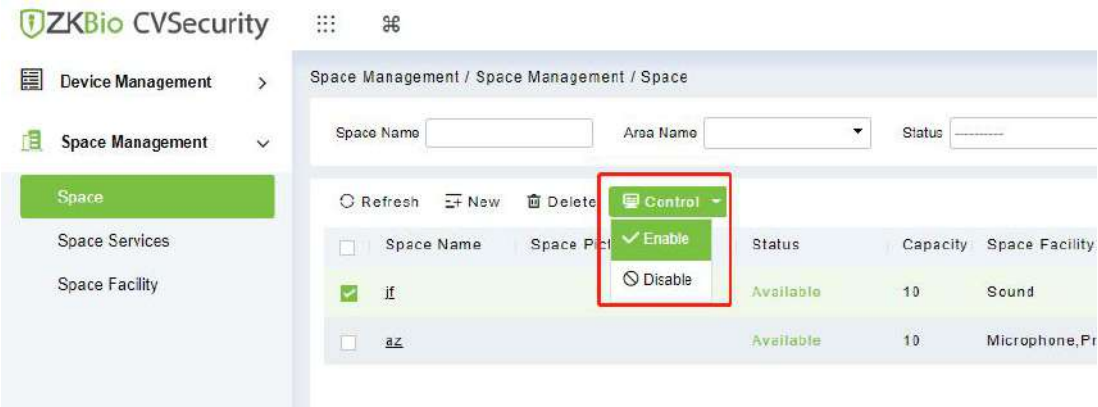First, select the space, then, choose to either enable it, setting the status to **[Available]**, or disable it, which will update the status to **[Disabled]**.




9.2.2 Space Services

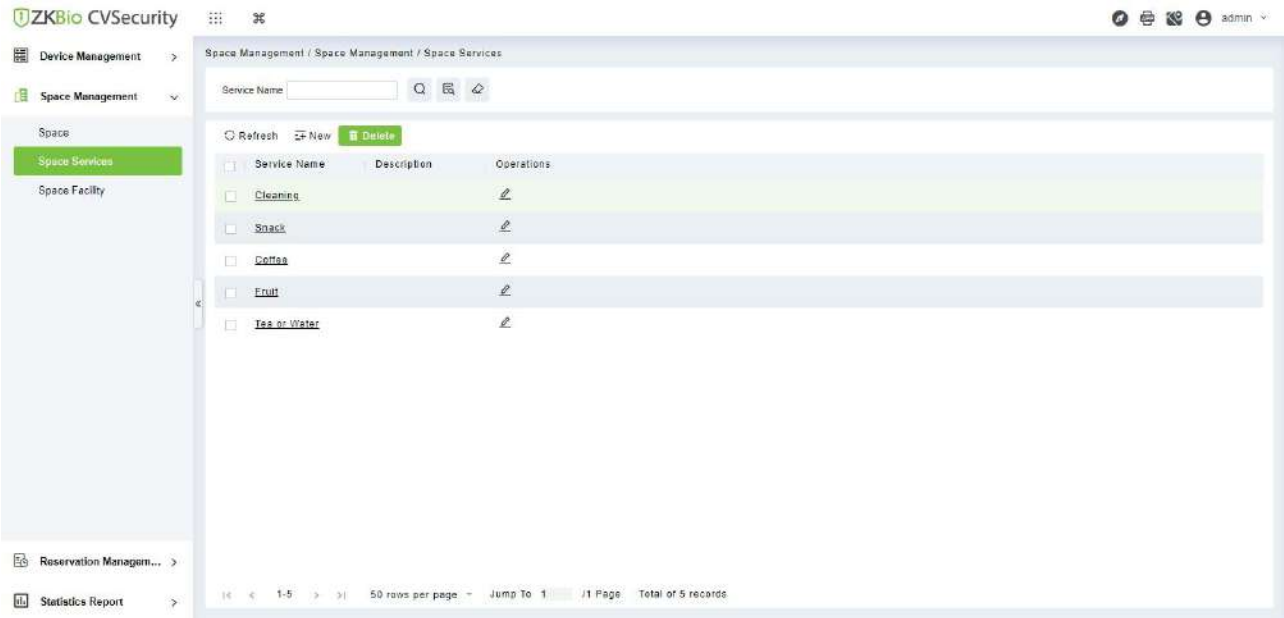Space Services allow for defining the scope of services within a space, covering a variety of standard services such as cleaning, tea, coffee, and more. Additionally, customized services can be added to meet the specific needs of the space.




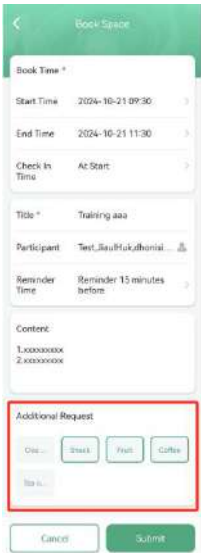After services are defined, personnel can select needed services when booking a space through the app, as shown in the figure below.




● New

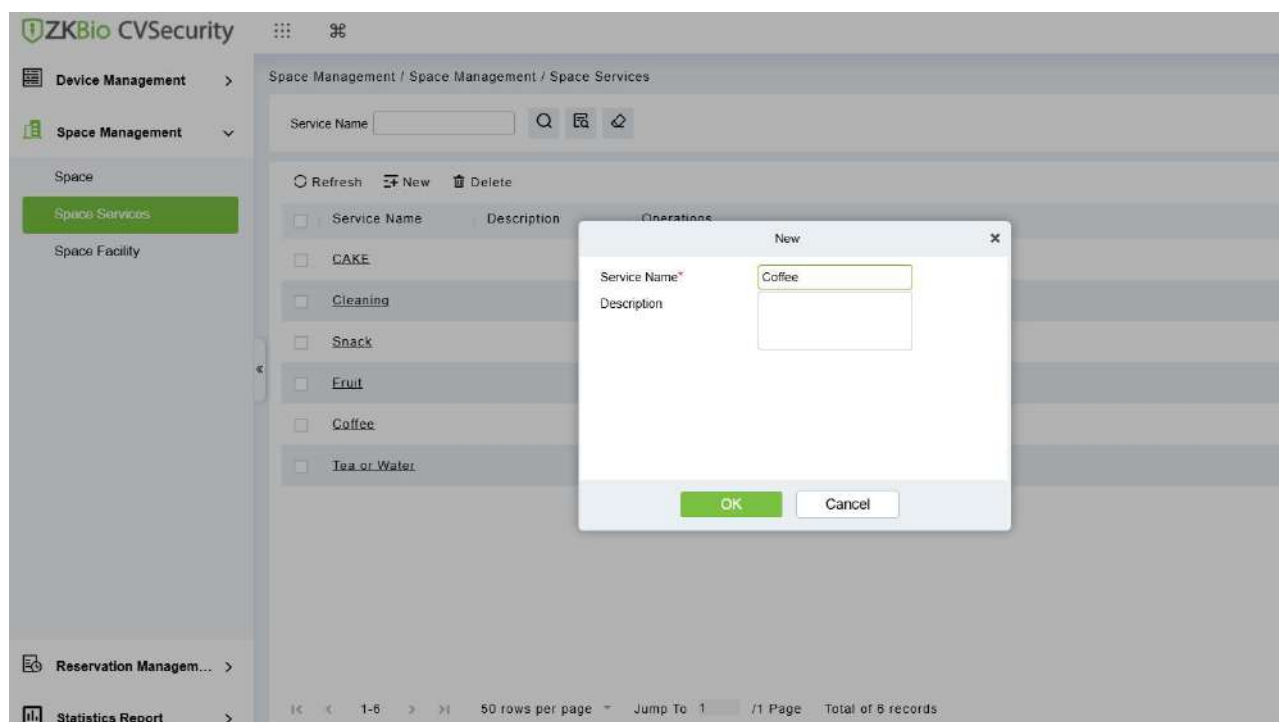Click [**Space Management**] > [**Space Service**] > [**+New**] to add a new customized service.




● Delete

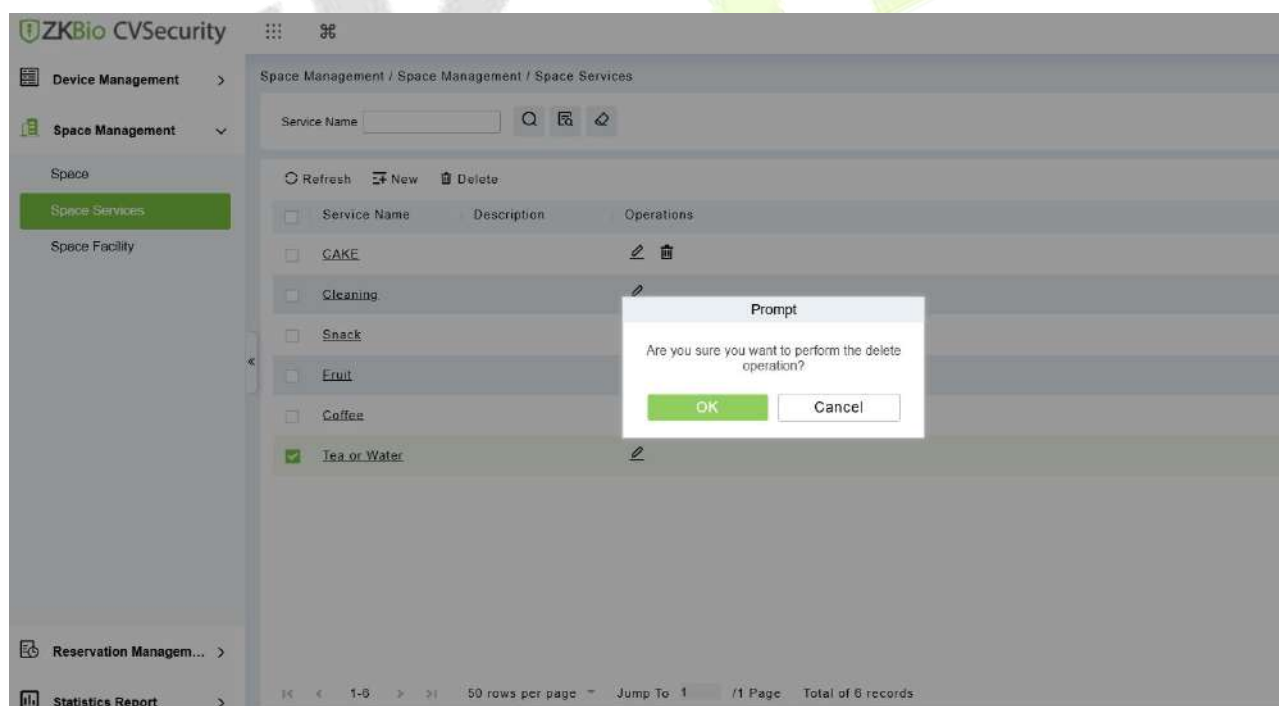Click [**Space Management**] > [**Space Service**] > [**Delete**] to delete added service.




9.2.3 Space Facility

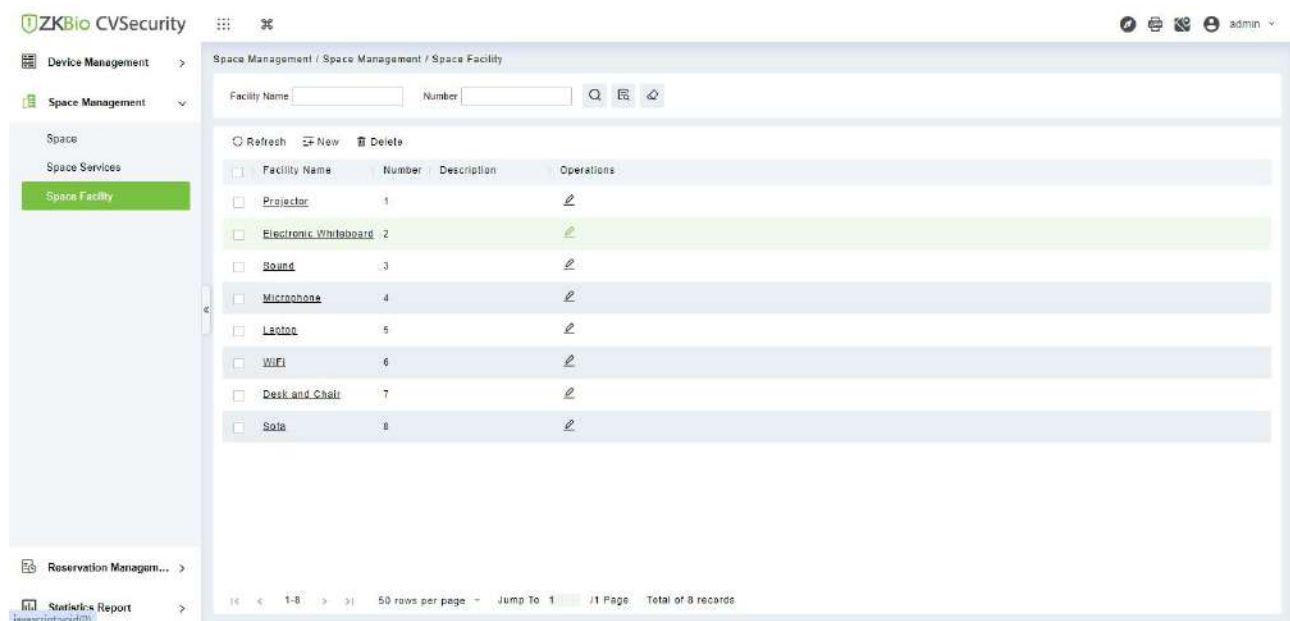Manage the service facilities within the space, with the flexibility to customize and add additional facilities as needed. This capability enables a tailored approach to space management, ensuring that the space is equipped with the precise services and amenities required to accommodate a diverse range of events and occupant needs.




● Add New

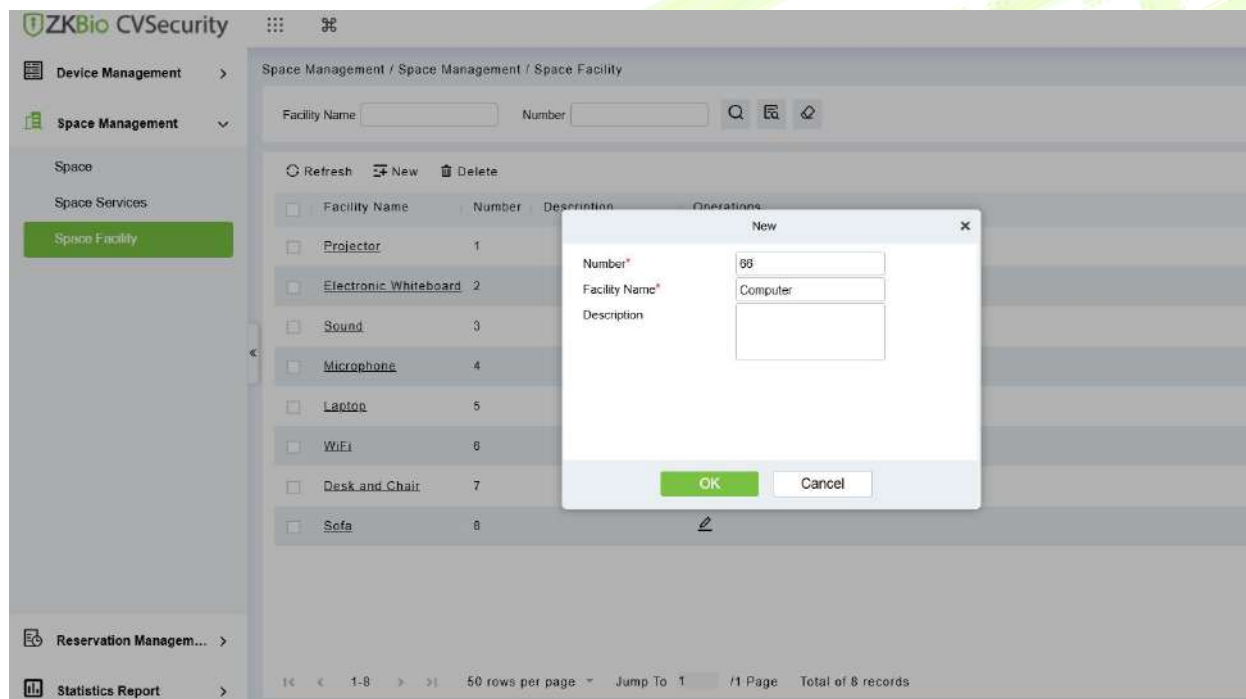Click **[Space Management] > [Space Facility] > [+New]** to add a new space facility.



● Delete

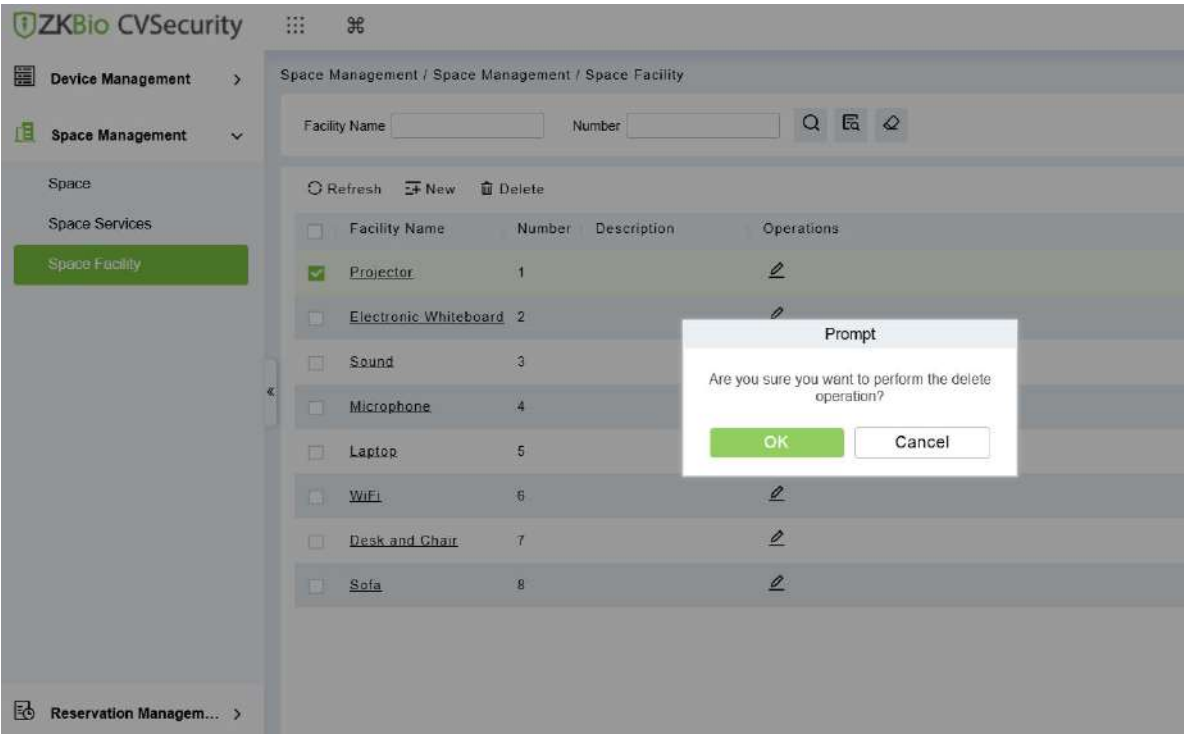
Click **[Space Management] > [Space Facility] > [Delete]** to delete added space facility.



9.3 Reservation Management

9.3.1 Space Reservation

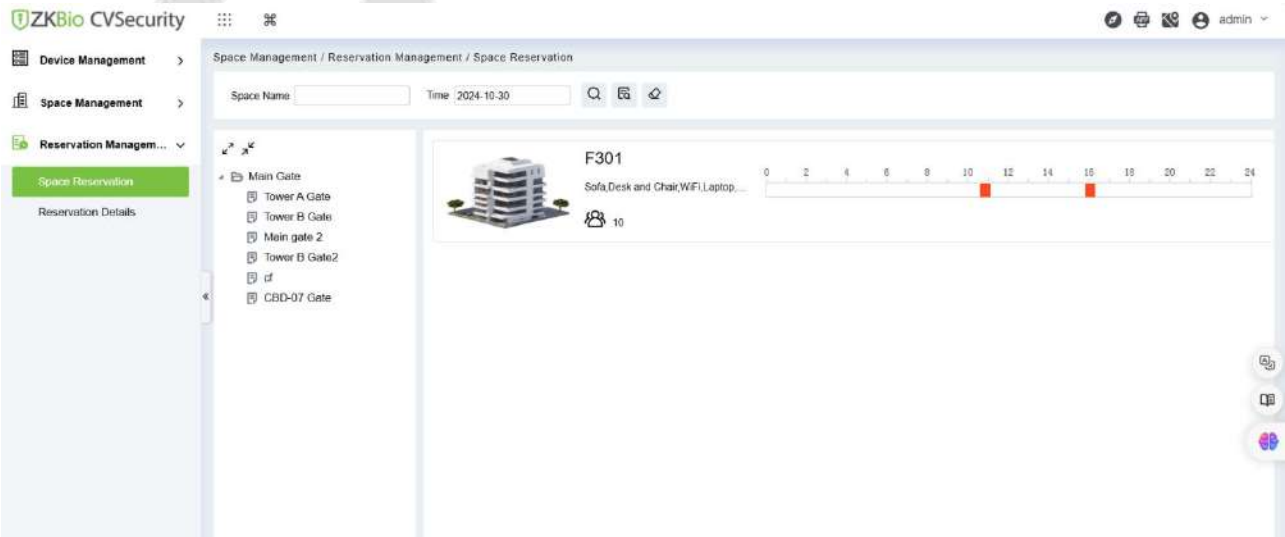The Space Reservation module provides an intuitive interface displaying the occupancy status of all spaces for the current day, allowing users to filter by area or search for specific spaces by name. This module enables seamless reservation operations, including selecting the desired date and time, adding the applicant and participants, choosing from a range of space services, and setting up notifications to stay informed about upcoming reservations.




Administrators can click on the space card to enter the space reservation interface.

Fields are as follows:

Parameter	Description
Applicant's Name	Name of the applicants
Applicant's Email	Email of the applicants
Start Time/End Time	Set the start time and end time for the reservation space.
Start Sign-in Time	Allowed to start check-in time on the device: At Start, 5 minutes before the start, 15 minutes before the start, 30 minutes before the start.
Space Name	Name of the Space.
Subject	Subject of the space.
Content	Content of the Space
Person's Name	Select participants for the meeting space.
Demand	Select the services required for the space.
Remind Time	Select the reminder time for the space reservation. Notifications will be sent to the participants via email or APP.

9.3.2 Reservation Details

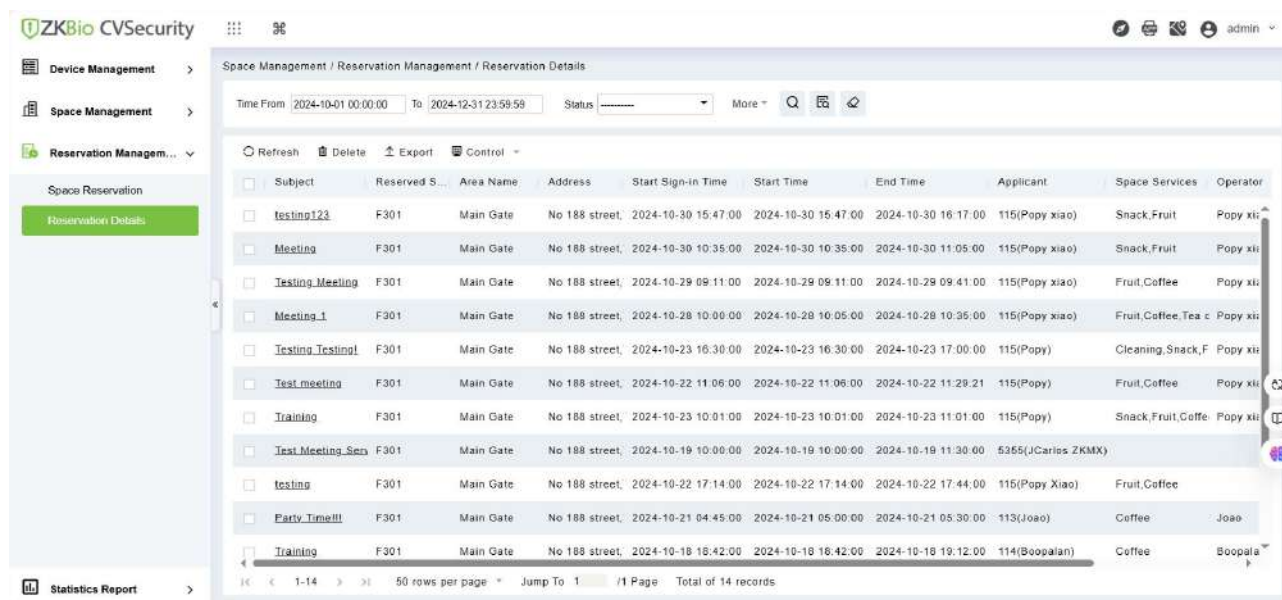Click **[Space Management] > [Reservation Management] > [Reservation Detail]** to enter the reservation details, where we can view the specific appointment situation.




● Cancel Reservation

Click [**Space Management**] > [**Reservation Management**] > [**Reservation Detail**] > [**Control**] >

[**Cancel Reservation**], we can cancel a previously booked space.

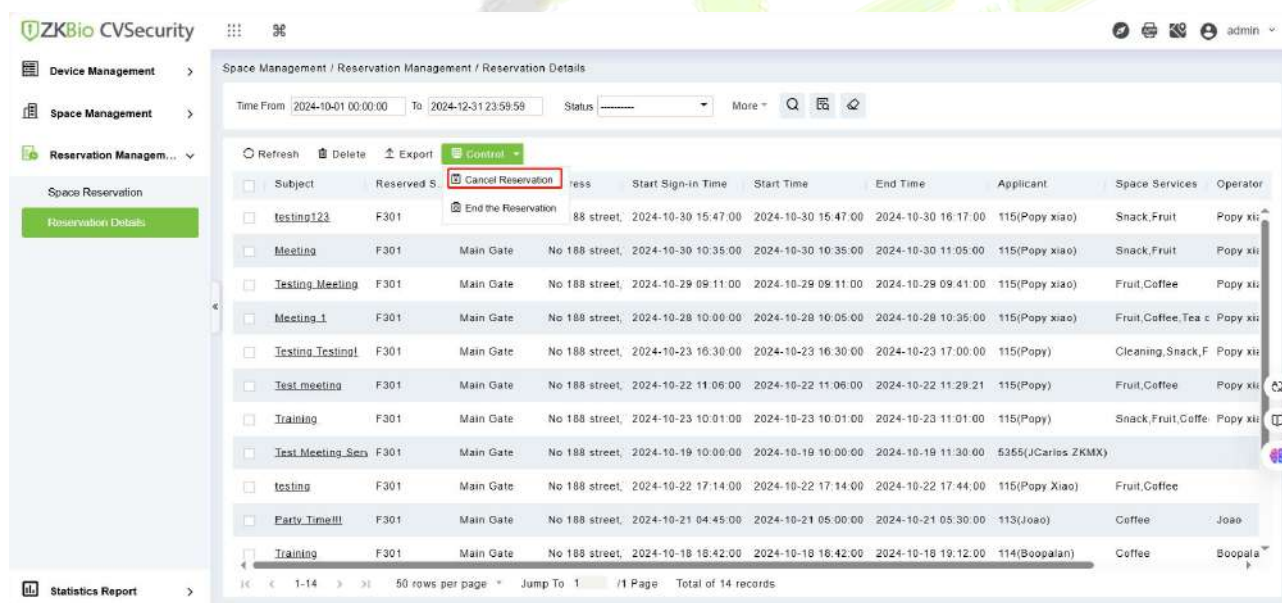
Note: Only events with the status [**Pending Start**] can be canceled. Clicking [**Cancel**] will release the entire reserved time slot back to an available state.



● End the Reservation

Click [**Space Management**] > [**Reservation Management**] > [**Reservation Detail**] > [**Control**] > [**End the Reservation**], we can conclude the event for the space that is currently in use.

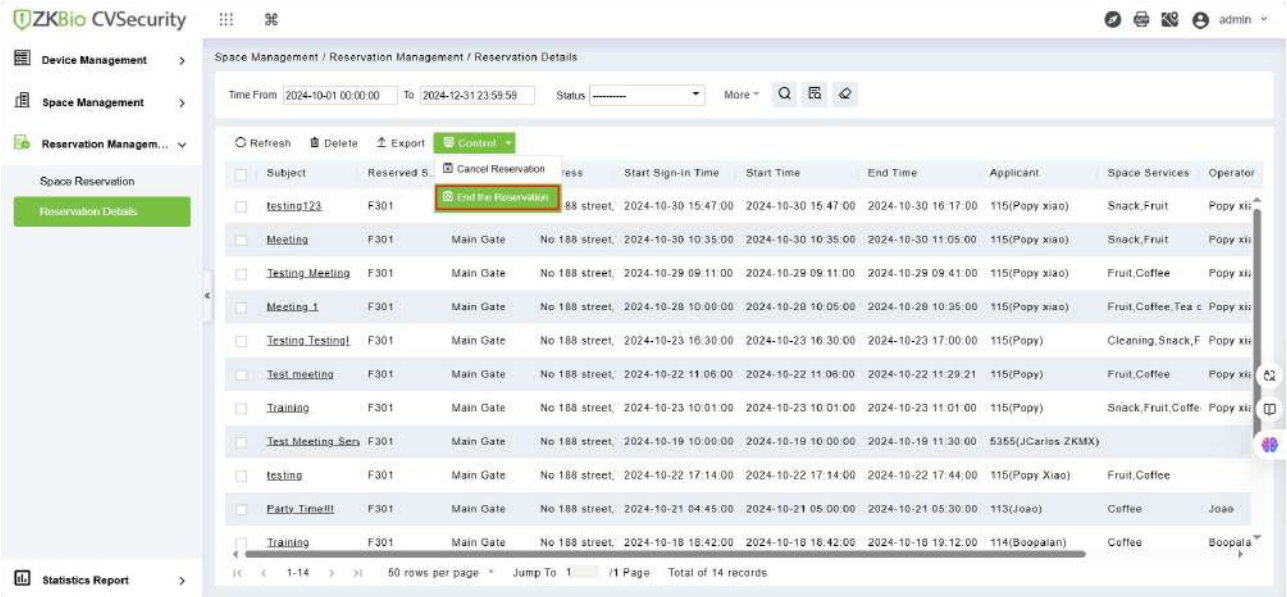
Note: Only meetings that are currently in progress can be ended. For meetings that have not yet started, it is not possible to perform an [**End the Reservation**] operation, but we can cancel the reservation for that space.



9.4 Statistics Report

9.4.1 Space Usage Statistics

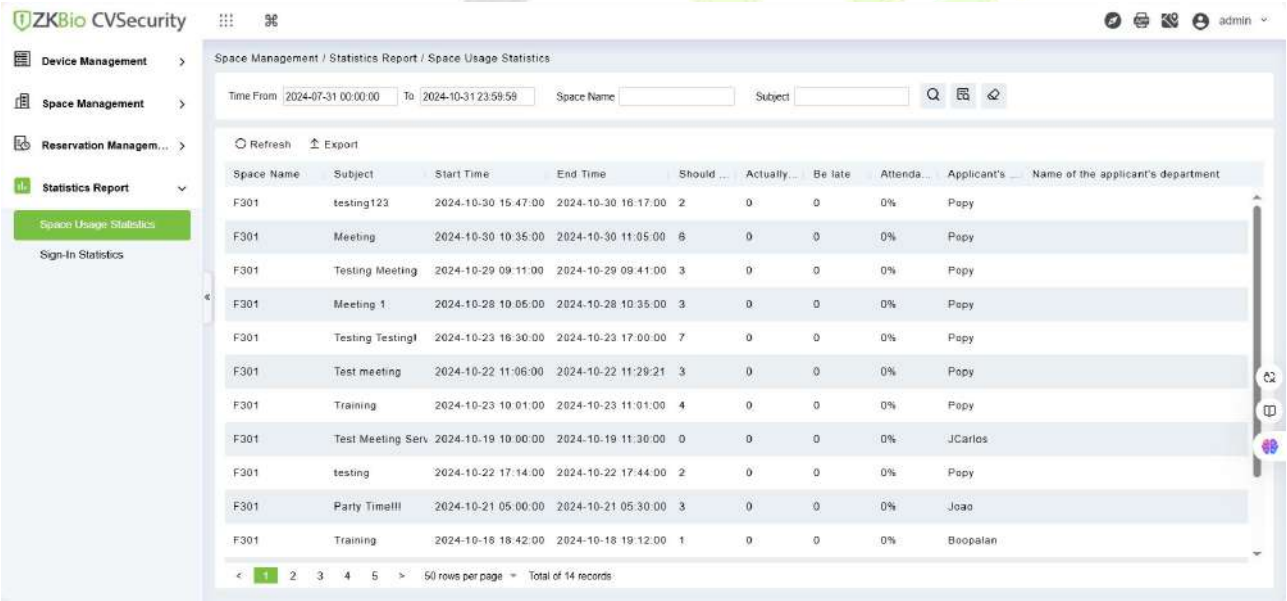The Space Usage Report provides an overview of space utilization.




Click **Export**, then you can export the report.

Space Usage Statistics										
Space Name	Subject	Start Time	End Time	Should arrive	Actually arrive	Be late	Attendance rate	Applicant's Name	Name of the applicant's department	
F301	testing123	2024-10-30 15:47:00	2024-10-30 16:17:00	2	0	0	0%	Popy		
F301	Meeting	2024-10-30 10:35:00	2024-10-30 11:05:00	6	0	0	0%	Popy		
F301	Testing Meeting	2024-10-29 09:11:00	2024-10-29 09:41:00	3	0	0	0%	Popy		
F301	Meeting_1	2024-10-28 10:05:00	2024-10-28 10:35:00	3	0	0	0%	Popy		
F301	Testing Testing!	2024-10-23 16:30:00	2024-10-23 17:00:00	7	0	0	0%	Popy		
F301	Test meeting	2024-10-22 11:06:00	2024-10-22 11:29:21	3	0	0	0%	Popy		
F301	Training	2024-10-23 10:01:00	2024-10-23 11:01:00	4	0	0	0%	Popy		
F301	Test Meeting Service	2024-10-19 10:00:00	2024-10-19 11:30:00	0	0	0	0%	JCarlos		
F301	testing	2024-10-22 17:14:00	2024-10-22 17:44:00	2	0	0	0%	Popy		
F301	Party Time!!!	2024-10-21 05:00:00	2024-10-21 05:30:00	3	0	0	0%	Joao		
F301	Training	2024-10-18 18:42:00	2024-10-18 19:12:00	1	0	0	0%	Boopalan		
F301	Meetings	2024-10-19 14:39:00	2024-10-19 15:09:00	1	0	0	0%	Boopalan		
F301	Jesse	2024-10-18 16:09:00	2024-10-18 16:09:00	3	0	0	0%	Jessica		
F301	ZKBio CVACCESS Training	2024-10-18 13:35:00	2024-10-18 14:05:00	0	0	0	0%	Popy		

9.4.2 Sign-In Statistics

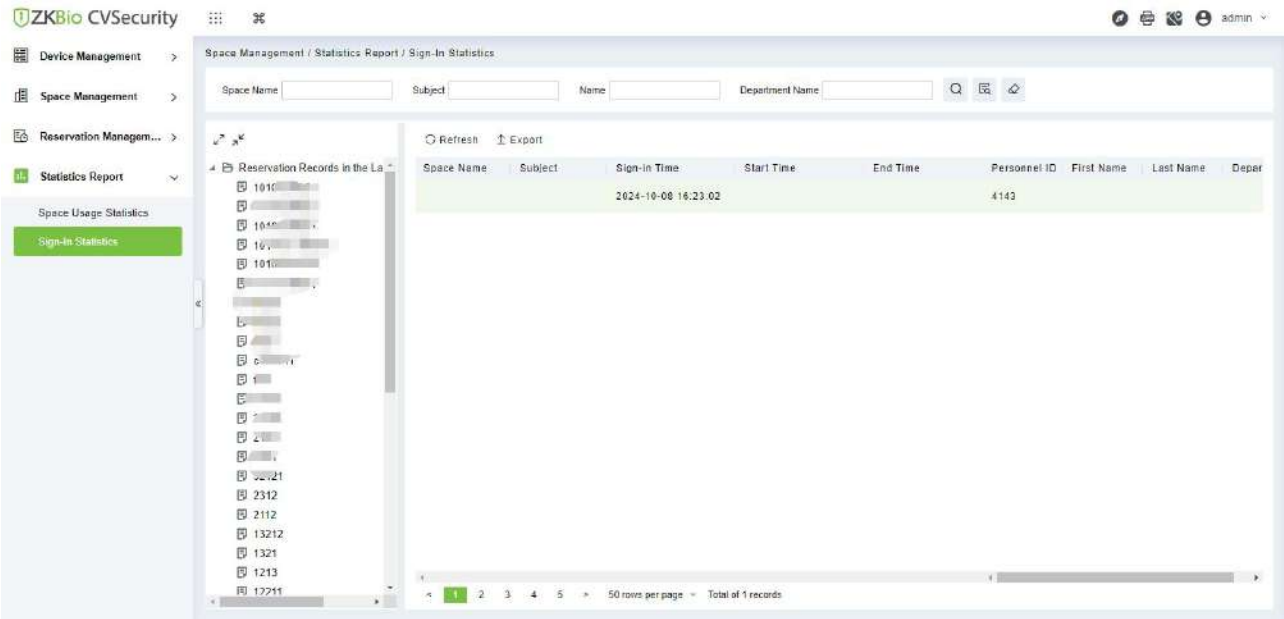The Check-in Report allows us to view the check-in status of individuals within the space.



Click **Export**, then you can export the report.

Sign-In Statistics							
Space Name	Subject	Sign-in Time	Start Time	End Time	Personnel ID	First Name	Department Name
F301	Testing Meeting1	2024-10-09 15:25:32	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy1	Testing
F302	Testing Meeting2	2024-10-09 15:19:39	2024-10-09 13:47:01	2024-10-09 14:43:01	4142	Popy2	Testing
F303	Testing Meeting3	2024-10-09 15:15:07	2024-10-09 13:47:02	2024-10-09 14:43:02	4142	Popy3	Testing
F304	Testing Meeting4	2024-10-09 14:28:07	2024-10-09 13:47:03	2024-10-09 14:43:03	4142	Popy4	Testing
F305	Testing Meeting5	2024-10-09 14:19:48	2024-10-09 13:47:04	2024-10-09 14:43:04	4142	Popy5	Testing
F306	Testing Meeting6	2024-10-09 14:00:47	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy6	Testing
F307	Testing Meeting7	2024-10-09 13:48:31	2024-10-09 13:47:00	2024-10-09 14:43:00	4145	Popy7	Testing
F308	Testing Meeting8	2024-10-09 13:48:21	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy8	Testing
F309	Testing Meeting9	2024-10-09 13:48:19	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy9	Testing
F310	Testing Meeting10	2024-10-09 13:48:06	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy10	Testing
F311	Testing Meeting11	2024-10-09 13:48:04	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy11	Testing
F312	Testing Meeting12	2024-10-09 13:47:54	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy12	Testing
F313	Testing Meeting13	2024-10-09 13:47:52	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy13	Testing
F314	Testing Meeting14	2024-10-09 13:47:50	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy14	Testing
F315	Testing Meeting15	2024-10-09 13:47:15	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy15	Testing
F316	Testing Meeting16	2024-10-09 13:47:14	2024-10-09 13:47:00	2024-10-09 14:43:00	4142	Popy16	Testing
F317	Testing Meeting17	2024-10-09 13:45:14			4142	Popy17	Testing
F318	Testing Meeting18	2024-10-09 13:45:12			4142	Popy18	Testing
F319	Testing Meeting19	2024-10-09 13:44:53			4142	Popy19	Testing
F320	Testing Meeting20	2024-10-09 12:27:52			4142	Popy20	Testing
F321	Testing Meeting21	2024-10-09 12:26:21			4142	Popy21	Testing
F322	Testing Meeting22	2024-10-09 11:57:51			4142	Popy22	Testing
F323	Testing Meeting23	2024-10-09 11:57:49			4142	Popy23	Testing
F324	Testing Meeting24	2024-10-09 11:57:47			4142	Popy24	Testing

9.5 Notification

Administrators can go to **Service Center -> Notification Center -> Notification Records** to view historical notification records.

Device Center

Event Center

Linkage Center

Notification Center

Notification Record

Map Center

Scene Center

Push Center

Service Center / Notification Center / Notification Record

title

Reader Type

Source Module

Space Management

Q

🔍

🔗

Refresh

Title	Notification Type	Source Mo...	Value	Create Time	Operations
Reservation is about to	Notify Message	Space Manage	The 2024-10-30 15:47:00 - 2024-10-30 15:47:00 F301 testing	2024-10-30 15:32:00	📄
Space Reservation	Notify Message	Space Manage	Popy xiao has successfully booked 2024-10-30 15:47:00 - 2024-10-30 14:48:02	2024-10-30 14:48:02	📄
Reservation is about to	Notify Message	Space Manage	The 2024-10-30 10:35:00 - 2024-10-30 10:35:00 F301 Meetin	2024-10-30 10:33:30	📄
Space Reservation	Notify Message	Space Manage	Popy xiao has successfully booked 2024-10-30 10:35:00 - 2024-10-30 10:33:22	2024-10-30 10:33:22	📄
Reservation is about to	Notify Message	Space Manage	The 2024-10-29 09:11:00 - 2024-10-29 09:11:00 F301 Testin	2024-10-29 08:56:00	📄
Reservation is about to	Notify Message	Space Manage	The 2024-10-28 10:05:00 - 2024-10-28 10:05:00 F301 Meetin	2024-10-28 09:50:00	📄
Space Reservation	Notify Message	Space Manage	Popy xiao has successfully booked 2024-10-29 09:11:00 - 2024-10-28 09:11:31	2024-10-28 09:11:31	📄
Space Reservation	Notify Message	Space Manage	Popy xiao has successfully booked 2024-10-28 10:05:00 - 2024-10-28 09:10:10	2024-10-28 09:10:10	📄
Reservation is about to	Notify Message	Space Manage	The 2024-10-23 16:30:00 - 2024-10-23 16:30:00 F301 Testin	2024-10-23 16:15:00	📄
Space Services	Notify Message	Space Manage	Space administrator 115(Popy) has responded to Popy's serv	2024-10-23 16:11:38	📄
Space Reservation	Notify Message	Space Manage	Popy has successfully booked 2024-10-23 16:30:00 - 2024-10-23 16:10:15	2024-10-23 16:10:15	📄

<

1

2

3

4

5

>

50 rows per page

Total of 32 records

After the applicant books a meeting, the applicant, attendees, and space manager will all receive corresponding emails or app push notifications. The content of the email notification is as follows:

Space Service Reminder

ZKBioCVSecurity Demo

To: Popy

Tuesday 8:56

Details

Hi

Popy xiao has applied for Testing Meeting which will start after 2024-10-29 09:11:00. Here are the details of the event:

Subject: Testing Meeting

Content: content 1111

Reserved Time: 2024-10-29 09:11:00 - 2024-10-29 10:11:00

Space: F301

Address: No 188 street,TangXia

Applicant: Popy xiao

Please participate in time, thank you.

ZKBioCVSecurity D...

Hi Popy xiao has applied for Meeting 1 which will start after 2024-10-28 10:05:00. Here are the det

Monday 9:50 AM

ZKBioCVSecurity D...

Hi Popy xiao has booked Testing Meeting which will start at 2024-10-29 09:11:00. Here are the detai

Monday 9:11 AM

ZKBioCVSecurity D...

Hi Popy xiao has booked Meeting 1 which will start at 2024-10-28 10:05:00. Here are the details of

Monday 9:10 AM

ZKBioCVSecurity D...

Hi Popy has applied for Testing Testing! which will start after 2024-10-23 16:30:00. Here are the d

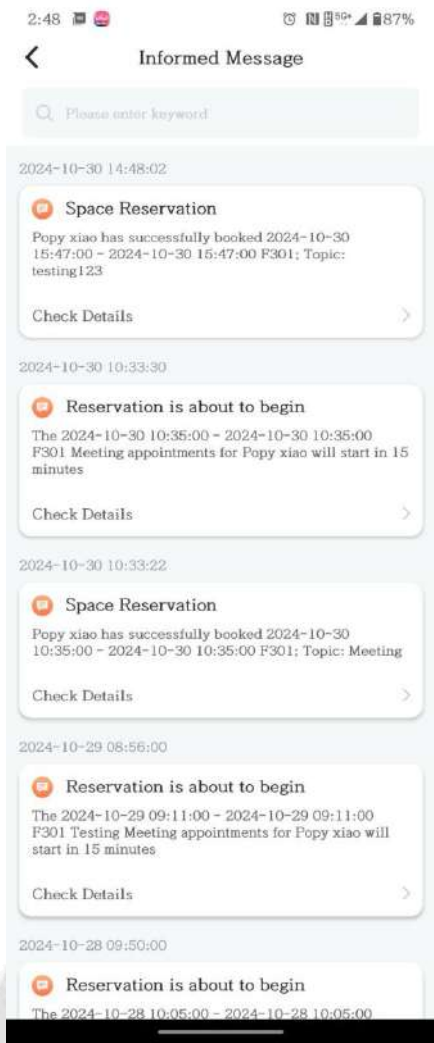
10/23 Wednesday 4:15 PM

ZKBioCVSecurity D...

Hi Popy has applied for Testing Testing! which will start after 2024-10-23 16:30:00. Here are the d

10/23 Wednesday 4:15 PM

The APP notification content is as follows:



10 Elevator Control

The following is the manual of online elevator control. The Elevator Control System is mainly used to set device parameters (such as the swiping interval for taking elevators and elevator key drive duration), manage personnel's rights to floors and elevator control time, and supervise elevator control events. You can set registered users' rights to floors. Only authorized users can reach certain floors within a period of time after being authenticated.

10.1 Elevator Control Management

10.1.1 Operation Scenario

Elevator control management, also known as elevator access control management, realizes the unified management of personnel entering and leaving the elevator through the configuration of floors and personnel authority groups.

Elevator control solves the elevator floor arrival authority of registered personnel, that is, in a certain period, on certain floors, authorized personnel can be verified and passed.

10.1.2 Operation Flow

Introduce the configuration process of Elevator control management business.

The business configuration process of Elevator control management business is shown in figure below:

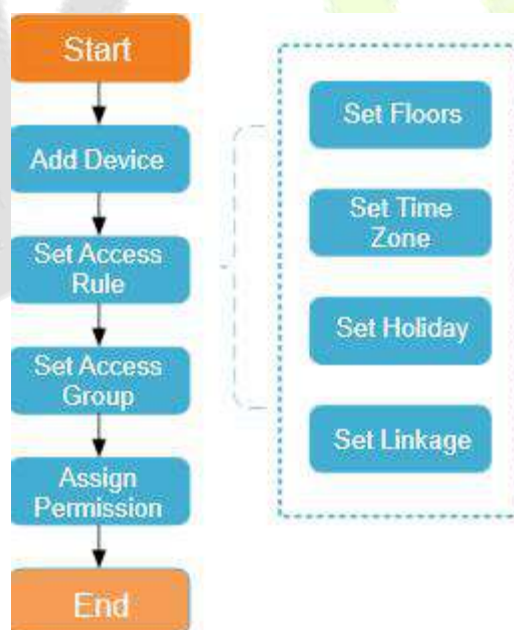


Figure 10- 1 Elevator Control Configuration Flow

10.1.3 Elevator Device

10.1.3.1 Add EC10- Elevator Control Device

This paper introduces the configuration Steps of adding **Elevator Control** device in platform.

10.1.3.1.1 Add device (New)

●Operating Steps:

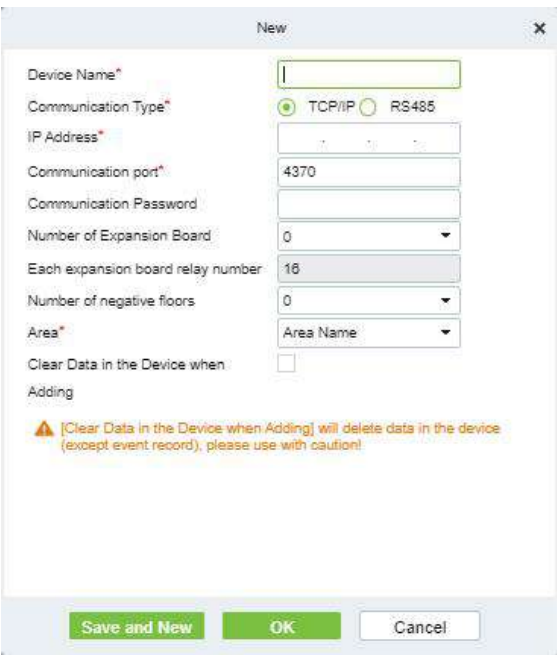
Step 1: In the Elevator Control module, select **Elevator Control Device > Device**.

Step 2: In the device management interface, click the **New** button to pop up the New box.

Step 3: Fill in the corresponding parameter information in the new box. The new box of device is shown in the figures below. Please refer to below table for parameter setting instructions.

Step 4: Click **OK** to complete the operation of adding Elevator control device.

TCP/ IP communication mode



RS485 communication mode

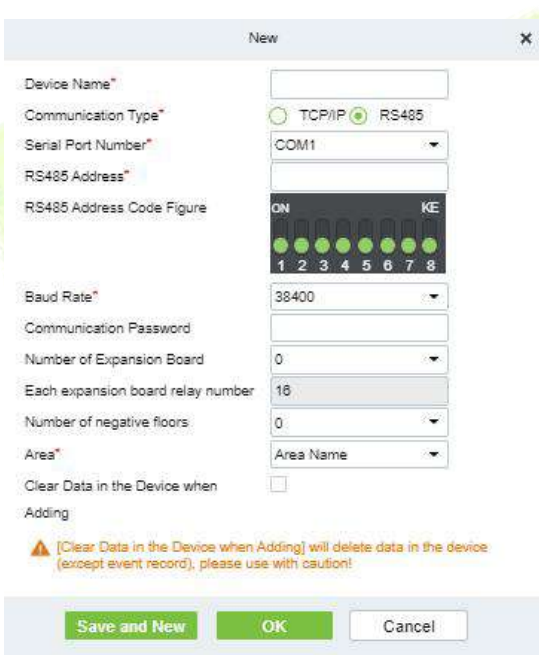


Figure 10- 2 Add Elevator Control Configuration Flow

Parameter	How to set
Device Name	Customize the name of this device
Communication Mode	Choose the communication mode of TCP/IP
IP Address	Fill in the IP address of Elevator control device
Communication Port	The default device communication port is 4370
Communication Cipher	Fill in the communication password of the device. If there is no password, it does not need to be filled in, and it can only be added after successful verification. For new factory device and initialized device, the communication password is

Parameter	How to set
	empty. In order to ensure that the device is not used by others, the user can enter the IP address of the device through the Web page and enter the background to customize the verification password.
Number of Expansion Plates	The Elevator control device can control the expansion of the number of floors
Number of Relays Per Expansion Board	Each expansion board has 16 relays
Region	The device is divided into regions, and the device can be filtered according to the regions during real-time monitoring
Delete Data in Device When Adding	Set whether the original Elevator control event data in the device will be automatically emptied after the device is added.

Table 10-1 Description of Settings for Adding Devices

10.1.3.1.2 Delete

Step 1: On the **Device** interface, select the required Device from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected Device.

Step 3: Click **Delete**, to ensure and delete the selected Device from the list.

10.1.3.1.3 Export

You can export all transactions in Excel, PDF, CSV format.

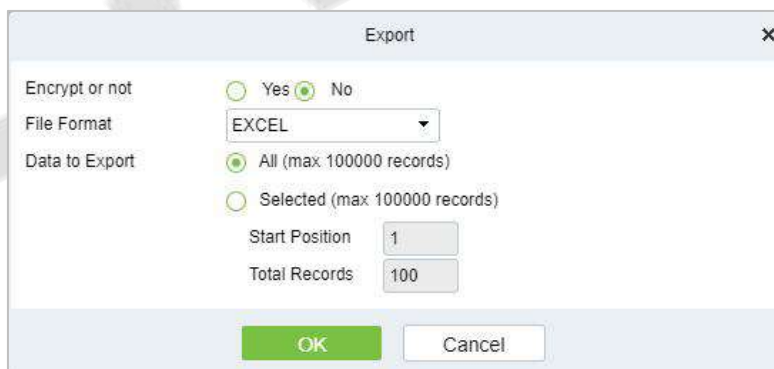


Figure 10- 3 Export Elevator Control Configuration Flow

10.1.3.1.4 Search And Add Elevator Control Device (Search)

This paper introduces the configuration Steps of adding Elevator control device in by searching.

Through the way of searching, the Elevator control device in the local area network is searched, and the Elevator control device that has been searched out is directly added, which is convenient to operate.

● Operating Steps:

Step 1: In the Elevator Control module, select "**Elevator Control Device > Device**".

Step 2: In the device management interface, click the **Search** button to pop up the search box.

Step 3: Click **"Start Search"** in the search box to display the Elevator control devices that can be added, as shown in figure below:



Figure 10- 4 Device Search Add Interface

Step 4: Optional: Modify the IP address of Elevator control device and click **"Modify IP Address"**. Modifying IP address will restart the device, and the IP address modification will be completed after restarting.

Step 5: For the Elevator control device searched, click the **Add** button in the operation bar to add the device; The device addition settings are shown in figure below, and the parameter settings are shown in table below.

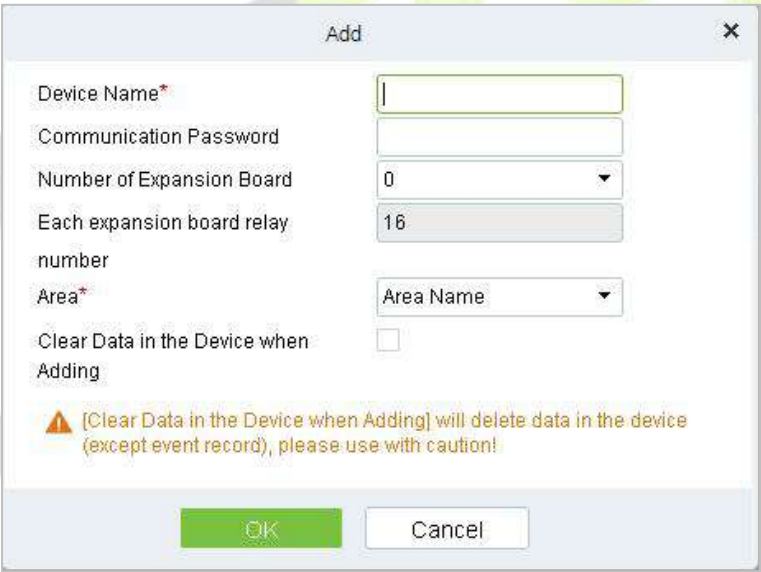


Figure 10- 5 Add Interface

Parameter	How to set
Device Name	Customize the name of the device.
Communication Cipher	Fill in the communication password of the device. If there is no password, it does not need to be filled in, and it can only be added after successful verification. For new factory device and initialized device, the communication password is empty. In order to ensure that the device is not used by others, the user can enter the IP address of the device through the Web page and enter the background to customize the verification password.

Number of Expansion Plates	Elevator control device can control the expansion of the number of floors.
Number of Relays Per Expansion Board	Each expansion board has 16 relays.
Region	The device is divided into regions, and the device can be filtered according to the regions during real-time monitoring.
Delete Data in Device When Adding	Set whether the original Elevator control event data in the device will be automatically emptied after the device is added.

Table 10-2 Device Search Added Settings Description

Step 6: Click **OK** to complete the operation of adding Elevator control device.

Step 7: Click **Close** to close the Device Search Add interface.

10.1.3.1.5 Control

Upgrade Firmware

Tick the device that needs to be upgraded, click **Upgrade firmware** to enter edit interface, then click **Browse** to select firmware upgrade file (named emfw.cfg) provided by Access software, and click **OK** to start upgrading.

Note: The user shall not upgrade firmware without authorization. Contact the distributor before upgrading firmware or upgrade it following the instructions of the distributor. Unauthorized upgrade may affect normal operations.

Reboot Device

It will reboot the selected device.

Synchronize Time

It will synchronize device time with server's current time.

Disable/Enable

Select device, click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

Synchronize All Data to Devices

Synchronize data of the system to the device. Select device, click **Synchronize All Data to Devices** and click **OK** to complete synchronization.

10.1.3.1.6 Set Up

Modify IP Address

Select a device and click **Modify IP address** to open the modification interface. It will obtain a real-time network gateway and subnet mask from the device. (Failed to do so, you cannot modify the IP address). Then enter a new IP address, gateway, and subnet mask. Click **OK** to save and quit. This function is the similar as Modify IP Address Function in Device.

Modify Communication Password

The system will ask for the old communication password before modifying it. After verification, input

the new password twice, and click **OK** to modify the communication password.

Note: Communication password shouldn't contain spaces; it is recommended to use a combination of numbers and letters. Communication password setting can improve the device's security. It is recommended to set communication password for each device.

Modify RS485 Address

Only the devices that use RS485 communication and with no DIP Switch can modify RS485 address.

Modify the Fingerprint Identification Threshold

Users can modify the fingerprint identification thresholds in the devices; it ranges from 35 to 70 and it is 55 by default. The system will read the thresholds from the device.

Set extended Parameters

We can set the extended parameters of device like temperature detection and mask detection

10.1.3.1.7 View/Get

Get Device Option

It gets the common parameters of the device. For example, get the firmware version after the device is updated.

Get Personnel Information

Renew the current number of personnel, fingerprints, finger vein and face templates in the device. The final value will be displayed in the device list.

Get Transactions

Get transactions from the device into the system. Two options are provided for this operation: Get New Transactions and Get All Transactions.

10.1.3.2 Add EC16-Elevator Control Device

This sub module introduces the configuration steps of adding Access Control device in platform. The elevator control device is added in a new way by TCP/IP and RS485 communication.

10.1.3.2.1 Add Device (New)

Operating Steps:

Step 1: In the Elevator module, select "**Elevator Device > Device**".

Step 2: In the device management interface, click on **New** to pop up the New box.

Step 3: Fill in the corresponding parameter information in the new box. The new box of device is shown in the figures below. Please refer to below table for parameter setting instructions.

Step 4: Click **OK** to complete the operation of adding Elevator control device.

Figure 10- 6 Add Elevator Control Configuration Flow

Fields to be filled for TCP/IP

Parameter	How to set
Device Name	Customize the name of this device.
Communication Type	Choose the communication mode of TCP/IP.
IP Address	Enter the IP address.
Communication Port	The default device communication port is 4370.
Communication Password	Fill in the communication password of the device. If there is no password, it does not need to be filled in, and it can only be added after successful verification. For new factory device and initialized device, the communication password is empty. In order to ensure that the device is not used by others, the user can enter the IP address of the device through the Web page and enter the background to customize the verification password.
Number of Expansion Board	The Elevator control device can control the expansion of the number of floors.
Each expansion board relay number	Each expansion board has 16 relays.
Number of negative floors	Select the number of negative floor from the default list of 5.
Area	The device is divided into areas, and the device can be filtered according to the area during real-time monitoring.
Clear Data in the Device when Adding	Set whether the original Elevator control event data in the device will be automatically emptied after the device is added.

Fields to be filled for RS485

Device Name	Customize the name of this device.
Communication Type	Choose the communication mode of TCP/IP.
Serial Port Number	Select the serial port number from the list up to COM255.
RS485 Address	Enter the Address in integer only and it must be 1-63. Once after enter figure, RS485 will update automatically.

Parameter	How to set
RS485 Address Code Figure	Set the address code figure by clicking or toggling on the required number. It must be from 1-63 only. Once it is done the RS485 Address will update automatically.
Baud Rate	Select one of the baud rate from the list 19200, 38400, 57600, and 115200.
Communication Password	Fill in the communication password of the device. If there is no password, it does not need to be filled in, and it can only be added after successful verification. For new factory devices and initialized devices, the communication password is empty. In order to ensure that the device is not used by others, the user can enter the IP address of the device through the Web page and enter the background to customize the verification password.
Number of Expansion Board	The Elevator control device can control the expansion of the number of floors.
Each expansion board relay number	Each expansion board has 16 relays
Number of negative floors	Select the number of negative floor from the default list of 5.
Area	The device is divided into areas, and the device can be filtered according to the area during real-time monitoring.
Clear Data in the Device when Adding	Set whether the original Elevator control event data in the device will be automatically emptied after the device is added.

Table 10-3 Description of Settings for Adding Devices

10.1.3.2.2 Delete

Step 1: On the **Device** interface, select the required Device from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected Device.

Step 3: Click **Delete**, to ensure and delete the selected Device from the list.

10.1.3.2.3 Search and Add Elevator Control Device (Search)

The configuration steps for adding an elevator control device through a search method. By searching within the local area network, the elevator control device is identified and directly added, providing a convenient operation process.

Operating Steps:

Step 1: Click **Elevator** > **Elevator Device** > **Device** > **Search**, to open the Search interface in the software.

Step 2: Click **Search** to search the elevator controller.

Step 3: After searching, the list and total number of elevator controllers will be displayed.

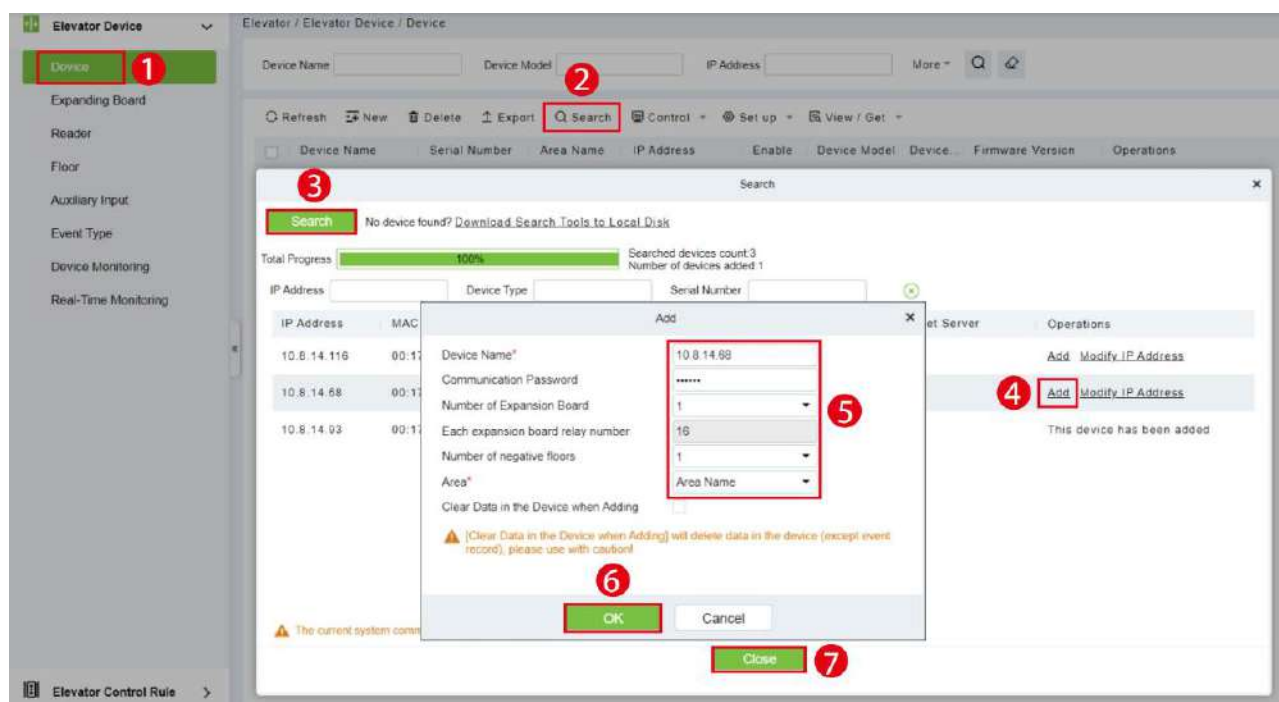


Figure 10- 7 Device Search Add

Step 4: For the Elevator control device searched, click **Add** in the operation bar to add the device.

Step 5: Click **OK** to complete the operation of adding elevator control device.

Step 6: Click **Close** to close the Device Search Add interface.

Parameter	How to set
Device Name	Customize the name of this device.
Communication Password	Fill in the communication password of the device. If there is no password, it does not need to be filled in, and it can only be added after successful verification. For new factory device and initialized device, the communication password is empty. In order to ensure that the device is not used by others, the user can enter the IP address of the device through the Web page and enter the background to customize the verification password.
Number of Expansion Plates	The Elevator control device can control the expansion of the number of floors.
Number of Relays Per Expansion Board	Each expansion board has 16 relays.
Region	The device is divided into regions, and the device can be filtered according to the regions during real-time monitoring.
Delete Data in Device When Adding	Set whether the original Elevator control event data in the device will be automatically emptied after the device is added.

Table 10-4 Device Search Added Settings Description

10.1.3.3 Expanding Board (EC10+EX16)

This introduces the configuration Steps of adding **Expanding Board** device in the platform.

10.1.3.3.1 Add Device (New)

● Operating Steps:

Step 1: In the Elevator Control module, select "Elevator Control device > Expanding Board".

Step 2: In the expanding board interface, click the **New** button to pop up the New box.

Step 3: Fill in the corresponding parameter information in the new box. The new box of device is shown in figure below. Please refer to table below for parameter setting instructions.

Step 4: Click **OK** to complete the operation of adding Expanding board interface.

Figure 10- 8 Add Expanding Board

10.1.3.3.2 Delete

Step 1: On the **Expanding Board** interface, select the required Device from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected Device.

Step 3: Click **Delete**, to ensure and delete the selected Device from the list.

10.1.3.4 Expanding Board (EC16+DEX16)

10.1.3.5 Add Expanding Board

Step 1: Connect the expansion board correctly and set the RS485 address of the expansion board with the dip switch, then restart the device within 6 minutes.

Step 2: In the Elevator Control module, select "**Elevator Control device > Expanding Board**".

Step 3: In the expanding board interface, click the **New** button to pop up the New box.

Step 4: Fill in the corresponding parameter information in the new box.

Step 5: Click **OK** to complete the operation of adding Expanding board interface.

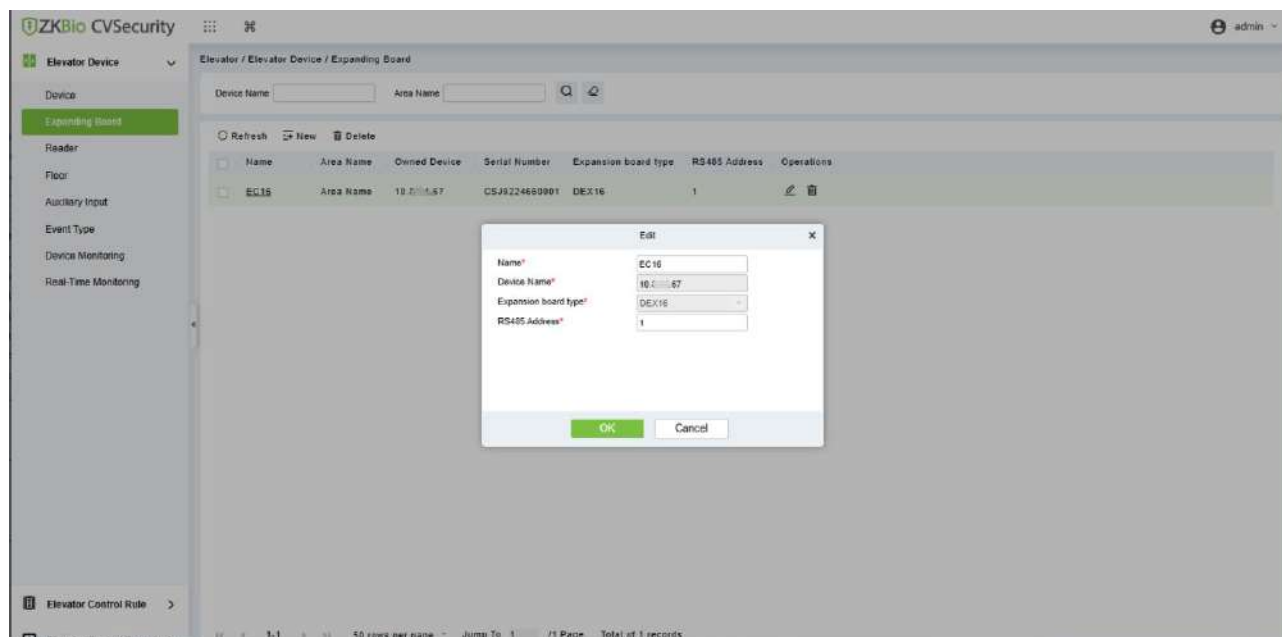


Figure 10- 9 Add Expanding Board

Parameter	Description
Name	The name of Expanding Board.
Device Name	Select the corresponding elevator control device.
Expansion Board Type	The type of expanding board. And the expansion board type cannot be modified.
Rs485 Address	Communication protocol between expansion board and reader. The communication protocol should be consistent.

Table 10-5 Description of Expanding Board

10.1.3.5.1 Delete

Step 1: On the Expanding Board interface, select the required Device from the list.

Step 2: Click Delete or click on the  icon to delete the selected Device.

Step 3: Click Delete, to ensure and delete the selected Device from the list.

10.1.3.6 Reader

Each elevator device has a reader, the reader information can be set.

● Operating Steps:

Click **Elevator Device** > **Reader**, select a reader name in the reader list:

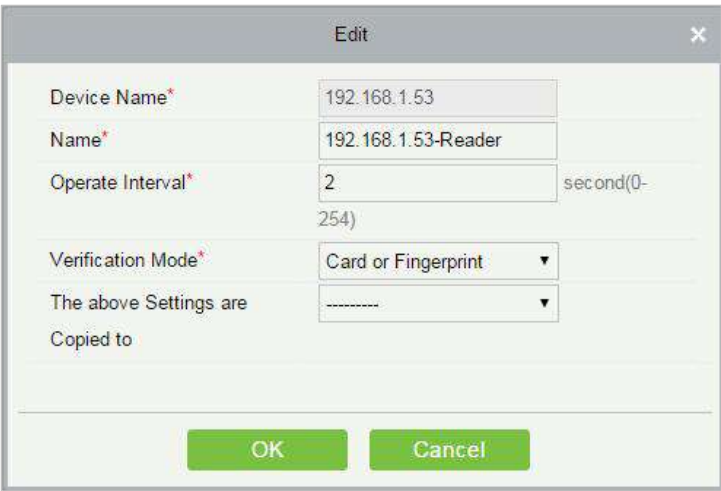


Figure 10- 10 Edit Reader interface

Parameter	How to set
Device Name	It is not editable.
Name	The default format is “Device Name - Reader”, editable in 30 characters.
Operate Interval	The interval between two verifications. The default value is 2 seconds, the range is 0 to 254 seconds.
Verification Mode	The default setting is “Card or Fingerprint”. The Wiegand reader supports “Only Card”, “Only Password”, “Card or Password”, “Card and Password”, “Card or Fingerprint”. The RS485 reader supports “Card or Fingerprint”. Make sure the reader has a keyboard when the verification mode is “Card and Password”.
The above settings are copied to	Apply the above settings to all readers within the current user’s level. Click OK to save and exit.

Table 10-6 Reader Setting

10.1.3.7 Floor Setting

The setting of floor parameters affects the logical judgment of Elevator control verification.

10.1.3.7.1 Edit

●Operating Steps:

Step 1: In the Elevator Control module, select **Elevator Control device > Floor**.

Step 2: In the floor management interface, click the **Edit** button in the floor selection operation bar to pop up the floor parameter setting box.

Step 3: In the floor parameter setting interface, fill in the corresponding parameters according to the addition requirements, as shown in figure below. Please refer to table below for parameter filling instructions.

The screenshot shows a software window titled "Edit" with a close button (X). Inside, there are several input fields and dropdown menus. The fields are: "Device Name" with the value "192.168.1.53", "Floor Number" with "1", "Floor Name*" with "192.168.1.53-1", "Floor Active Time Zone*" with a dropdown showing "24-Hour Accessible", "Floor Passage Mode" with a dropdown showing "-----", "Time Zone" with a dropdown showing "-----", "Button Open Duration*" with "5" and a unit "second(0-254)", and "The above Settings are Copied to" with a dropdown showing "-----". At the bottom, there are two green buttons labeled "OK" and "Cancel".

Figure 10- 11 Floor Parameter Setting

Parameter	How to set
Owned Device	Displays the basic information of this floor, and reset is not supported.
Floor Number	The system automatically numbers the device according to the number of relays.
Floor Name	It defaults to "device Name-Floor Number", which can be repaired as needed, and can be filled in with a maximum of 30 arbitrary characters.
Effective Time Period of Floor	When editing a floor, the effective time period of the floor is required. Only after the effective time period of the floor is set can the close floor button be continuously released.
Time Period for Continuously Releasing Keys	It must be valid within the effective period of the floor. It is recommended to set the continuous release period of the floor. The setting is included in the effective period of the floor.
Key Holding Time	Used to control swiping cards or pressing fingerprints, within the range of time, you can press the floor buttons of elevators. The default is 5 seconds, and the range is 0-254.
Copy The Above Settings To	Set which floors the above floor parameters also apply to. The options are: all floors of current device and floors of all device.

Table 10-7 Instructions for Setting Floor Parameters

Step 4: Click **OK** to complete the operation of adding Elevator-controlled floors.

10.1.3.7.2 Remotely Release the Button

It determines whether the corresponding key to the selected floor can be pressed. You can customize the key release duration (15s by default) or select Enable Intraday Passage Mode Time Zone. You can also directly set the current status of the floor to continuously release. In this case, the floor is not

subject to restrictions of any periods, including Floor Active Time Zone, Floor Passage Mode Time Zone, and Button Open Duration. That is, the floor will be continuously released in 24 hours every day.

10.1.3.7.3 Remotely Lock the Button

This normal event is triggered if a user remotely locks a button successfully.

10.1.3.7.4 Remote Normal Opening

The person having open door permission punch effective card at the opened door to trigger this normal event.

10.1.3.7.5 Enable Intraday Passage Mode Timezone

If the intraday passage mode time zone is disabled, punch effective card for five times (must be the same user) or select Enable Intraday Passage Mode Time Zone in remote opening operation, and this normal event is triggered.

10.1.3.7.6 Disable Intraday Passage Mode Timezone

In door normal open state, punch effective card for five times (must be the same user) or select **Disable Intraday Passage Mode Time Zone** in remote closing operation, and this normal event is triggered.

10.1.3.8 Auxiliary Input

It is mainly used to connect to devices, such as the infrared sensor or smog sensor.

10.1.3.8.1 Edit

● Operating Steps:

Step 1: Click **Elevator Device** > **Auxiliary Input** on the Action Menu, enter into the following page.

Step 2: Click **Edit** to modify the parameters

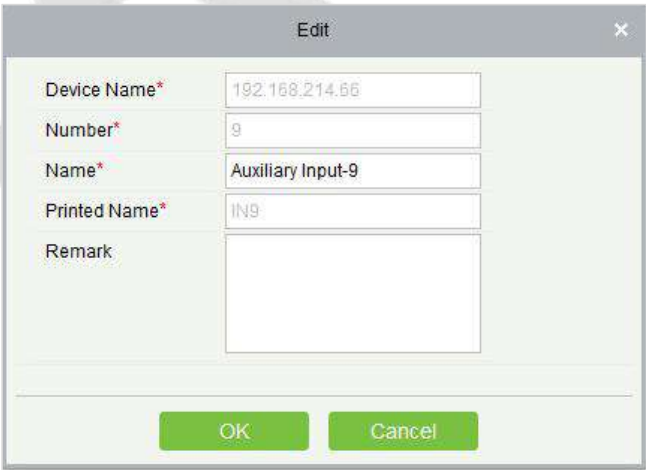


Figure 10- 12 Auxiliary Input Add Interface

Parameter	How to set
Device Name	You can customize the name according to your preference.
Number	Displays the Number.

Parameter	How to set
Name	It displays the default name of “Auxiliary Input”
Printed Name	The printing name in the hardware, for example IN9.
Remark	Displays the Comment.

Table 10-8

10.1.3.9 Event Type

Display the event types of the elevator devices.

● Operating Steps

Step 1: Click **Elevator Device** > **Event Type**, the following page is displayed:

Refresh				
Event Name	Event No.	Event Level	Device Name	Serial No.
Normal Punch Open	0	Normal	192.168.90.235	0013130700074
Punch during Passage Mode Time Zone	1	Normal	192.168.90.235	0013130700074
Open during Passage Mode Time Zone	5	Normal	192.168.90.235	0013130700074
Remote Release	8	Normal	192.168.90.235	0013130700074
Remote Locking	9	Normal	192.168.90.235	0013130700074
Disable Intraday Passage Mode Time Zone	10	Normal	192.168.90.235	0013130700074
Enable Intraday Passage Mode Time Zone	11	Normal	192.168.90.235	0013130700074
Normal Fingerprint Open	14	Normal	192.168.90.235	0013130700074
Press Fingerprint during Passage Mode Time Zone	16	Normal	192.168.90.235	0013130700074
Operate Interval too Short	20	Exception	192.168.90.235	0013130700074
Button Inactive Time Zone(Punch Card)	21	Exception	192.168.90.235	0013130700074
Illegal Time Zone	22	Exception	192.168.90.235	0013130700074
Access Denied	23	Exception	192.168.90.235	0013130700074

Figure 10- 13 Event Type Interface

10.1.3.10 Device Monitoring

10.1.3.10.1 Export

By default, it monitors all devices within the current user's level, click **Elevator Device** > **Device Monitoring**, and lists the operation information of devices: Device Name, Serial No., Area, Operation Status, current status, commands List, and Related Operation.

Area	<input type="text"/>	Status	<input type="text"/>	Device Name	<input type="text"/>	Serial Number	<input type="text"/>	
Export								
Device Name	Serial Number	Area	Operation Status	Current Status	Commands List	Recently The Abnormal State	Operations	
192.168.214.55	0013130700074	Area Name	Get real-time event	Normal	0	None	Clear Command View Command	

Figure 10- 14 Device monitoring Interface

10.1.3.11 Real Time Monitoring

10.1.3.11.1 Operating Steps

Click **Elevator Device** > **Real-Time Monitoring**, real-time monitor the status and real-time events of elevator controllers in the system, including normal events and abnormal events (including alarm

events).

Area	Device Name	Remotely Release the Button		Remotely Lock the Button				
Time	Area Name	Device Name	Event Point	Event Description	Card Number	Person	Reader Name	Verification Mode
2017-02-10 16:11:12	Area Name: 192.168.214.66/00131	192.168.214.66-2		Remote Release				Other
2017-02-10 16:11:12	Area Name: 192.168.214.66/00131	192.168.214.66-1		Remote Release				Other
2017-02-10 16:11:01	Area Name: 192.168.214.66/00131	192.168.214.66-Real	Disabled Card		2338494	2829(xinxiao yang; 192.168.214.66-Read Card or Fingerprint		
2017-02-10 16:10:47	Area Name: 192.168.214.66/00131	192.168.214.66-Real	Disabled Card		2338494	2829(xinxiao yang; 192.168.214.66-Read Card or Fingerprint		
2017-02-10 16:10:44	Area Name: 192.168.214.66/00131	192.168.214.66-Real	Disabled Card		2338494	2829(xinxiao yang; 192.168.214.66-Read Card or Fingerprint		

Figure 10- 15 Real Monitoring

10.1.3.11.2 Remotely Release the Button

1.Click Remotely Release Button:

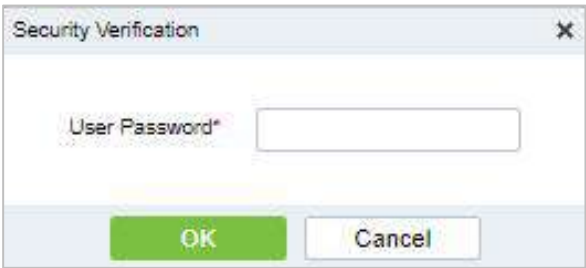


Figure 10- 16 Security Verification

2.Input the user password (the system logging password), click Next Step:

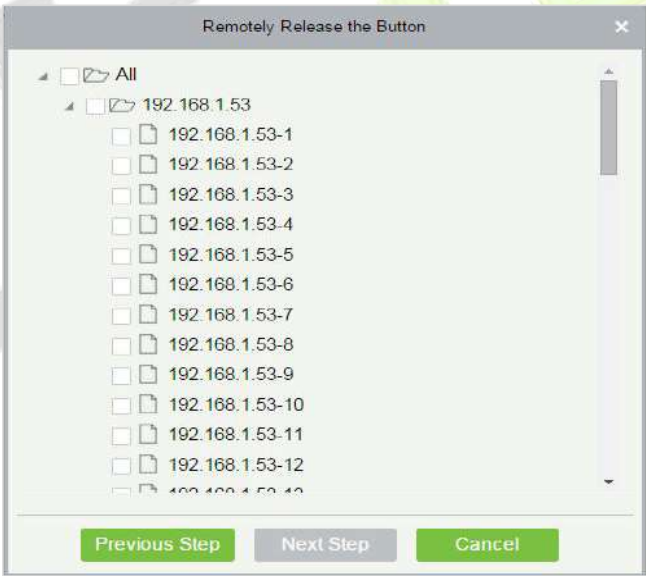


Figure 10- 17 Remotely Release Button

3.Select the floor, and click Next Step:

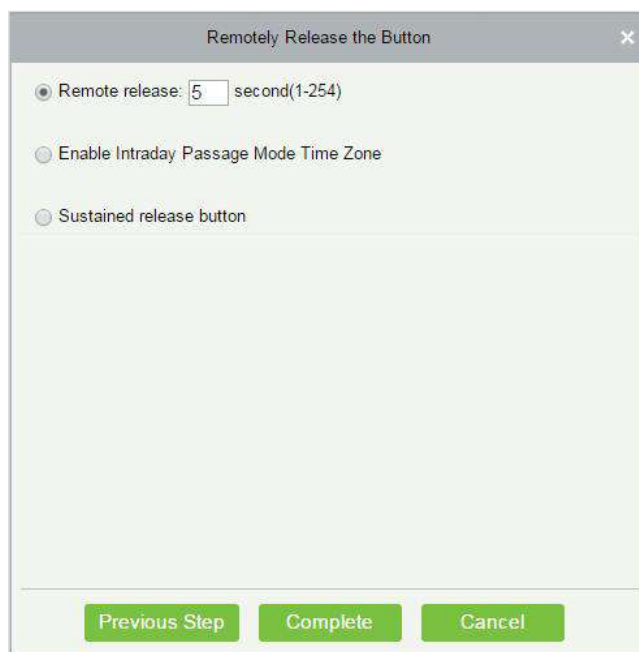


Figure 10- 18 Remotely Release Button

10.1.3.11.3 Remotely Lock the Button

Same as "Remotely Release the button".

● Remote Release:

It determines whether the corresponding key to the selected floor can be pressed. You can customize the key release duration (15s by default) or select Enable Intraday Passage Mode Time Zone. You can also directly set the current status of the floor to continuously release. In this case, the floor is not subject to restrictions of any periods, including Floor Active Time Zone, Floor Passage Mode Time Zone, and Button Open Duration. That is, the floor will be continuously released in 24 hours every day.

● Enable Intraday Passage Mode Time Zone:

To close a floor, you must first set Disable Intraday Passage Mode Time Zone to prevent the case that the floor is opened because other continuous open periods take effect. Then, you need to set to close the Remote Lock Button.

● Sustained Release Button:

The floor that is set to the continuously release state is not subject to restrictions of any periods, that is, the floor will be continuously released in 24 hours every day. To close the floor, you must select Disable Intraday Passage Mode Time Zone.

Note: If a failure message is always returned for the remote release key, check whether there are too many currently disconnected devices on the device list. If yes, check the network connection.

Select the options, click **Complete** to finish enabling the button.

10.1.4 Elevator Control Rules

10.1.4.1 Time Period Setting Time Zones

In Elevator control, time period is a very important basic concept, which is used to set the use time of floors and specify that Elevator control can be used in effective time period.

This paper introduces the configuration Steps of manually adding time periods in.

10.1.4.2 New

●Operating Steps:

Step 1: In the Elevator Control module, select "**Elevator Control Rules > Time Period**".

Step 2: Click **Add** to pop up the interface of adding time period.

Step 3: Add the interface in the time period and set the corresponding content according to the new requirements, as shown in figure below Please refer to Table 9-8 for parameter setting instructions.

New

Time Zone Name*

Remarks

Date	Time	Interval 1		Interval 2		Interval 3	
		Start Time	End Time	Start Time	End Time	Start Time	End Time
Monday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Tuesday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Wednesday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Thursday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Friday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Saturday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Sunday		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Holiday Type 1		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Holiday Type 2		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00
Holiday Type 3		00 : 00	00 : 00	00 : 00	00 : 00	00 : 00	00 : 00

Copy Monday's Setting to Others Weekdays:

Save and New

OK

Cancel

Figure 10- 19 New Time Period

Parameter	How to set
Time Period Name	Custom setting time period name for easy memory.
Remarks	Custom Setting Notes Description.
Time Interval	Set the start and end time in each time interval. Time period includes one week and three holiday type time intervals.
Copy Monday time to other working days	You can quickly copy Monday settings to other workdays.

Table 10-9 Description of New Parameter Settings in Time Interval

Step 4: Click **OK** to complete the addition of this time period.

10.1.4.2.1 Delete

Step 1: On the **Time Zone** interface, select the required time zone from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected time zone.

Step 3: Click **Delete**, to ensure and delete the selected time zone from the list.

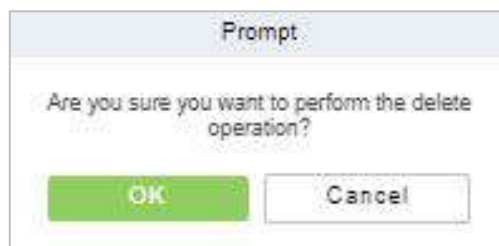


Figure 10- 20 Delete Time Period

10.1.4.3 Holiday Setting

The Elevator control time on holidays may be different from the usual Elevator control time. For simple operation, the system supports setting the Elevator control time separately on holidays.

This paper introduces the configuration Steps of manually adding holidays in.

10.1.4.3.1 New

●Operating Steps:

Step 1: In the **Elevator Control** module, select "Elevator Control Rules > Holidays".

Step 2: Click **New** to pop up the holiday adding interface.

Step 3: In the holiday new interface, set the corresponding content according to the new requirements, as shown in figure below; Please refer to Table 9-9 for parameter setting instructions.

Figure 10- 21 New Holidays

Parameter	How to set
Holiday Name	Customize the holiday name for easy memory.
Holiday Type	Customize the holiday type: Holiday Type 1, Holiday Type 2, Holiday Type 3. The holiday type is set and selected in the "Time Period" addition.
Start Time/End Time	Set the time range for this holiday.
Annualized Cycle	Set whether this holiday cycle year by year: Yes, no. For example, if New Year's Day is January 1 of each year, it can be set to "Yes"; Mother's Day is the second Sunday in May every year. If the date is uncertain, it

Parameter	How to set
	will be set to "No".
Remarks	Custom settings description.

Table 10-10 Parameter Setting Description for Holidays

Step 4: Click **OK** to complete the operation of Elevator-controlled holidays.

10.1.4.3.2 Delete

Step 1: On the **Holidays** interface, select the required holidays from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected holidays.

Step 3: Click **Delete**, to ensure and delete the selected holidays from the list.

10.1.4.4 Elevator Levels

Elevator levels indicate that one or several selected doors can be opened by verification of a combination of multi person within certain time zone. The combination of multi-person set in Personnel Access Level option.

10.1.4.4.1 New

● Operating Steps:

Step 1: Click **Elevator** > **Elevator Control Rule** > **Elevator Levels** > **New** to enter the Add Levels editing interface.

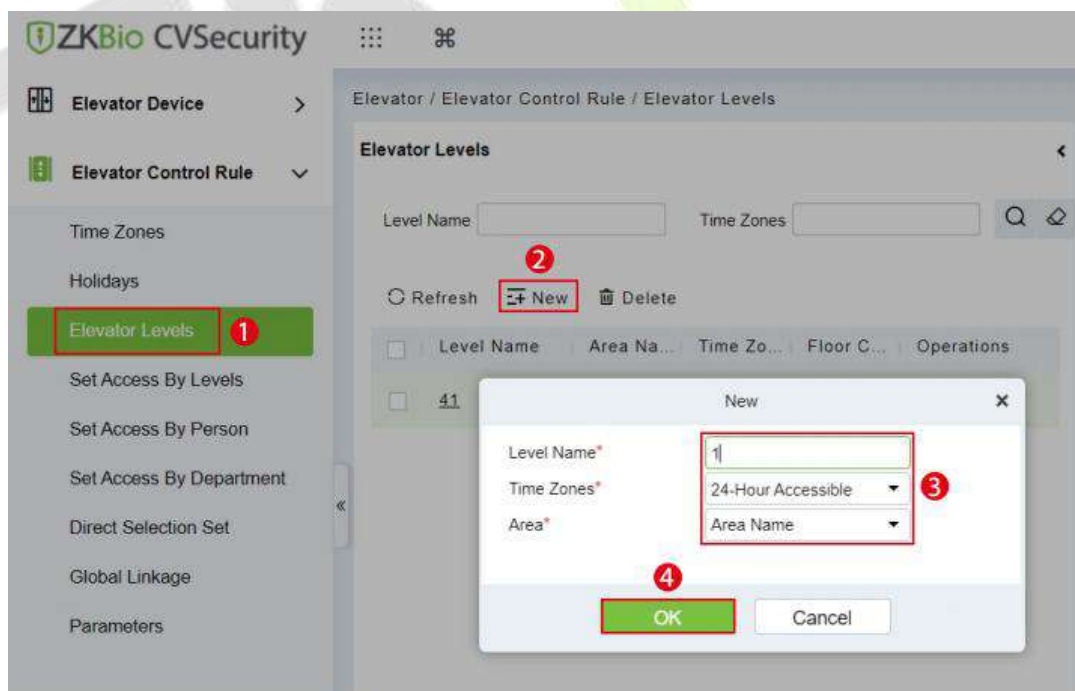


Figure 10- 22 Elevator Level Add Interface

Step 2: Set each parameter: Level Name (unrepeatable), Time Zone and Area.

Step 3: Click **OK**, the system prompts "Add floors to the current elevator control level immediately", click **OK** to add floors, click **Cancel** to return the elevator levels list. The added level is displayed in the list.

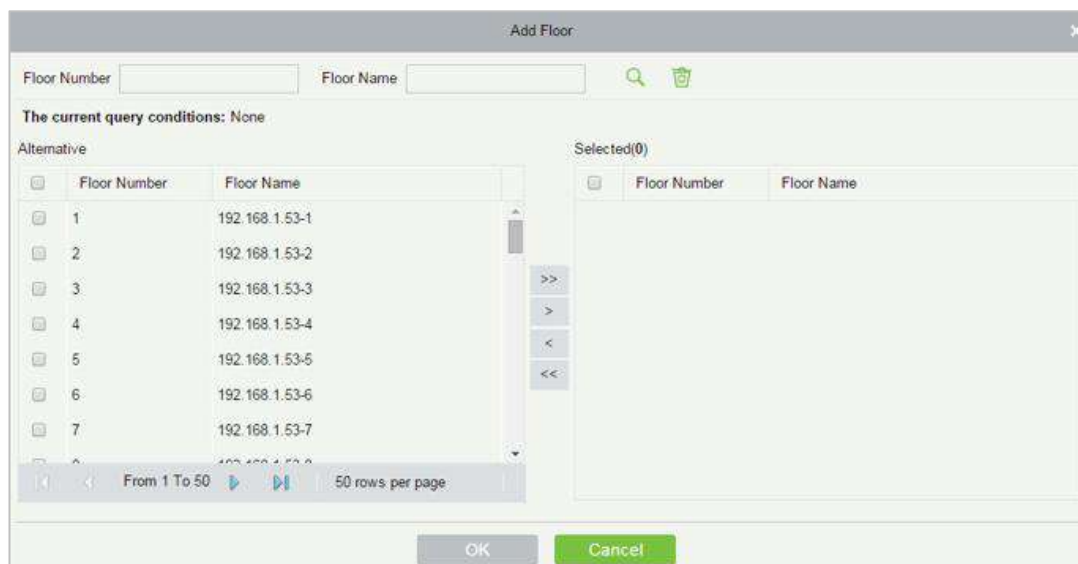


Figure 10- 23 Elevator Level Add Interface



Figure 10- 24 Elevator Level Cancel Interface

Note: Different floors of different elevator controllers can be selected and added to an elevator level.

10.1.4.4.2 Delete

Step 1: On the **Elevator Level** interface, select the required level from the list.


Step 2: Click **Delete** or click on the  icon to delete the selected level floors.

Step 3: Click **Delete**, to ensure and delete the selected level from the list.

10.1.4.5 Set Access by Levels

● Operating Steps:

Step 1: Click Elevator > Set by Levels to enter the edit interface, Click an Elevator level in left list, personnel having right of opening door in this access level will display on right list.

Step 2: In the left list, click **Add Personnel** under Operations to pop-up the Add Personnel box; select personnel (multiple) and click  to move it to the right selected list, then click **OK** to save and complete.

Step 3: Click the level to view the personnel in the right list. Select personnel and click **Delete Personnel** above the right list, then Click **OK** to delete.

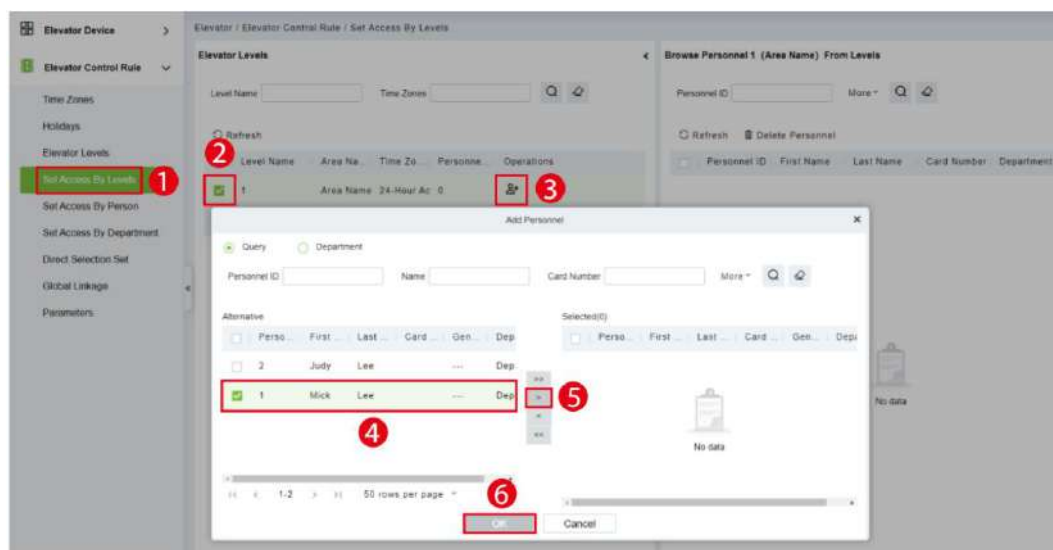


Figure 10- 25 Set Access by Levels

10.1.4.5.1 Delete Personnel

Step 1: On the **Access Level** interface, select the required Personnel ID from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected Personnel ID.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

10.1.4.6 Set Access by Person

Add selected personnel to selected elevator levels or delete selected personnel from the elevator levels.

● Operating Steps:

Step 1: Click **Elevator > Elevator Levels > Set by Person**, click employee to view the levels in the right list.

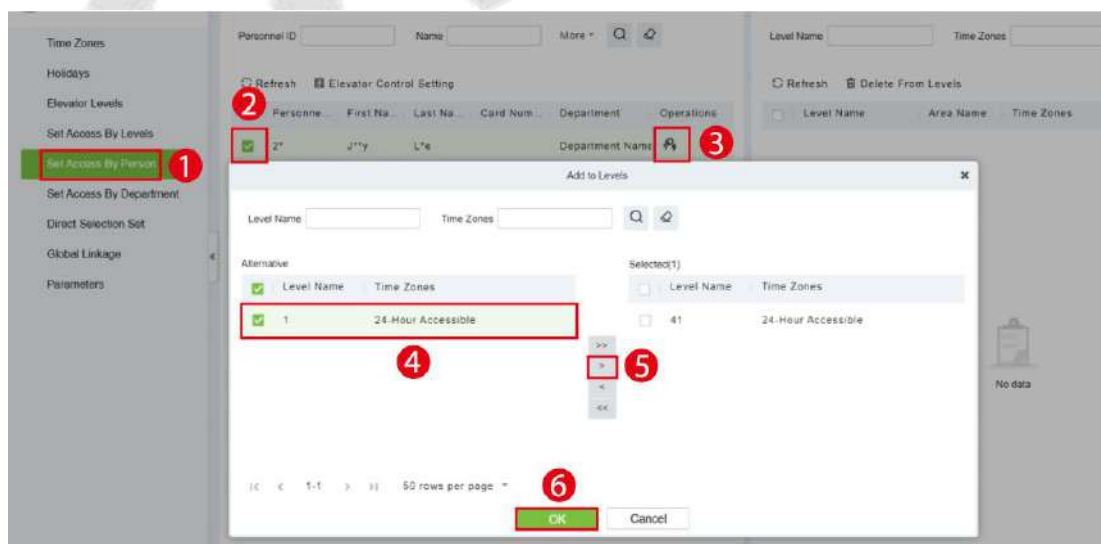


Figure 10- 26 Set Access by Person Interface

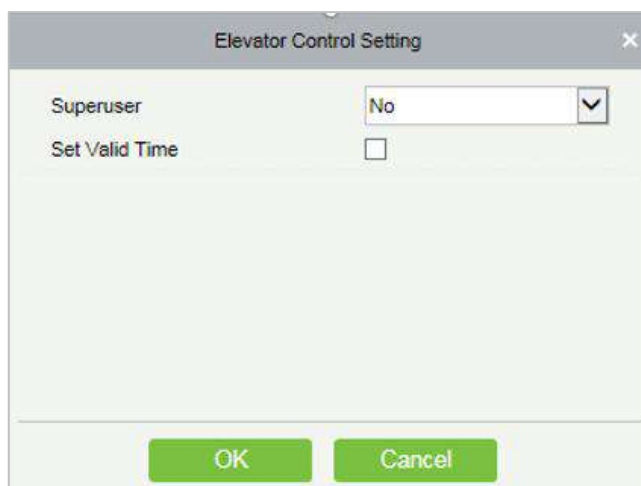
10.1.4.6.1 Delete from Levels

Step 1: Select Level (multiple) in the right list and click **Delete from levels** above the list, then click **OK** to delete the selected levels.

10.1.4.6.2 Elevator Control Setting


● Setting Levels for Selected Personnel:

Step 1: Select a person in the list on the left and click **Elevator Control Setting**. The following page is displayed:



The dialog box titled "Elevator Control Setting" contains two settings: "Superuser" with a dropdown menu set to "No", and "Set Valid Time" with an unchecked checkbox. At the bottom are "OK" and "Cancel" buttons.


Figure 10- 27 Elevator Control Setting

Step 2: In the left list, click **Add Personnel** under Operations to pop-up the Add Personnel box; select personnel (multiple) and click  to move it to the right selected list, then click **OK** to save and complete.

10.1.4.7 Set Access by Department

● Operating Steps:

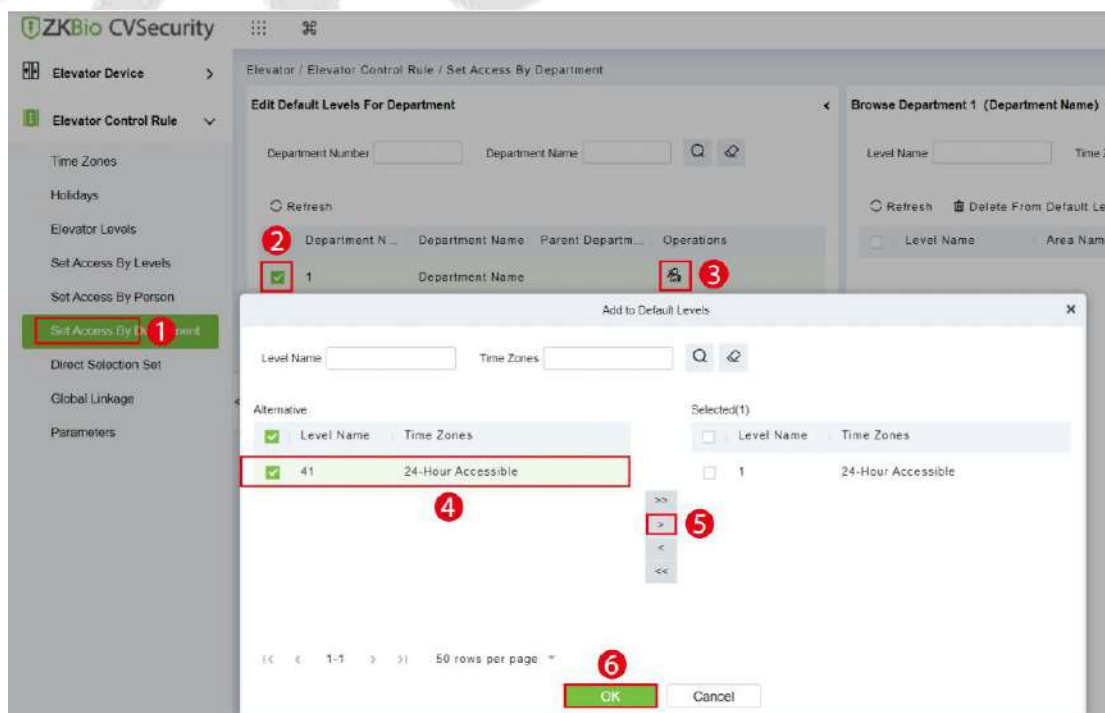Step 1: Add selected department to selected elevator levels or delete selected department from the elevator levels. The access of the staff in the department will be changed.



The screenshot shows the "Set Access by Department" dialog box. The main window has a sidebar with "Set Access By Department" highlighted. The dialog box has two panes: "Edit Default Levels For Department" and "Browse Department 1 (Department Name) D". The "Edit Default Levels For Department" pane contains a table with columns "Department Number", "Department Name", "Parent Department...", and "Operations". A row with "1" is selected. The "Browse Department 1 (Department Name) D" pane contains a table with columns "Level Name" and "Time Zones". A row with "41" and "24-Hour Accessible" is selected. The "Add to Default Levels" dialog box is open, showing the selected row in the "Alternative" list and the "Selected(1)" list. The "Add to Default Levels" dialog box has "OK" and "Cancel" buttons.

Figure 10- 28 Set Access by Department

10.1.4.7.1 Delete from Default Levels

Select Level (multiple) in the right list and click **Delete from levels** above the list, then click **OK** to delete the selected levels.

10.1.4.8 Direct Selection Set (EC16)

Assign the user the right to go directly to the floor, then the user can reach the target floor after verification.

Operating Steps:

Step 1: Click **Elevator Control Rule > Direct Selection Set**.

Step 2: Selected target personnel.

Step 3: Click  to add direct selection layer.

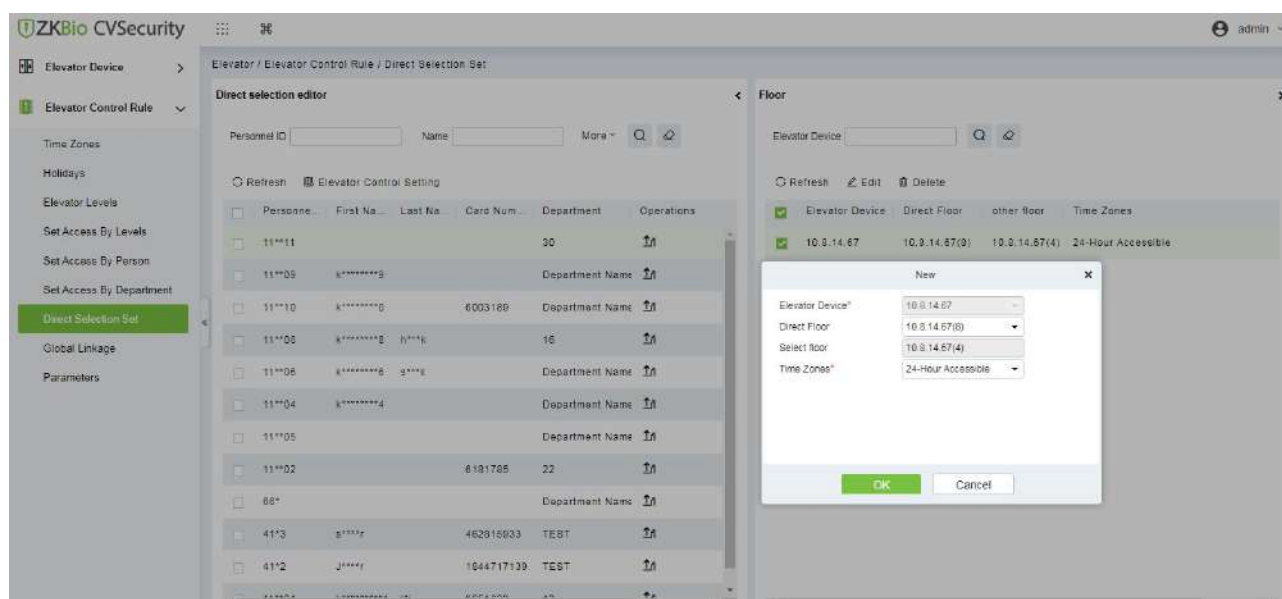


Figure 10- 29 Direct Selection Set

Parameter	Instructions
Elevator Device	Select the elevator device of the controller.
Direct Floor	After the verification is completed, you can reach the designated floor.
Select Floor	Floors that users can reach in addition to direct floors. After the first verification, the elevator can reach the direct floor. At this time, it needs to be verified again before the user can press the elevator button to reach the selected floor.
Time Zones	The period of time that the user is allowed to use the elevator.

Table 10-11 Description of Direct Selection Set

10.1.4.9 Global Linkage

The use method and scene of linkage are very flexible. After a specific event is triggered at an input point in the Elevator control system, a linkage action will be generated at the designated output point to control the events such as door opening, alarm and abnormality in the system.

10.1.4.9.1 New

●Operating Steps:

Step 1: In the **Elevator Control** module, select "Elevator Control Rules > Global Linkage".

Step 2: In the linkage setting interface, select and click the **Add** button, as shown in figure below, and refer to Table 9-11 for linkage parameter setting.

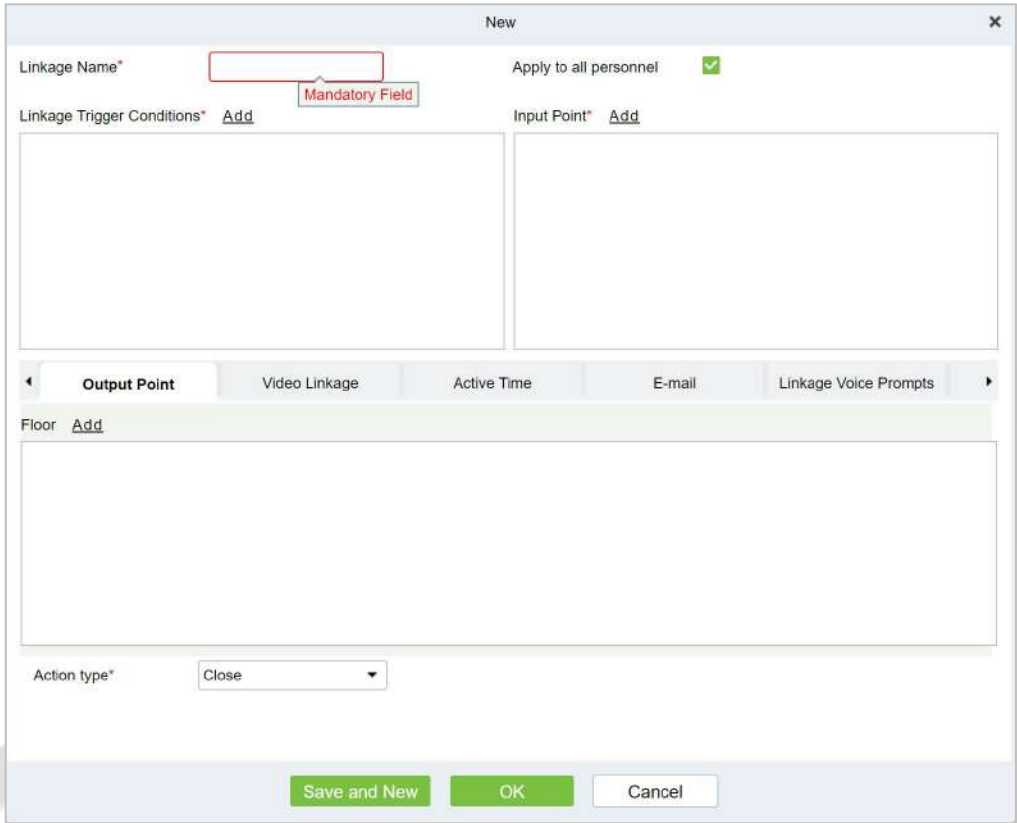


Figure 10- 30 New Linkage Configuration Interface

Parameter		How to set
Linkage Name		Custom setting linkage name for easy reference
Linkage Condition	Trigger	Select the condition that the linkage operation triggers, that is, the type of event generated by the selected device
Input Point		Select the input point to set the device input
Output Point		Select the output point to set the output of the device
Linkage Action Setting		Select and set linkage action, including device operation at output point, video linkage and mail

Table 10-12 New Linkage Parameter Setting Description

Step 5: Click **OK** to complete the linkage configuration.

10.1.4.9.2 Delete

Step 1: On the **Elevator** interface, select the required linkage from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected linkage.

Step 3: Click **Delete**, to ensure and delete the selected linkage from the list.

10.1.4.9.3 Enable/Disable

Select device, click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

10.1.4.9.4 Delete Personnel

Step 1: On the **Elevator** interface, select the required Personnel ID of the Global Linkage from the list.

Step 2: Click **Delete** or click on the  icon to delete the selected Personnel ID.

Step 3: Click **Delete**, to ensure and delete the selected Personnel ID from the list.

10.1.5 Parameters

● Operating Steps:

Step 1: Click **Elevator** > **Elevator** > **Parameters**:

Figure 10- 31 Parameters Interface

Parameter	How to set
Type of Getting Transaction	Start from the setting and efficient time, the system attempts to download new transactions every time interval.
Real Time Monitoring	When an access control event occurs, the personnel photo will pop up, set the size of the pop-up photos, the range is 80-500px.

Table 10-13 Parameter Setting Description

10.1.6 Elevator Control Reports

10.1.6.1 All Transaction

The system displays the latest three months transactions by default. As the data size of elevator access control event records is large, you can view elevator access control events as specified condition when querying.

10.1.6.1.1 Clear All Data

● Operating Steps:

Step 1: Click **Elevator Control Reports > All Transactions** to view all transactions:

Time	Device Name	Event Point	Floor	Event Description	Media File	Personnel ID	First Name	Last Name	Card Number	Department
2023-01-17 16:59:20	10.8.14.67	10.8.14.67	7	Direct button trigger		41*3	summer		462815933	TEST
2023-01-17 16:59:20	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open		41*3	summer		462815933	TEST
2023-01-17 16:59:16	10.8.14.67	10.8.14.67	7	Direct button trigger		41*3	summer		462815933	TEST
2023-01-17 16:59:18	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open		41*3	summer		462815933	TEST
2023-01-17 16:59:16	10.8.14.67	10.8.14.67	7	Direct button trigger		41*3	summer		462815933	TEST
2023-01-17 16:59:16	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open		41*3	summer		462815933	TEST
2023-01-17 16:59:14	10.8.14.67	10.8.14.67	7	Direct button trigger		41*3	summer		462815933	TEST
2023-01-17 16:59:14	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open		41*3	summer		462815933	TEST
2023-01-17 16:59:02	10.8.14.67	10.8.14.67	7	Direct button trigger		41*3	summer		462815933	TEST
2023-01-17 16:59:02	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open		41*3	summer		462815933	TEST
2023-01-17 16:59:58	10.8.14.67	10.8.14.67	7	Direct button trigger		41*3	summer		462815933	TEST
2023-01-17 16:59:58	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open		41*3	summer		462815933	TEST
2023-01-17 16:15:16	10.8.14.67	10.8.14.67	-1,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31	Superuser Close Buttons		41*3	summer		462815933	TEST

Figure 10- 32 All Transaction Interface

Step 2: Click **Clear All Data** to pop up prompt and click **OK** to clear all transactions.

10.1.6.1.2 Export

You can export all transactions in Excel, PDF, CSV format.

All Transactions

Time	Device Name	Event Point	Floor	Event Description	Personnel ID	First Name	Last Name	Card Number	Department	Reader Name	Verification Mode	Area
2023-01-17 16:59:20	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:20	10.8.14.67	10.8.14.67	7	Direct button trigger	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:18	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:18	10.8.14.67	10.8.14.67	7	Direct button trigger	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:16	10.8.14.67	10.8.14.67	7	Direct button trigger	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:16	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:14	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:14	10.8.14.67	10.8.14.67	7	Direct button trigger	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:02	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:59:02	10.8.14.67	10.8.14.67	7	Direct button trigger	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:58:58	10.8.14.67	10.8.14.67	7	Direct button trigger	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:58:58	10.8.14.67	10.8.14.67	1,4,17,23	Normal Verify Open	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name
2023-01-17 16:15:16	10.8.14.67	10.8.14.67	1,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,23,24,25,26,27,28,29,30,31	Superuser Close Buttons	4143	summer		462815933	TEST	10.8.14.67-Reader1	Card	Area Name

Figure 10- 33 All Transaction Export Interface

10.1.6.2 All Exception Events

10.1.6.2.1 Clear All Data

●Operating Steps:

Step 1: Click **Reports > All Exception Events** to view exception events in specified condition. The options are same as those of **All Transactions**.

Figure 10- 34 All Exception Events Interface

Step 2: Click **Clear All Data** to pop up prompt, click **OK** to clear all exception events.

10.1.6.2.2 Export

Step 1: You can export all exception events in Excel, PDF, CSV format.

Time	Area	Device	Event Point	Event Description	Card Number	Personnel ID	First Name	Last Name	Department	Reader Name	Verification Mode	Remark
2017-12-15 10:29:11	Area Name	192.168.214.65-Reader	192.168.214.65-Reader	Disabled Card	9050900	1	Jerry	Wang	General	192.168.214.65-Reader	Card or Fingerprint	
2017-12-15 10:29:14	Area Name	192.168.214.65-Reader	192.168.214.65-Reader	Disabled Card	4481253	2940	Sherry	Yang	General	192.168.214.65-Reader	Card or Fingerprint	
2017-12-15 10:29:09	Area Name	192.168.214.65-Reader	192.168.214.65-Reader	Disabled Card	13260079	3	Leo	Hou	General	192.168.214.65-Reader	Card or Fingerprint	
2017-12-15 10:29:09	Area Name	192.168.214.65-Reader	192.168.214.65-Reader	Operate Interval too Short	13260079	3	Leo	Hou	General	192.168.214.65-Reader	Card or Fingerprint	

Figure 10- 35 All Exception Events Export Interface

10.1.6.3 Access Rights by Floor

●Operating Steps:

Step 1: Click **Reports > Access Rights by Floor**, the data list in the left side shows all floors in the system, select a floor, the personnel having access levels to the floor will display on the right data list.

Figure 10- 36 Access Right by Floor Interface

10.1.6.3.1 Export

Step 1: You can export all the personnel having access levels to the floor data in Excel, PDF, CSV format

192.168.218.65-1(1) Opening Personnel

Personnel ID	First Name	Last Name	Department
2940	Sherry	Yang	Hotel
1	Jerry	Wang	General
2	Lucky	Tan	Development Department
3	Leo	Hou	Financial Department
5	Necol	Ye	Marketing Department
6	Amber	Lin	Financial Department
8	Glori	Liu	Marketing Department
9	Lilian	Mei	Development Department

Figure 10- 37 Access Right by Floor Export Interface

10.1.6.4 Access Rights by Personnel

● Operating Steps:

Step 1: Click **Reports > Access Rights by Personnel**, the data list in the left side shows all doors in the system, select personnel, the personnel having access levels to the door will display on the right data list.

Elevator / Elevator Control Reports / Access Rights By Personnel

Access Rights By Personnel

Personnel ID Name More Q Q

Refresh

Personnel ID	First Name	Last Name	Depart...
9999	K-TEST		Departme
12135			Departme
12134	name1		hr
1119	multibio		Departme
555	fo		Departme
2222	ygv		Departme
5	yyyy		Departme

Floor

Refresh Export

Floor Number	Floor Name
--------------	------------

Figure 10- 38 Access Right by Personnel Interface

10.1.6.4.1 Export

Step 1: You can e export all the floor information in Excel, PDF, CSV format.

2940(Sherry) Having Level to Access

Floor Number	Floor Name
1	192.168.218.65-1
2	192.168.218.65-2
3	192.168.218.65-3
4	192.168.218.65-4
5	192.168.218.65-5
6	192.168.218.65-6
7	192.168.218.65-7
8	192.168.218.65-8
9	192.168.218.65-9
10	192.168.218.65-10

Figure 10- 39 Access Right by Personnel Export Interface

10.1.6.5 First In and Last Out

Click **Elevator Controls Reports > First In And Last Out** to view the First and the Last time interval.

10.1.6.5.1 Clear All Data

Click **Clear All Data** to pop up prompt and click **OK** to clear all transactions.

10.1.6.5.2 Export

You can export all transactions in Excel, PDF, CSV format.

10.1.7 Elevator Integration

10.1.7.1 Service Config

Login to the ZKBio CVSecurity Software, and click **Elevator Module**, click **Elevator Integration > Service Config > New**, and fill in the information.

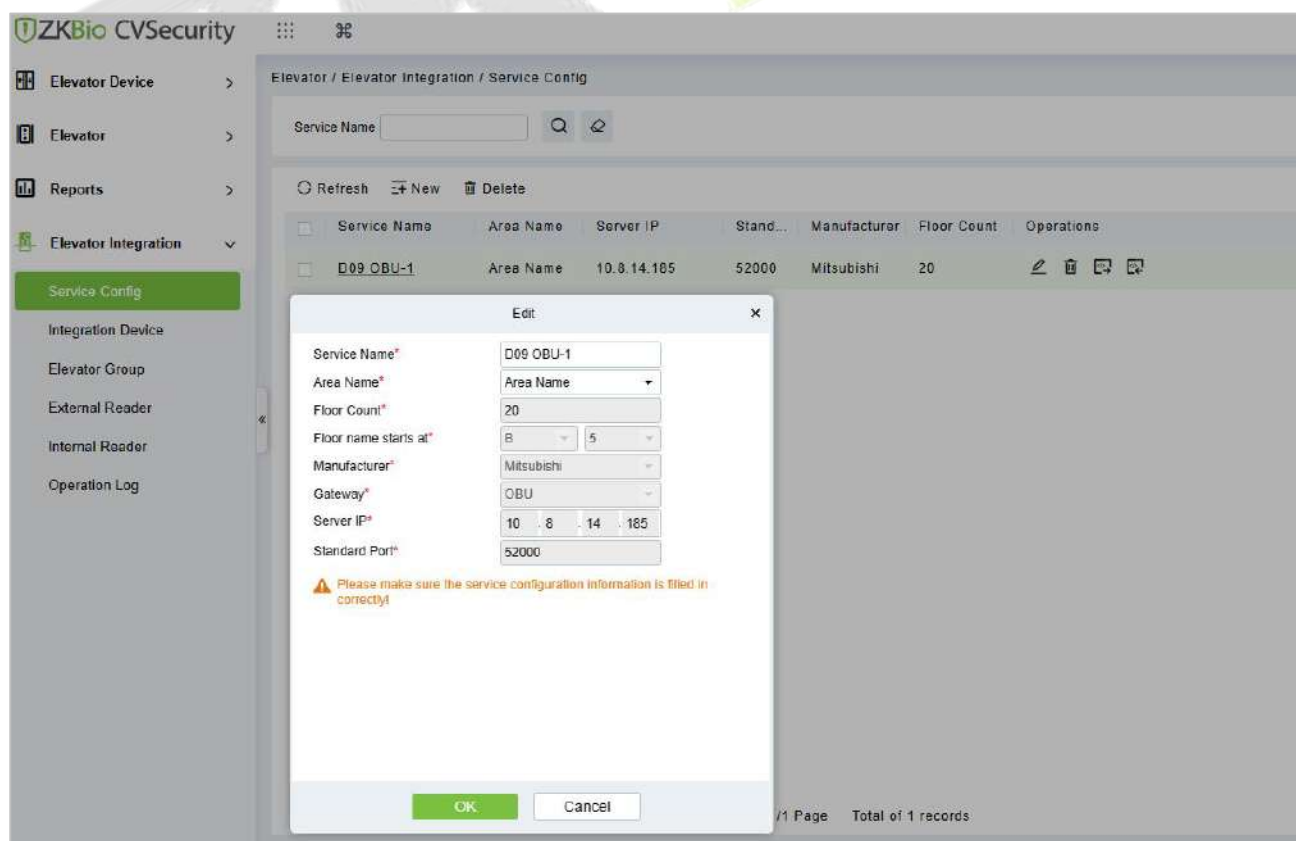


Figure 10- 40 New Service Config Interface

Parameter	How to set
Service Name	User-defined.
Area Name	Based on the actual situation.
Floor Count	Based on the actual situation.
Floor name starts at	Based on the actual situation.
Manufacturer	Mitsubishi.
Gateway	ELSGW/OBU.
Server IP	The computer IP where the ELSGW Emulator is installed.
Standard Port	52000(default).

Table 10-14 Parameter Setting Description

Click **Set external global mask**, and select the arrive situation according to the actual situation.

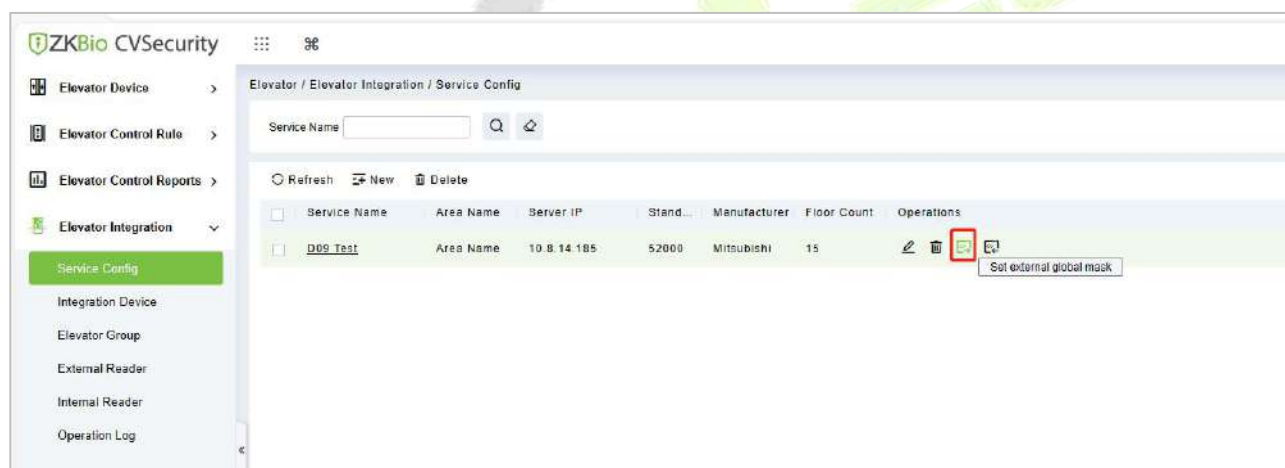


Figure 10-41 Set External Global Mask Interface

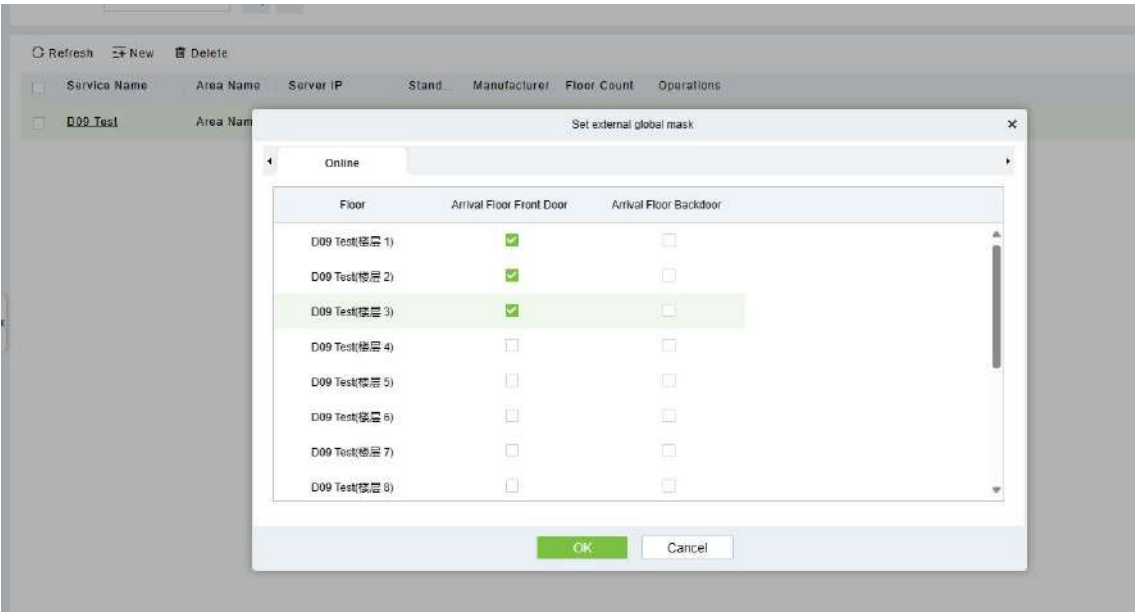


Figure 10- 42 Set External Global Mask setting Interface

Click **Set internal global mask**, and select the internal situation according to the actual situation.



Figure 10- 43 Set Internal Global Mask Interface

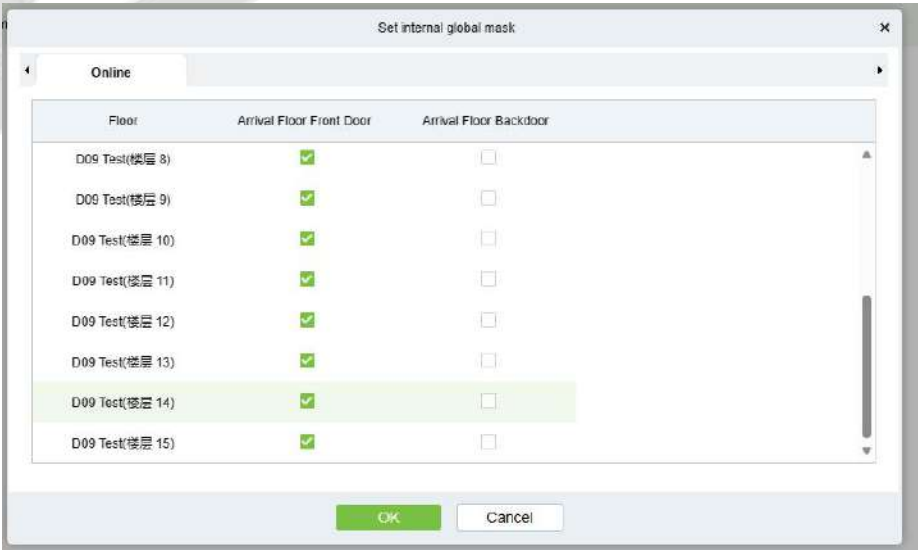


Figure 10- 44 Set Internal Global Mask Setting Interface

10.1.7.2 Integration Device

In the Elevator > Elevator Integration > Integration Device> New, add the related access control devices.

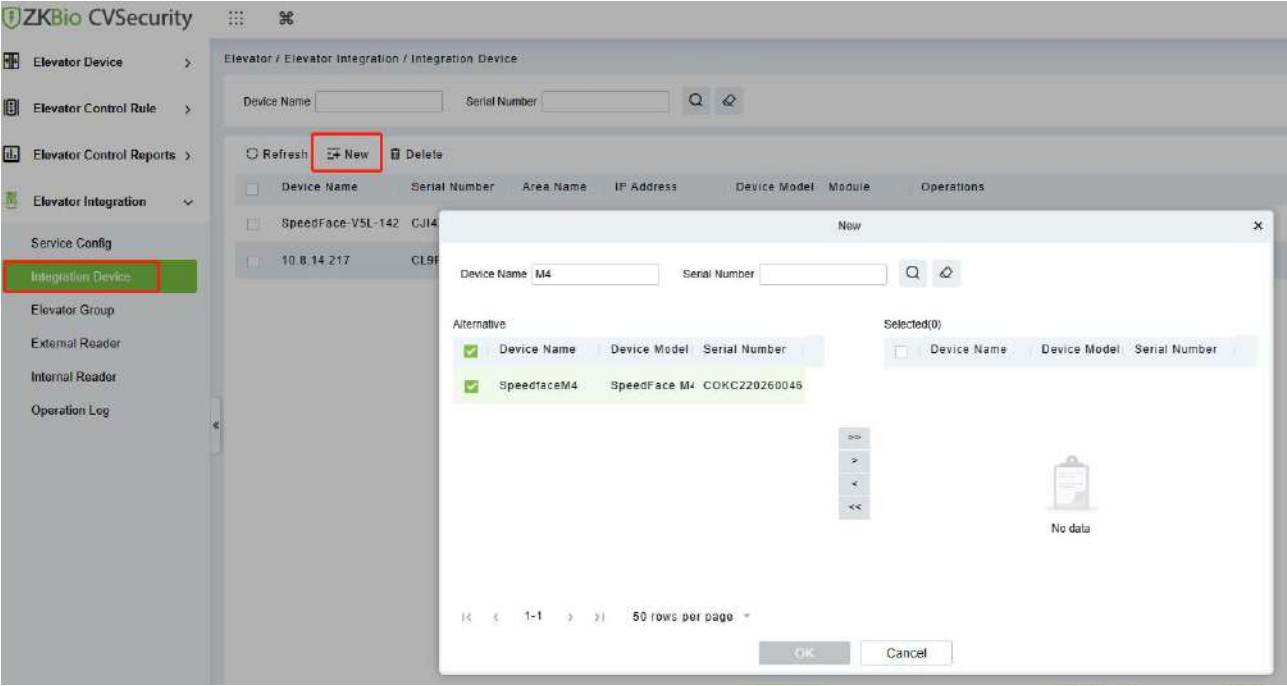


Figure 10- 45 New Intergration Device Interface

10.1.7.3 Elevator Group

In the **Elevator > Elevator Integration > Elevator Group> New**, fill in the group name and group number, and select the service that we just added.

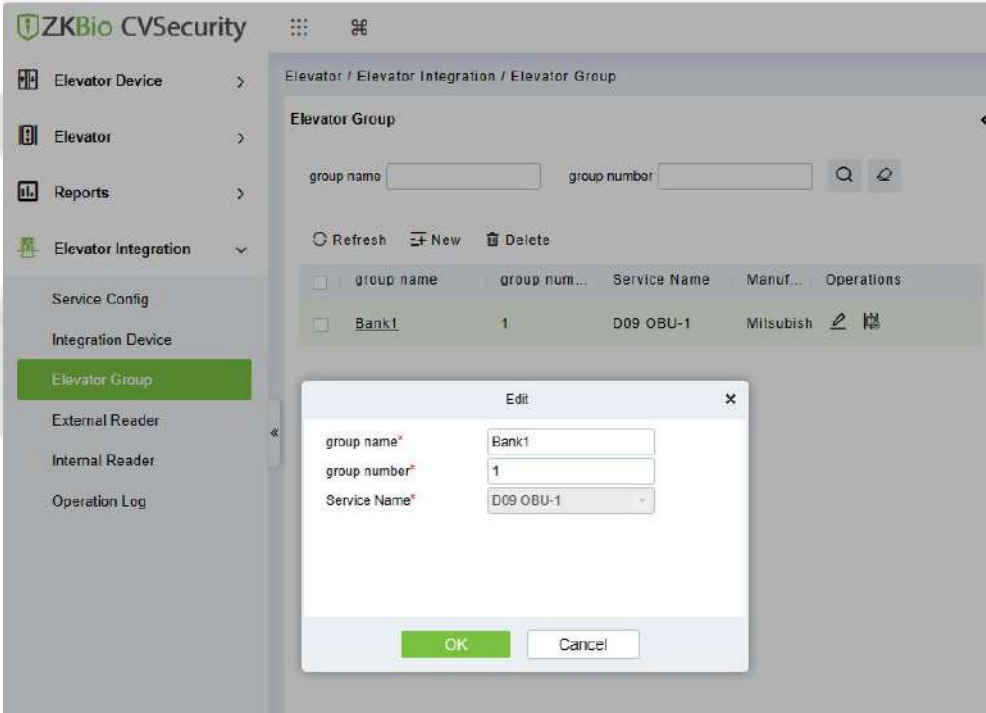


Figure 10- 46 New Elivator Group Interface

Then add the Elevator for the elevator group.

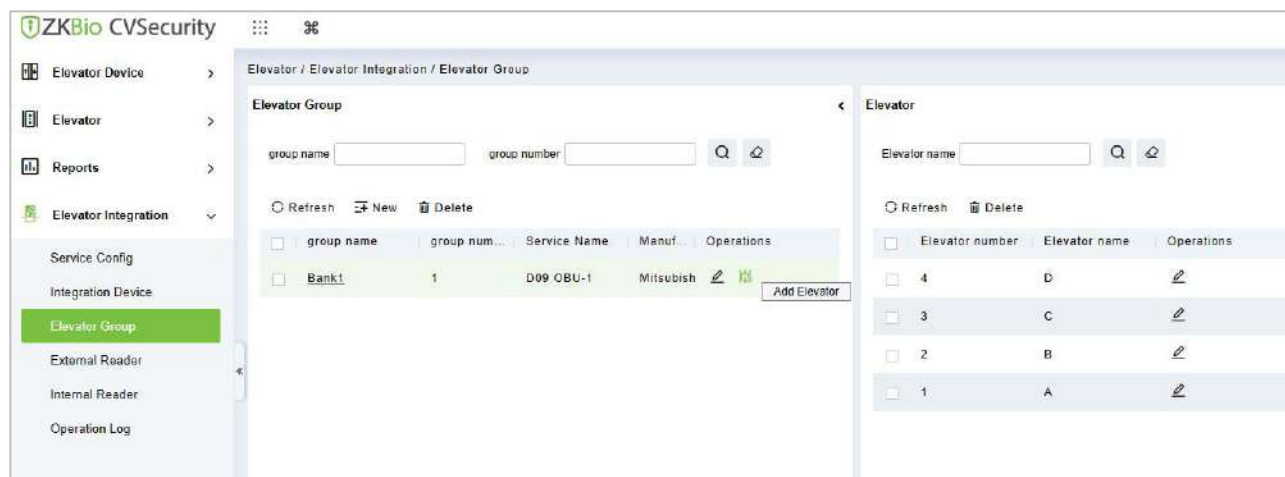


Figure 10- 47 Elivator Group Interface

10.1.7.4 External Reader

External Reader refers to the reader installed outside the elevator, generally used for DOP/HOP.

In the Elevator > Elevator Integration > External Reader> New, and fill in the information.

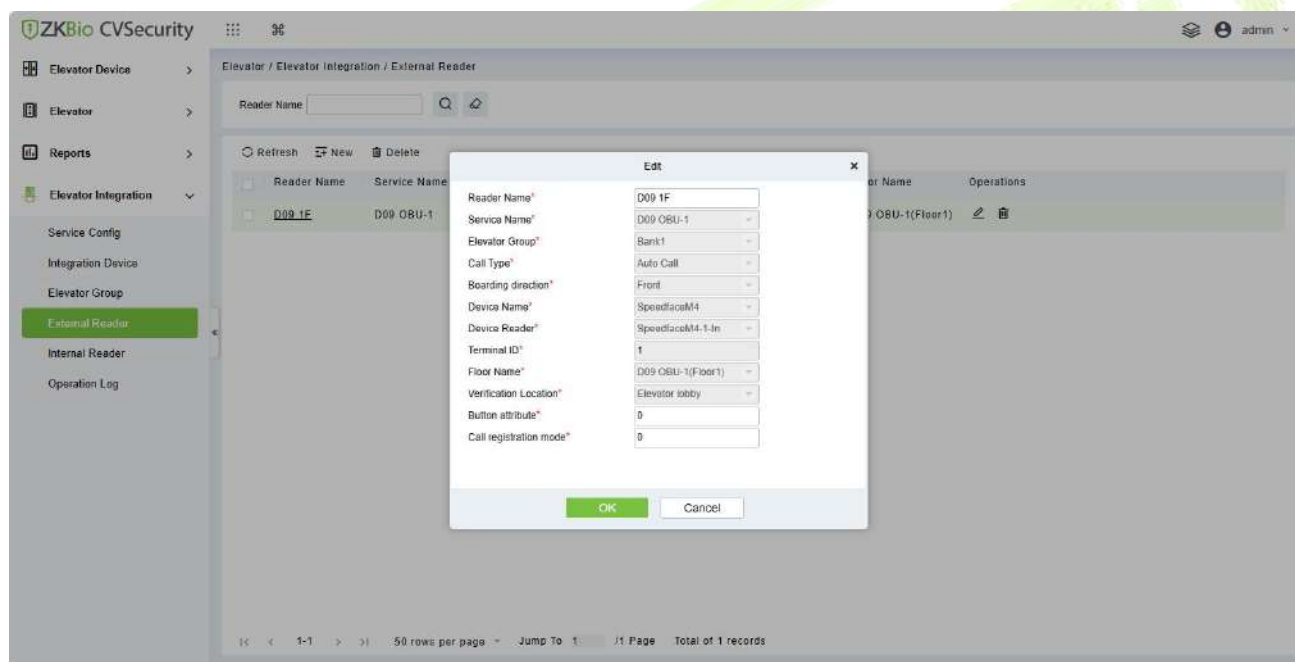


Figure 10- 48 New External reader Interface

Parameter	How to set
Reader Name	User-defined.
Service Name	Select corresponding service that added in Service Config.
Elevator Group	Select corresponding elevator group that added in Elevator Group.
Call Type	Option 1. Manual Call: which means manually calling the destination floor. Option 2: Auto Call, which means the system automatically calls the user's

	default floor.
Boarding direction	Based on the actual situation: Front / Rear .
Device Name	User-defined.
Device Reader	Select the integration device based on the actual situation.
Terminal ID	User-defined.
Floor Name	Select the floor according to the actual situation.
Verification Location	Based on the actual situation: Elevator lobby / Entrance / Room / Security gate.
Button attribute	User-defined.
Call registration mode	User-defined.

Table 10-15 Parameter Setting Description

10.1.7.5 Internal Reader

Internal Reader refers to the reader installed outside the elevator, generally used for COP.

Click **Elevator > Elevator Integration > Internal Reader > New**, and fill in the relevant information.

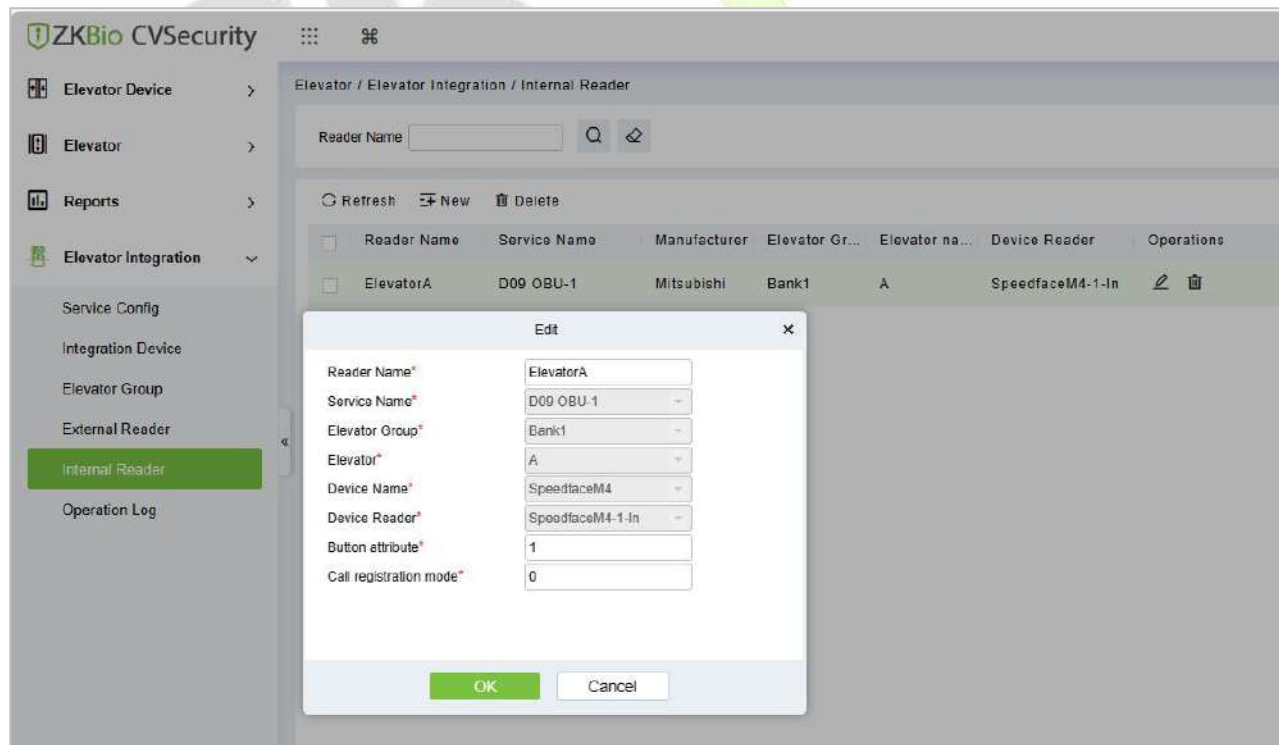


Figure 10- 49 New Internal Reader Interface

Parameter	How to set
Reader Name	User-defined.
Service Name	Select corresponding service that added in Service Config.
Elevator Group	Select corresponding elevator group that added in Elevator Group.
Elevator	Select the elevator based on the actual situation.
Device Name	User-defined.
Device Reader	Select the integration device based on the actual situation.
Button attribute	User-defined.
Call registration mode	User-defined.

Table 10-16 Parameter Setting Description

ZKBio
CVSecurity-Mitsub

For more information, please refer to the following materials

11 Consumption (Offline)

The devices for which the offline consumption module is applicable are Promerc 10, Peomerc 20.

11.1 Consumption System

This module allows the user to set up a consumption system with the device and realize their functions. The device can be set as either a "Consumer Machine", a "Cashier Machine" or a "Subsidy Machine". The "Consumer machine" type combines various consumption modes to meet the diversified consumption requirements such as fixed value mode or amount mode. The "Cashier Machine" type realizes the device recharge and refund function. The "Subsidy machine" type is used to receive allowances/subsidies. This module will collect the data from the device and summarize it on the various consumption reports. It can also perform various operations like issue card, card return, card suspend and resume, and other operations through the card reader connected to the software.

11.1.1 Consumption Basic Management

11.1.1.1 Piecewise Fixed Value

Piecewise Fixed value is the value and validity of a card which is supposed to be used on the consumer device.

Click **Consumption Basic Management > Piecewise Fixed Value** as shown in the following figure:

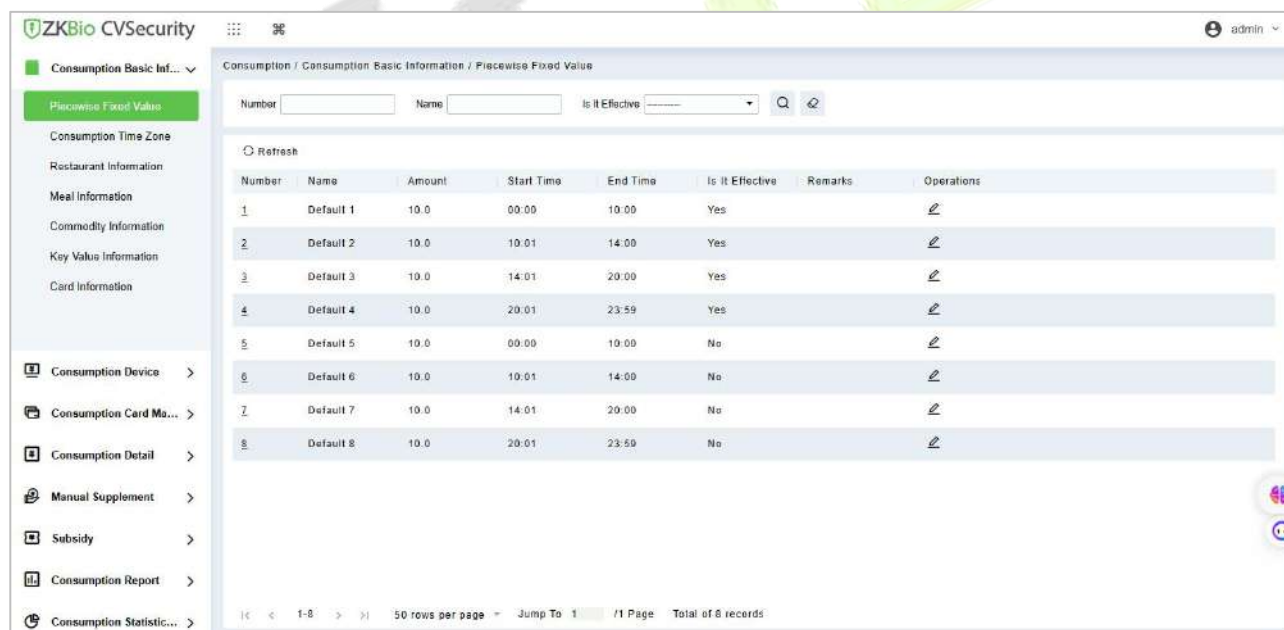


Figure 11- 1

●Edit:

By default, there are eight values, click **Edit** on the operation column to open the modification dialog box.

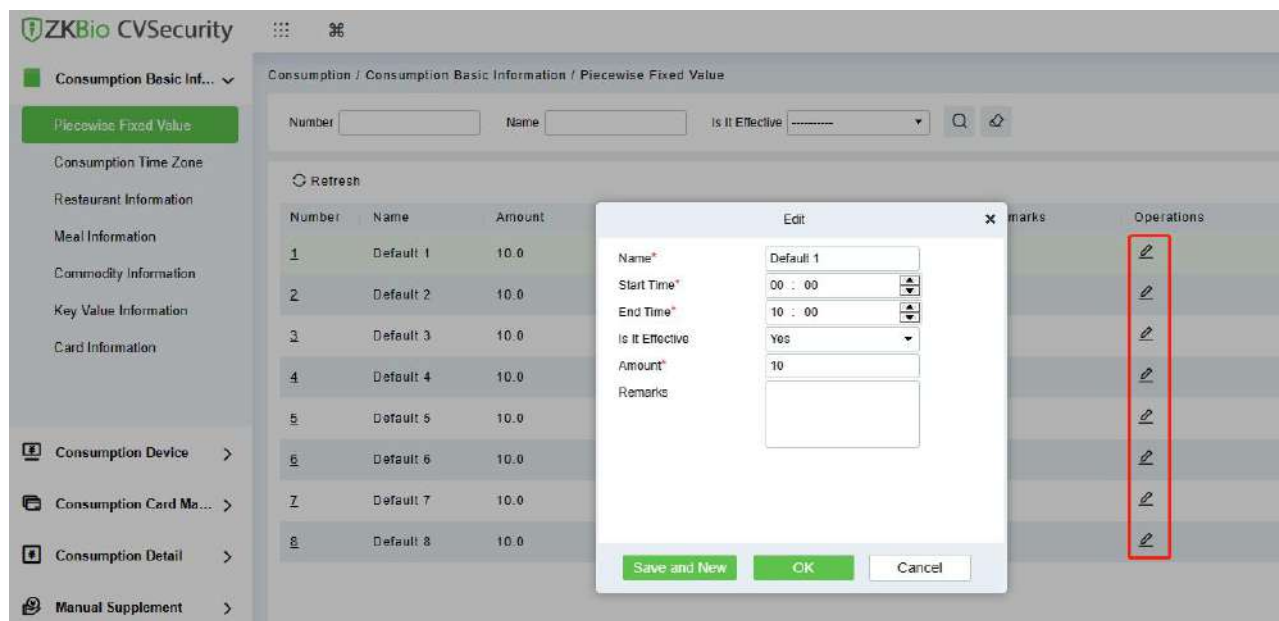


Figure 11- 2

You can provide the desired information in the dialog box which include: **Name**, **Start time**, **End time**, **Whether Effective** (status of the card), **Amount**, and **Remarks**.

11.1.1.2 Consumption Time Zone

Click **Consumption Basic Management > Consumption Time Zone** as shown in the following figure:

By default, the system has some Consumption Time zones, you can select and edit according to your preferences.

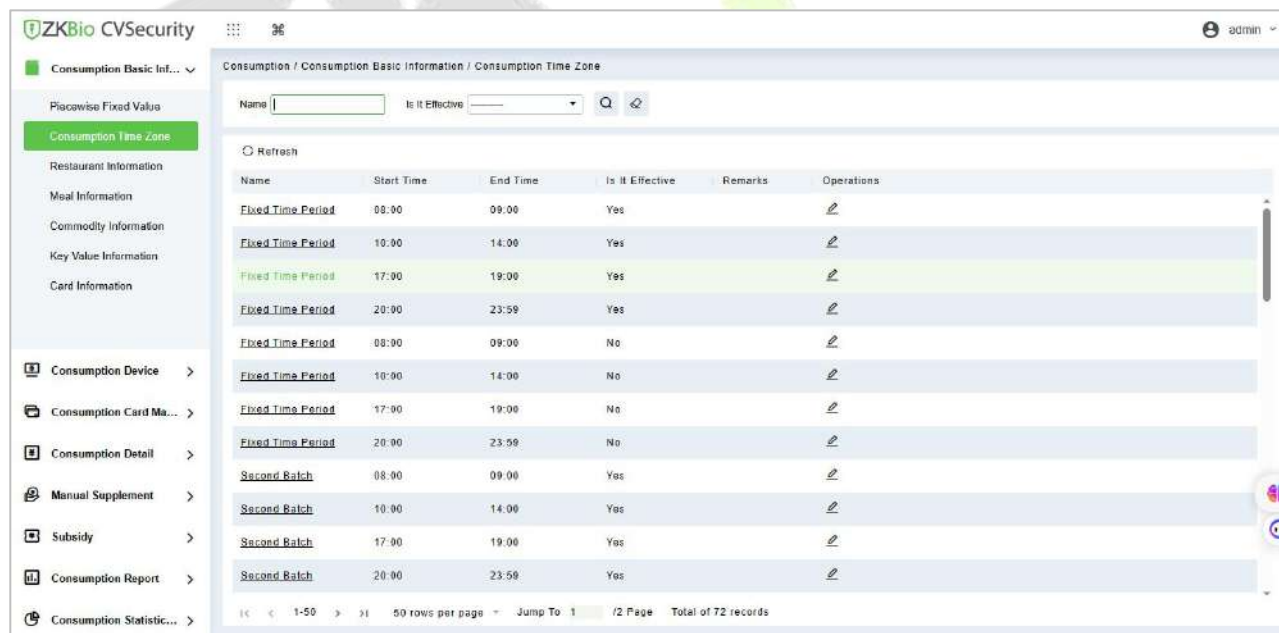


Figure 11- 3

● Edit:

Click **Edit** column on the operation column to open the modification dialog box.

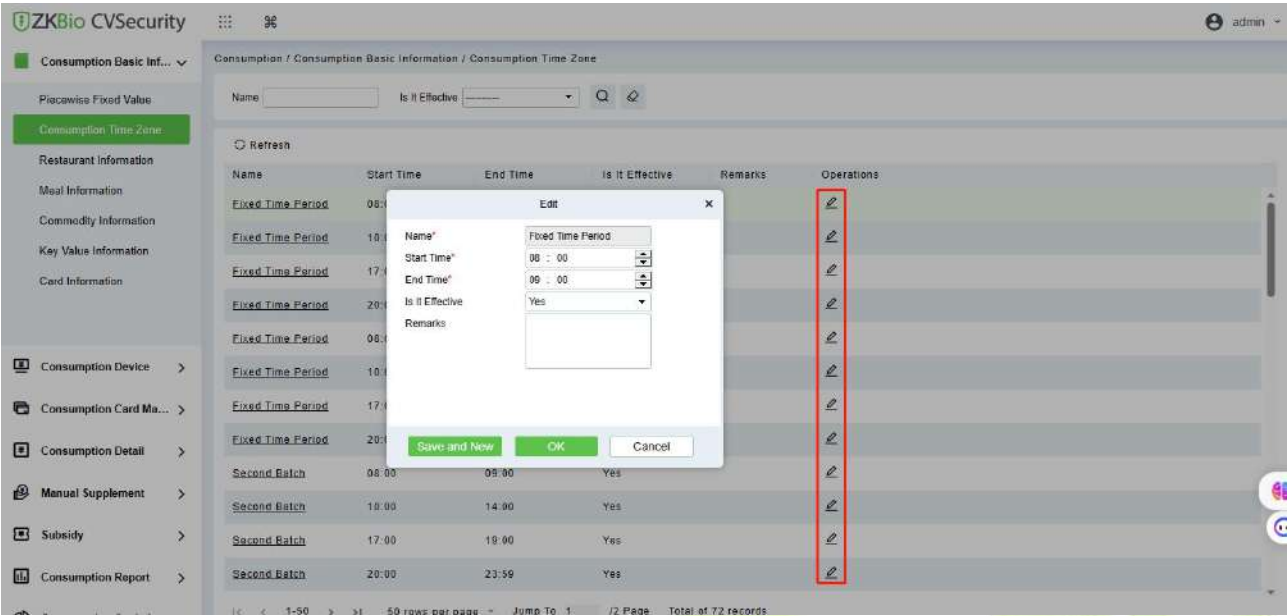


Figure 11- 4

On the dialog box, you can select the required **Start time**, **End time**, **Whether Effective**, and **Remarks** (optional), as shown in the above figure. After providing the information, click **OK**.

11.1.1.3 Restaurant Information

By default, a Restaurant name is already added, you can edit it and also add new ones.

Click **Consumption Basic Management > Restaurant Information**, shown as following figure:

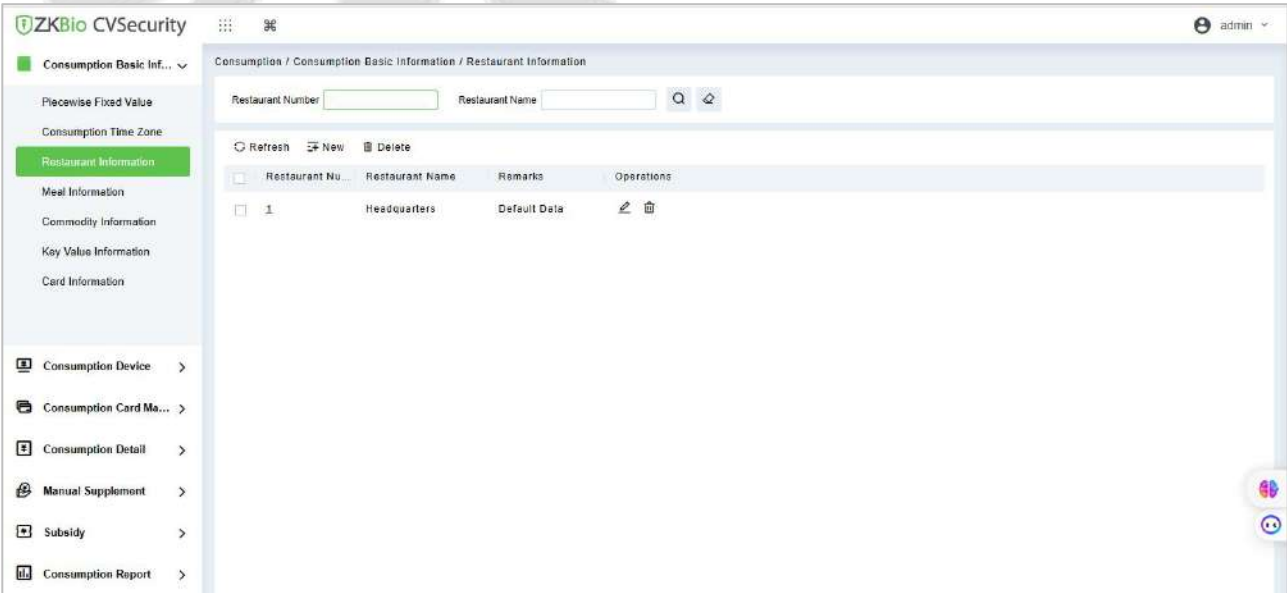


Figure 11- 5

●New:

Click **New**, to add a restaurant.

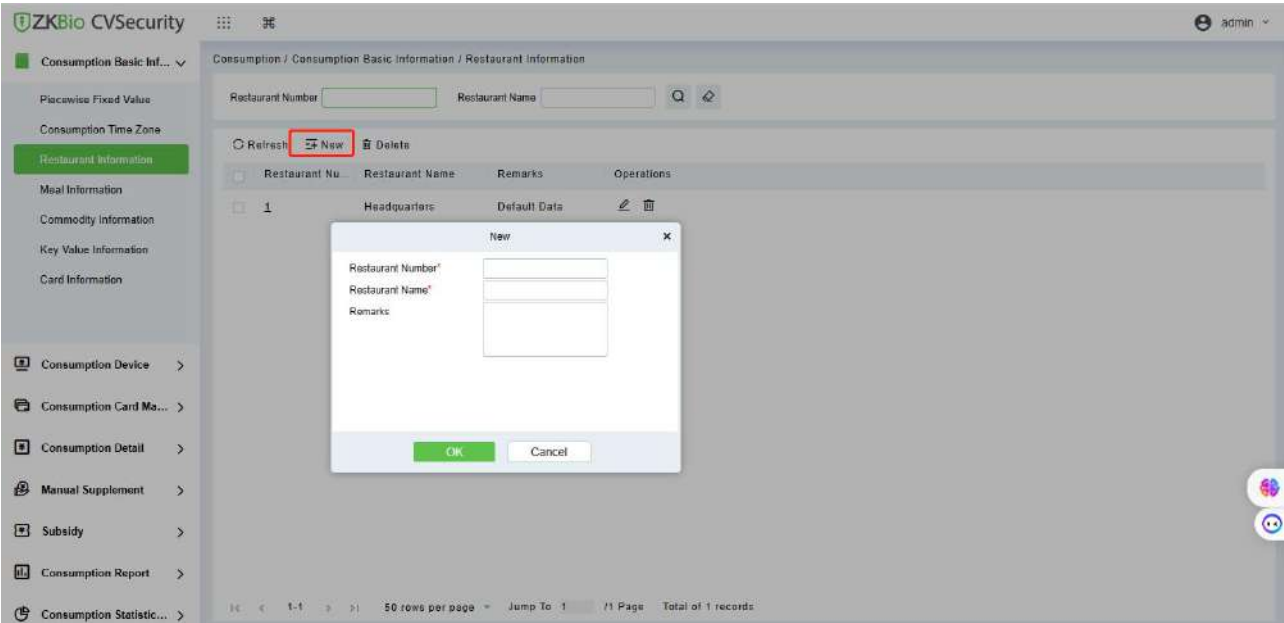


Figure 11- 6

Type the preferred Restaurant number, Restaurant name, and Remarks (optional) information, and then click **OK** to save and close or click **Save and New** for continue adding.

●Delete:

You can directly click **Delete** on the required hotel to remove it from the system.



Figure 11- 7

For deleting in batch, select the required hotel(s) as shown below and click **Delete**. The default restaurant number 1 cannot be deleted.



Figure 11- 8

●Edit:

Click **Edit** in the operation column to open the modification dialog box.

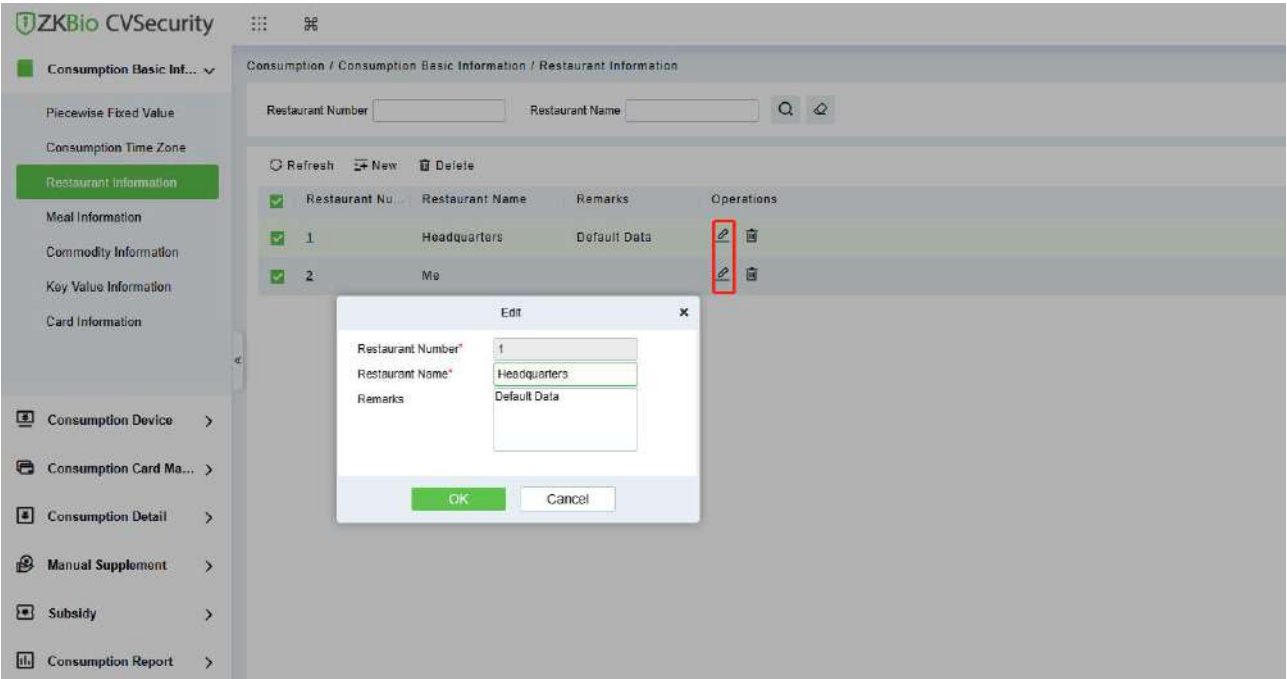


Figure 11- 9

11.1.1.4 Meal Information

Click **Consumption Basic Management > Meal Information**, shown as following figure:

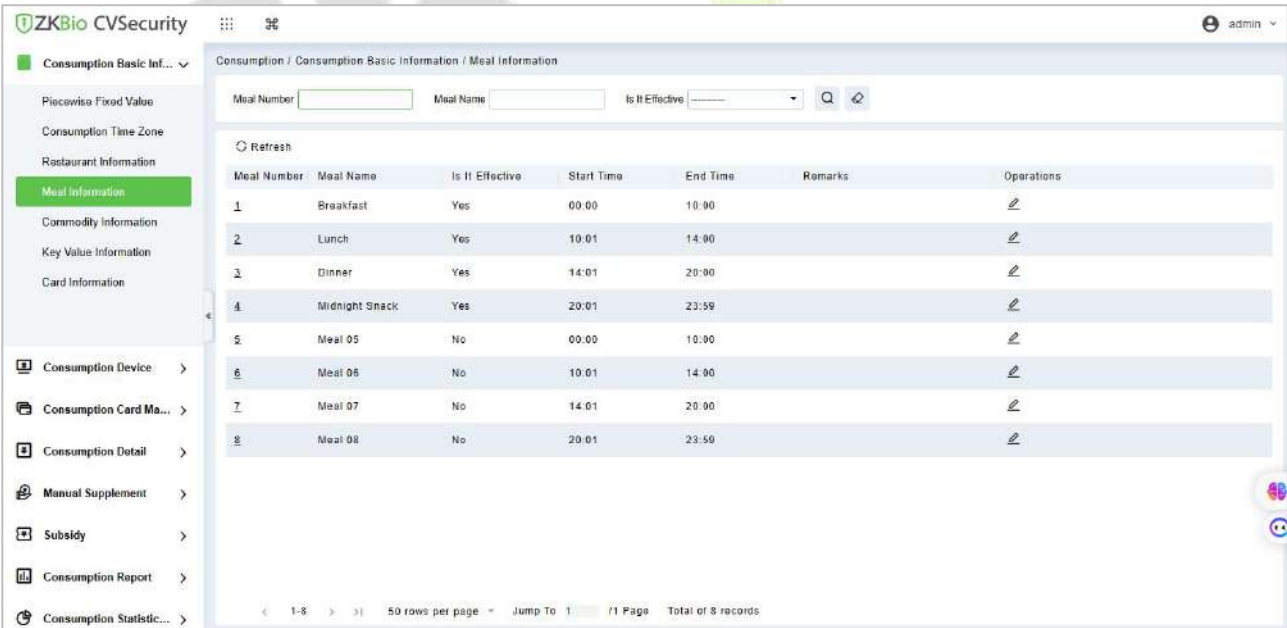
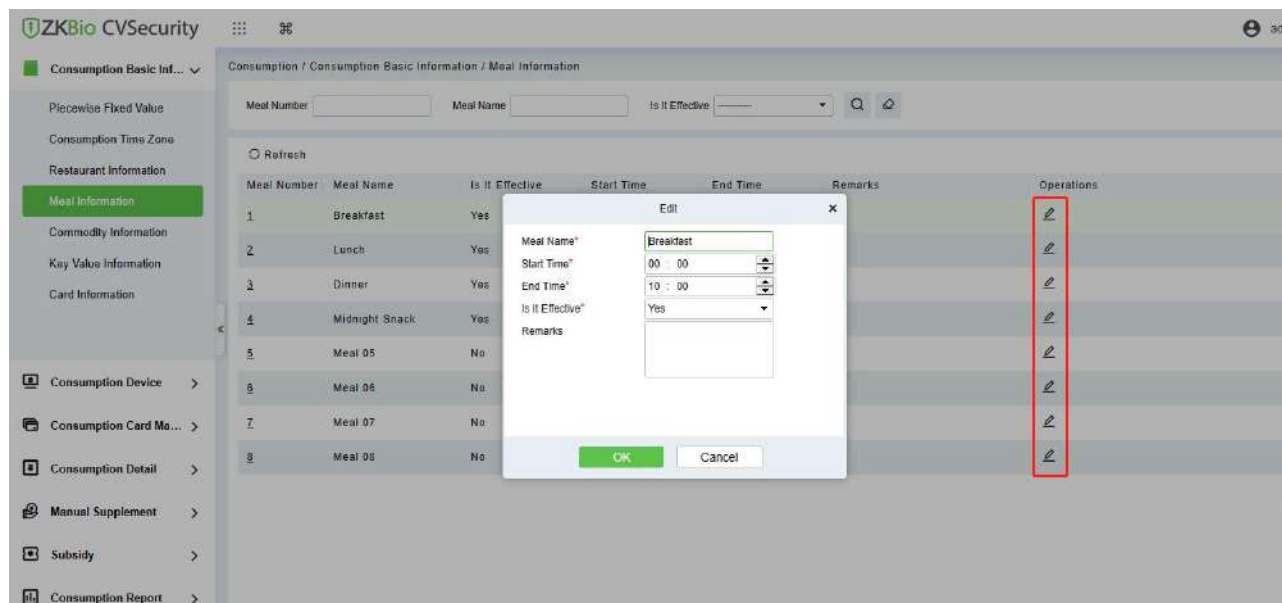


Figure 11- 10

●Edit:

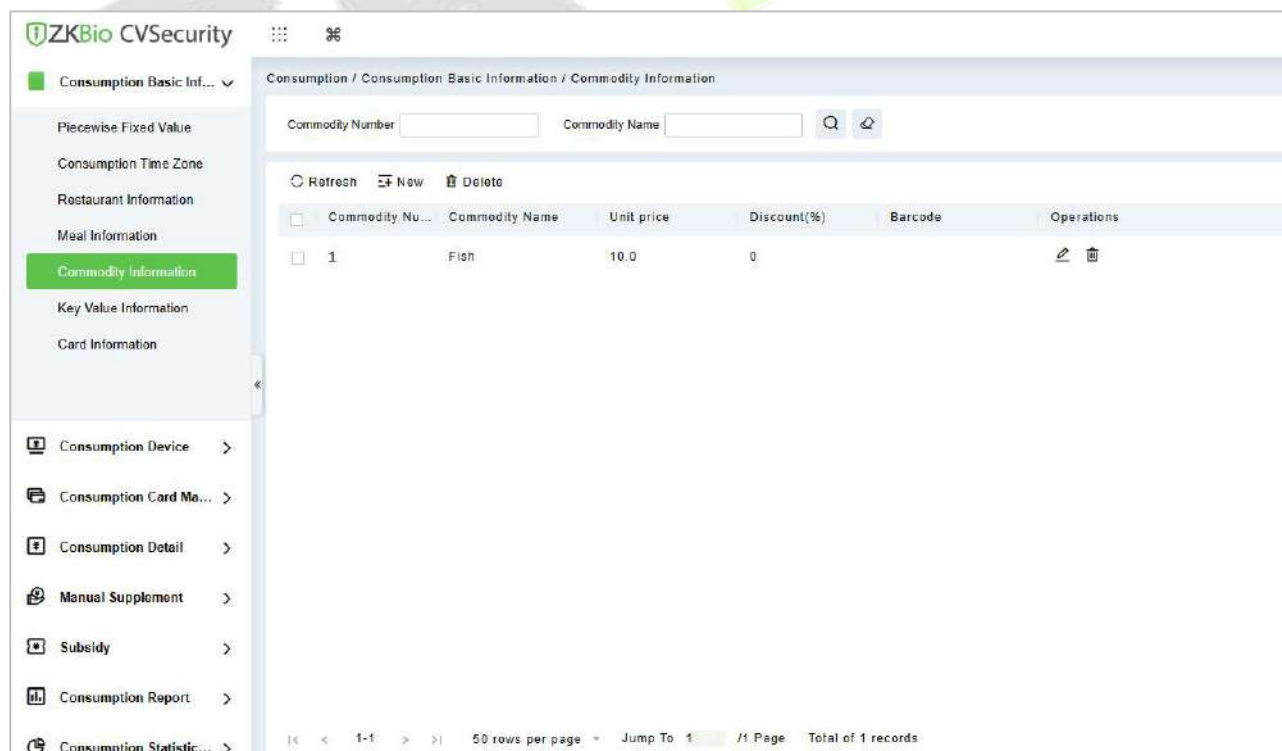
Click on the meal number of list and the edit column of the operation to pop up the modification dialog box.

**Figure 11- 11**

Enter the information in the dialog box which include: **Meal Name**, **Start Time**, **End time**, **Whether Effective** (status), **Remarks** (optional) and then click **OK** to save.

11.1.1.5 Commodity Information

Click **Consumption Basic Management > Commodity Information** as shown in the following figure:

**Figure 11- 12**

●New:

Click **New** to add, enter required **Commodity number**, **Commodity Name**, **Barcode**, **Unit price**, **Discount** in the dialog box, and then click **OK** to save and close or click **Save and New** for continue adding.

Note: If you put 0 in **Discount**, then the product is not discounted.

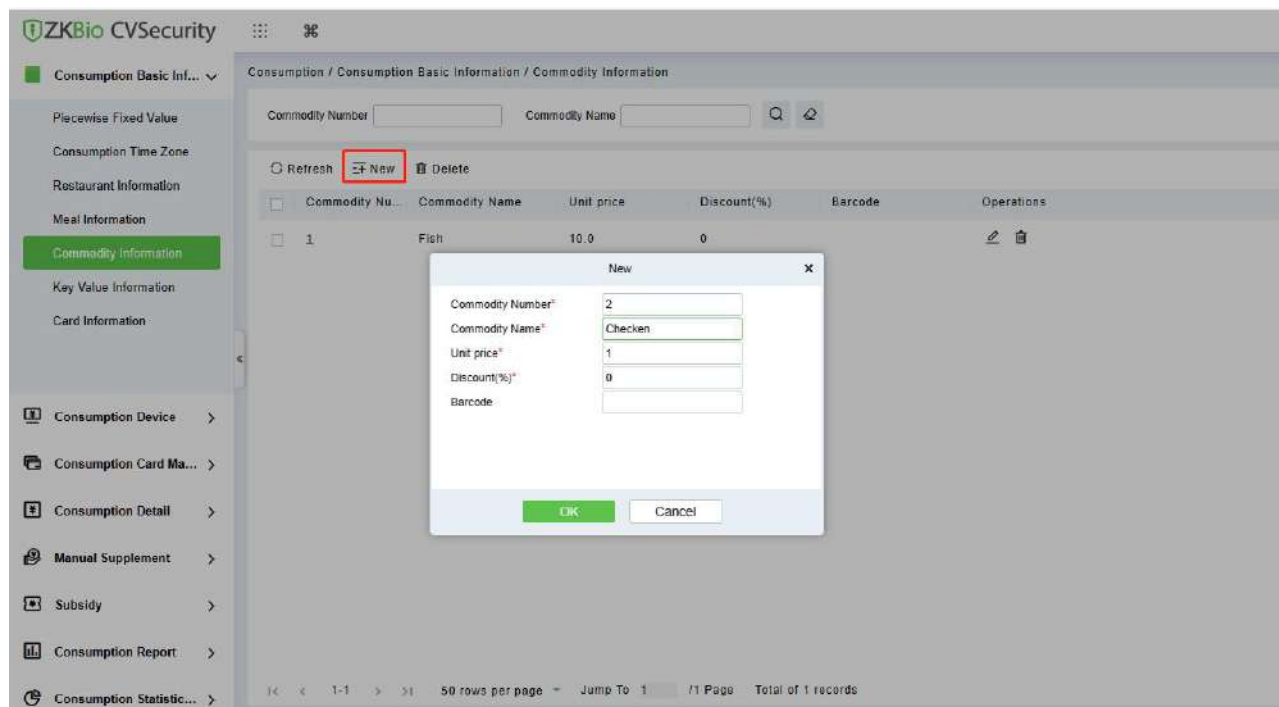


Figure 11- 13

●Delete:

You can directly click **Delete** on the required Commodity to remove it from the system.

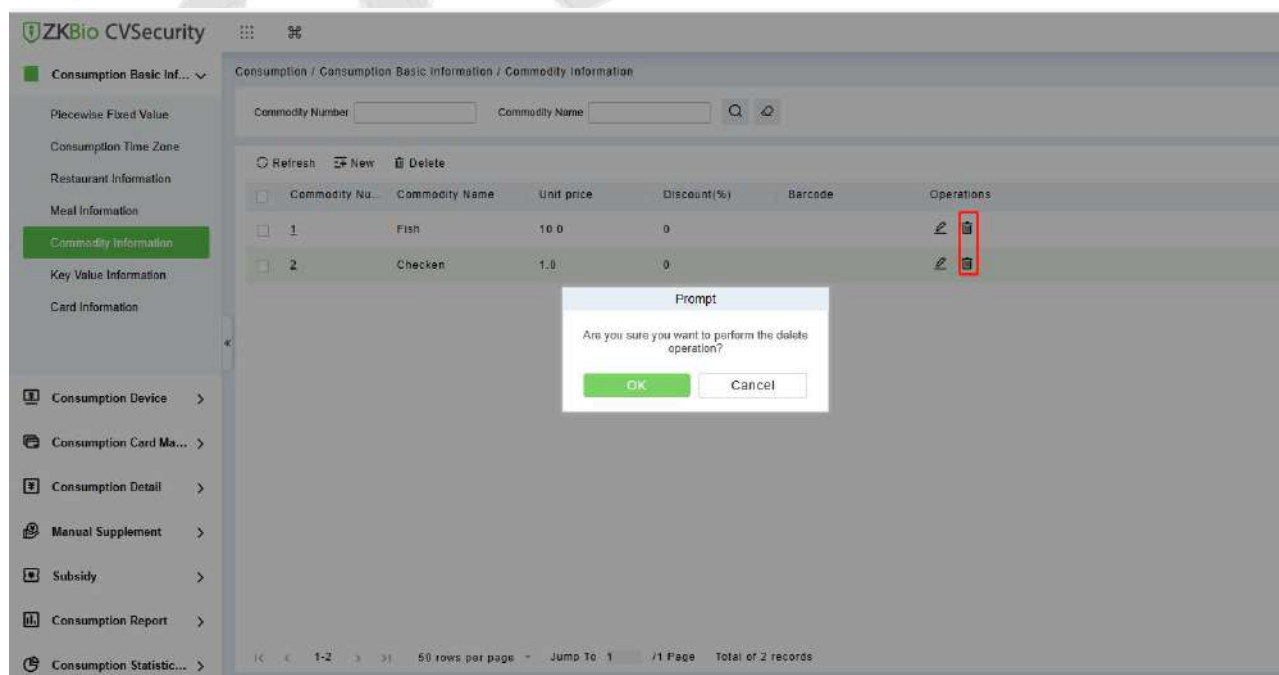


Figure 11- 14

For deleting in batch, select the required Commodity(s) as shown below and click **Delete**.

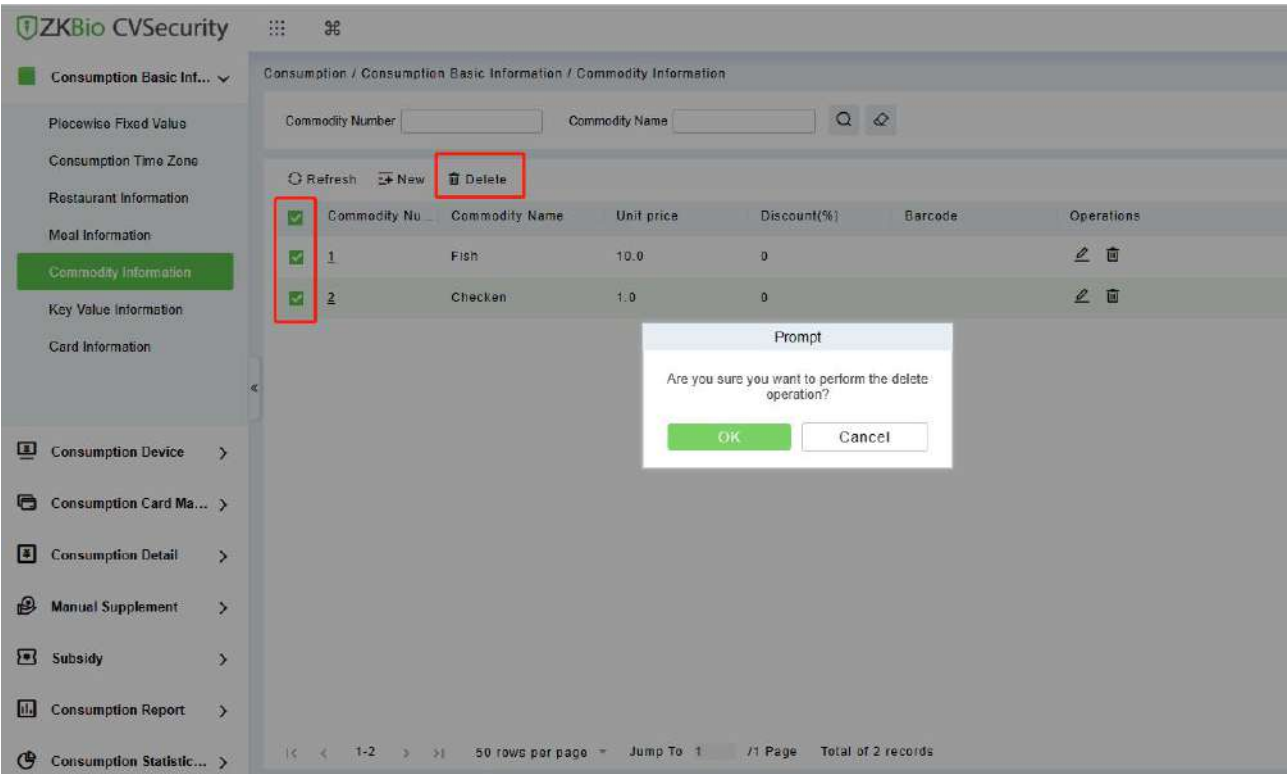


Figure 11- 15

11.1.2 Key Value Information

Click **Consumption Basic Management > Key Value Information** to enter the unit value in the consumer device as shown below:

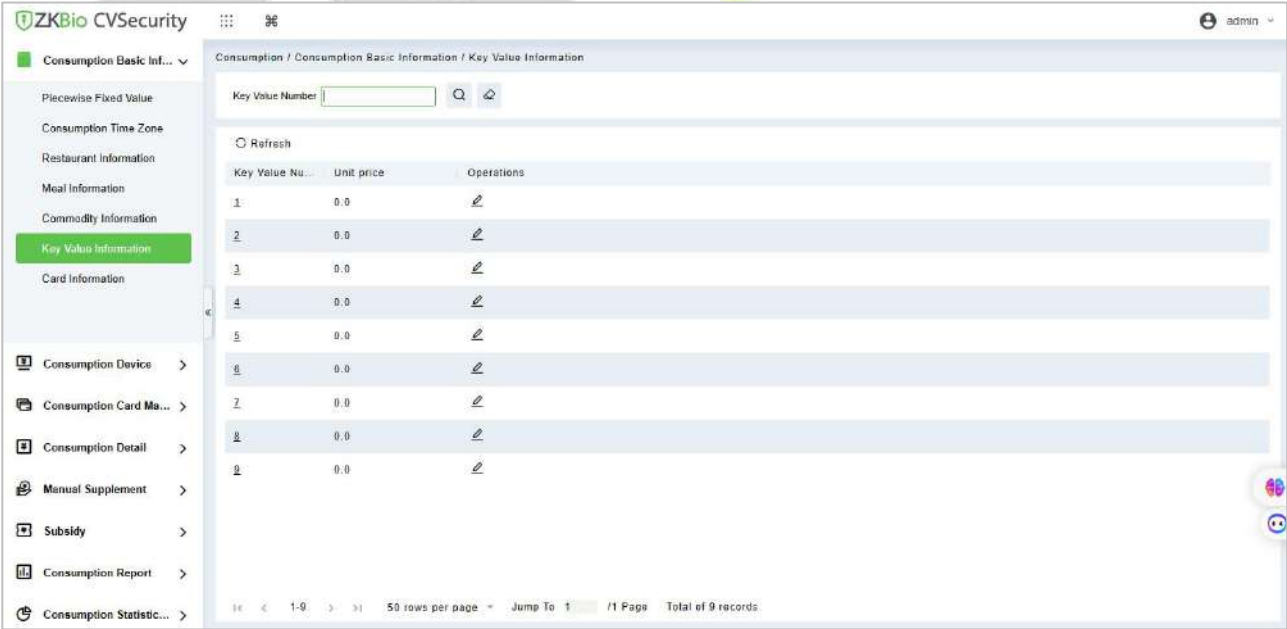


Figure 11- 16

●Edit:

Click the key value number of the list and the edit column of the operation to pop up the modification dialog box. Only the unit price can be modified. The specific display of the dialog box is as follows:

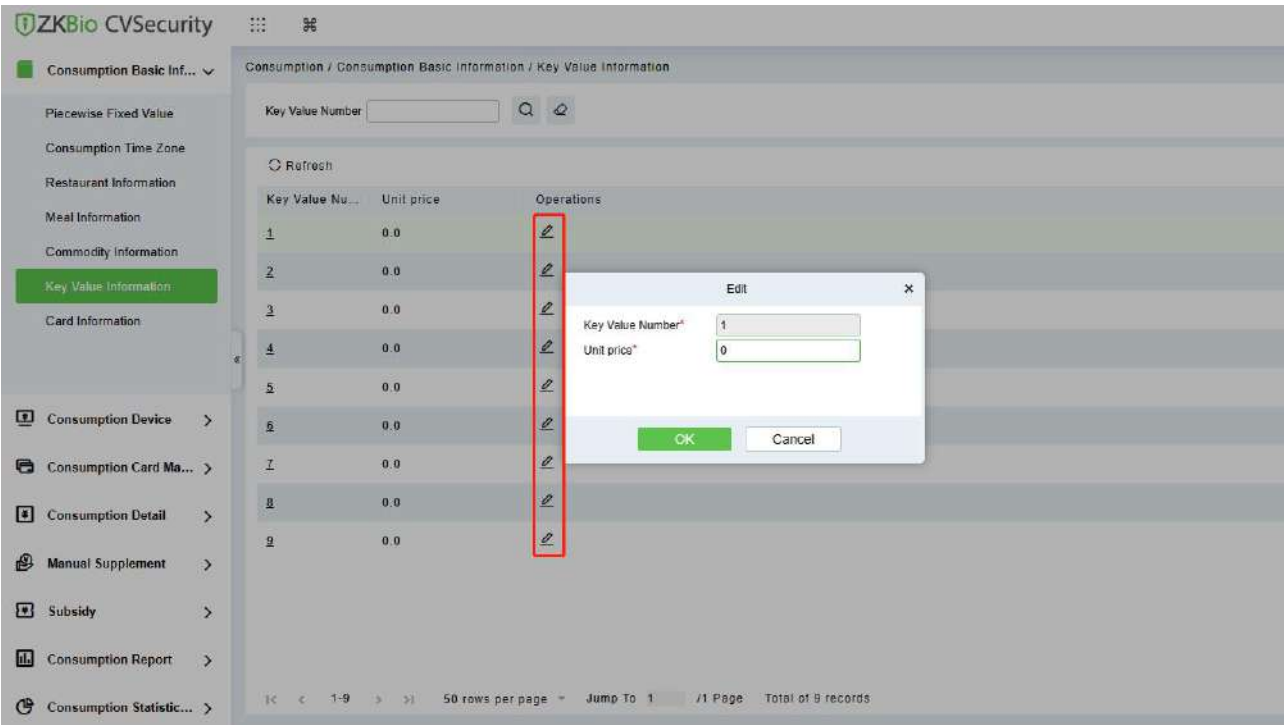


Figure 11- 17

11.1.3 Card Information

Click Consumption Basic Management > Card Information, as shown below:

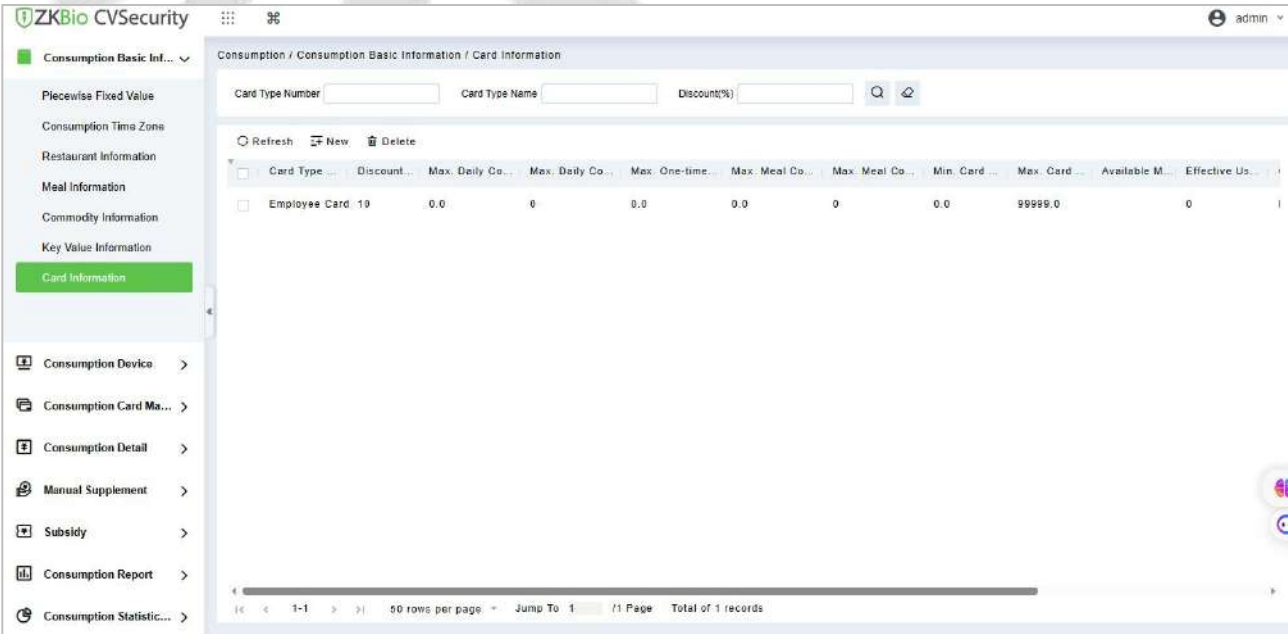


Figure 11- 18

●New:

Click **New**, in the dialog box, you can fill in the **Card Type Number**, **Card Type Name**, **Discount**, **Consumption Time Zone**, **Maximum Daily Consumption Amount**, **Maximum Daily Consumption Times**, **Maximum One-Time Consumption Amount**, **Maximum Meal Consumption Amount**,

Maximum Meal Consumption Times, Minimum Card Balance, Maximum Card Balance, Effective Use of Days, Available Meal, Available Device, Remarks, as shown below:

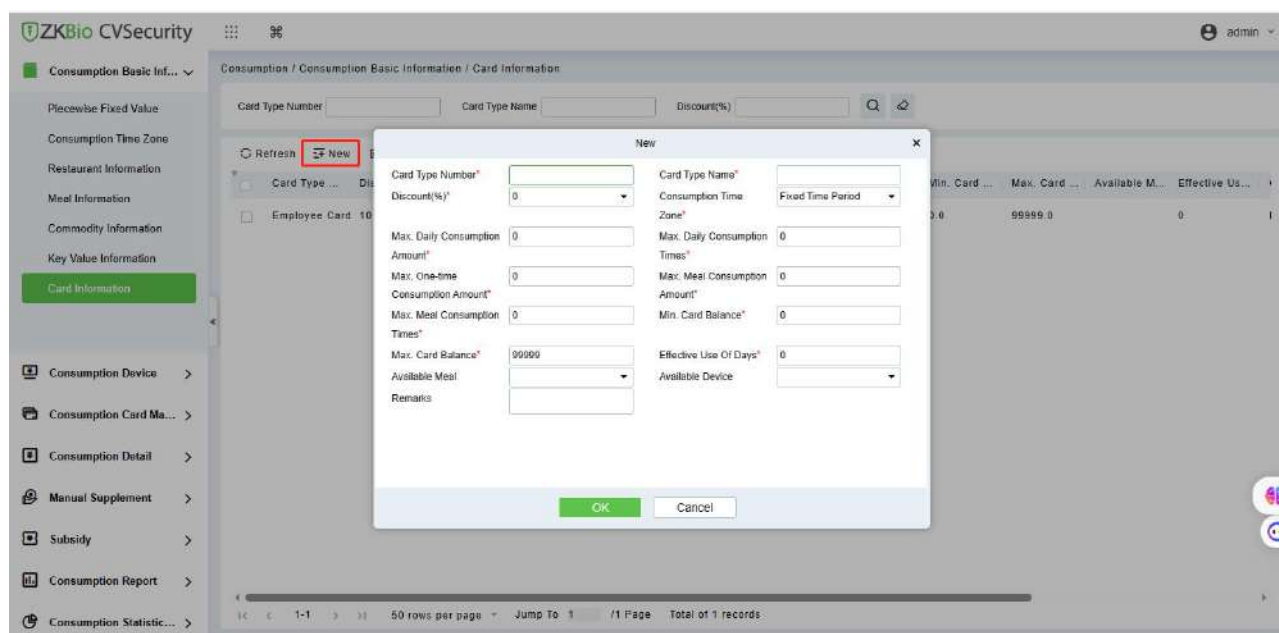


Figure 11-19

● **Edit:**

Click the card type number of the list and the edit column of the operation to pop up the modification dialog box.

● **Delete:**

You can directly click **Delete** on the required Card to remove it from the system.



Figure 11-20

For deleting in batch, select the required Card (s) as shown below and click **Delete**. The default employee card cannot be deleted.

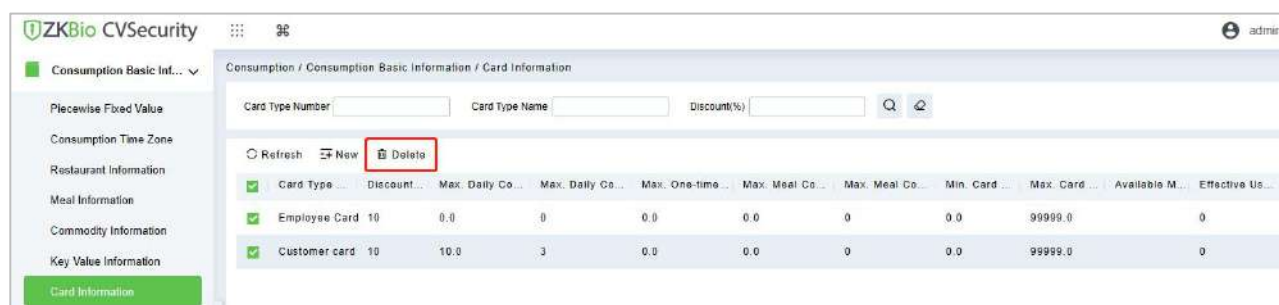


Figure 11-21

11.2 Device Management

This module is used to manage consumer devices and set basic parameters of the consumer system.

11.2.1 Consumption Device

Click Consumption Device > Consumption Device, as shown below:

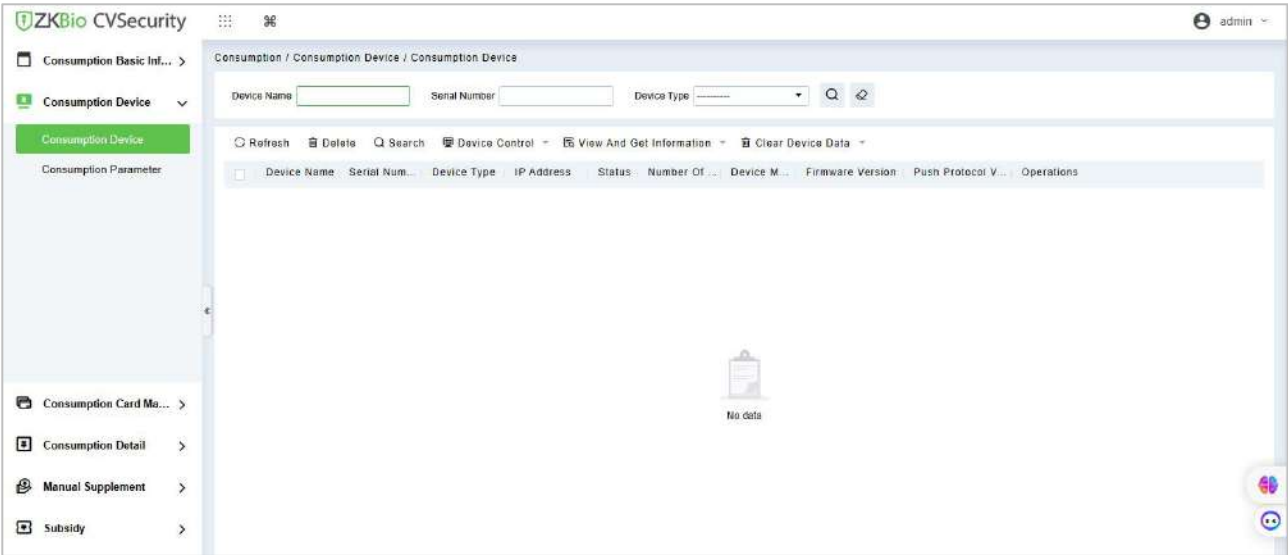


Figure 11- 22

●New:

Click **Search**, the system will automatically searching to add the device . The specific display of the dialog box is as follows:

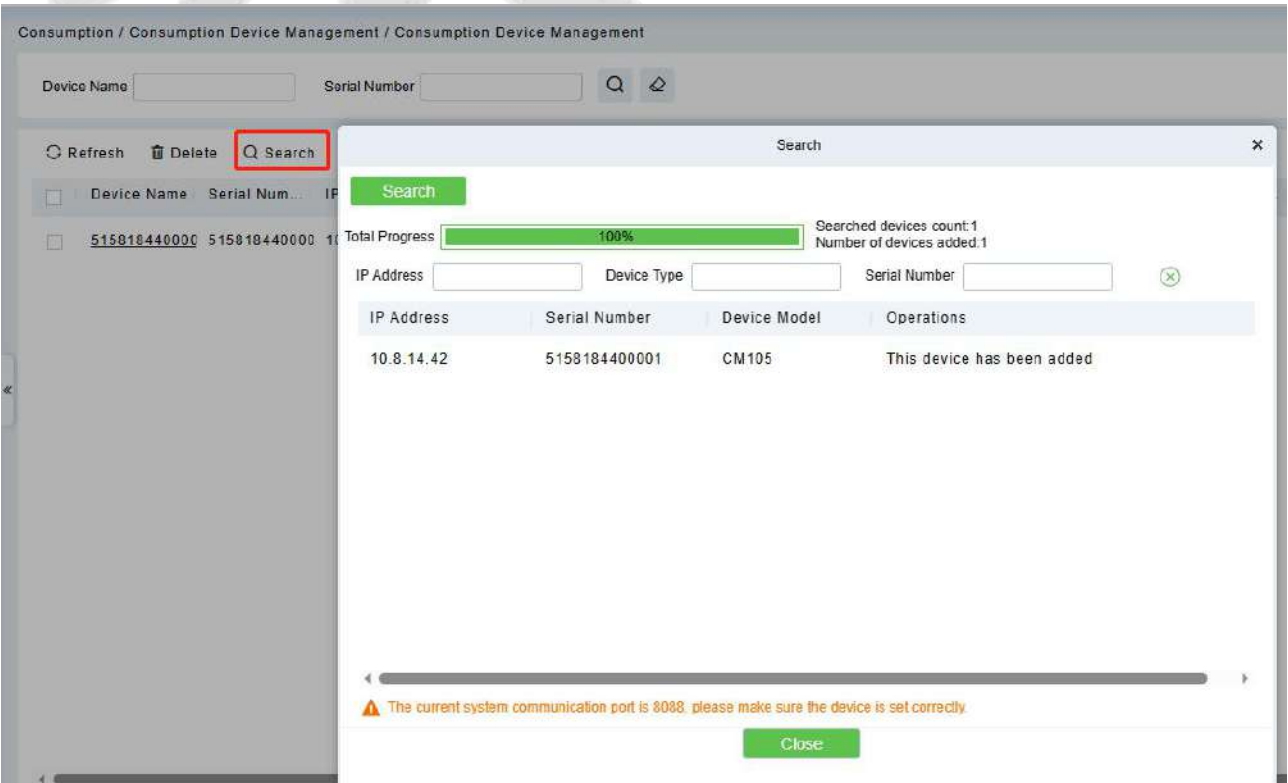


Figure 11- 23

- Some parameters are explained as follows:

Equipment use: This will define the usage type of the consumer device.

Whether accounting: It appears when the device type is selected as Consumer machine. If the **Whether Accounting** check box is selected, the billing record is generated when the card is swiped and the amount is not deducted from the card.

Operator check: If the **Operator Card Check** checkbox is selected, the device will be initially in locked state after being added to the system. To unlock the device, the operation card needs to be swiped. Please note that, the operation card must have been issued before using this parameter.

Consumption mode: The options are fixed value mode, Amount Mode, Key-value mode, Counting mode, Commodity mode, Recording Time Mode. Selected for different needs.

Cumulative Subsidy: It appears when the device type is selected as Subsidy machine. If the accumulative subsidy is not checked, only the last subsidy application can be received when there are multiple unsubsidized records; when the accumulative subsidy is checked, all the subsidized amounts will be collected.

Clear subsidy: Displayed only when the device is a subsidized machine. If the zero subsidy is not checked, the subsidy application will be directly received; if the zero subsidy is checked, the original subsidy in card will be cleared first and then collect the latest subsidy.

- Edit:

Click the device name of the list or the edit column of the operation to pop up the modification dialog box. The items that can be modified in the modification dialog box includes device name, area, device usage, whether accounting, operator card check, consumption mode, and restaurant. And you can also view the segmentation value, card type, and key value data corresponding to the device, as shown in the following figure.

The 'Edit' dialog box is shown with the following configuration:

- Device Name*: ProMerc-10
- Serial Number*: 524145556
- IP Address*:
- Communication port*: 4370
- Area*: Area Name
- Equipment Use*: Consumer Machine
- Whether Accounting: ☒
- Operator Card Check: ☒
- Whitelist Check: ☒
- Consumption Mode*: Amount Mode
- Owned Restaurant*: Headquarters

Number	Name	Start Time	End Time	Amount	Whether Effective
1	Default 1	00:00:00	10:00:59	10.0	Yes
2	Default 2	10:01:00	14:00:59	10.0	Yes
3	Default 3	14:01:00	20:00:59	10.0	Yes
4	Default 4	20:01:00	23:59:59	10.0	Yes
5	Default 5	00:00:00	10:00:59	10.0	No
6	Default 6	10:01:00	14:00:59	10.0	No

Navigation: |< < 1 - 8 > >| 50 rows per page Jump To 1 /1 Page Total of 8 records

Buttons: OK Cancel

Figure 11- 24

- Delete:

Check the consumer device record, click **Delete** at the top of the list or **Delete** under the operation bar, **OK** to delete the selected consumer device data, and **Cancel** to cancel the operation.

- Clear Swipe Card Data:

Click the **Clear Swipe Card Data** button at the top of the list, a dialog box will pop up as shown below.

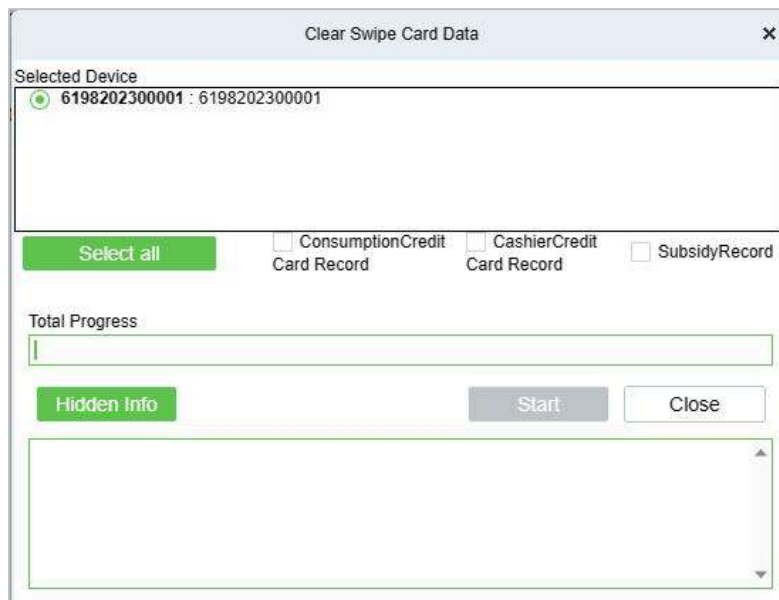


Figure 11-25

The operation here is to select the device first, then you can check the type of the card record, you can select all, click **Start** will clear the data of the selected card record, click **Close** will close the current dialog box, no operation.

- Clear consumer device settings:

Click the **Clear Consumer Device Settings** button at the top of the list, a dialog box will pop up as shown below.

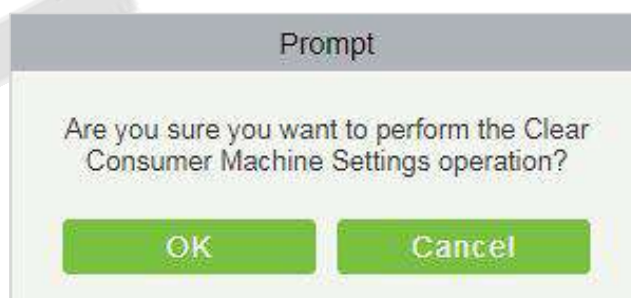
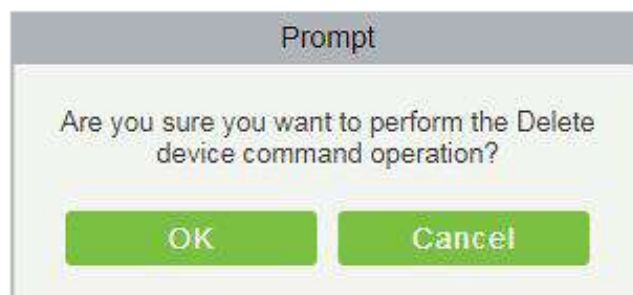


Figure 11-26

Clicking **OK** will clear the setting information of the consumer device, and clicking **Cancel** will close the current dialog box and do nothing.


- Delete device command:

Select a device in the device list below, click and select the device check box on the left side, click the Delete Device command, and the following dialog box will pop up. Click **OK**. The command to be parsed by the device will be deleted and cleared.

**Figure 11-27**

●Collect all data:

Select a device in the device list below, click and select the device from the list, click to collect all data, and the following dialog box will pop up. According to the operator's needs, check the data that needs to be synchronized. Click Start and wait for the data to sync until the synchronization is complete.

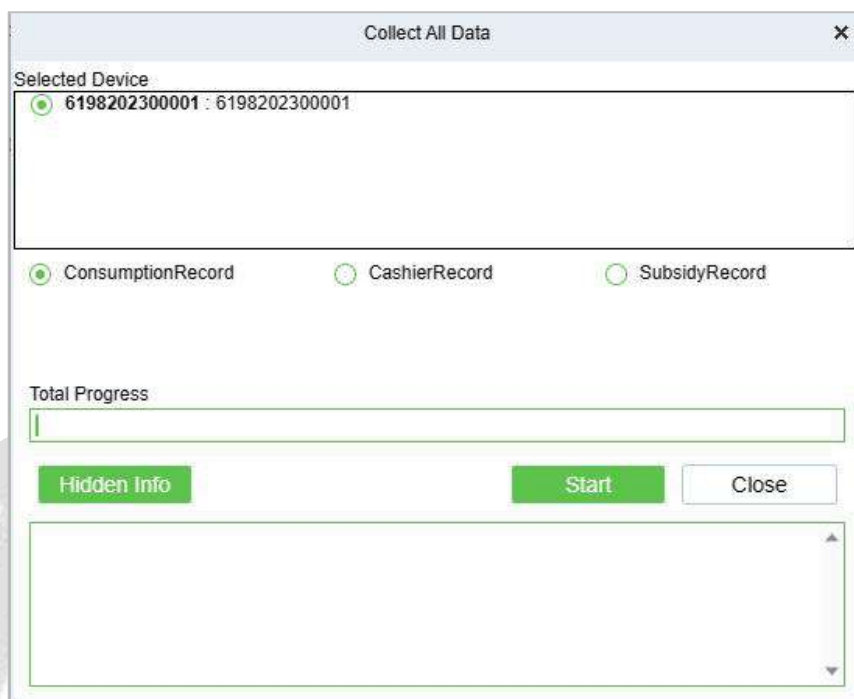**Figure 11-28**

●More:

There are two hidden function buttons under the button, which are to restart the device and synchronize the software data to the device:

Restart the device: Check one device, click this button, the device will automatically restart.

Synchronize software data to device: Select a device, click this button, it will send data such as setting parameters of the software to the device to achieve the function of synchronization information so that the device can set the properties synchronously.

11.2.2 Consumption Parameter

Click **Device > Consumption Parameters**, as shown below:

Figure 11- 29

● Basic Setting:

- 1) Set the upper limit of the card balance. You can set an integer value between 1~9999, default value is 9999.
- 2) Set the master and slave sectors of card issuing: The master sector of card issuing can be selected from sector 1 to sector 14, and the default is sector 1 and it cannot be edited.
- 3) Consumption rate is the value set to obtain the consumption amount with respect to the entered amount on the device.
- 4) Set the system password: The default is 123456 and you need to change it before using the password for 1st time. This password will be written on the card while issuing.
- 5) The default mode is **Single wallet mode**.
- 6) Click **OK** to save the modified consumption parameter information.

Note: The system password and mode are not allowed to be changed again after the device has been added.

11.3 Card Management

11.3.1 Card Service

Using this option, you can issue different types of card and set their usage limits. You can also manage the already existing cards.

The initial interface of this module is shown below:

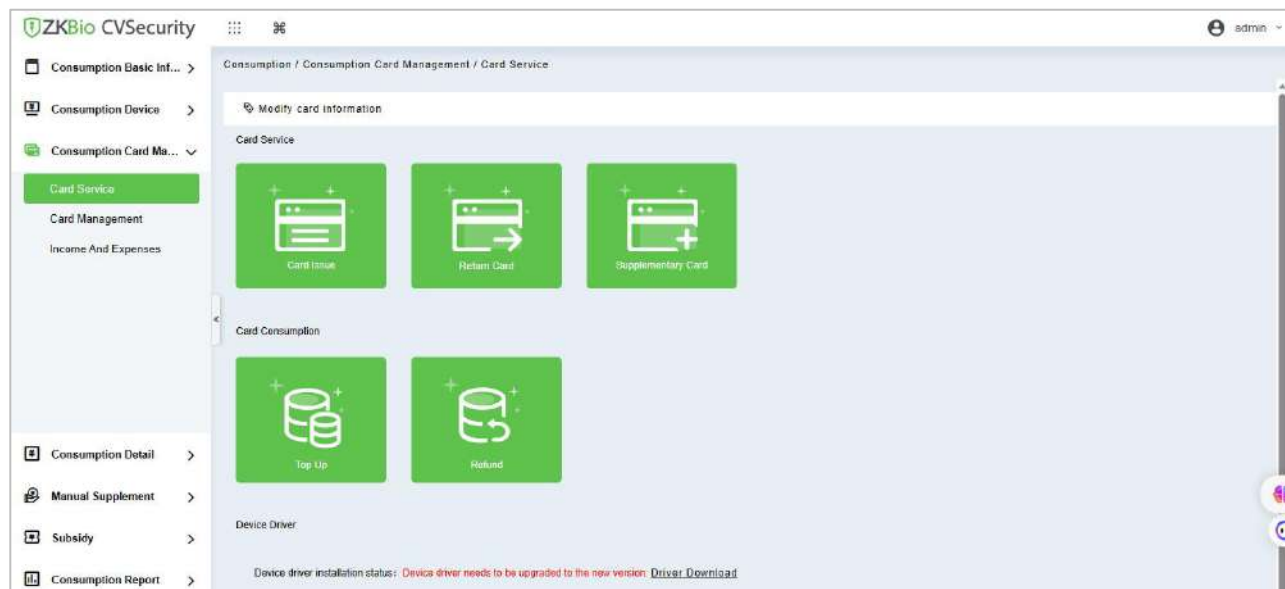


Figure 11-30

11.3.1.1 Device Driver

First of all, you need to check the status of the Device driver at the bottom of this interface.

If it is not installed, you need to click **Driver Download** and install it before using this function.

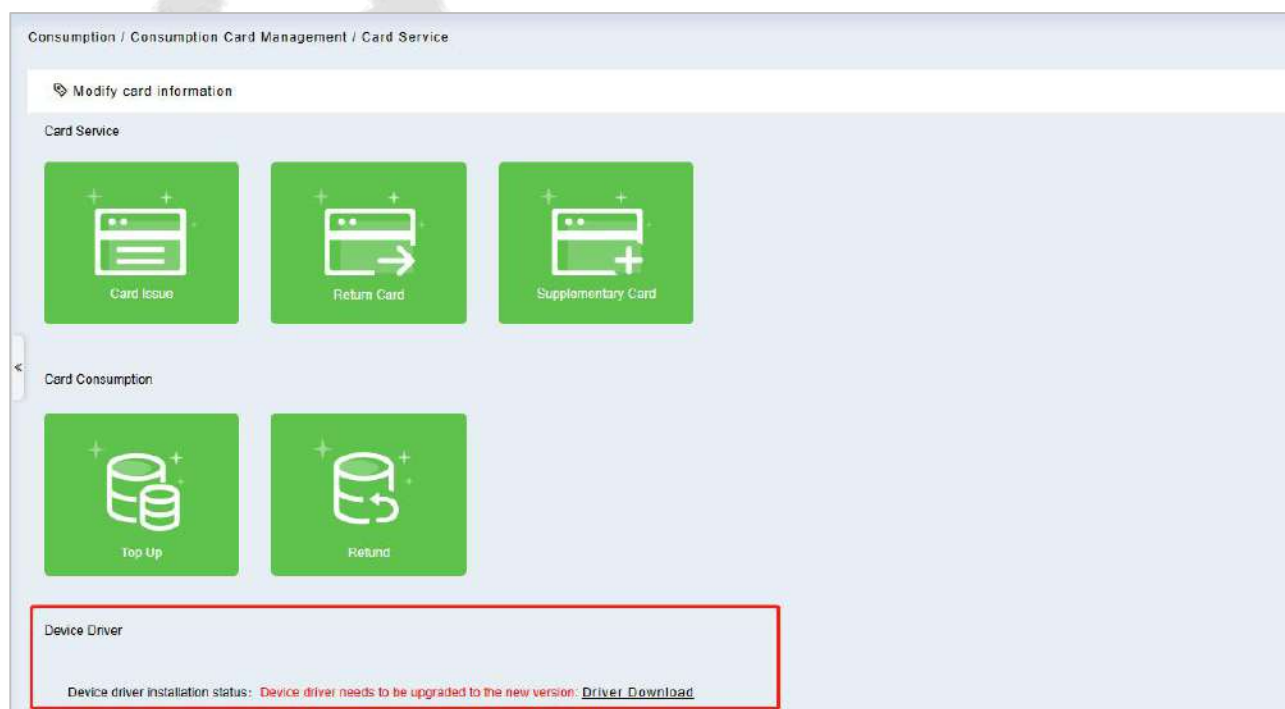


Figure 11-31

Click **Driver Download** to start downloading. Once it is downloaded, install it as per the on-screen prompts. After the installation is complete, you can see the updated status as shown below:

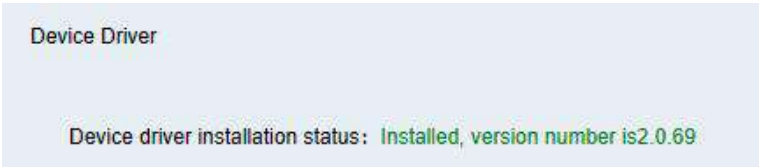


Figure 11- 32

11.3.1.2 Modify Card Information

Place the card on the card reader, click **Modify card information** as shown below. A dialog box will appear with all the details of the card.

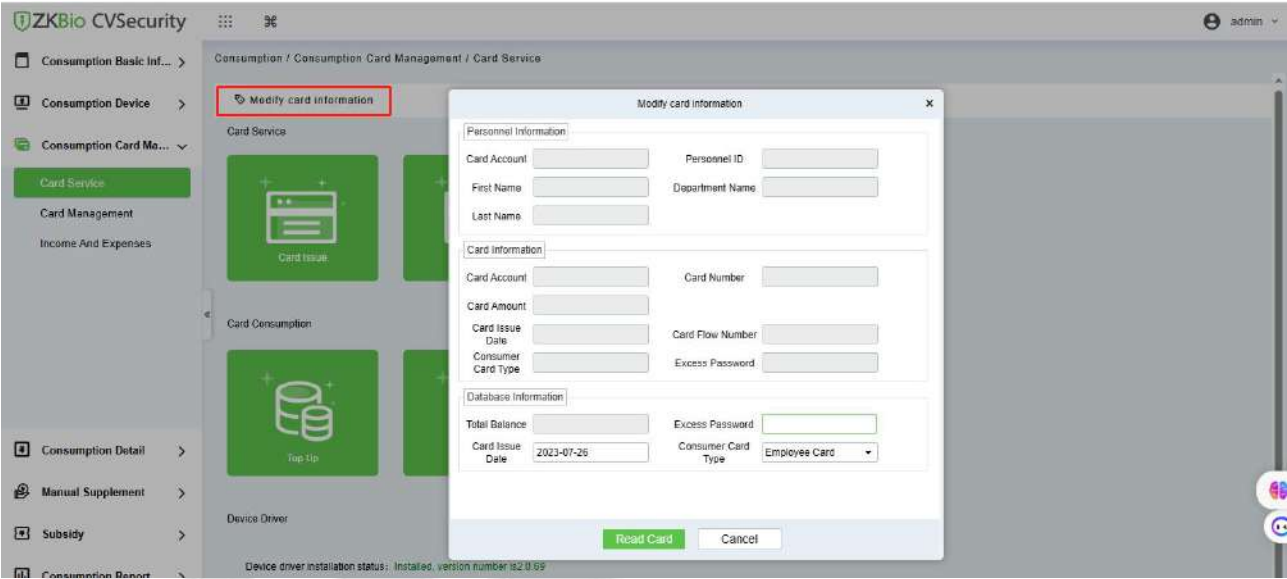


Figure 11- 33

11.3.1.3 Card Issue

You must initialize a card through this system before using it on the consumer device.

Click on the card issue icon, the card issuing interface is as follows.

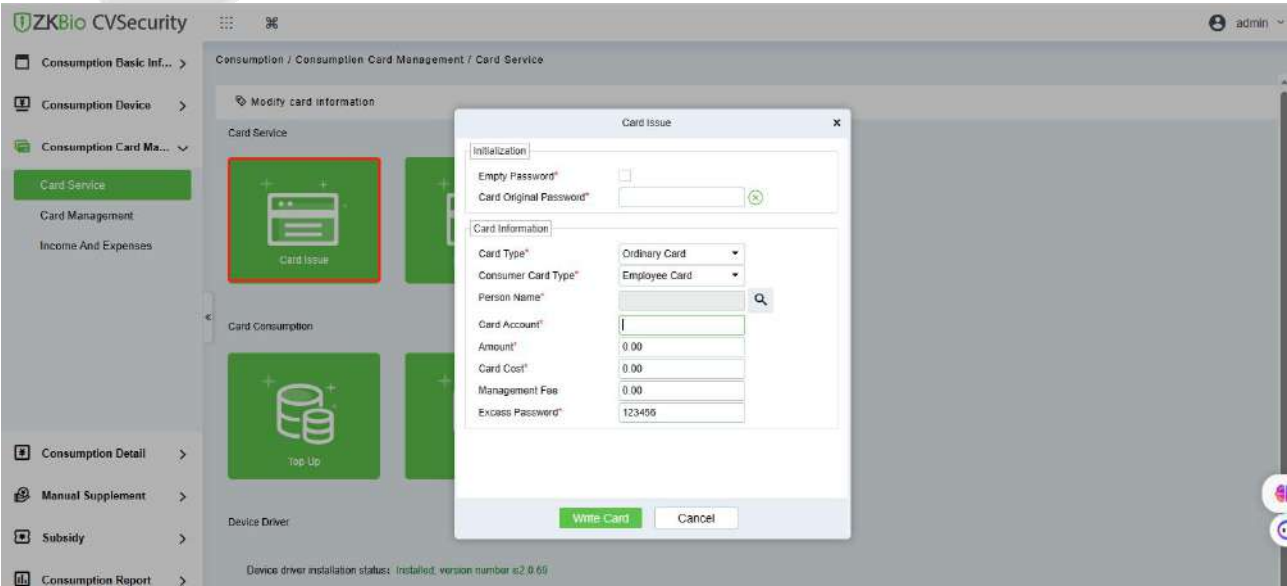


Figure 11- 34

If the card is previously used before initialization, you can set blank password or keep the original password of the card. After setting the card type and consumer card type in this window, click the icon beside the Person's name field and select the required personnel (you need to add the required personnel in the personnel module before issuing card). Then set the Card Account, Amount, Card Cost, Management Fee, Excess Password, click Issue card to complete.

● **Prerequisites:**

1. Make sure the required person is already added in the personnel module before issuing card.
2. The card needs to be initialized before issuing the card.

11.3.1.4 Return Card

Return Card operation is performed to stop the card being used further in the consumption software system.

After clicking **Return card**, a pop-up window will give additional information for the operation. Put the card on the card reader, click on the card to read, the card information will be displayed, check the information and click OK to block or revoke the card.

● **Prerequisites:**

To withdraw a card approval, you must have an issued card.

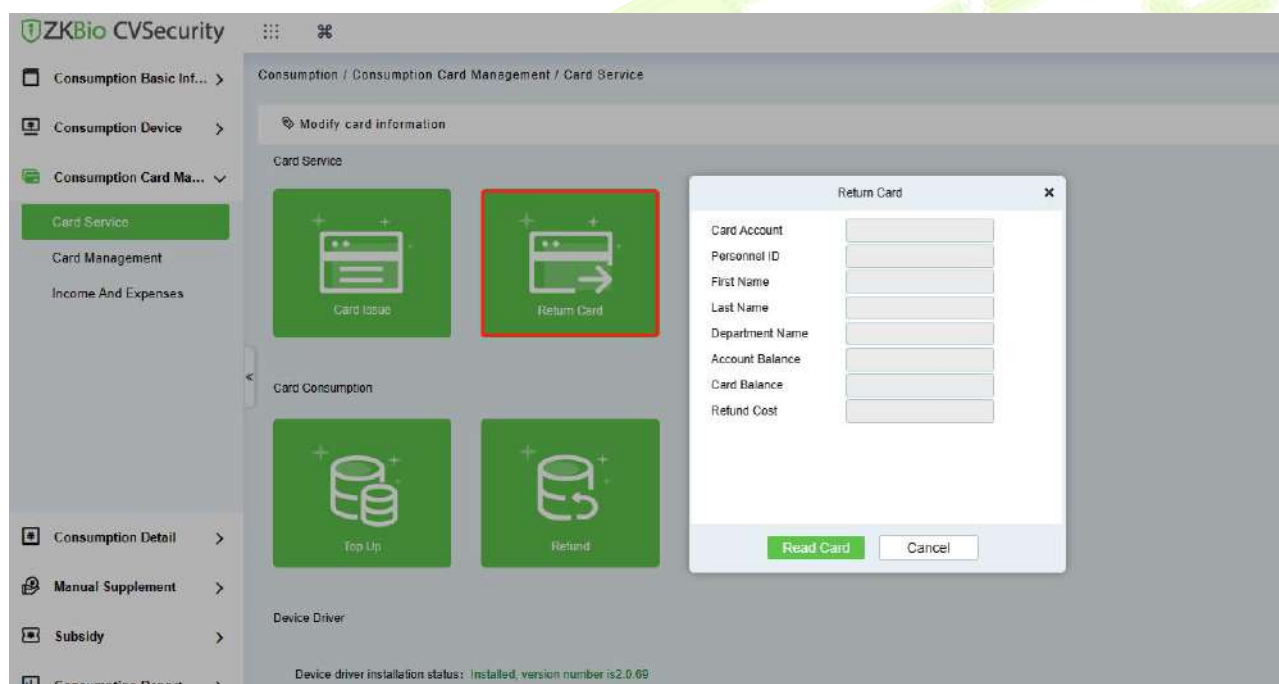


Figure 11- 35

11.3.1.5 Supplementary Card

● **Prerequisite:**

This function is used when a card is reported lost.

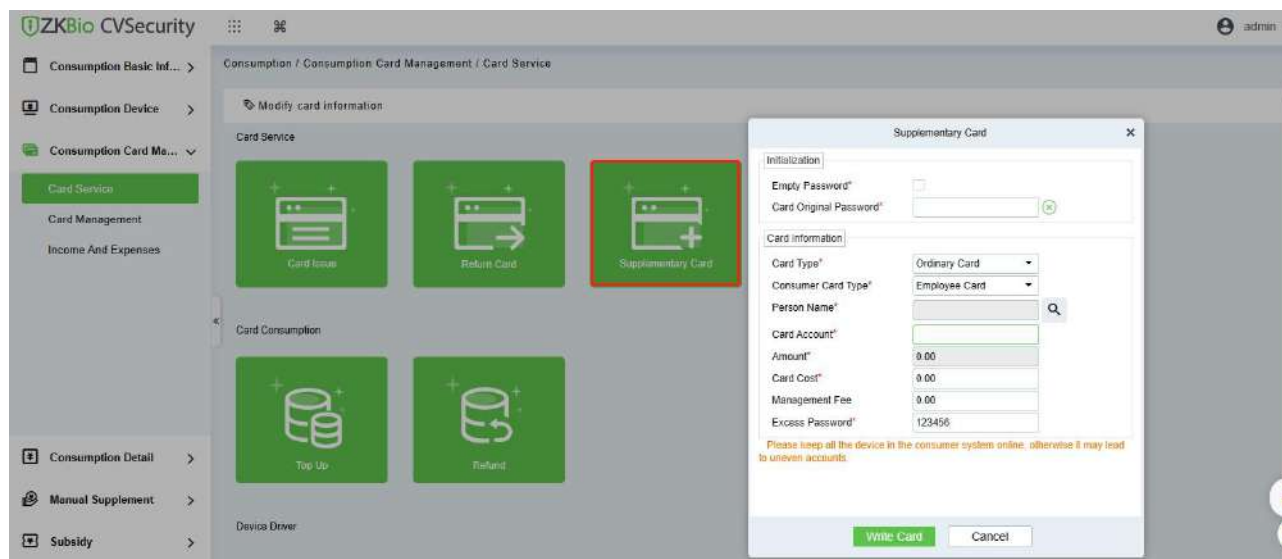



Figure 11-36

Click the  search icon beside the Person Name field and select the person who has lost the card. Click to write the card with the same information as the lost card. After the card is issued, the balance and other information in the original card will be written into the new card. (The used card needs to be initialized, and the card can be set to a blank password or a card original password at the initialization interface.)

Note: Please ensure that all devices in the consumption system are online. Otherwise, the processing result after the above operation cannot be synchronized to other devices. And the original card can still be used for consumption, resulting in the card balance being inconsistent with the actual amount and the account being uneven. Please be careful with this!

11.3.2 Top Up

This function is used to add an extra amount to the card balance. Click the top up button to open the Top-up interface. Put the card on the card reader, click on the card to confirm the card information. Enter the amount you need to recharge and then click OK to execute the operation.

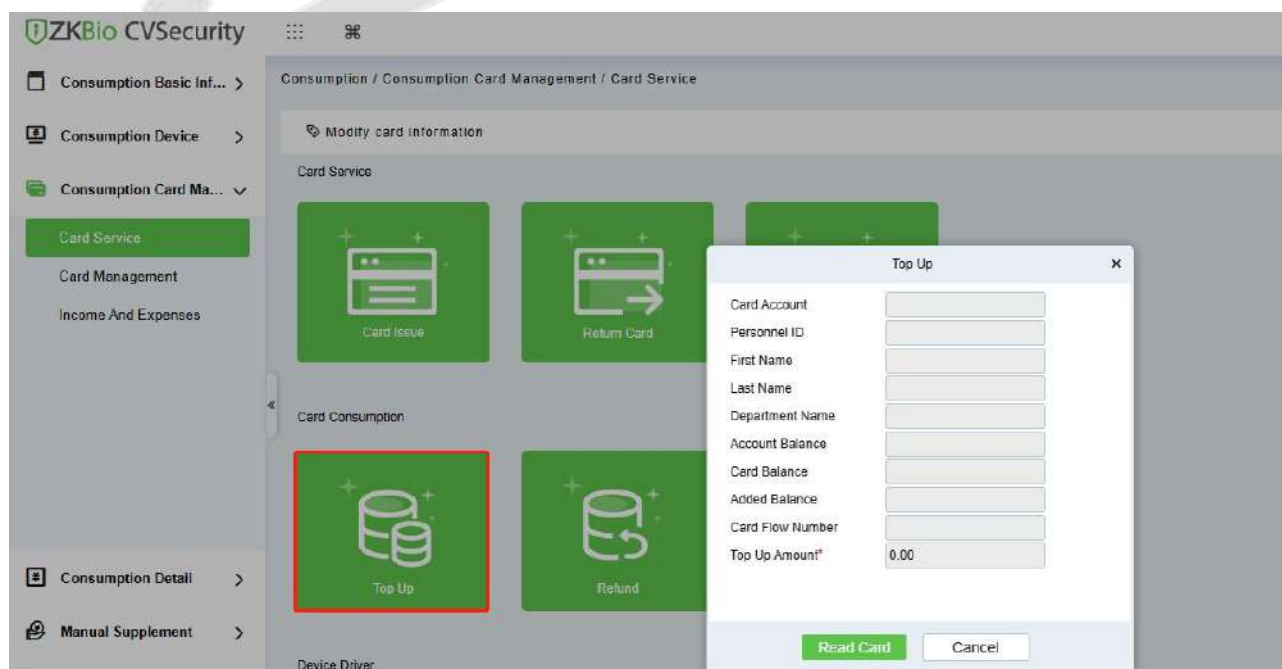


Figure 11-37

11.3.2.1 Refund

Refund operation is used to return a specified amount to the card. Click the refund button to open the refund interface, put the card on the card reader, click on the Read card to confirm the card information. Enter the amount you need to refund, and click OK to execute the operation.

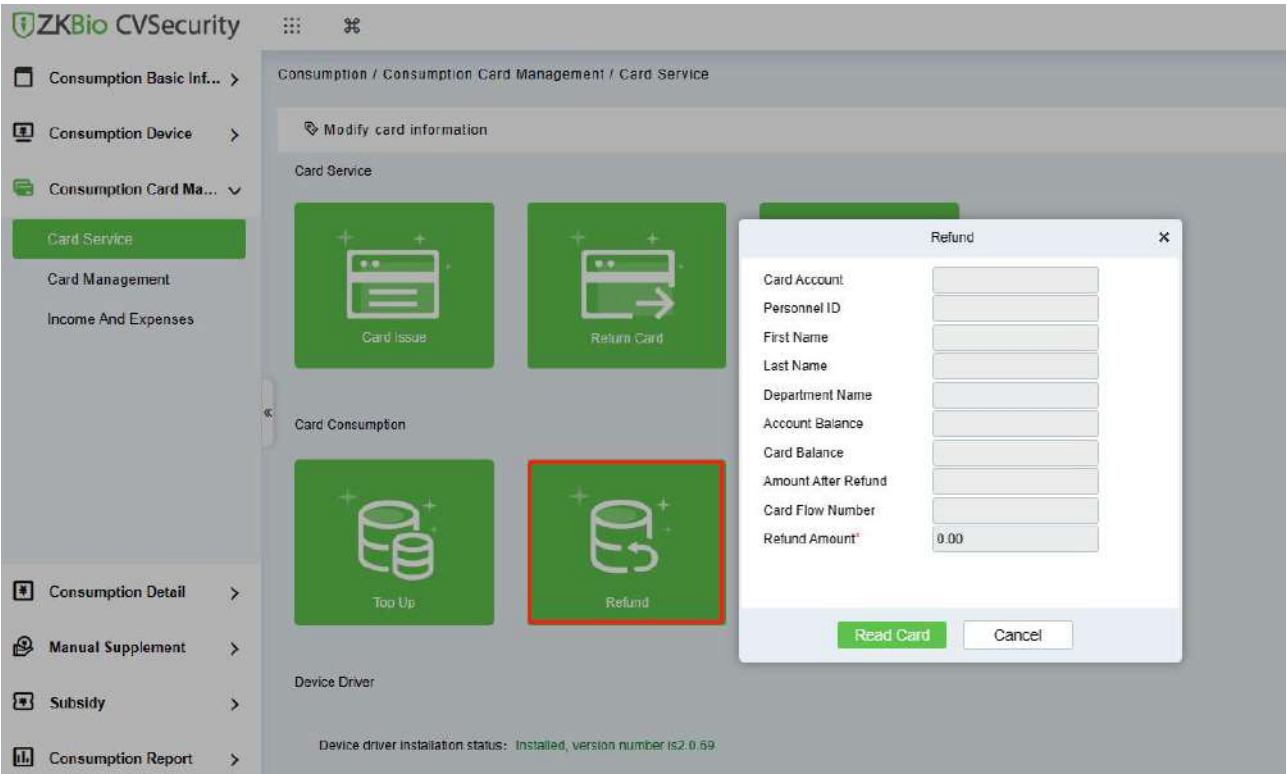


Figure 11- 38

11.3.3 Card Management

This function is used to perform two operations; **Logout Management Card and Non-Card Return Card**. And on this interface, you can also view the card information that has been issued till date.

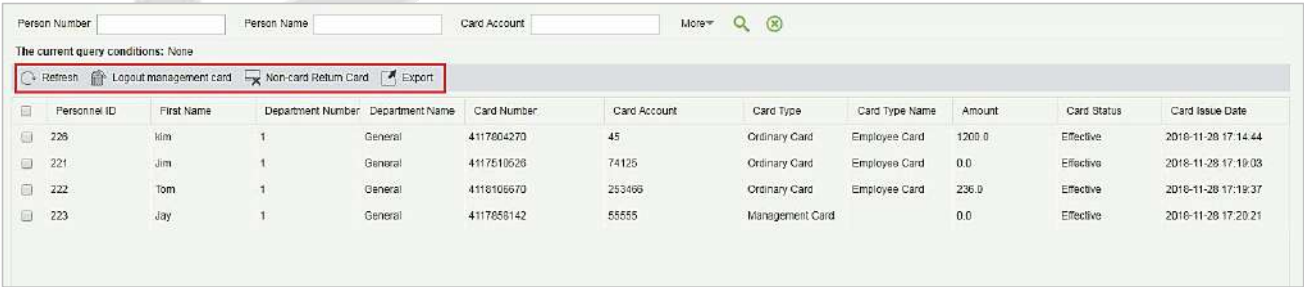


Figure 11- 39

The top of the interface provides several search criteria:



Figure 11- 40

Consumption / Consumption Card Management / Card Management

Personnel ID

Name

Card Account

Retract


Q

Card Status

Card Type

Card Number

Figure 11- 41

Enter the known information in the respective field to search for the corresponding card information. For example, if you need to search all the ordinary cards, click the card type drop-down menu, select Ordinary card, and click the  icon on the right to get the search results. The search results are displayed on the report interface at the bottom of the page. As shown below.

<input type="checkbox"/>	Personnel ID	First Name	Department Number	Department Name	Card Number	Card Account	Card Type	Card Type Name	Amount	Card Status	Card Issue Date
<input type="checkbox"/>	226	Jim	1	General	4117804270	45	Ordinary Card	Employee Card	1200.0	Effective	2018-11-28 17:14:44
<input type="checkbox"/>	221	Jim	1	General	4117510520	74125	Ordinary Card	Employee Card	0.0	Effective	2018-11-28 17:19:03
<input type="checkbox"/>	222	Tom	1	General	4118109670	253466	Ordinary Card	Employee Card	236.0	Effective	2018-11-28 17:19:37
<input type="checkbox"/>	223	Jay	1	General	4117859142	55555	Management Card		0.0	Effective	2018-11-28 17:20:21

Figure 11- 42


11.3.3.1 Logout Management Card

This function is used to log out the management and the operation card. After the logout operation, the management card or operation card will be invalid.


11.3.3.2 Non-Card Return Card

Click **Non-card return card**, select the desired refund option and click **OK**. If the card is eligible for the refund, the amount will be refunded to the card and a refund record will be generated in the system.

The card will not be used in this consumer system after the card is not returned.

 **Note: Non-card return card** Please ensure that all devices in the consumption system are online before operation. Otherwise, the processing result after operation may not be synchronized to other devices in time. The card can still be consumed, resulting in the card balance being inconsistent with the actual amount and unbalanced situation. Please be careful with this!

Non-card Return Card

 Please ensure that all equipment in the consumer system is online, otherwise it may lead to unfair accounts !

isRefund*

Yes

Amount that should be

1200.0

OK

Cancel


Figure 11- 43

11.3.3.3 Refresh

It is used to update the card interface with new data.

11.3.3.4 Export



It exports the current report data.

 **Note:** The report loss/resume card operation is performed in the card management in the **Personnel Module**.



11.3.4 Income and Expenses

This function will show all the payments and due amount data of all the cards in the consumption system.

Click **Card Management > Income and Expenses**, as shown below:

Operating Time From To Person Number More▼  

The current query conditions: Operating Time From(2019-06-28 00:00:00) To(2016-11-28 23:59:59)

 Refresh  Export

Personnel ID	First Name	Department Name	Card Number	Card Account	Card Flow Number	Type Name	Type	Subsidy Type	Amount	Balance	Upload Time	Operating Time	Device Serial Number	Device Flow Number	Created By
223	Jay	General	4117858142	55555	1	Management			0.0	0.0	2019-11-28 17:20:21	2016-11-26 17:20:21			admin
222	Tom	General	4118106670	253466	1	Card Issue	Income		236.0	236.0	2019-11-28 17:19:37	2016-11-26 17:19:37			admin
221	Jim	General	4117510526	74125	1	Card Issue	Income		0.0	0.0	2019-11-28 17:19:03	2016-11-26 17:19:03			admin
226	Kim	General	4117804270	45	1	Card Issue	Income		1200.0	1200.0	2019-11-28 17:14:44	2016-11-28 17:14:44			admin
223	Jay	General	4117804270	99999	1	Logout manag			0.0	0.0	2019-11-28 16:22:42	2016-11-26 16:22:42			admin
224	Lee	General	4117858142	44444	2	Return Card	Expenses		100.0	0.0	2019-11-28 16:04:48	2016-11-26 16:04:48			admin
222	Tom	General	4117510526	88888	2	Return Card	Expenses		100.0	0.0	2019-11-28 16:04:29	2016-11-26 16:04:29			admin
221	Jim	General	4118106670	1111111	2	Return Card	Expenses		100.0	0.0	2019-11-28 16:04:08	2016-11-28 16:04:08			admin
224	Lee	General	4117858142	44444	1	Card Issue	Income		100.0	100.0	2019-11-28 16:02:58	2016-11-26 16:02:58			admin
222	Tom	General	4117510526	88888	1	Card Issue	Income		100.0	100.0	2019-11-28 16:02:13	2016-11-28 16:02:13			admin
223	Jay	General	4117804270	99999	1	Management			0.0	0.0	2019-11-28 15:59:28	2016-11-26 15:59:28			admin
221	Jim	General	4118106670	1111111	1	Card Issue	Income		100.0	100.0	2019-11-28 15:58:06	2016-11-28 15:58:06			admin

Figure 11-44

11.3.4.1 Refresh

Click **Refresh** to load the latest card cash receipts and payments data.

11.4 Consumer Details

Click **Consumption Details > Consumption Details Report**, as shown below:

Consumption Time From		2018-08-28 00:00:00		To	2018-11-28 23:59:59		Person Number				More▼						
The current query conditions: Consumption Time From:(2018-08-28 00:00:00) To:(2018-11-28 23:59:59)																	
		Refresh				Export				Error Correction							
<input type="checkbox"/>	Person Number	First Name	Card Status	Department Number	Department Name	Card Account	Type Name	Amount of Consumption	Balance	Consumption Mode	Restaurant Name	Meal Name	Device Serial Number	Device Flow Number	Card Flow Number	Consumption Time	Upload Time
<input type="checkbox"/>	222	Tom	Effective	1	General	253466	Supplemental	12.0	208.0	Manual Suppl	Headquarters	Dinner	524145556		4	2018-11-28 2	2018-11-28 17:32:59
<input type="checkbox"/>	227	King	Effective	1	General	8579652	Supplemental	20.0	474.0	Manual Suppl	Headquarters	Lunch	524145556		4	2018-11-28 1	2018-11-28 17:42:16
<input type="checkbox"/>	227	King	Effective	1	General	8579652	Supplemental	20.0	491.0	Manual Suppl	Headquarters	Midnight Snac	522153322		3	2018-11-28 1	2018-11-28 17:41:53
<input type="checkbox"/>	227	King	Effective	1	General	8579652	Supplemental	10.0	511.0	Manual Suppl	Headquarters	Dinner	524145556		2	2018-11-28 1	2018-11-28 17:41:35
<input type="checkbox"/>	226	Kim	Effective	1	General	45	Supplemental	20.0	1149.0	Manual Suppl	Headquarters	Midnight Snac	524145556		4	2018-11-28 1	2018-11-28 17:38:24
<input type="checkbox"/>	226	Kim	Effective	1	General	45	Supplemental	22.0	1168.0	Manual Suppl	Headquarters	Midnight Snac	522153322		3	2018-11-28 1	2018-11-28 17:34:33
<input type="checkbox"/>	226	Kim	Effective	1	General	45	Supplemental	10.0	1190.0	Manual Suppl	Headquarters	Dinner	522153322		2	2018-11-28 1	2018-11-28 17:34:13
<input type="checkbox"/>	222	Tom	Effective	1	General	253466	Supplemental	6.0	230.0	Manual Suppl	Headquarters	Breakfast	524145556		2	2018-11-28 1	2018-11-28 17:30:42
<input type="checkbox"/>	222	Tom	Effective	1	General	253466	Supplemental	10.0	220.0	Manual Suppl	Headquarters	Lunch	524145556		3	2018-11-28 1	2018-11-28 17:31:25
<input type="checkbox"/>	Summary:								130.0								

Figure 11-45

11.4.1.1 Refresh

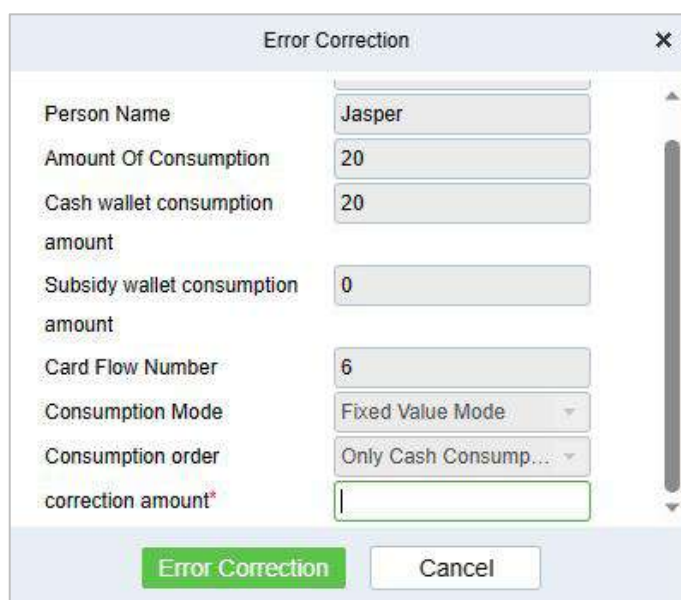
Click **Refresh** to load the latest consumption details.

11.4.1.2 Export

This feature allows you to export consumption details in EXCEL, PDF, CSV format files.

11.4.1.3 Error Correction

Click **Error Correction**. You can carry out the error correction process on the software. This operation is only valid for the records where the consumption type is the amount mode. Select a consumption record, read out the current balance of the card, enter the correct amount of consumption, and modify the balance of the card.



The 'Error Correction' dialog box contains the following fields and controls:

- Person Name:** Text input field with 'Jasper' entered.
- Amount Of Consumption:** Text input field with '20' entered.
- Cash wallet consumption amount:** Text input field with '20' entered.
- Subsidy wallet consumption amount:** Text input field with '0' entered.
- Card Flow Number:** Text input field with '6' entered.
- Consumption Mode:** Dropdown menu set to 'Fixed Value Mode'.
- Consumption order:** Dropdown menu set to 'Only Cash Consump...'.
- correction amount*:** Empty text input field.
- Buttons:** 'Error Correction' (green) and 'Cancel' (white).

Figure 11- 46

Notes:

- 1) The same consumption record cannot be corrected repeatedly.
- 2) Software error correction automatically produces two new records: One is the record for the system error correction of the return of the original error consumption amount, the other is the correct consumption record of the manual supplement.

11.4.1.4 Import U Disk Record

If the equipment consumption record is found inconsistent with the software, you can export the consumption records of the machine (Select **U disk management** > **Download consumption records**) to the U disk, and then import the consumption records into the software (Select **Consumption** > **Consumption detail** > **Consumption detail report** > **Import U disk Records**).

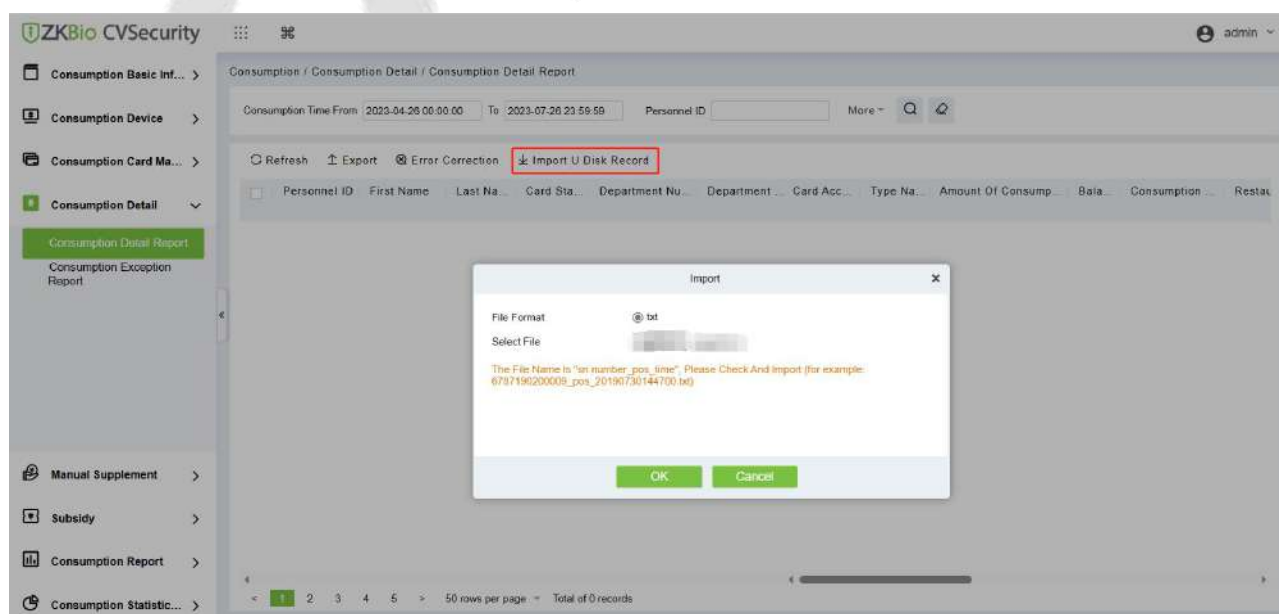


Figure 11- 47

11.5 Manual Supplement

It is used to enter some consumptions record details manually in the system.

Note: Before performing this operation, you need to have the relevant operation card.

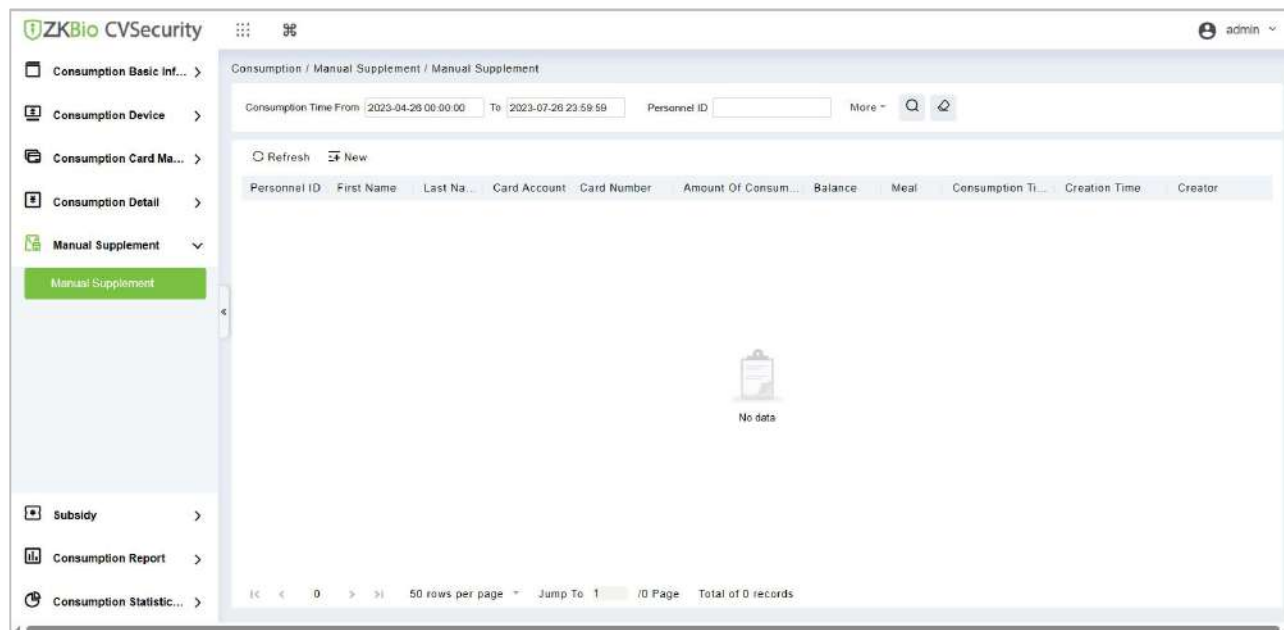


Figure 11-48

11.5.1 New

You can manually enter some consumptions entries. Click **New** to open the addition interface.

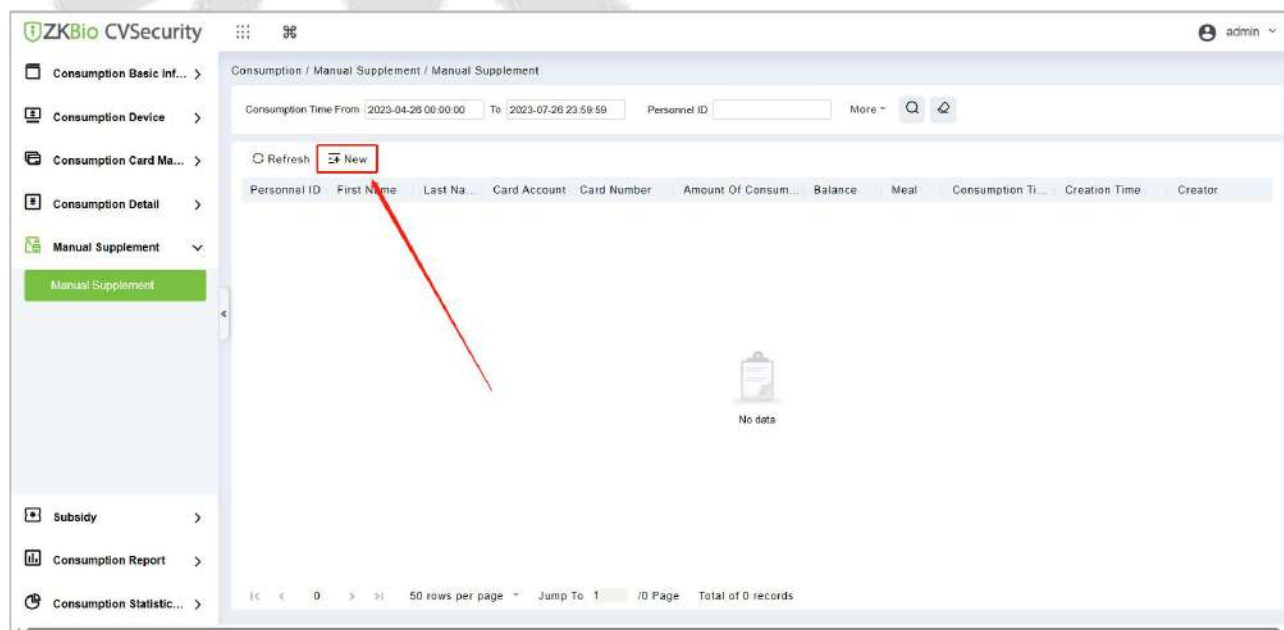


Figure 11-49

You need to cross-check the relevant information of the card. When the user puts the relevant card into the card reader, click on read card to read the detailed data such as the Card Account, Card Number, Name, Person Number, Balance, Card Flow Number. Meals, Available Device, Consumption time and Consumption Amount.

New

Card Account

Card Number

First Name

Last Name

Personnel ID

Balance

Card Flow Number

Meal*

Available Device*

Consumption Time*

Amount Of Consumption*

0

Read Card

Cancel

Figure 11- 50

11.5.2 Refresh

This feature is mainly used to update the interface content with new data.

11.6 Subsidy

11.6.1 Subsidy Management

Click **Subsidy > Subsidy Management** to enter the subsidy page, you can perform different function related to subsidy:

Person Number: Person Name: Whether to receive: Moreview

The current query conditions: None

Refresh Subsidy Registration Review One-click Review Reissue the command Import Export Delete

	Person Number	First Name	Card Account	Card Flow Number	Subsidy Amount	Receiving Amount	Card Balance	Subsidy Batch	Whether to receive	Whether to pass the review	Auditors	Subsidy Receive Time	Effective Time of Subsidy	Remarks	Operations
<input type="checkbox"/>	222	king	8579652		10.0				Not Received	Not Approved		2018-11-29 00:00:00			Edit Delete
<input type="checkbox"/>	222	Tom	253486		10.0				Not Received	Not Approved		2018-11-29 00:00:00			Edit Delete
<input type="checkbox"/>	221	Jim	74125		10.0				Not Received	Not Approved		2018-11-29 00:00:00			Edit Delete
<input type="checkbox"/>	226	Jim	45		10.0				Not Received	Not Approved		2018-11-29 00:00:00			Edit Delete

Figure 11- 51

Note: Before the subsidy operation, you need to add personnel in the **Personnel** module.

11.6.1.1 Add

- 1.Click Subsidy > Subsidy Management > Subsidy Registration to enter the subsidy registration interface.

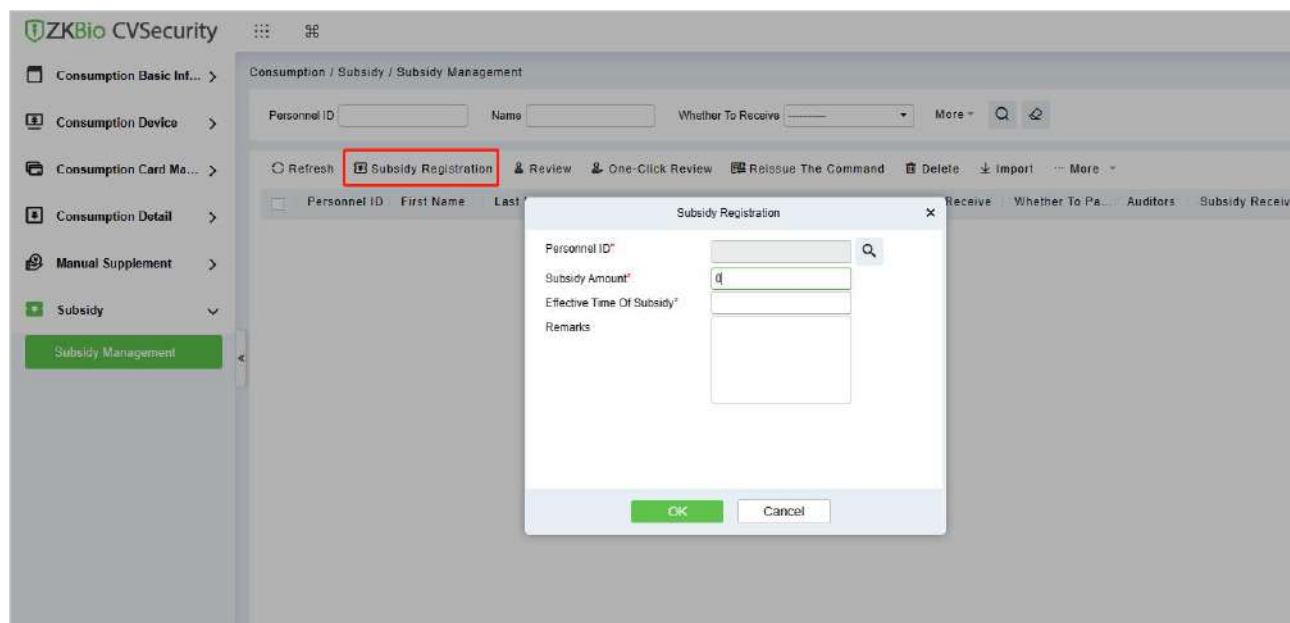


Figure 11- 52

2.Fill in the information and click OK to confirm.

11.6.1.2 Review

This function is mainly to review the audit. Before performing audit, you need to select the subsidy (select in the multi-select box). After clicking the review, an audit dialog box will pop up. The dialog box will display the person number and name as selected by the user.



Figure 11- 53

11.6.1.3 One-Click Review

This function is mainly to review the unapproved subsidies in the system, and will not deal with the subsidy records that have been approved. During the review process, if the unapproved subsidy cannot be approved for some reason (such as the user has already returned the card), the subsidy will not be processed.

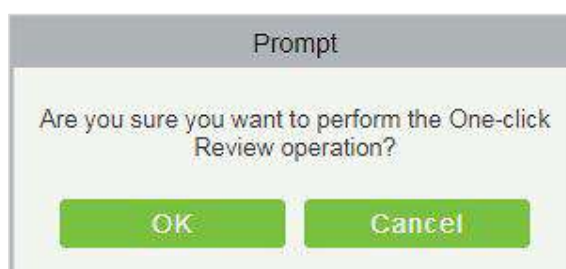


Figure 11- 54

11.6.1.4 Reissue the Command

This function is primarily used to re-issue the subsidy to the subsidy machine. Select the required subsidy(s), then click Reissue the command. The dialog box will display the person number and name selected by the user, click OK to reissue the subsidy order to the subsidy machine.



Figure 11-55

11.6.1.5 Import

This function is used to import subsidies in batches.

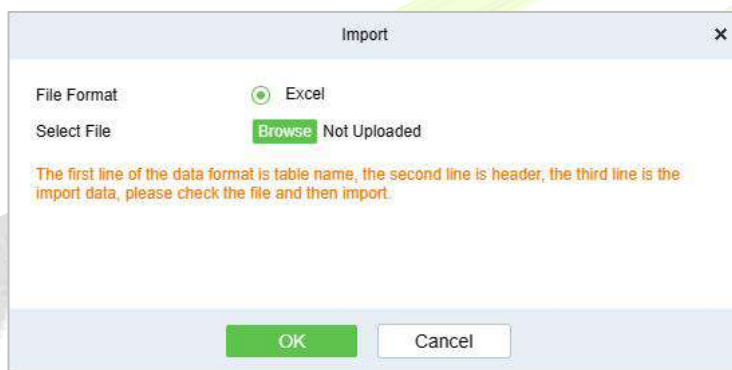


Figure 11-56

If you want to download the sample template excel file for importing, click the **xlsx template** hyperlink. Once the sample excel is downloaded, you can fill your data into it and save. Then click **Choose File** and select the saved excel file.



Figure 11-57

Click **Open**.

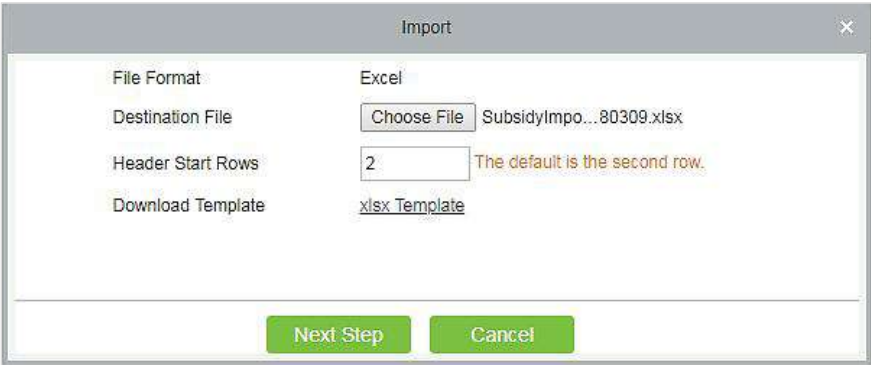


Figure 11- 58

Click **Next Step** button to proceed.

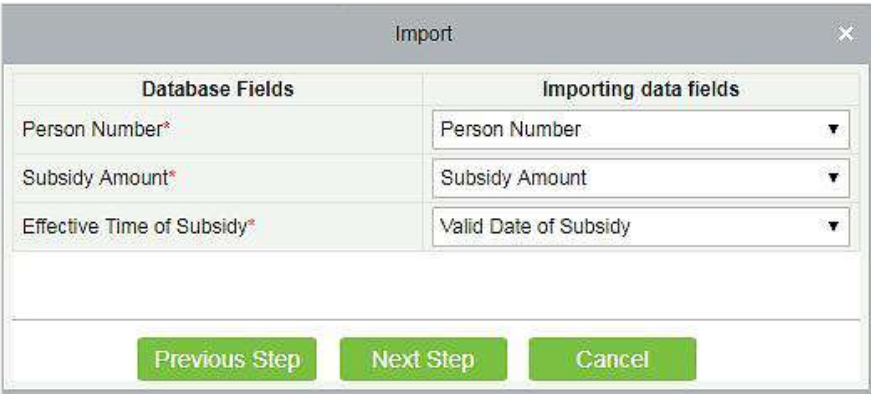


Figure 11- 59

Select the corresponding relationship between the subsidy record field and the imported field in Excel. Then click **Next Step** button to import the subsidy into the system. After the subsidy is imported, it will go directly to the approved or unapproved status based on your installation in which the initialization parameters of this software are determined.

11.6.1.6 Export

This function is used to export the queried subsidies. Click on Export to open the exporting interface.

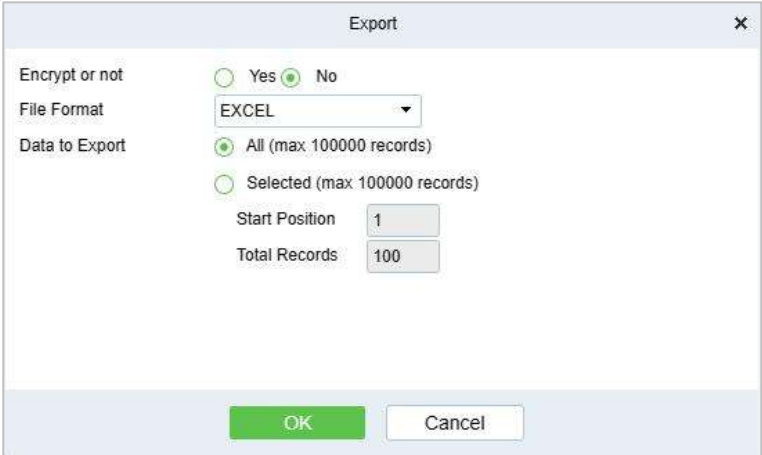



Figure 11- 60

Select the file type and export mode. If you select **All data**, then all query data limited to 40,000 will be exported. If you want to export only few results from the query, then select the second mode and enter the desired start and end points of the required data to be exported.

Click **OK** to finish.

11.6.1.7 Delete

Select the required subsidy record(s) and click  **Delete** under the operation bar to delete the subsidy record. It only supports the removal of unapproved subsidy(s).

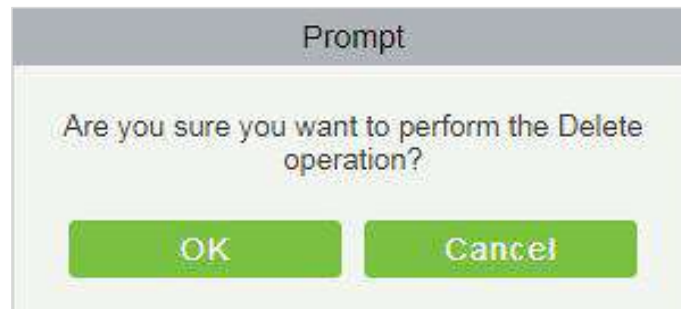


Figure 11- 61

11.6.1.8 Edit

Click **Edit** under the operation bar to modify the unapproved subsidies.

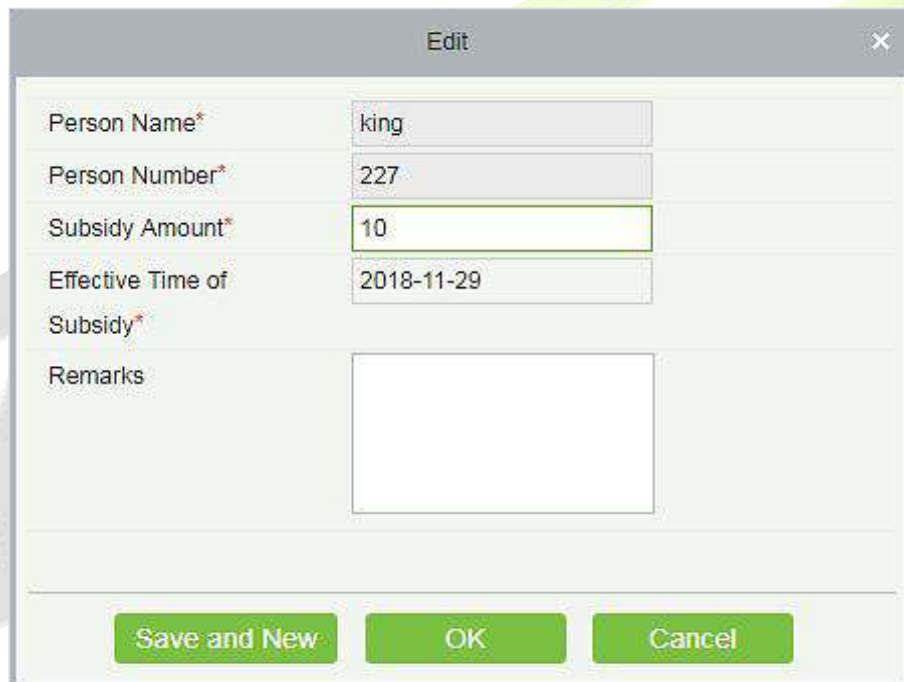
A dialog box titled "Edit" with a close button (X) in the top right corner. It contains a form with the following fields: "Person Name*" with the value "king", "Person Number*" with the value "227", "Subsidy Amount*" with the value "10", "Effective Time of Subsidy*" with the value "2018-11-29", and "Remarks" with an empty text area. At the bottom, there are three green buttons: "Save and New", "OK", and "Cancel".

Figure 11- 62

Modify the required information and click the **OK** to save successfully.

11.6.2 Consumption Report

The statistical report consists of 9 modules: Issue Card Table, Top Up Table, Refund Table, Subsidy Table, Table of Return Card, Card Cost Table, Card Balance Table, Non-Card Return Card Table, And Table of Resume The Card.

11.6.2.1 Issue Card Table

Click Consumption Report > Issue Card Table, as shown below:

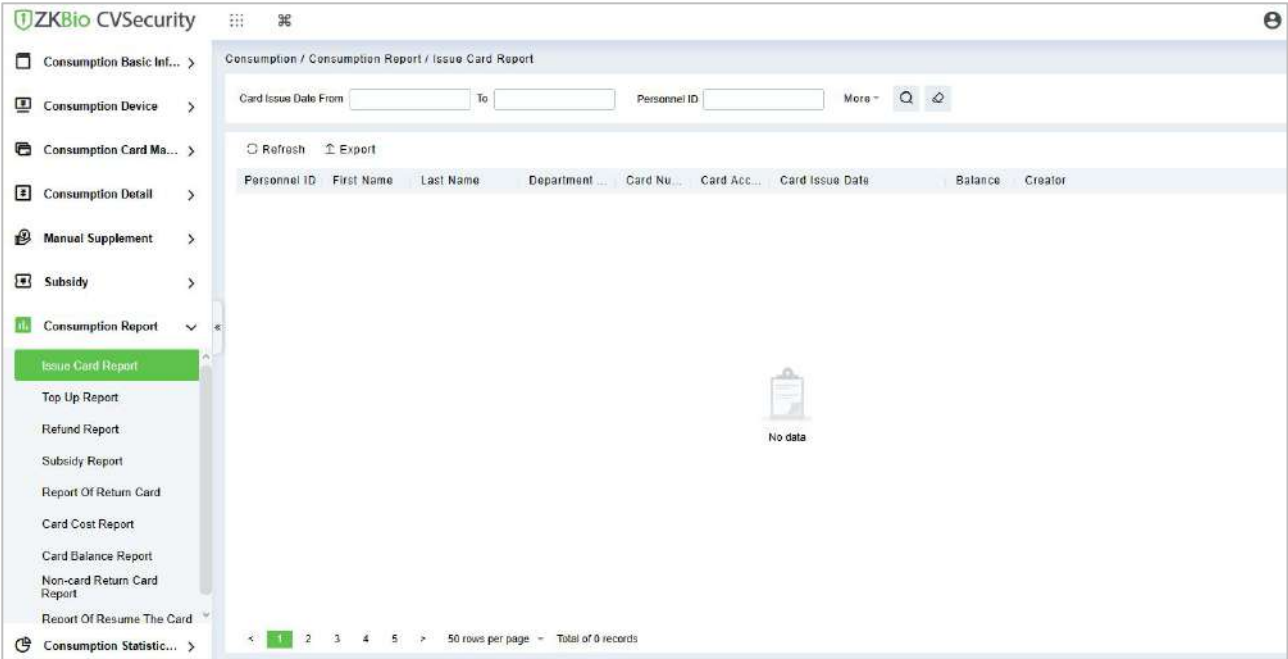


Figure 11- 63

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

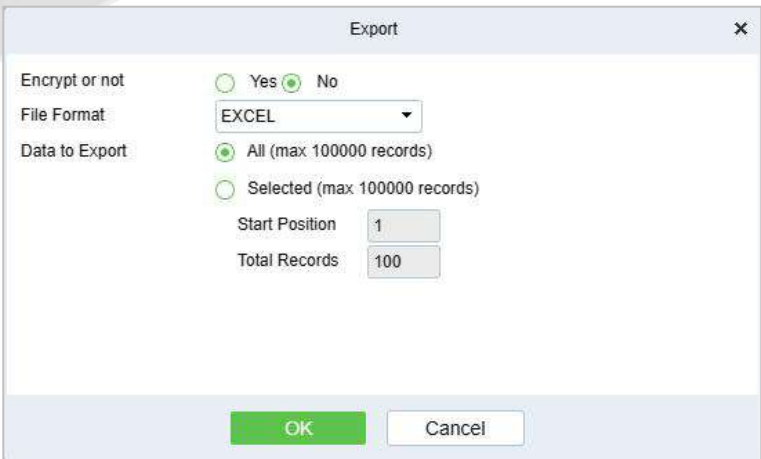


Figure 11- 64

11.6.2.2 Top Up Table

Click Consumption Report > Top Up Table, as shown below:

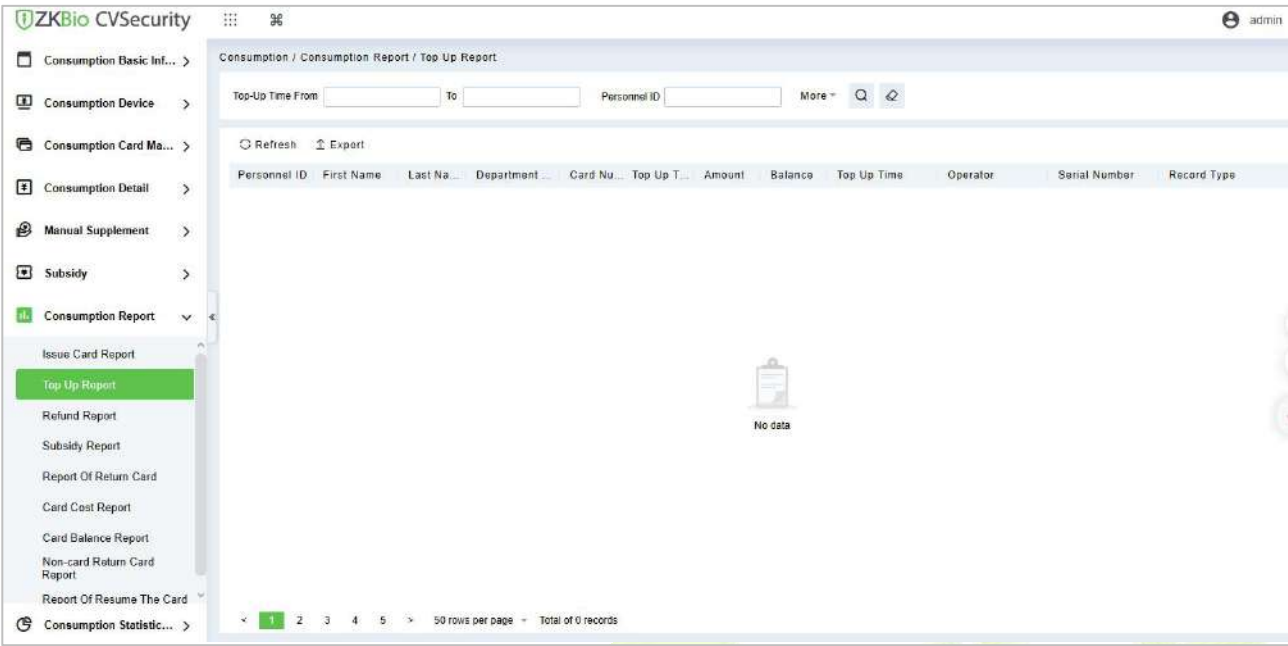


Figure 11- 65

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

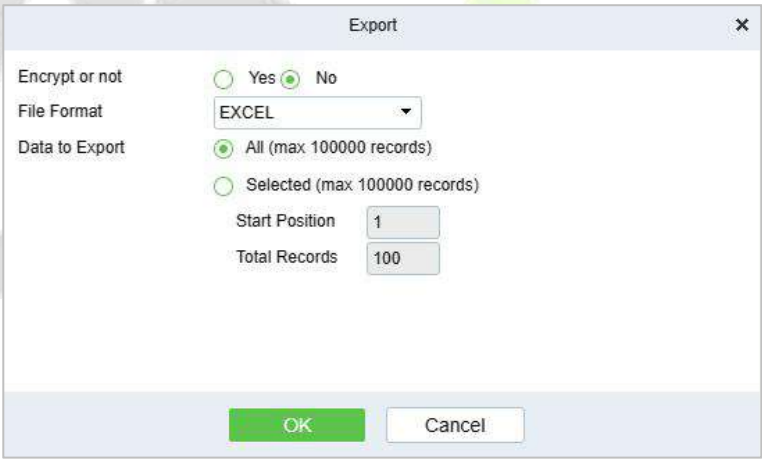


Figure 11- 66

11.6.2.3 Refund Table

Click Consumption Report > Refund Table, as shown below:

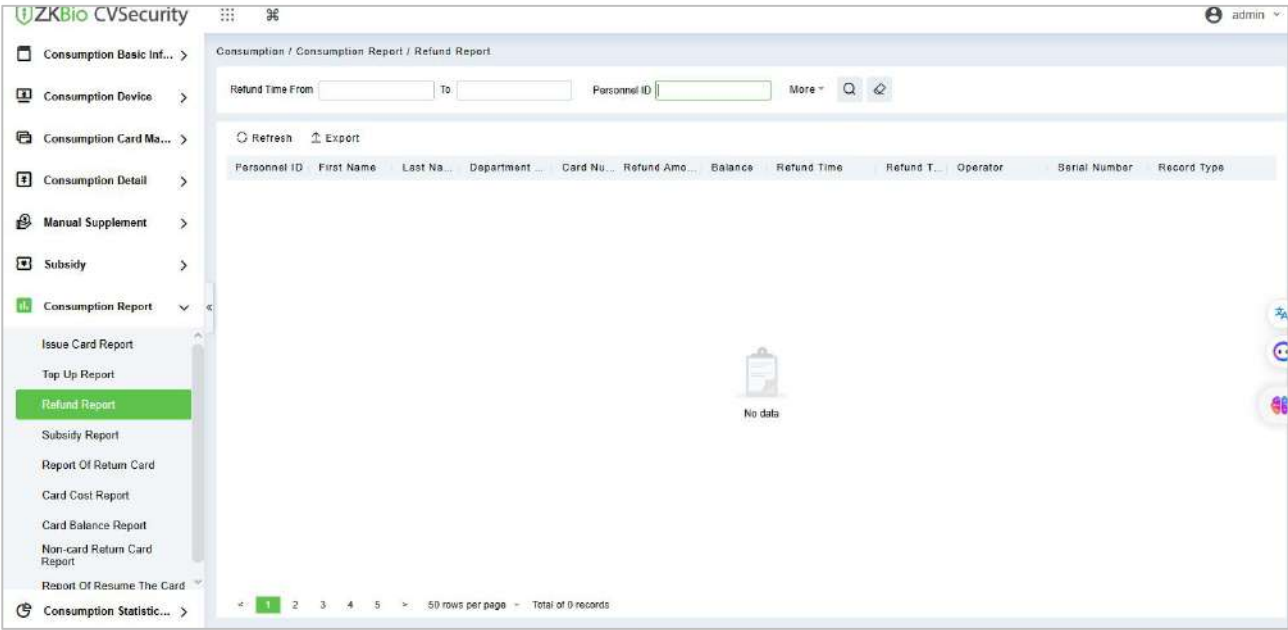


Figure 11- 67

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

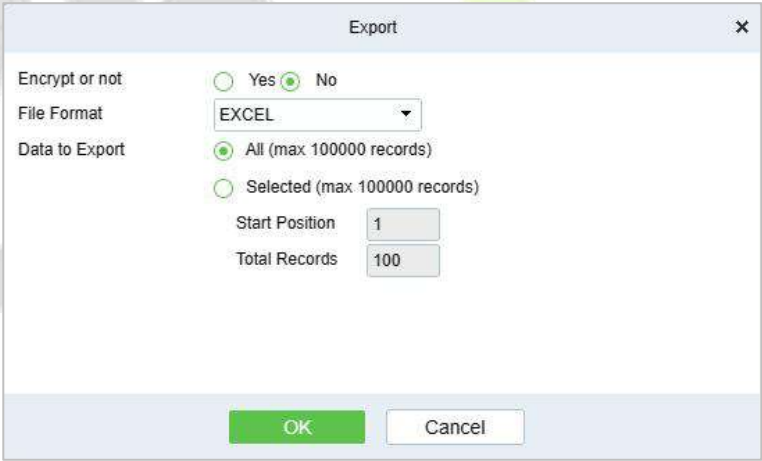


Figure 11- 68

11.6.2.4 Subsidy Table

Click Consumption Report > Subsidy Table, as shown below:

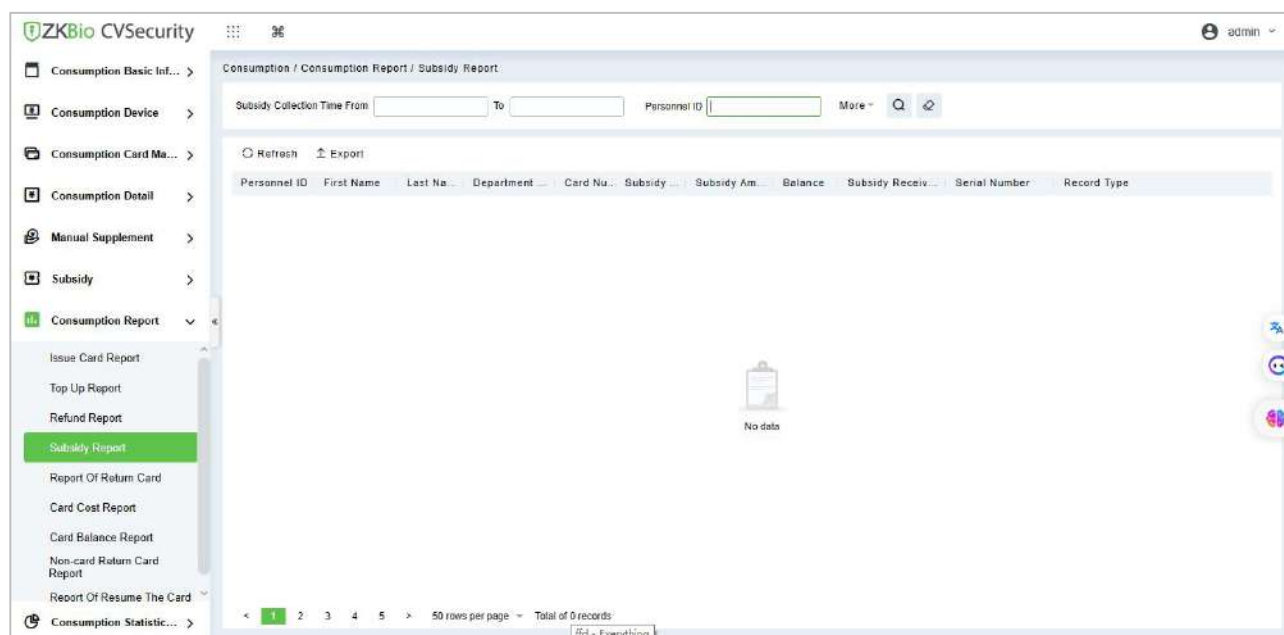


Figure 11-69

● Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

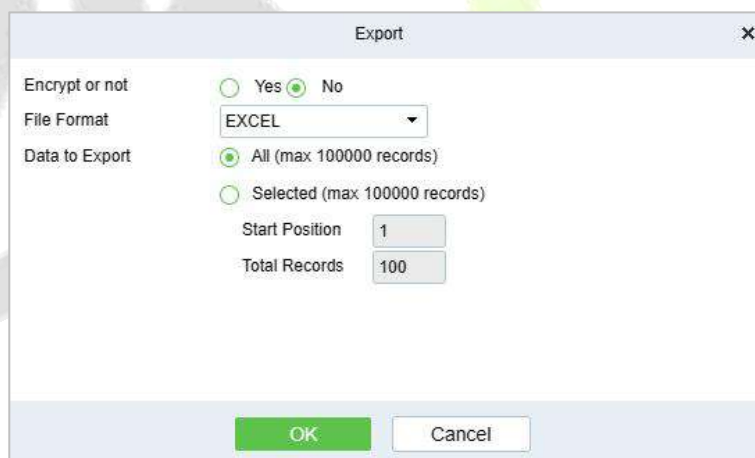


Figure 11-70

11.6.2.5 Report of Return Card

Click **Consumption Report > Table of Return Card**, as shown below:

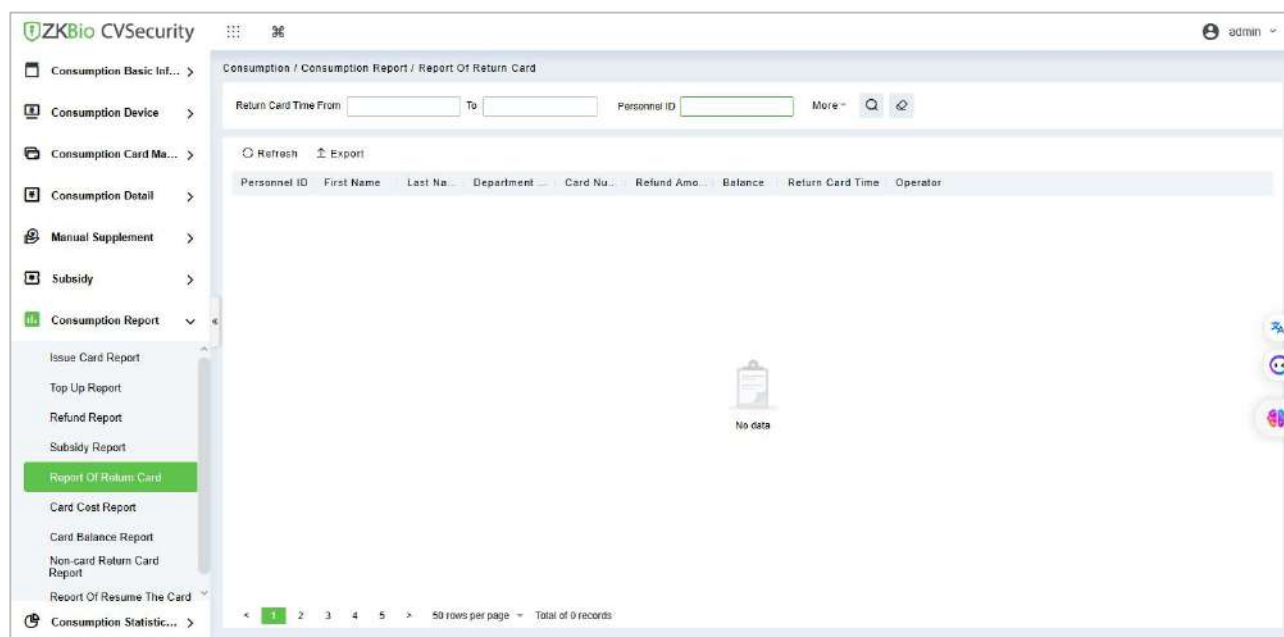


Figure 11-71

● Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

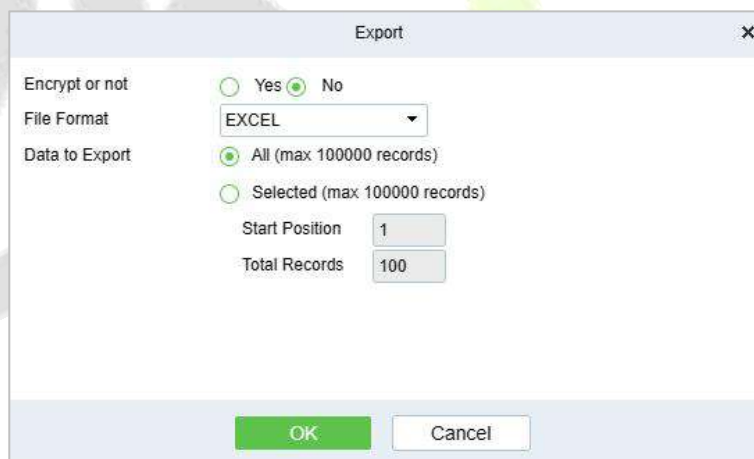


Figure 11-72

11.6.2.6 Card Cost Table

Click **Consumption Report > Card Cost Table**, as shown below:

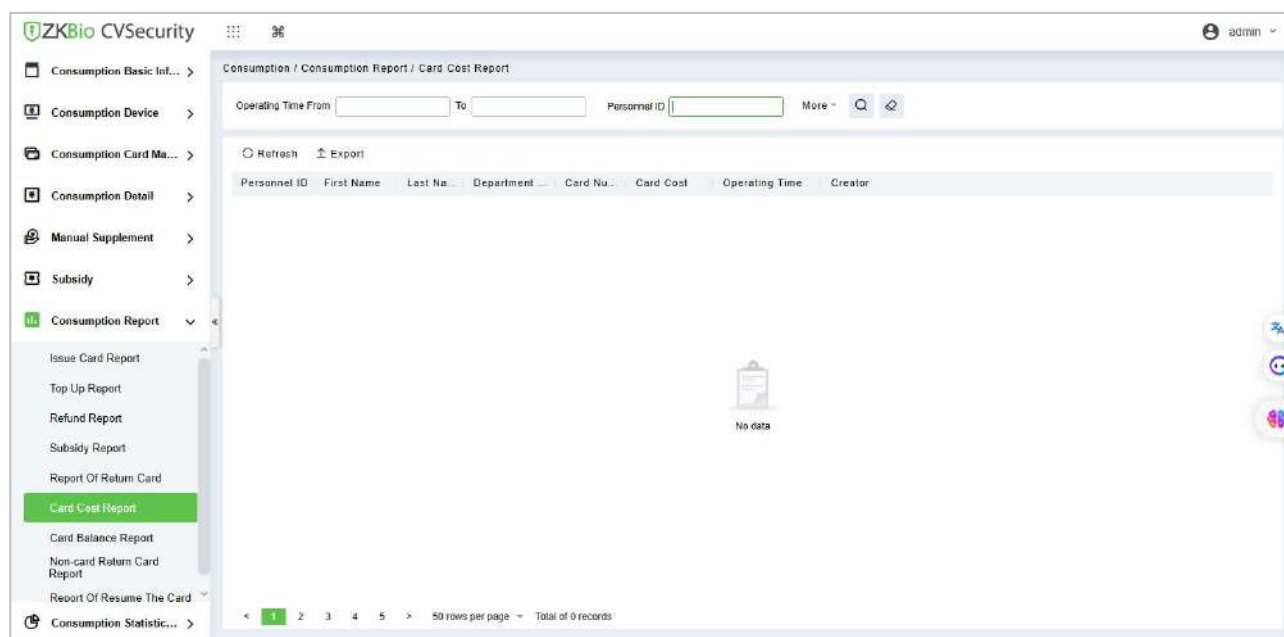


Figure 11- 73

● **Export:**

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

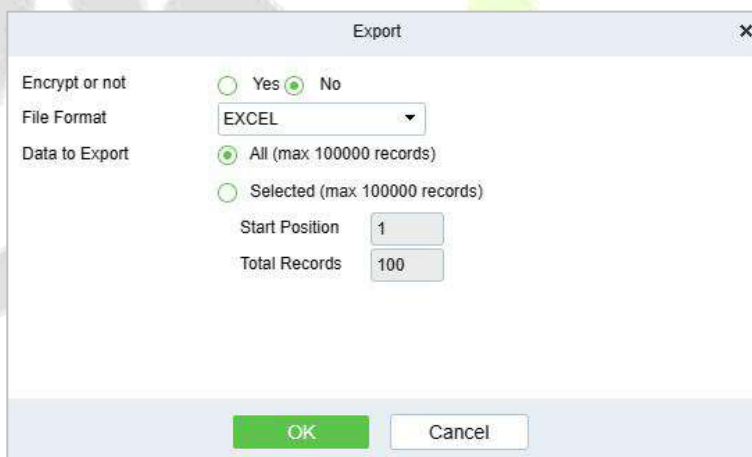


Figure 11- 74

11.6.2.7 Card Balance Table

Click **Consumption Report > Card Balance Table**, as shown below:

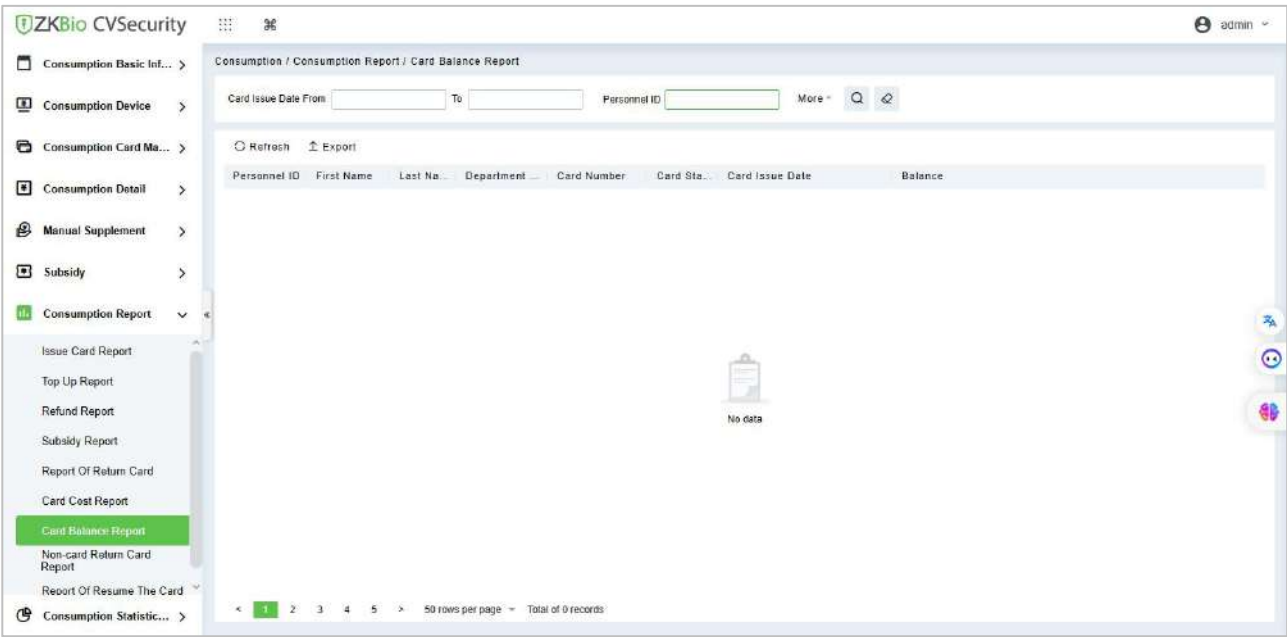


Figure 11- 75

Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

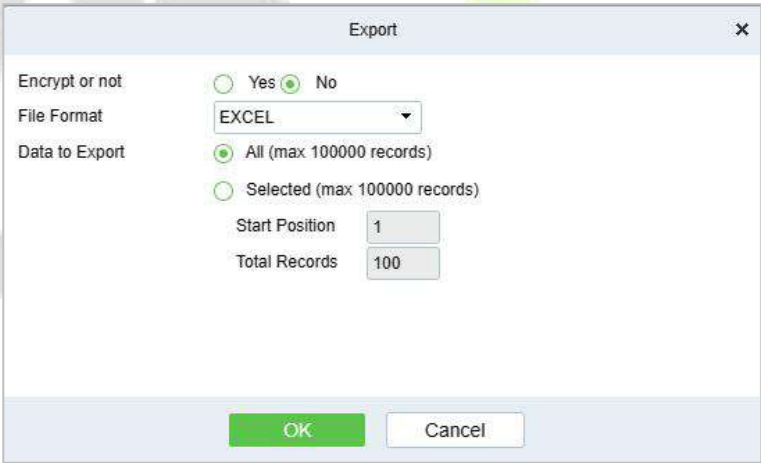


Figure 11- 76

11.6.2.8 Non-card Return Card Table

Click **Consumption Report > Non-card Return Card**, as shown below:

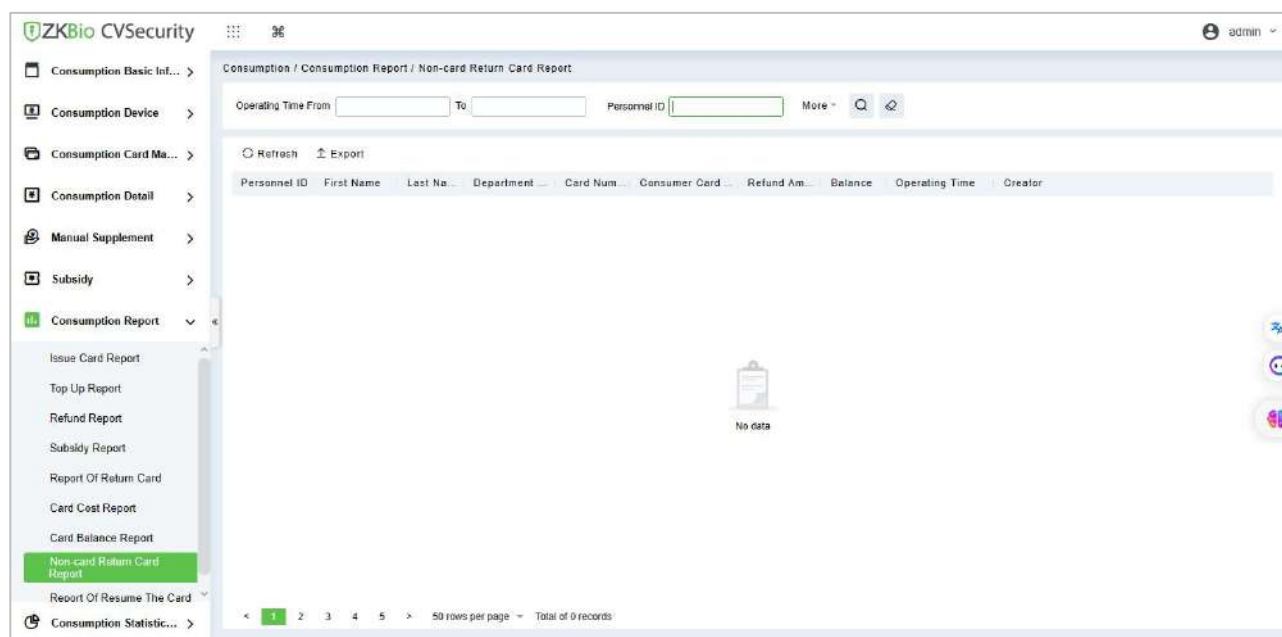


Figure 11-77

● Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

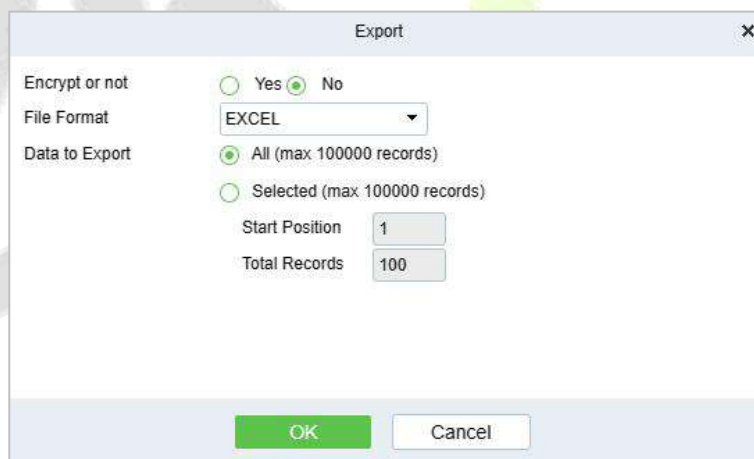


Figure 11-78

11.6.2.9 Table of Resume the Card

Click **Consumption Report > Table of Resume the Card**, as shown below:

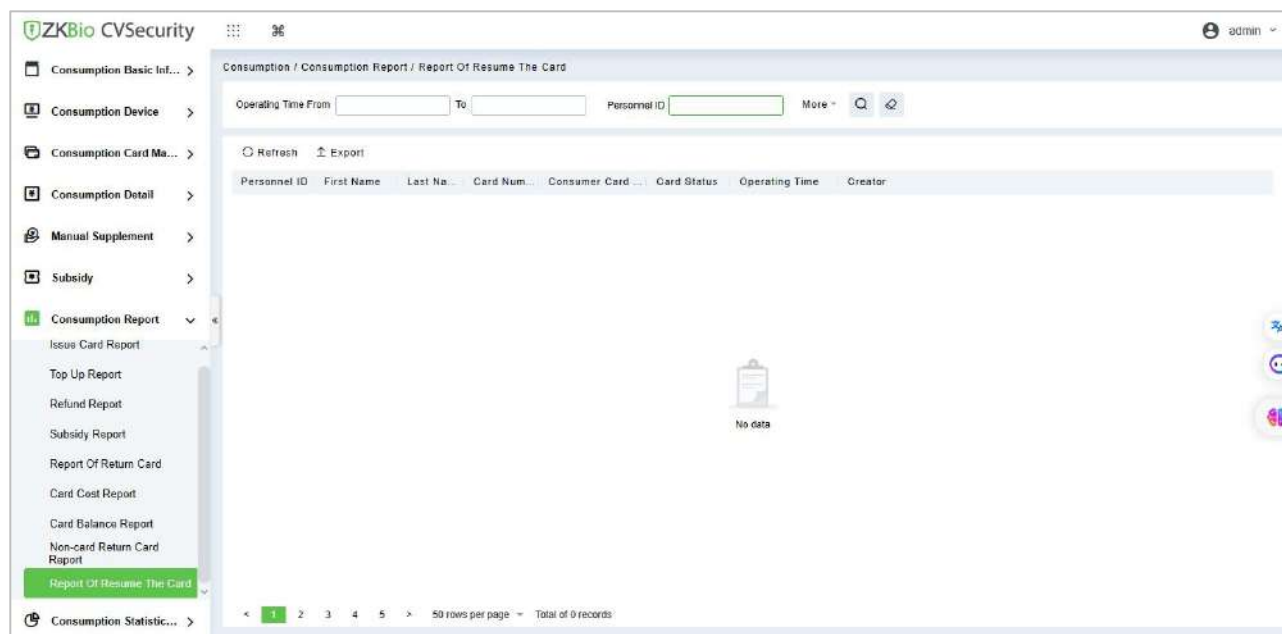


Figure 11-79

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

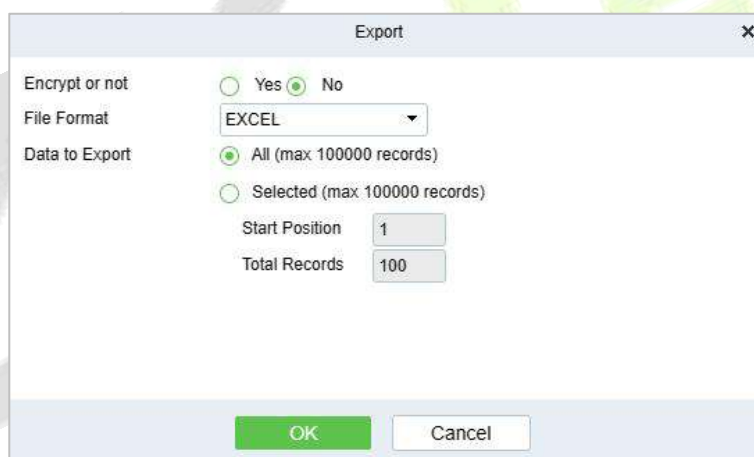


Figure 11-80

11.6.3 Statistical Report

The statistical report contains the statistical information of consumption system module.

11.6.3.1 Personal Consumption Table

Click **Statistical Report > Personal Consumption Table**, as shown below:

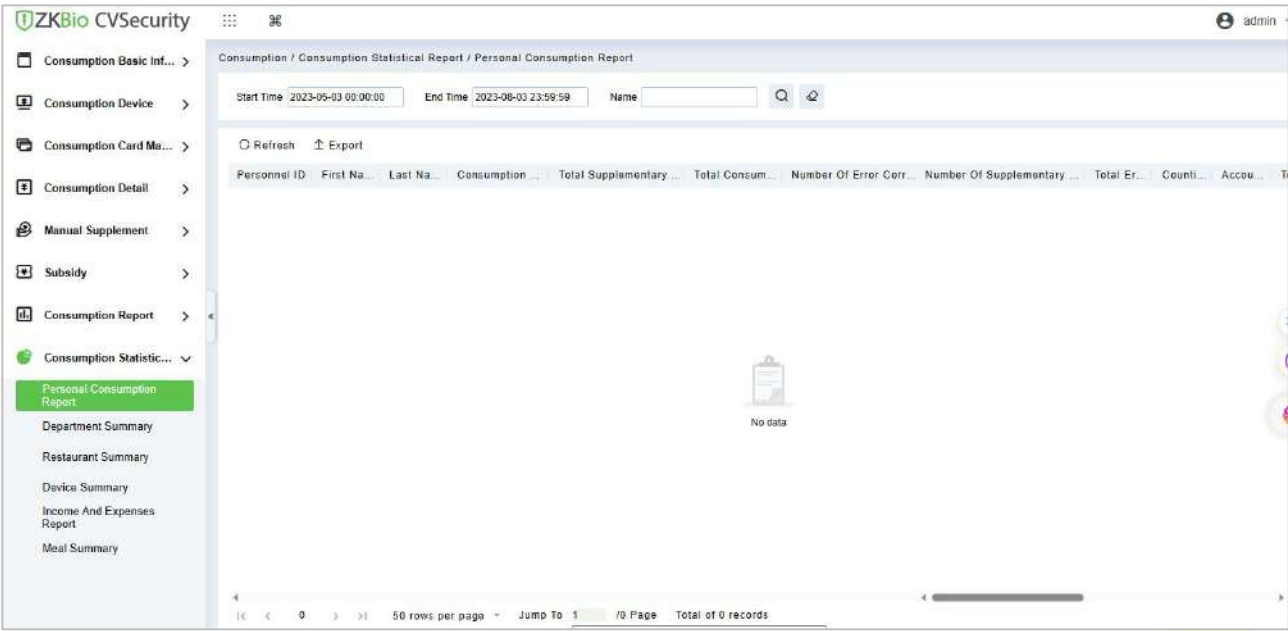


Figure 11- 81

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

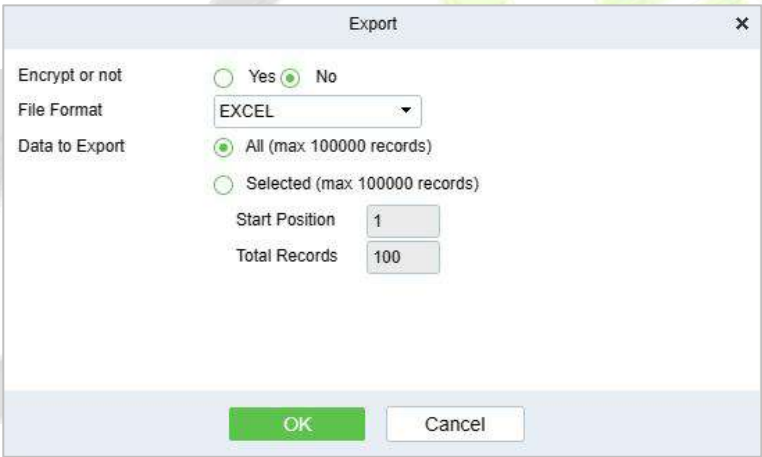



Figure 11- 82

●Refresh:

Click **Refresh** to load the latest personal consumption statistics table data.

Note: If the page personal consumption statistics table data is more, you can also enter the person name, department name, consumption time in the search field, click  to search and query.

The data statistics column includes below information:



Figure 11- 83

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number Of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times Of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (Device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (Device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (Including Supplementary Order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (Including Billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

11.6.3.2 Department Summary Table

Click **Statistical Report > Department Summary Table** as shown below:

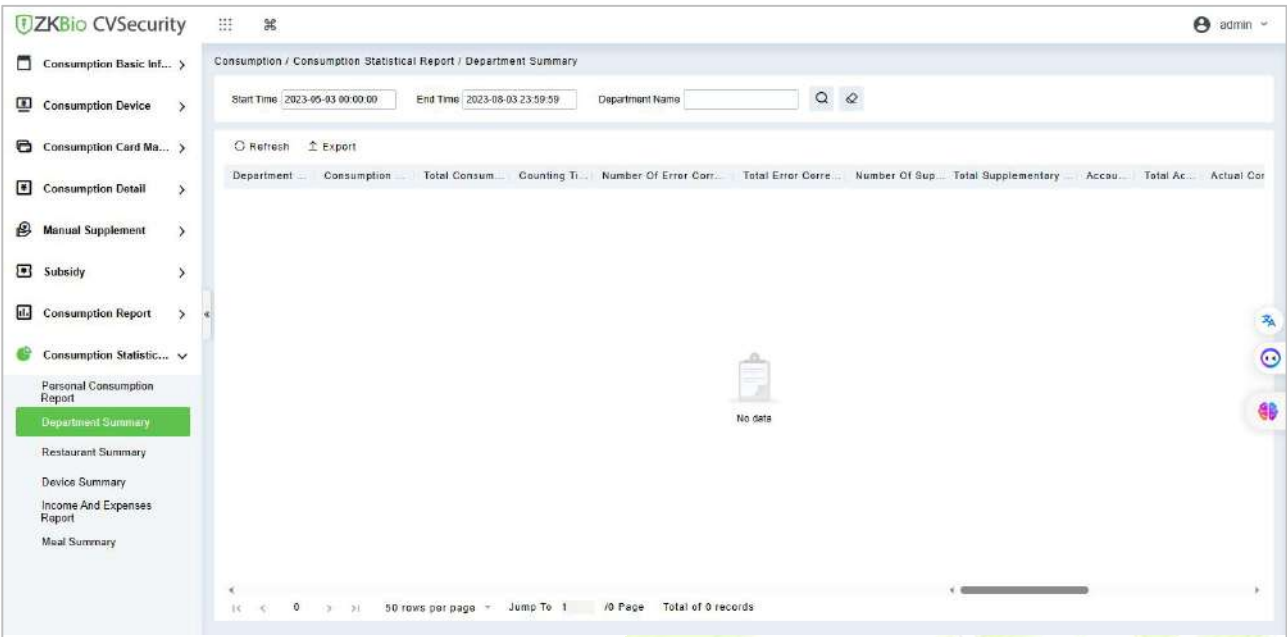


Figure 11- 84

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

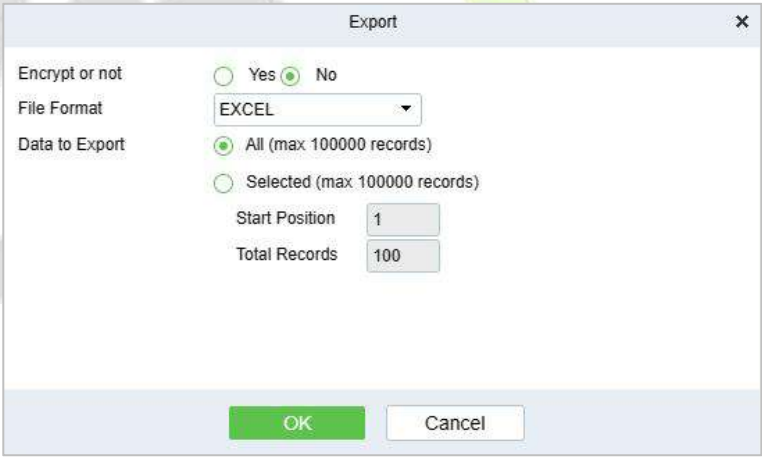



Figure 11- 85

Refresh

Click **Refresh** to load the latest department summary table data.

Note: If the page department summary table data is more, you can also enter the department name and consumption time in the search field, and click  to search for the query.

The data statistics column includes:

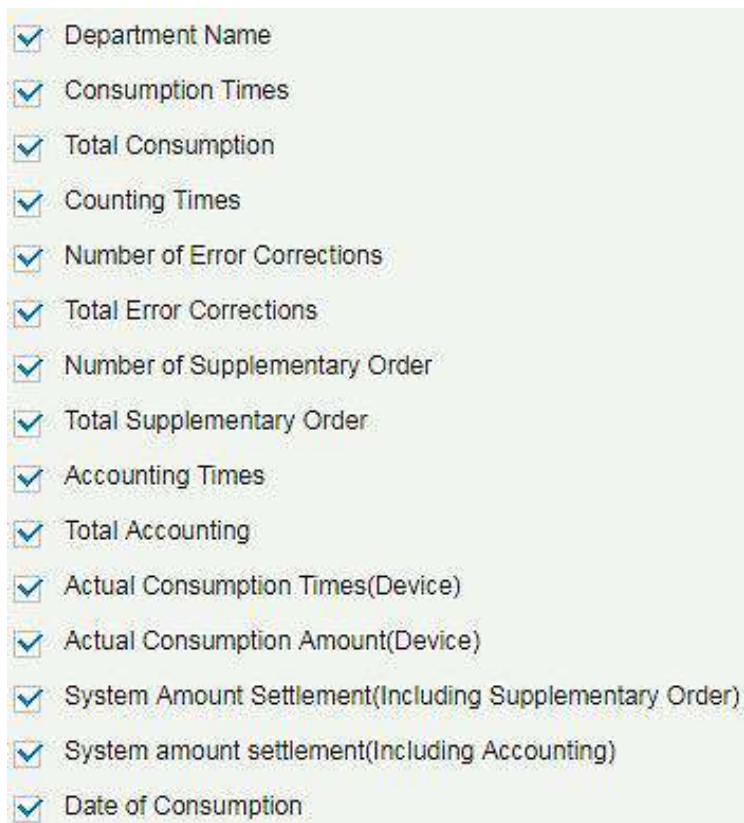


Figure 11- 86

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type.
- **Total Error Correction** = Total amount of error correction for the particular type.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

11.6.3.3 Restaurant Summary

Click **Statistical Report > Restaurant Summary**, as shown below:

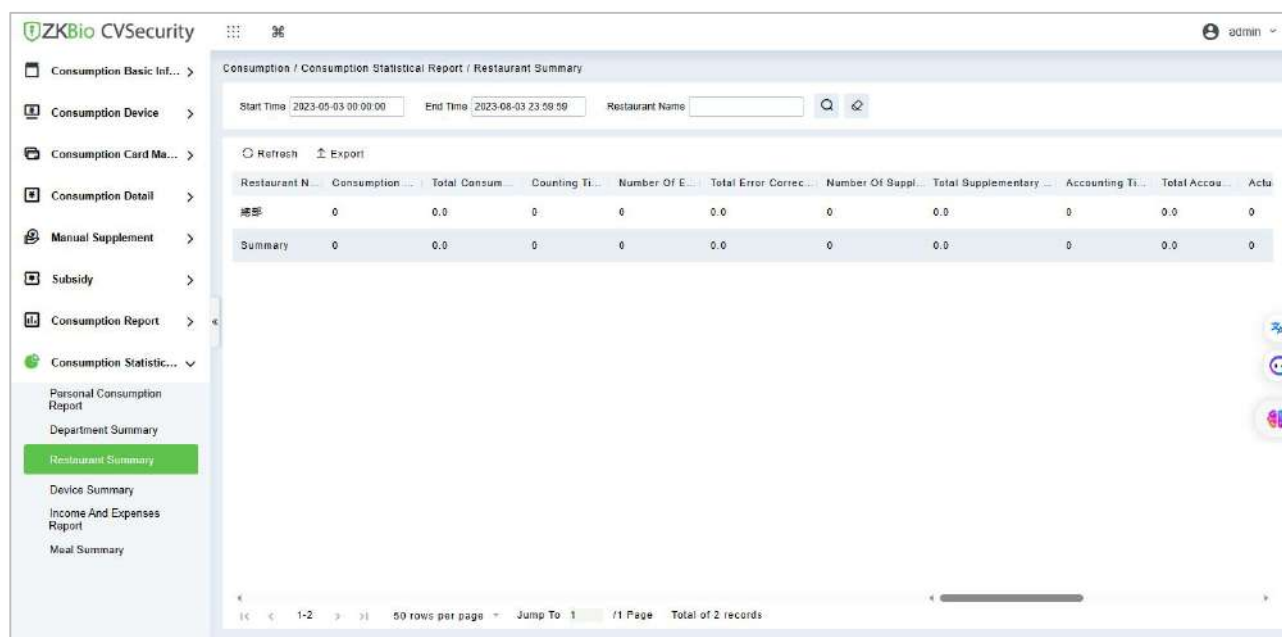


Figure 11- 87

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

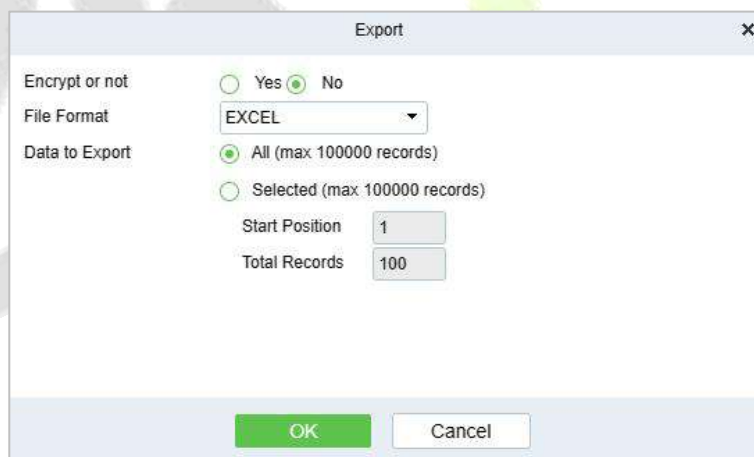



Figure 11- 88

●Refresh:

Click **Refresh** to load the latest restaurant summary table data.

Note: If the page restaurant summary table data is more, you can also enter the restaurant name, consumption time in the search bar, click  to search and query.

The data statistics column includes:

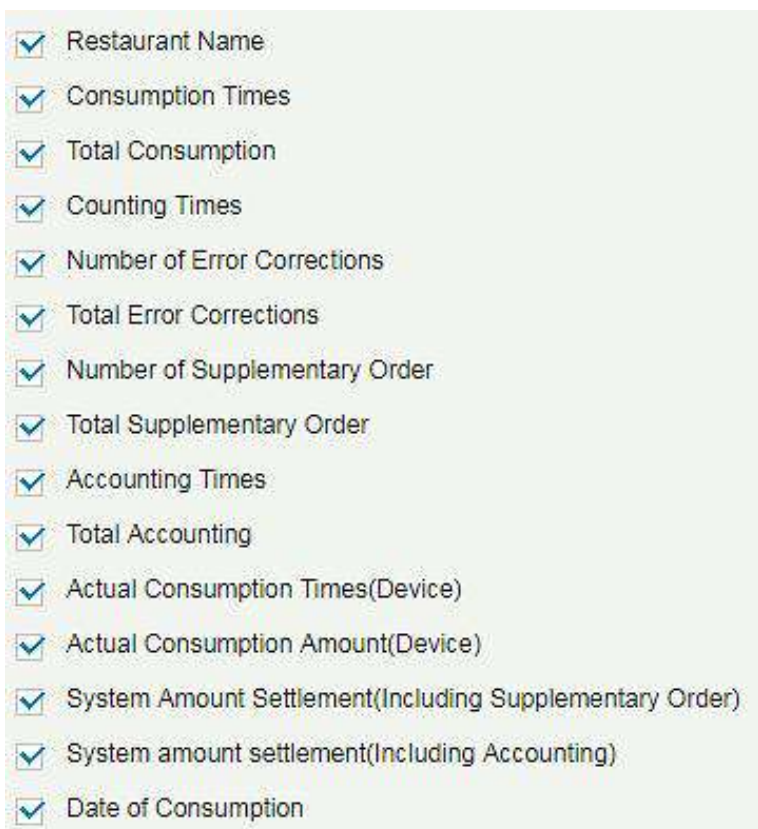


Figure 11- 89

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

11.6.3.4 Device Summary Table

Click **Statistical Report > Device Summary Table**, as shown below:

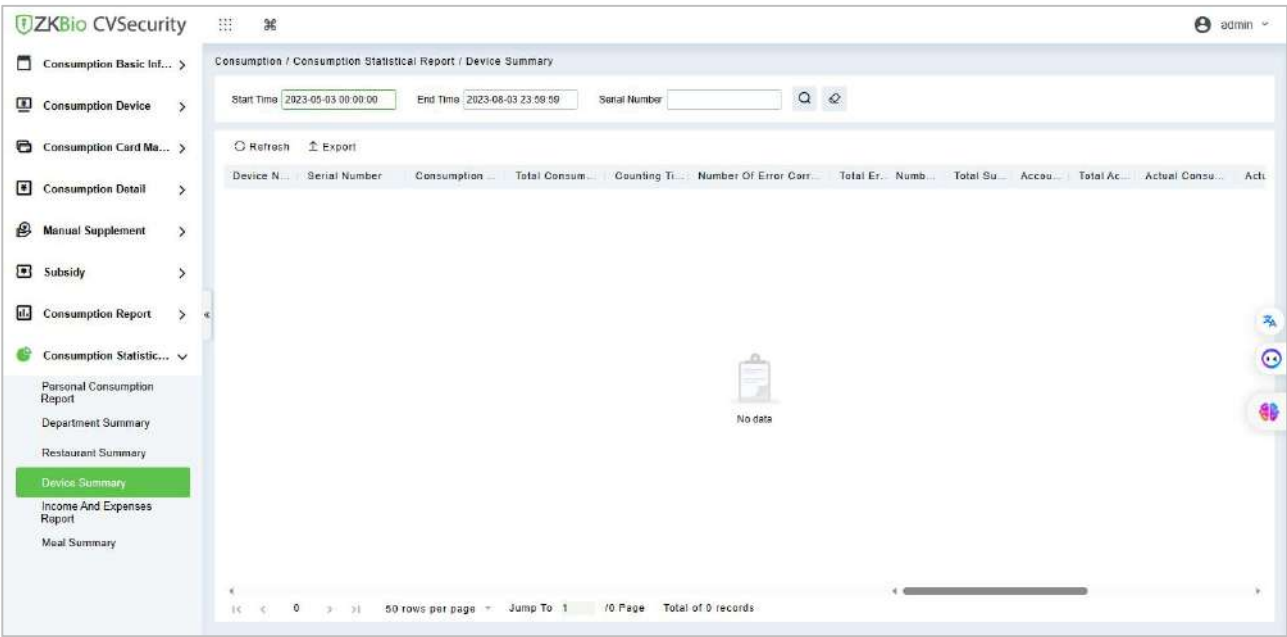


Figure 11- 90

Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

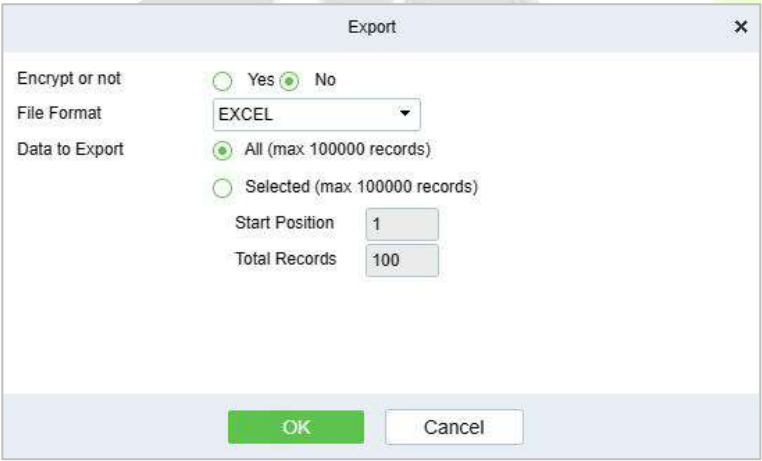



Figure 11- 91

● Refresh:

Click **Refresh** to load the latest equipment summary table data.

Note: If there is more data on the page device summary table, you can also enter the device name and consumption time in the search field, and click  to search for it.

The data statistics column includes:



Figure 11- 92

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

11.6.3.5 Income and Expenses Table

Click **Statistical Report > Income and Expenses Table**, as shown below:

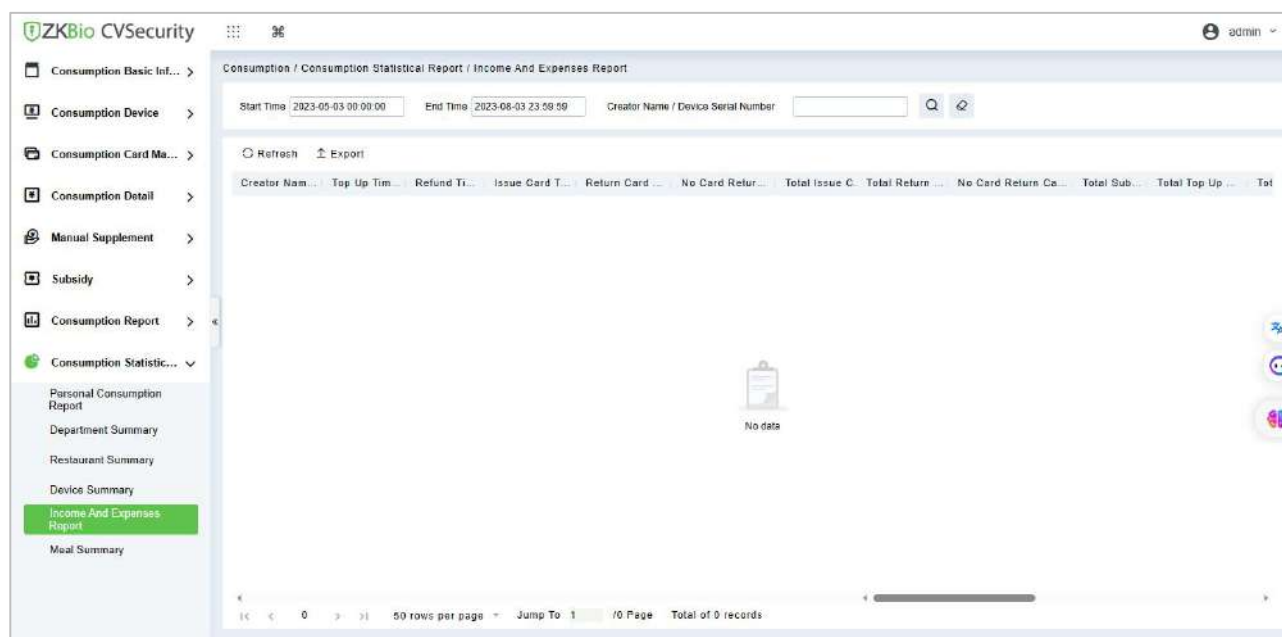


Figure 11- 93

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

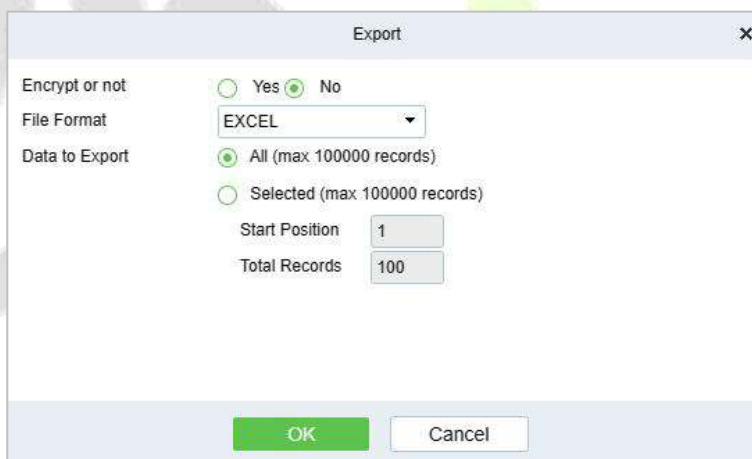



Figure 11- 94

●Refresh:

Click **Refresh** to load the latest revenue and expenditure summary table data.

Note: If there is more data on the page income and expenditure summary table, you can also enter the creator name/device serial number and summary time in the search field, and click  to search for it.

The data statistics column includes



Figure 11- 95

- **Top up Times** = The total number of counts a card was added extra amount.
- **Refund Times** = The total number of counts a card were refunded.
- **Issue Card Times** = The total number of counts a card were issued.
- **Return Card Times** = The total number of counts the cards were returned.
- **Non-card Return card Times** = The total count of Non-card Return card.
- **Total Issue Card** = The total number of issued card.
- **Total Return card** = The total number of cards returned.
- **No Card Return Card Total** = The total number of blocked card which are not returned.
- **Total Subsidy** = The total amount of subsidy for the card type.
- **Total Top-up Offer** = The total amount of top-up discount for the card type.
- **Total Top-up** = The total amount of top-up for the card type.
- **Total Refund** = The total amount of refund for the card type.
- **Card Cost Support** = The total amount of card cost for the card type.
- **Management Fee** = The total amount of management fee for the card type.
- **Card Cost Expense** = The total amount of card cost for the card type.
- **Total Revenue and Expenditure** = (Total Top up + Card Cost Expense + Total Issue Card + Management fee) - (Total Refund - Total Return Card).

11.6.3.6 Meal Summary Table

Click **Statistical Report > Meal Summary Table**, as shown below:

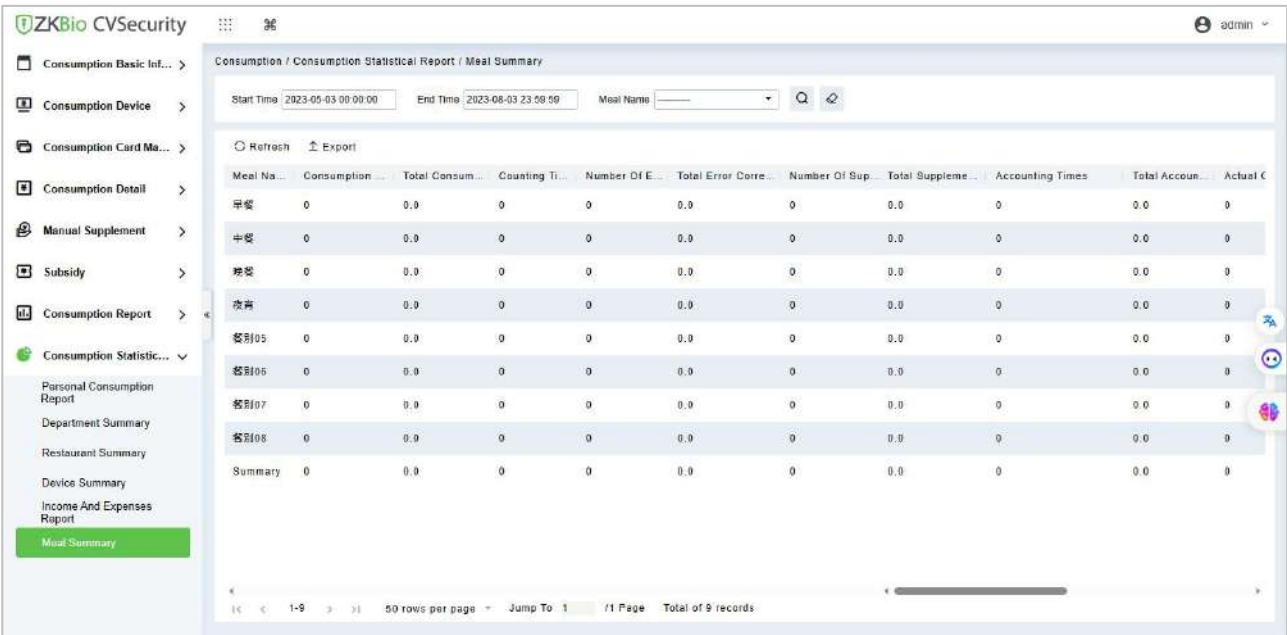


Figure 11- 96

●Export:

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

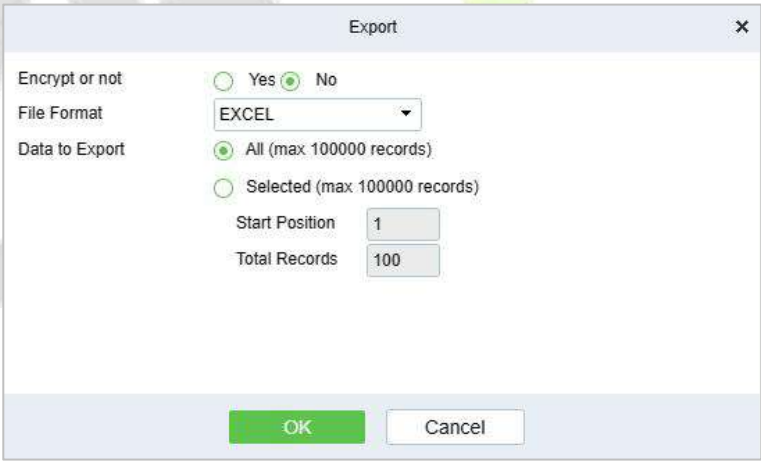



Figure 11- 97

●Refresh:

Click **Refresh** to load the latest meal summary table data.

✎ **Note:** If there is more data in the page meal summary table, you can also enter the device name, name, and consumption time in the search field, and click  to search for it.

The data statistics column includes:



Figure 11-98

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

12 Consumption (Online) System

Based on controlled devices by software, it realizes the online consumption mode combining the functions of the Promerc-300 face consumer machine. The software mainly configures background data, including consumption time zone, commodity information, restaurant information and other data. Centralize various data on the device, generate consumption reports, and operate online account creating, refund, recharge, subsidy, etc. on the software.

12.1 Consumption Basic Management

12.1.1 Piecewise Fixed Value

Piecewise Fixed value is the value and validity of a card which is supposed to be used on the consumer device. Click **Consumption Basic Management > Piecewise Fixed Value** as shown in the following figure.



Figure 12- 1

12.1.1.1 Edit

By default, there are eight values, Click **Edit** on the operation column to open the modification dialog box.

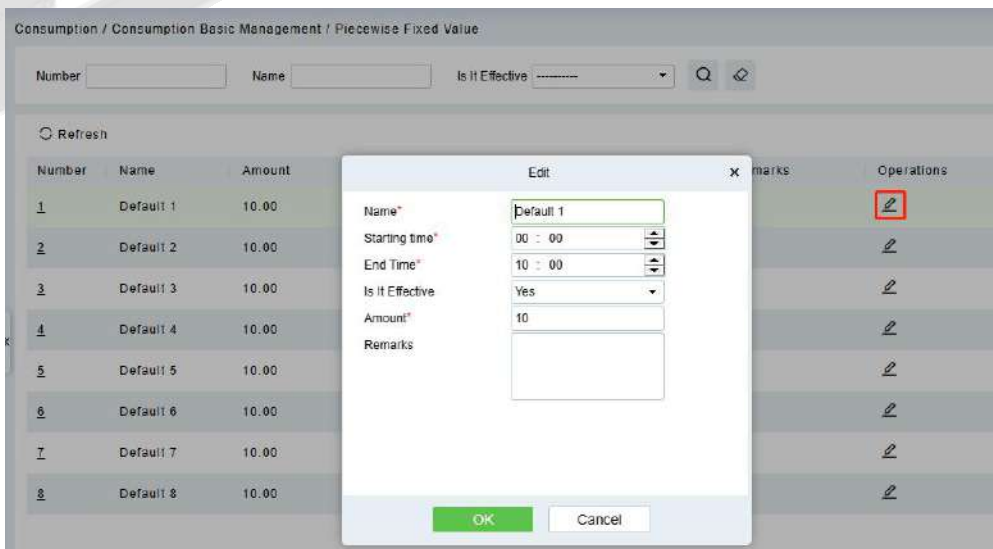


Figure 12- 2

You can provide the desired information in the dialog box which include: **Name, Start time, End time, Whether Effective, Amount, and Remarks.**

12.1.2 Consumption Time Zone

Click **Consumption Basic Management > Consumption Time Zone** as shown in the following figure:
By default, the system has some Consumption Time zones, you can select and edit according to your preferences.

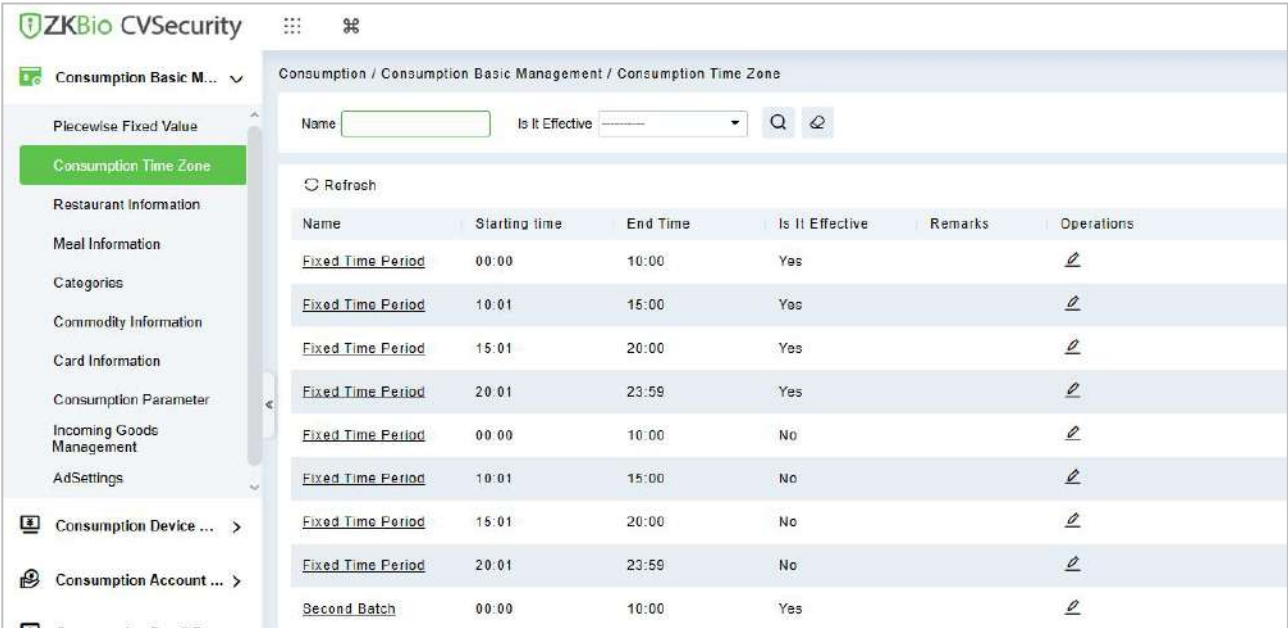


Figure 12- 3

12.1.2.1 Edit

Click **Edit** column on the operation column to open the modification dialog box.

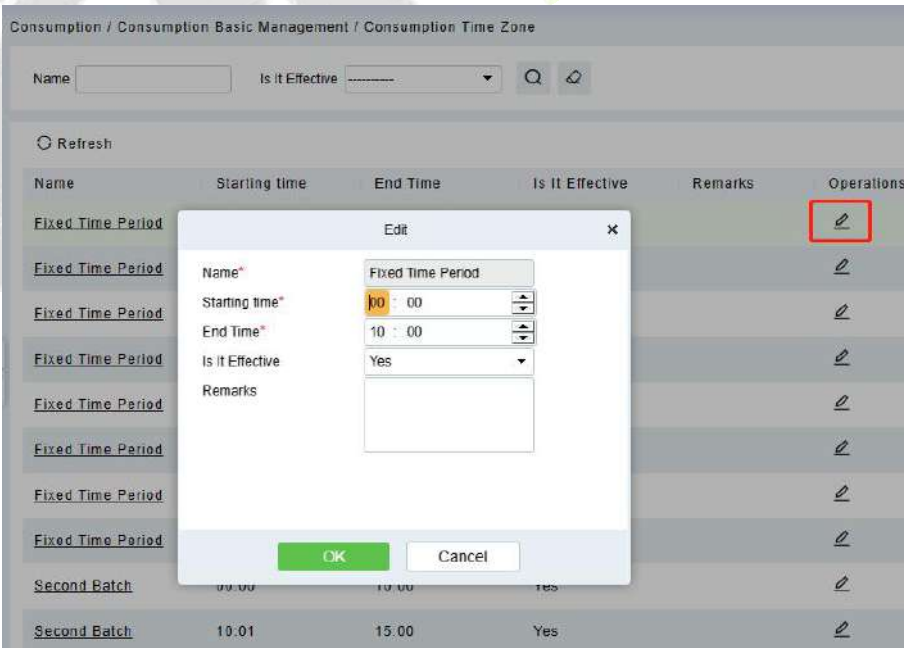


Figure 12- 4

On the dialog box, you can select the required **Start time**, **End time**, **Whether Effective**, and **Remarks** (optional), as shown in the above figure. After providing the information, click **OK**.

12.1.3 Restaurant Information

By default, a Restaurant name is already added, you can edit it and also add new ones.

Click **Consumption Basic Management > Restaurant Information**, shown as following figure:

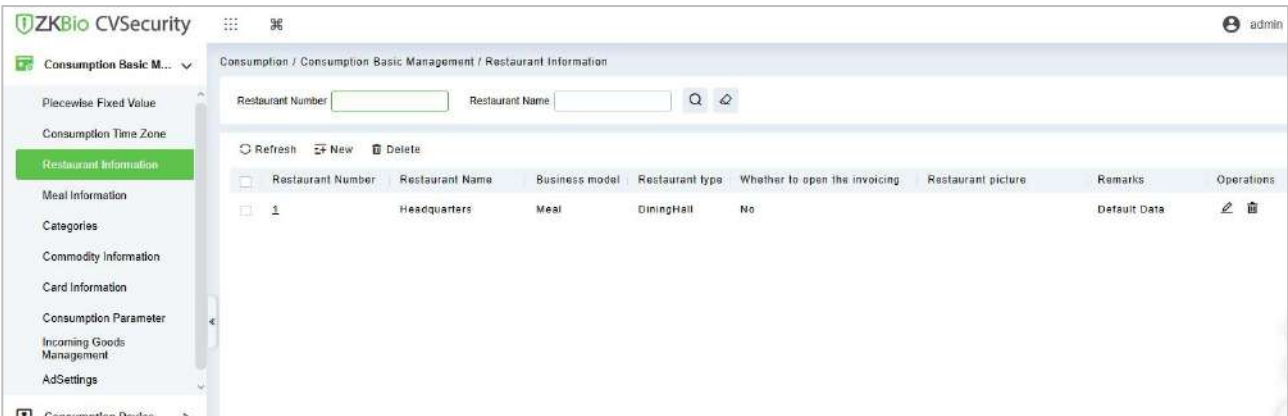


Figure 12- 5

12.1.3.1 New

Click **New**, to add a restaurant.

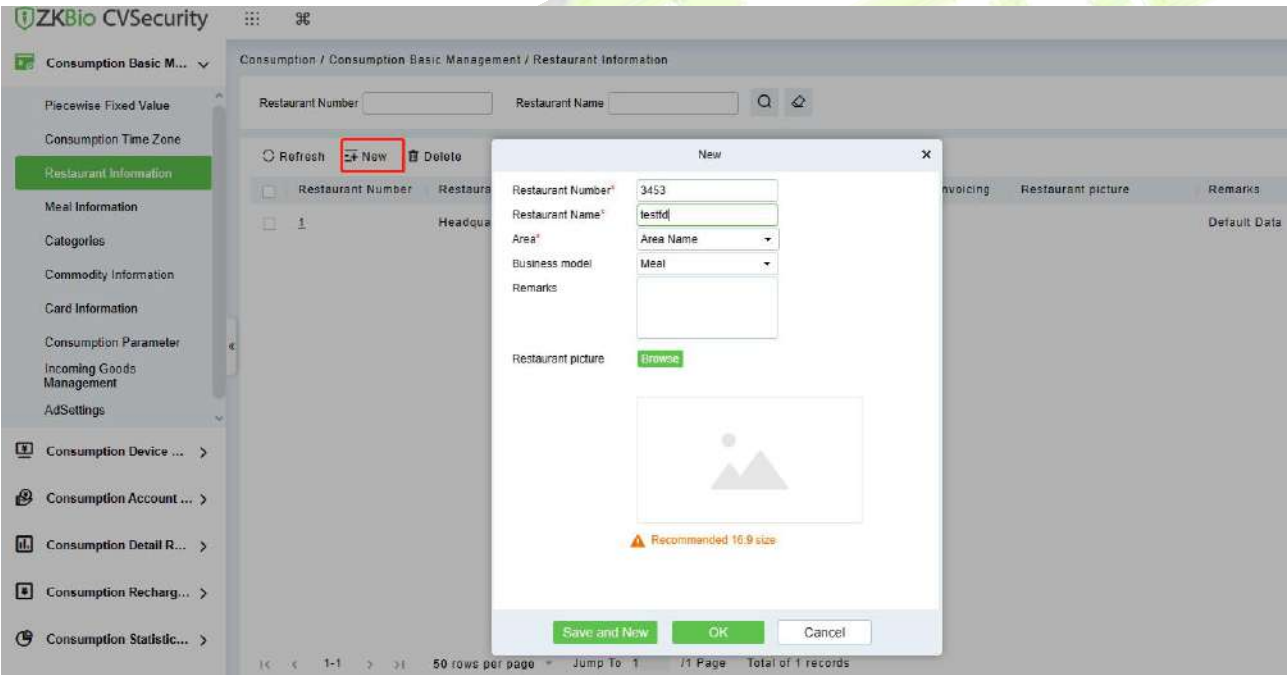


Figure 12- 6

Type the preferred Restaurant number, Restaurant name, and Remarks (optional) information, choose whether to open the invoicing, and allows user to upload restaurant picture, then click **OK** to save and close or click **Save and New** for continue adding.

12.1.3.2 Edit

Click **Edit** in the operation column to open the modification dialog box.

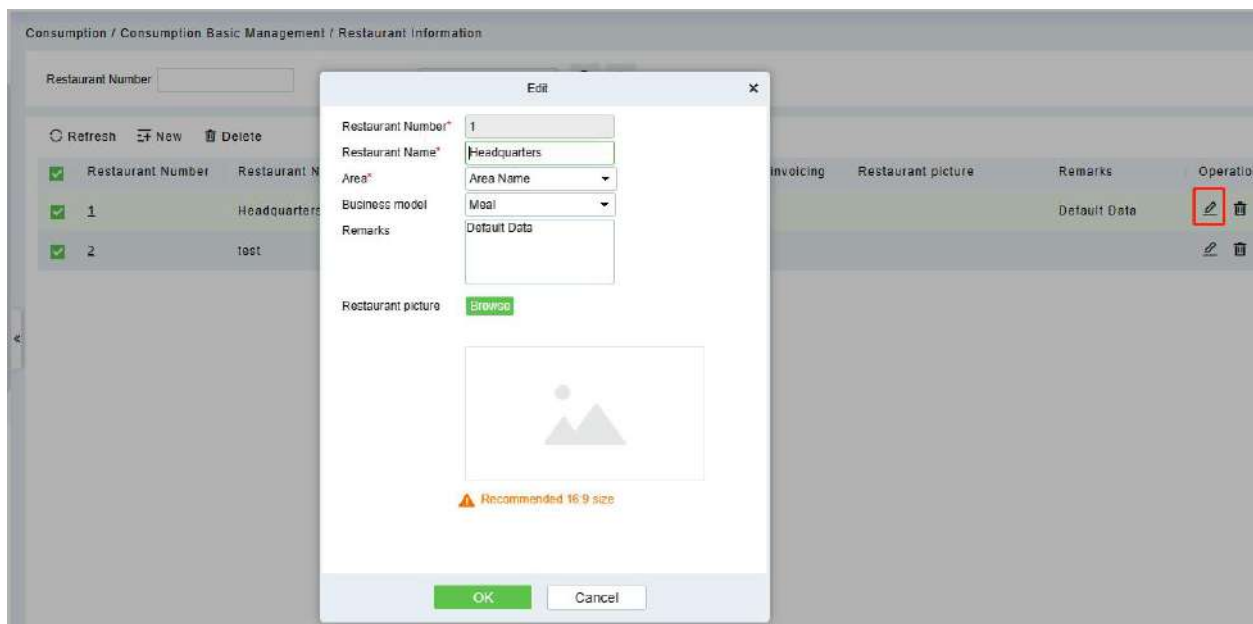


Figure 12- 7

12.1.3.3 Delete

You can directly click **Delete** on the required hotel to remove it from the system.

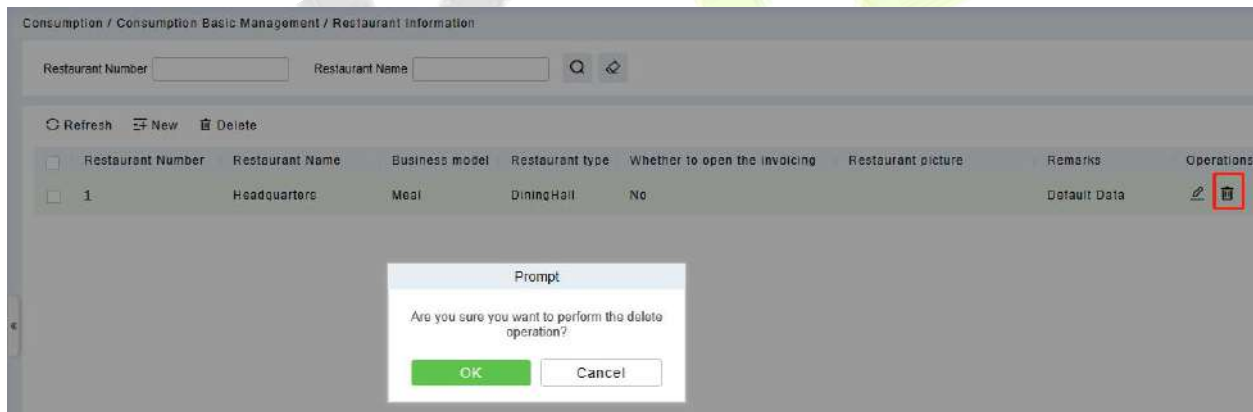


Figure 12- 8

For deleting in batch, select the required hotel(s) as shown below and click **Delete**. The default restaurant number 1 cannot be deleted.

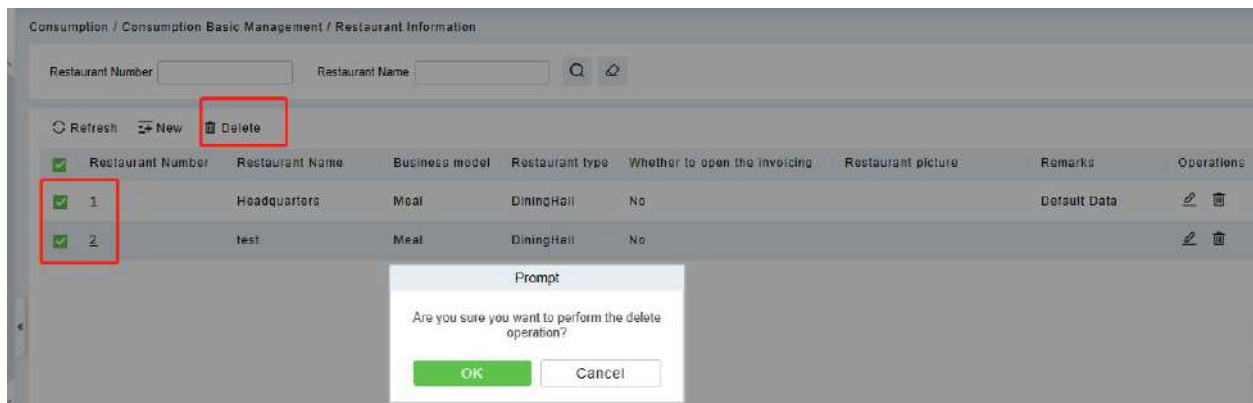


Figure 12- 9

12.1.4 Meal Information

Click **Consumption Basic Management > Meal Information**, shown as following figure:

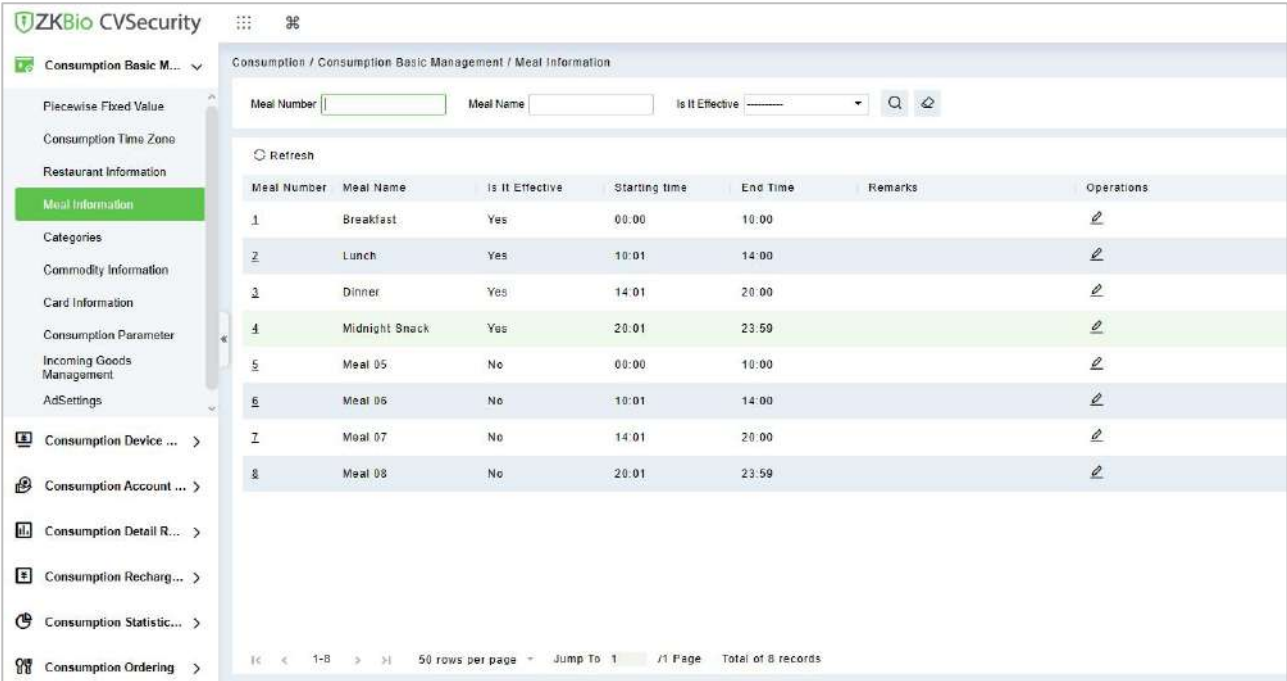


Figure 12- 10

12.1.4.1 Edit

Click on the meal number of list and the edit column of the operation to pop up the modification dialog box.

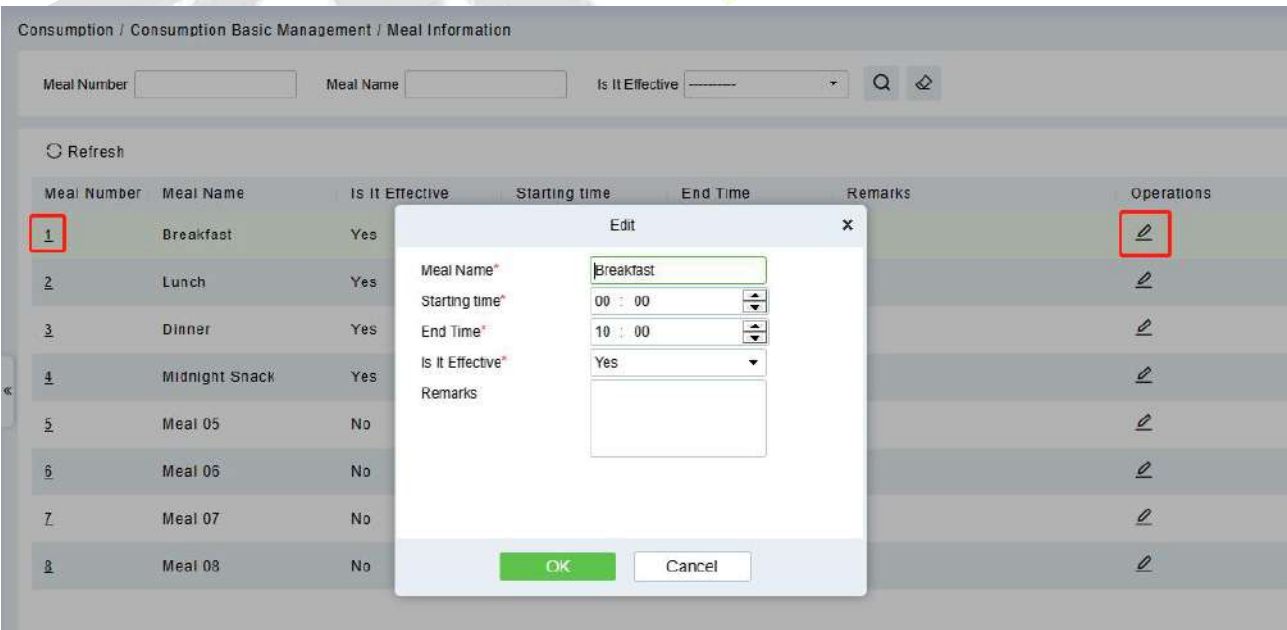


Figure 12- 11

Enter the information in the dialog box which include: **Meal Name**, **Start Time**, **End time**, **Whether Effective** (status), **Remarks** (optional) and then click **OK** to save.

12.1.5 Categories

Click **Consumption Basic Management > Categories** as shown in the following figure:

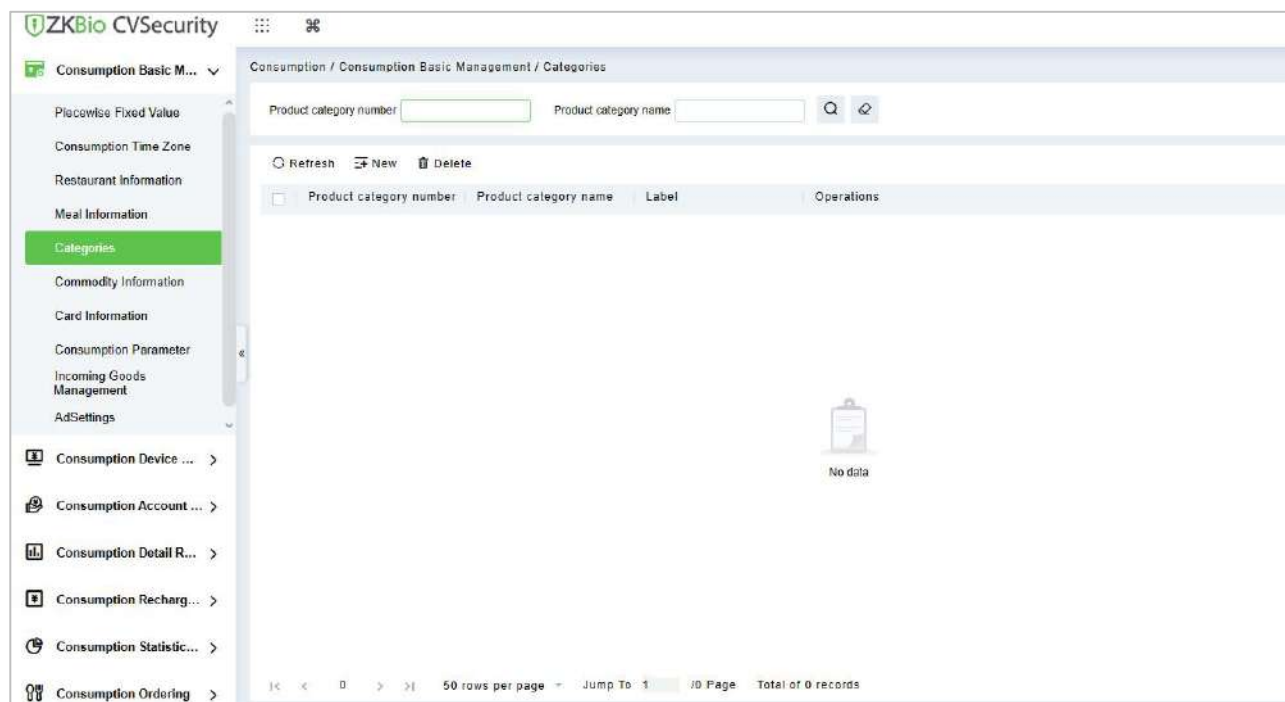


Figure 12- 12

12.1.5.1 New

Click **New** to add, enter required **Product category number**, **Product category name**, in the dialog box, and then click **OK** to save.

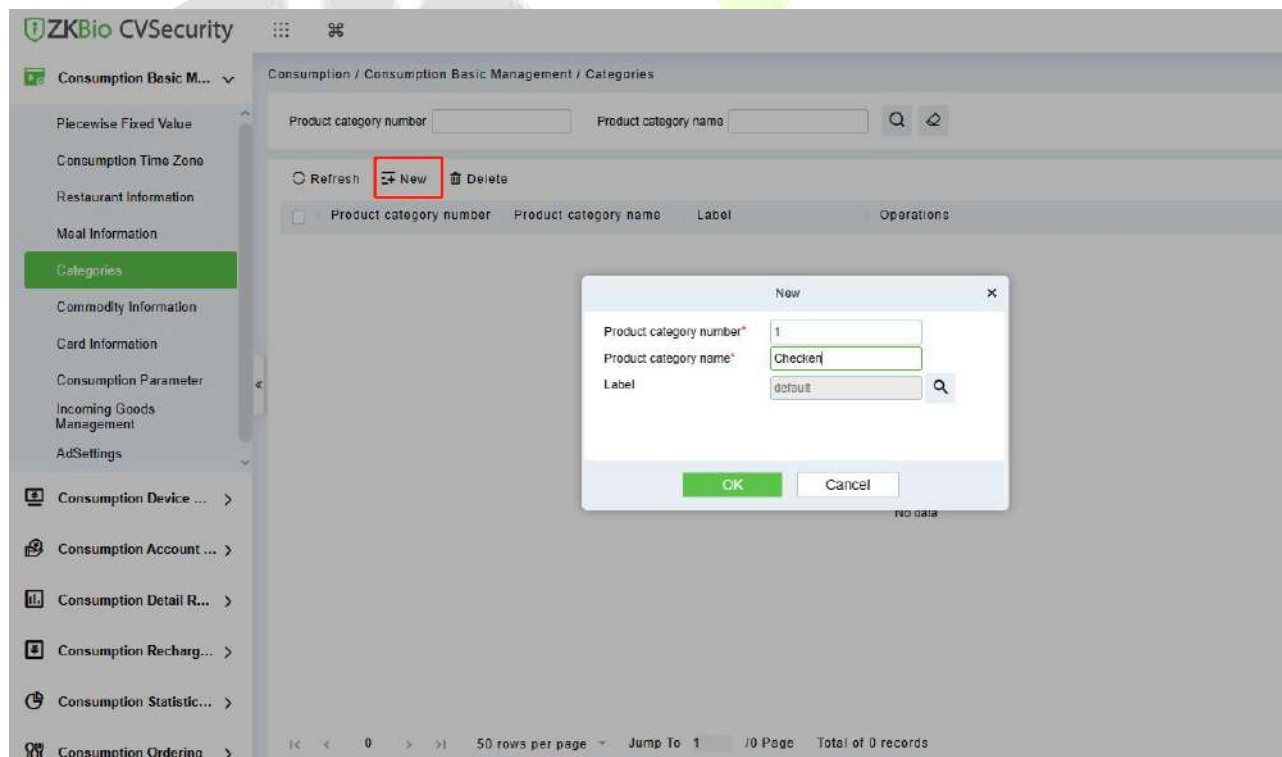


Figure 12- 13

12.1.6 Commodity Information

Click **Consumption Basic Management > Commodity Information** as shown in the following figure:

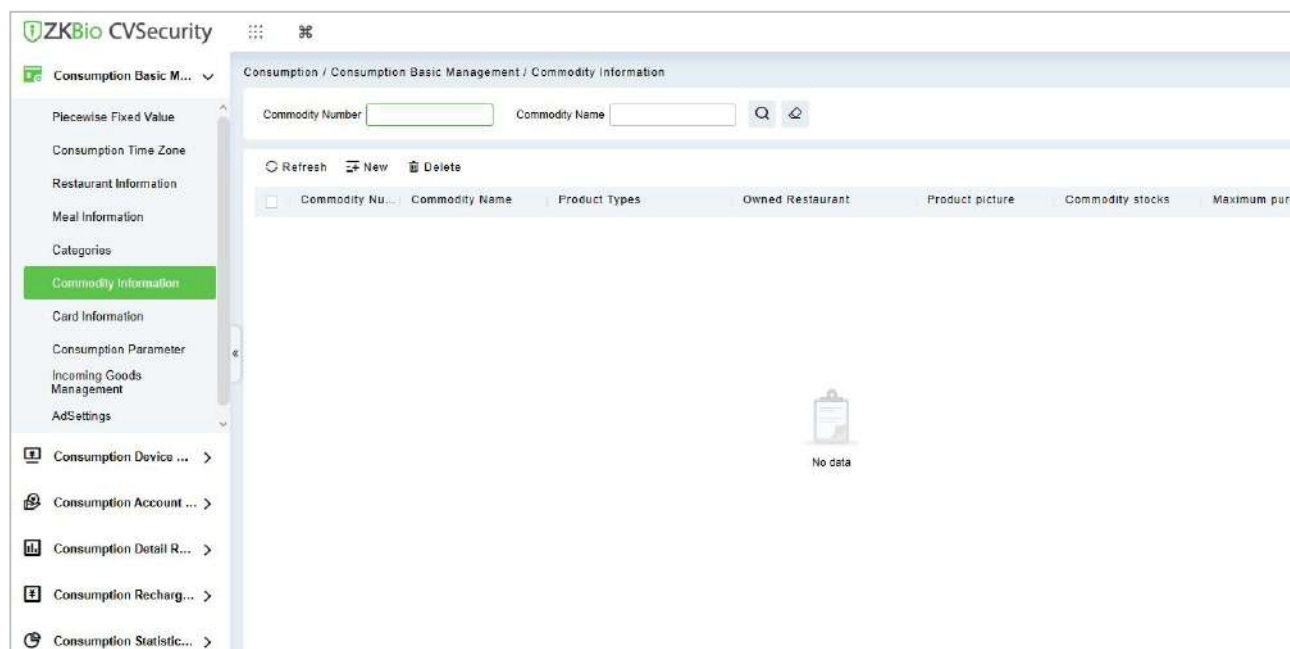


Figure 12- 14

12.1.6.1 New

Click **New** to add, enter required **Commodity number**, **Commodity Name**, Commodity stocks, Maximum purchase quantity, **Unit price**, **Member price**, **Barcode**, and **remarks** in the dialog box, choose the Commodity categories and Owned Restaurant in the pull-down list, and then click **OK** to save and close or click **Save and New** for continue adding.

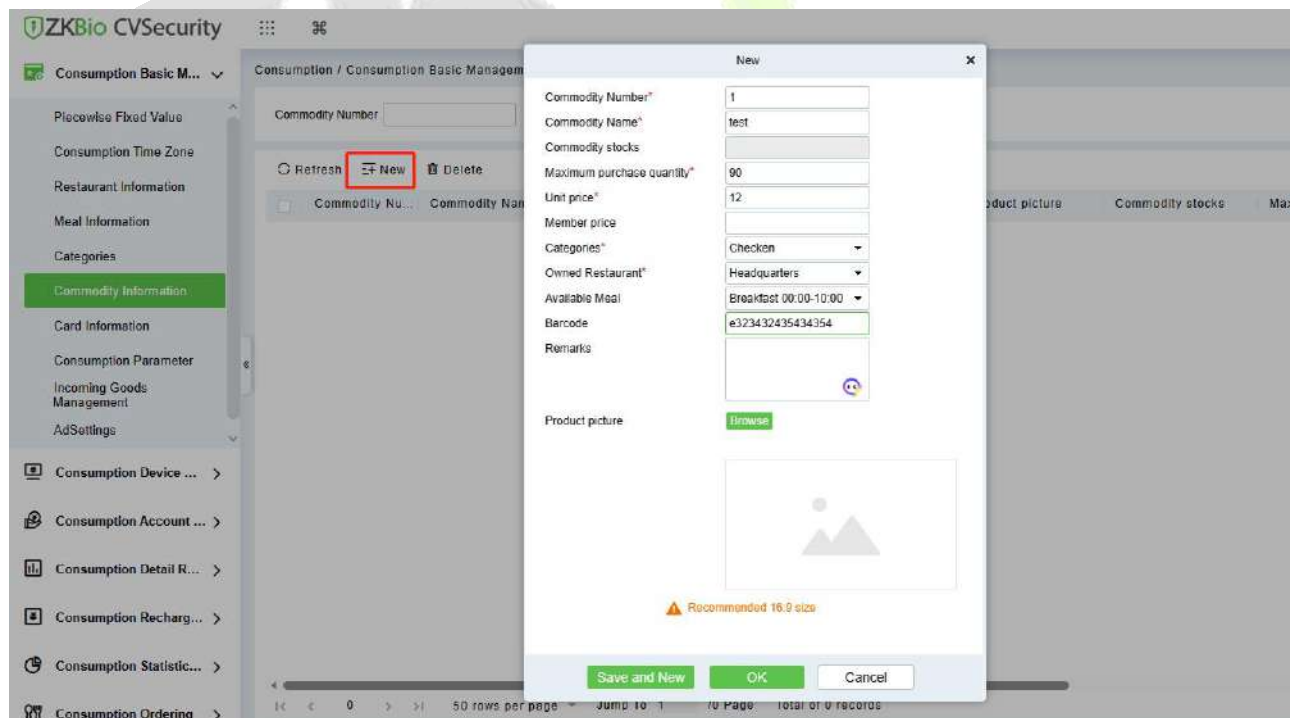


Figure 12- 15

12.1.6.2 Delete

You can directly click **Delete** on the required Commodity to remove it from the system.

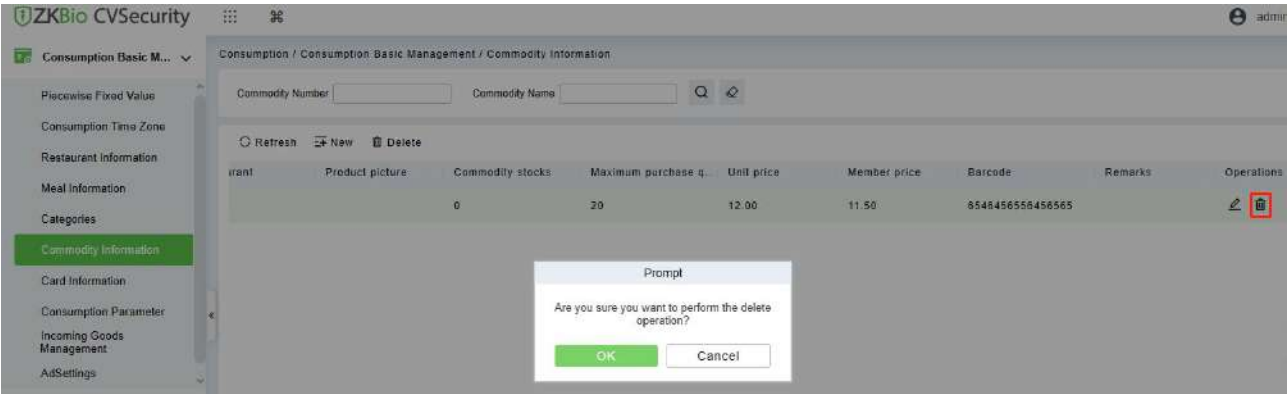


Figure 12- 16

For deleting in batch, select the required Commodity(s) as shown below and click **Delete**.

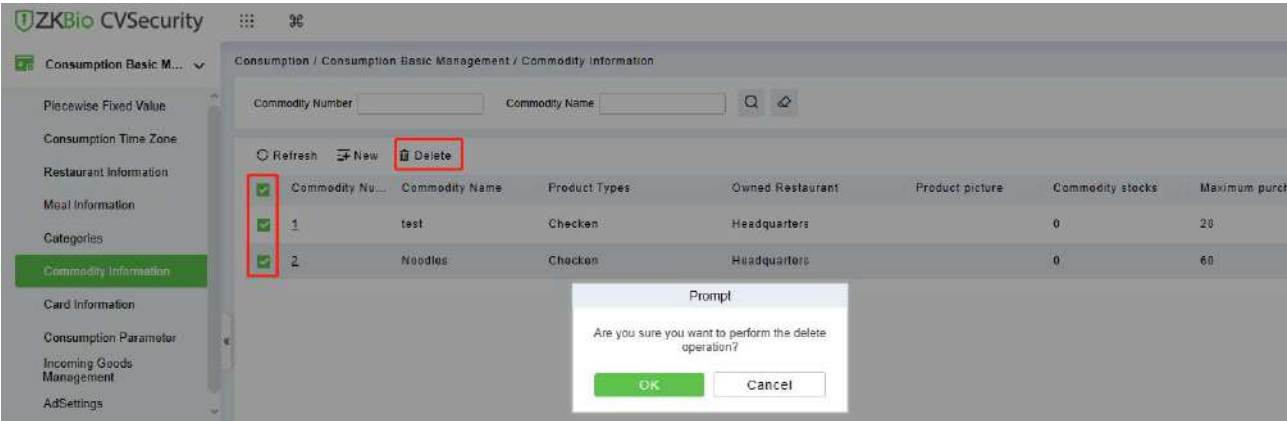


Figure 12- 17

12.1.7 Card Information

Click Consumption Basic Management > Card Information, as shown below:

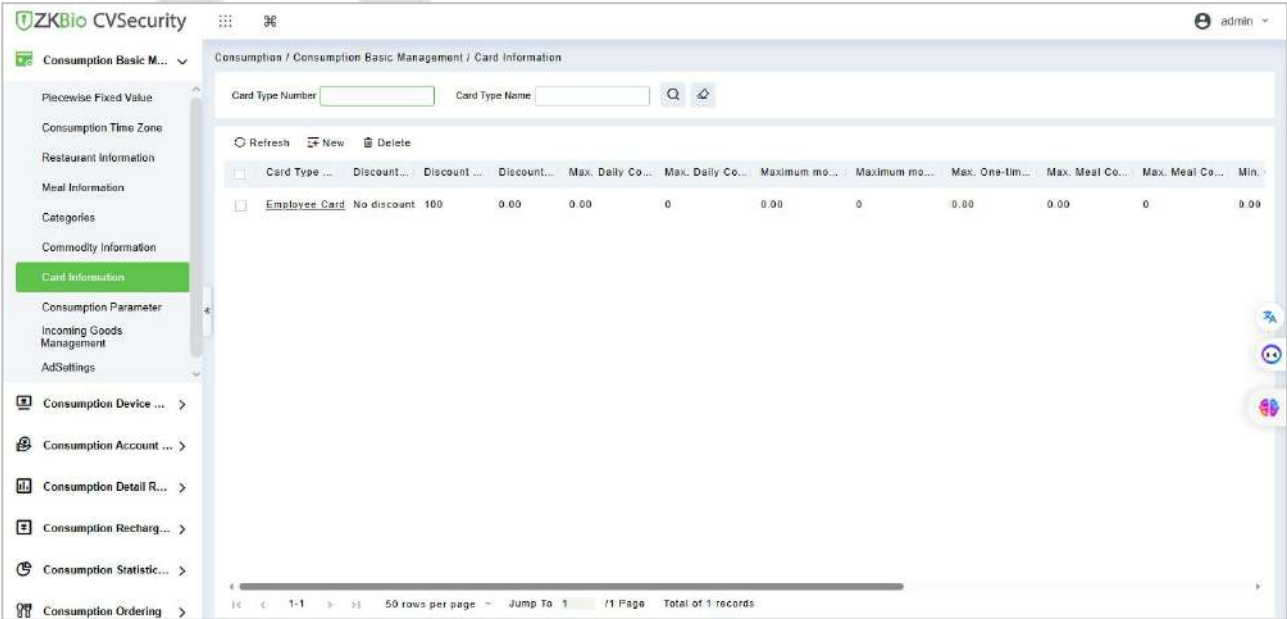


Figure 12- 18

12.1.7.1 New

Click **New**, in the dialog box, you can fill in the card type number, card type name, discount,

consumption time zone, maximum daily consumption amount, maximum daily consumption times, maximum one-time consumption amount, maximum meal consumption amount, maximum meal consumption times, minimum card balance, maximum card balance, effective use of days, available meal, available device, remarks, as shown below:

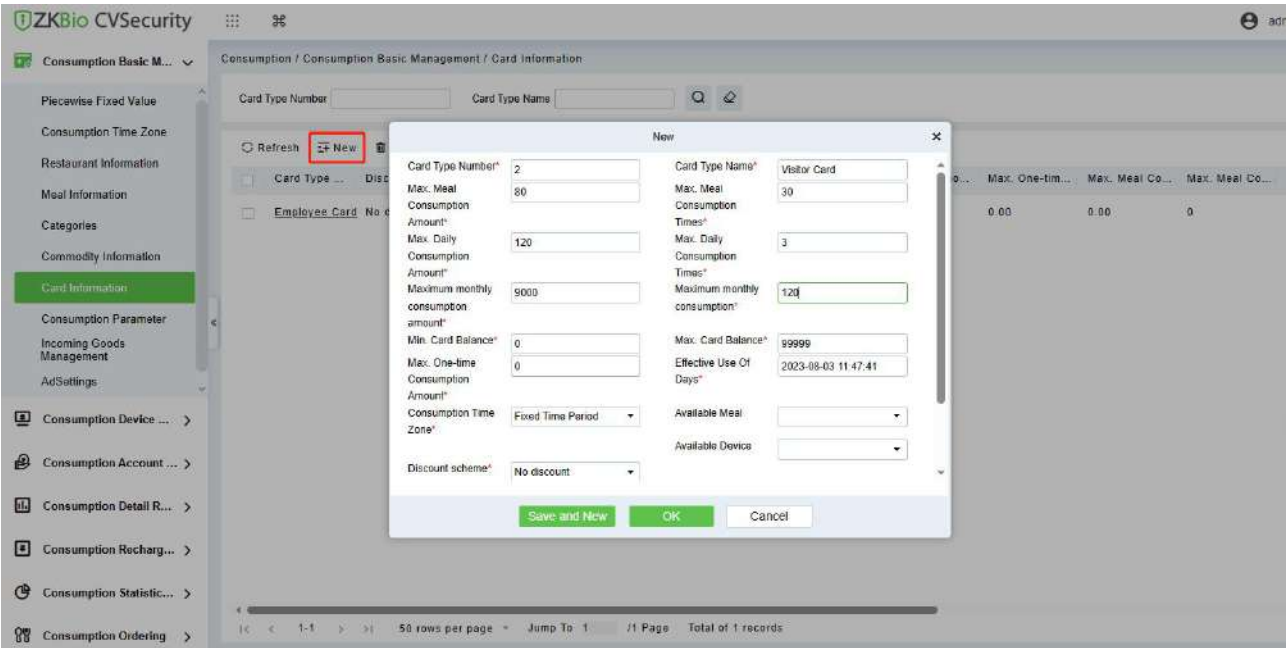


Figure 12- 19

12.1.7.2 Edit

Click the card type number of the list and the edit column of the operation to pop up the modification dialog box.

12.1.7.3 Delete

You can directly click **Delete** on the required Card to remove it from the system.

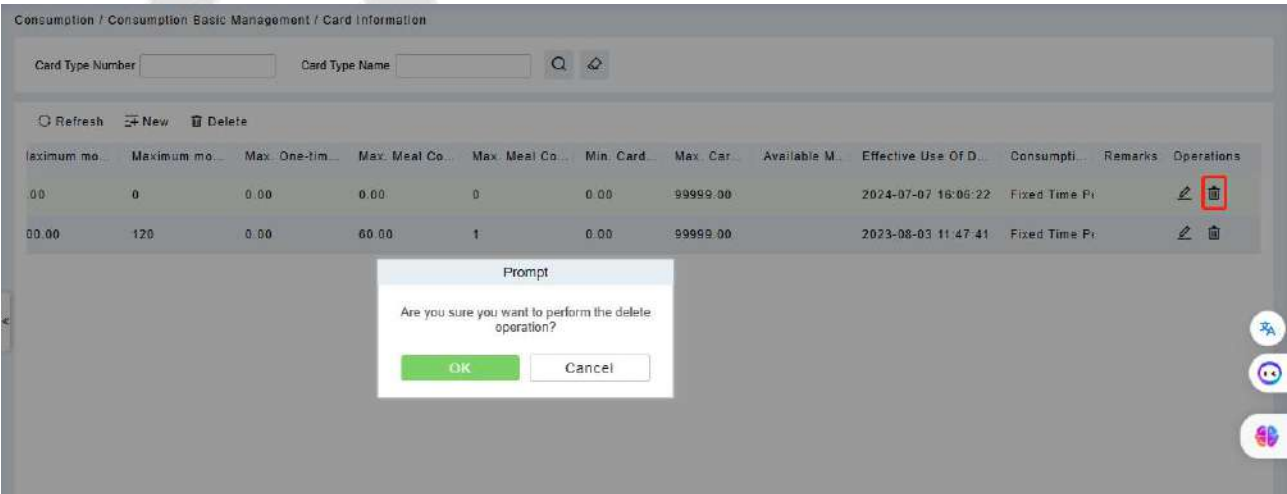


Figure 12- 20

For deleting in batch, select the required Card (s) as shown below and click **Delete**. The default employee card cannot be deleted.

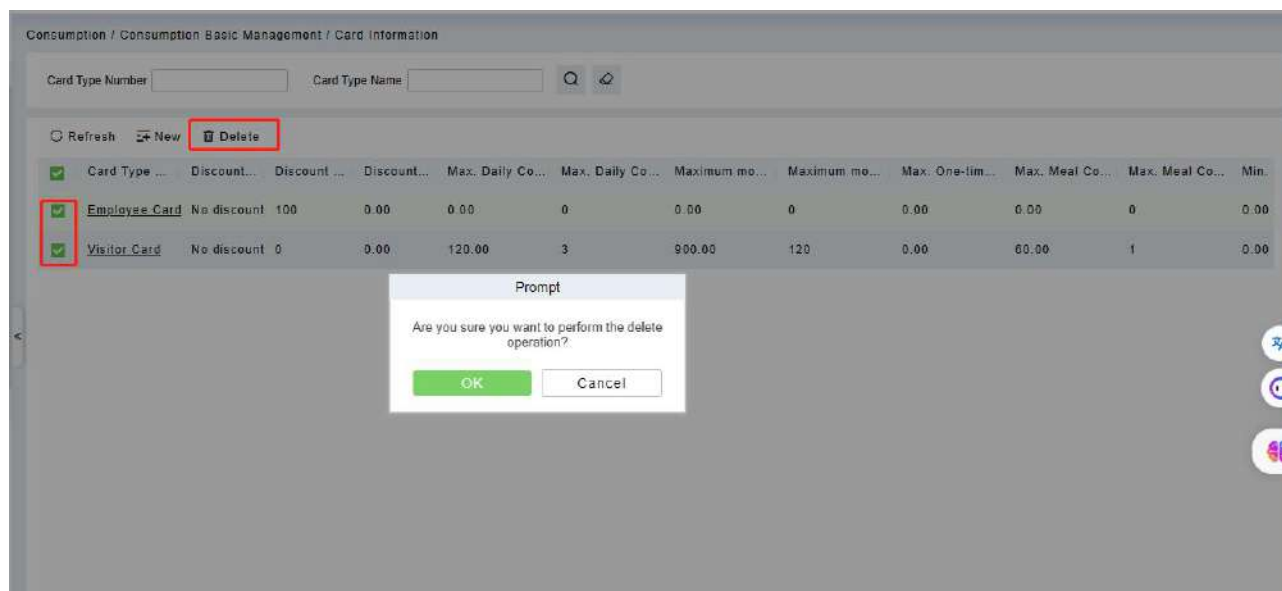


Figure 12-21

12.1.8 Consumption Parameter

Click **Consumption Basic Management** > **Consumption Parameter** to enter the consumption module setting, shown below:

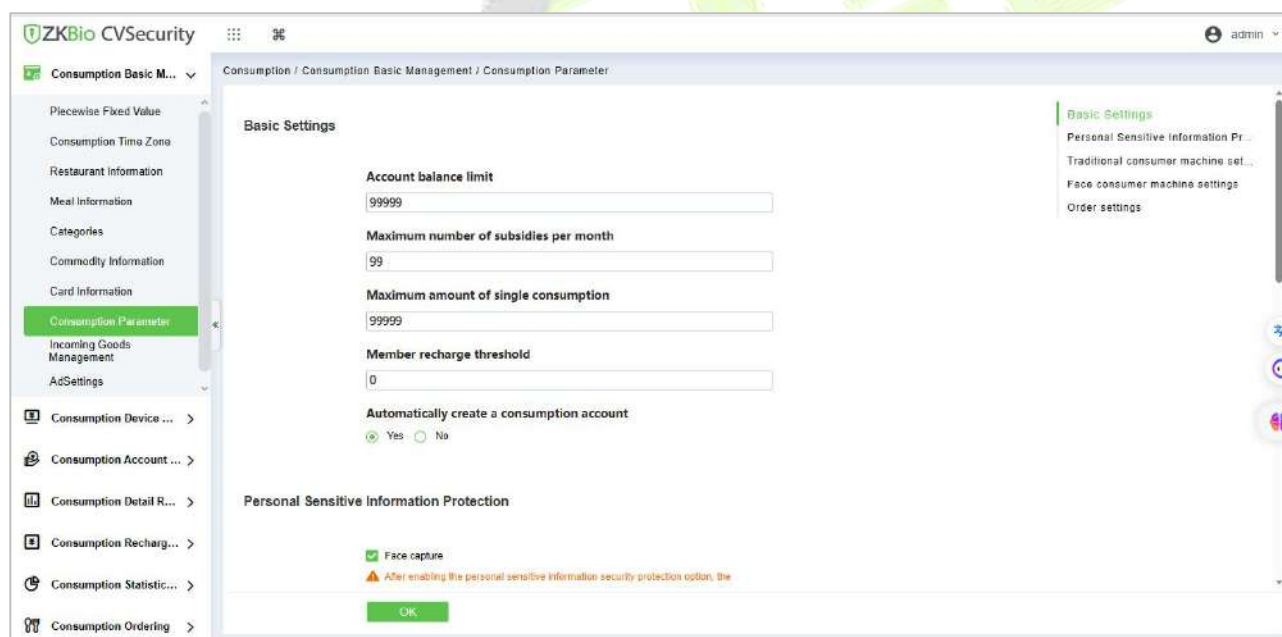


Figure 12-22

● Basic Settings:

1. Set the upper limit of the account balance. You can set an integer value between 1~99999, default value is 9999.
2. Set the upper limit number of the subsidies. You can set an integer value between 1~99, default value is 99.
3. Set the upper limit amount of single consumption. You can set an integer value between 1~9999, default value is 9999.
4. Member recharge threshold. Default value is 0, maximum number is 9999.

● Traditional consumer machine settings:

1. Set the prompt timing mode starts billing. Allows user define the prompt slogan.
2. Set the Timekeeping mode whether subject to start or end rules.

● Face consumer machine settings:

1. Set the Insufficient balance reminder threshold. Default is 0.
2. Set the prompt words when the amount below the threshold .
3. Set whether to open the second consumption function.

● Order settings:

1. Set whether ordering is required to consume: Default is no;
2. Set the number of days in advance for ordering: Default is 1-7 days;
3. Set the amount of time (in minutes) required to cancel an order in advance: Default is 60 minutes;
4. Double Wallet Wallet Consumption Order: Dual wallet spending pattern configuration: cash-only spending, subsidized spending only, or cash spending first, subsidized spending later.

Note:

- 1) The parameters for reminder threshold for insufficient balance and prompt message for amount below the threshold are not supported by traditional consumption machines, but are supported by facial recognition consumption machines.
- 2) The parameters for enabling double confirmation of consumption are not supported by traditional consumption machines, but are supported by facial recognition consumption machines.

12.1.9 Incoming Goods Management

Click **Consumption Basic Management > Incoming Goods Management** to enter the commodity purchase management page, through the bar-code corresponding to the commodity, shown below:


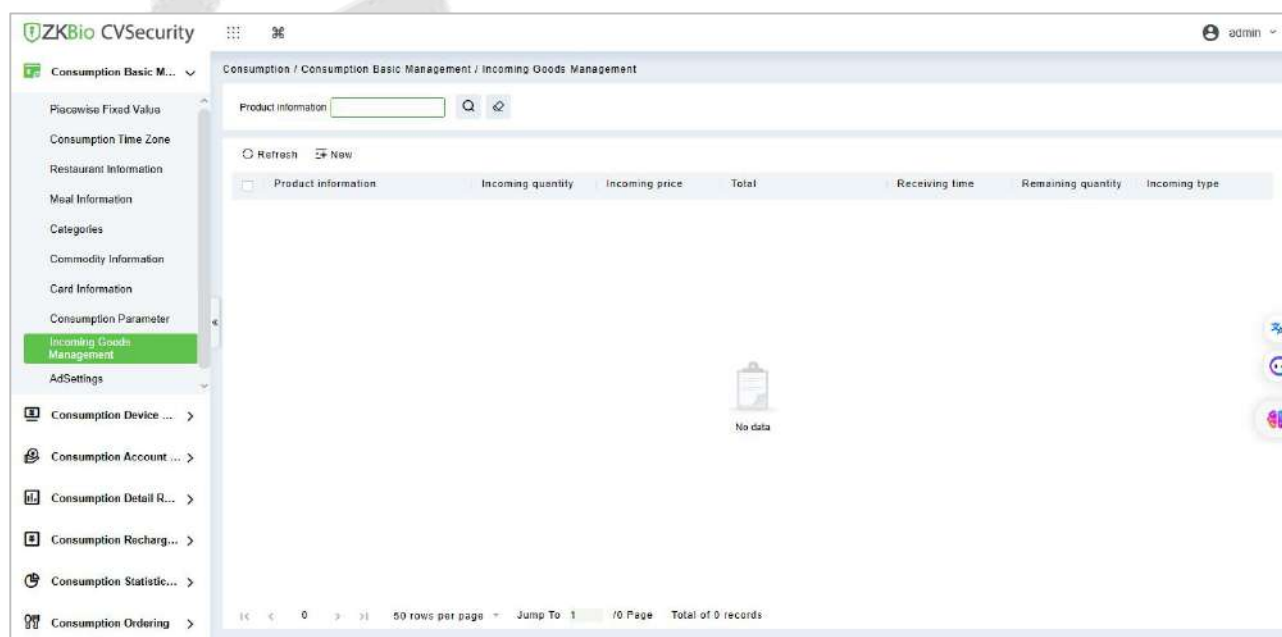


Figure 12- 23

12.1.9.1 New

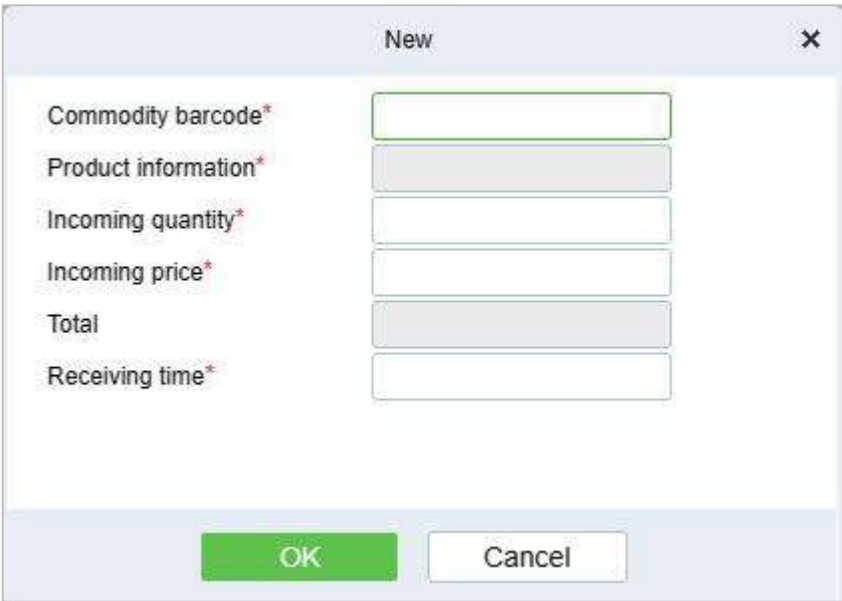Click the New button, to enter the goods edit page. Input the Commodity bar-code, incoming quantity, incoming price, total amount and receiving time.



The 'New' dialog box contains the following fields:

- Commodity barcode*
- Product information*
- Incoming quantity*
- Incoming price*
- Total
- Receiving time*

Buttons: OK, Cancel

Figure 12- 24

12.1.10AD Setting

Click **Consumption Basic Management > Incoming Goods Management**, as shown below:

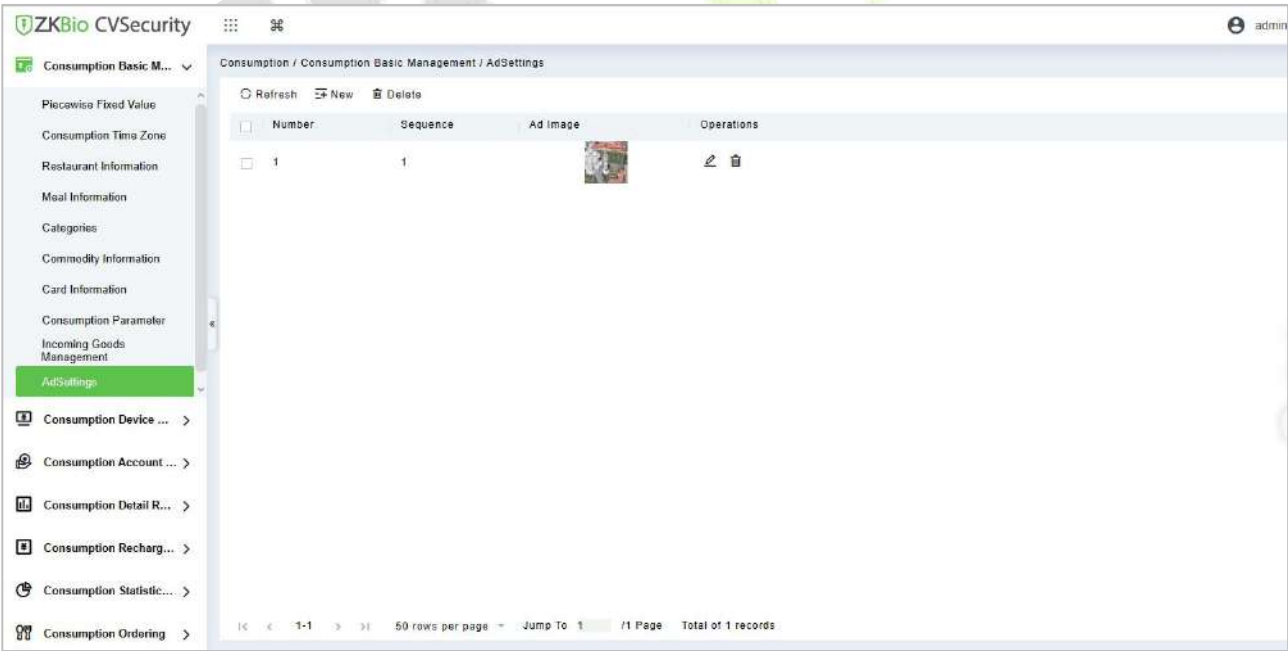


Figure 12- 25

12.1.10.1 New

Click **New**, in the dialog box, fill in **Number**, **Sequence**, **Upload Image**. then click **OK**.

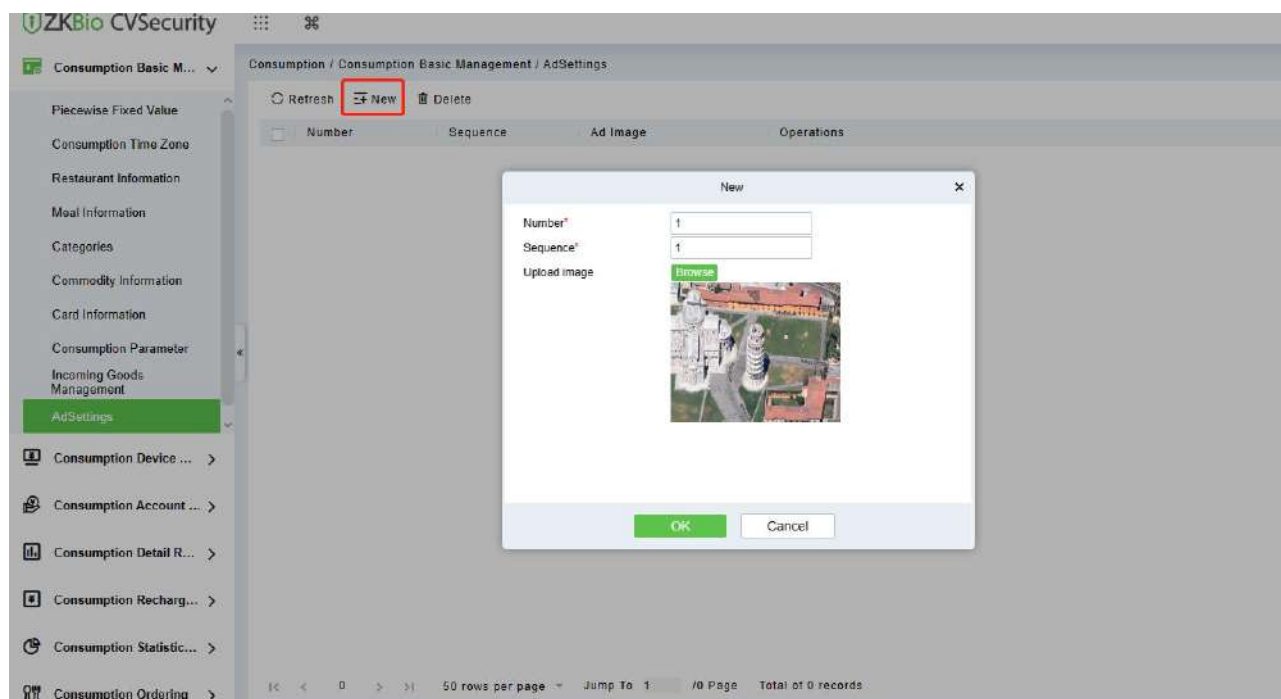


Figure 12- 26

12.2 Device Management

This module is used to manage online face consumer devices.

12.2.1 Consumption Device Management

This menu is available for **Promerc-30**, **Peomerc-40**.

Click Consumption Device Management > Consumption Device Management, as shown below:

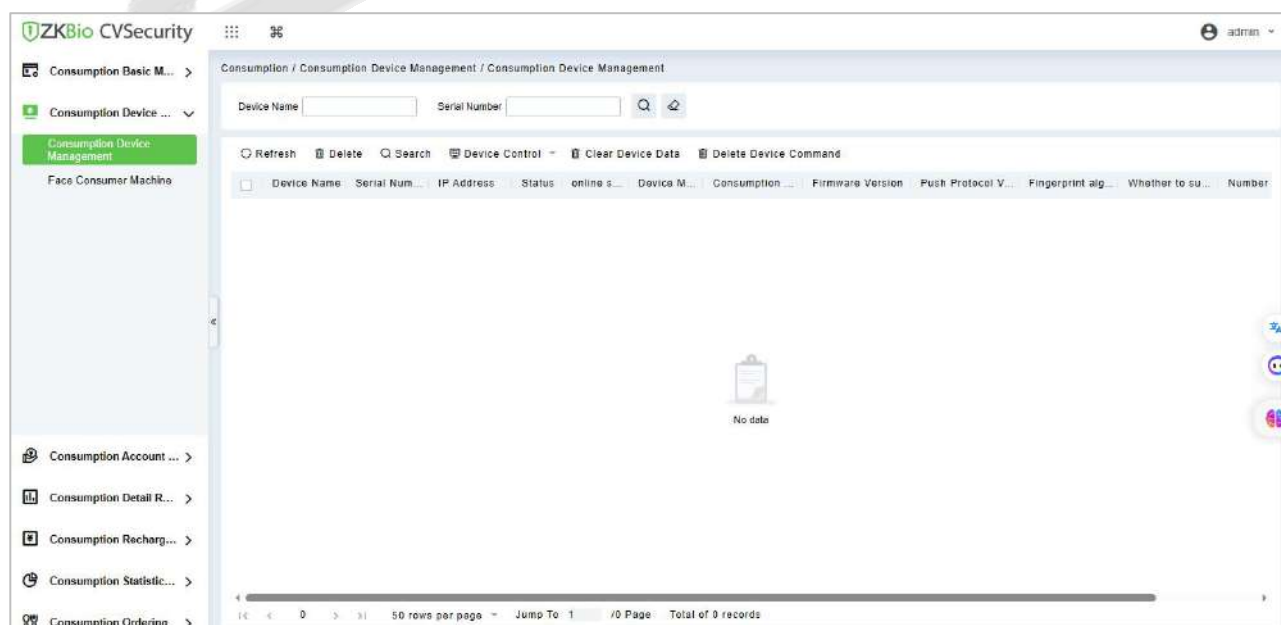


Figure 12- 27

12.2.2 Face Consumption Machine

This menu is available for **Promerc-300**.

Click Consumption Device Management > Face Consumption Machine, as shown below:

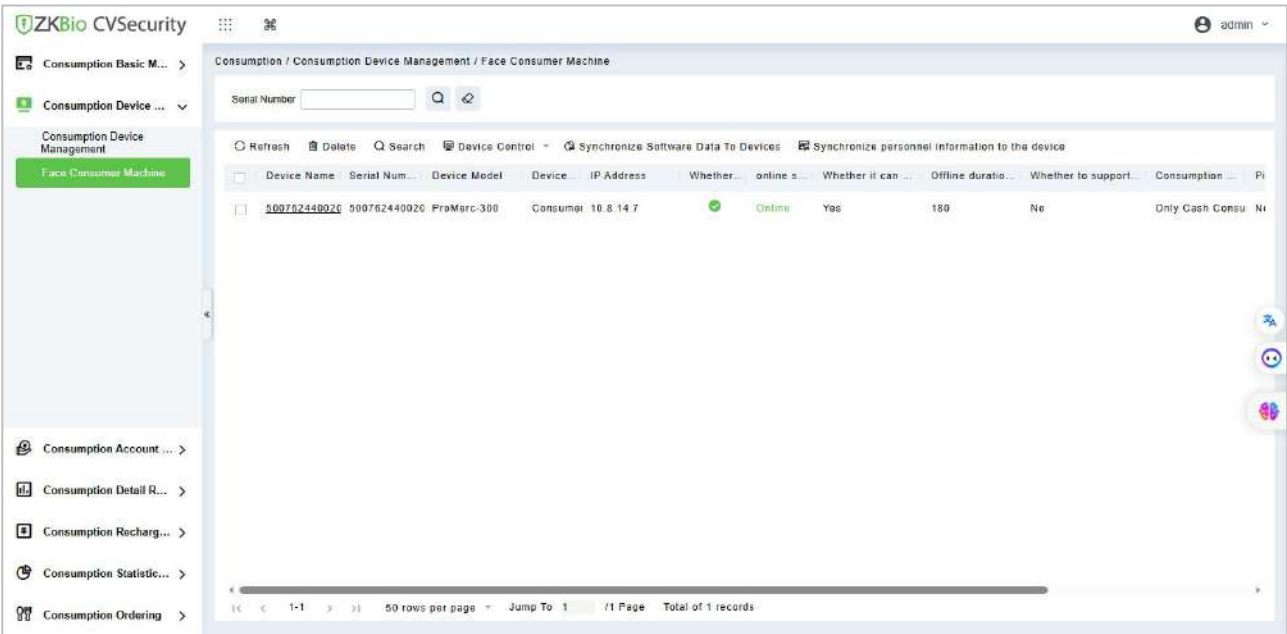


Figure 12- 28

12.2.2.1 Search

Click **Search**, and the page is show as follows:


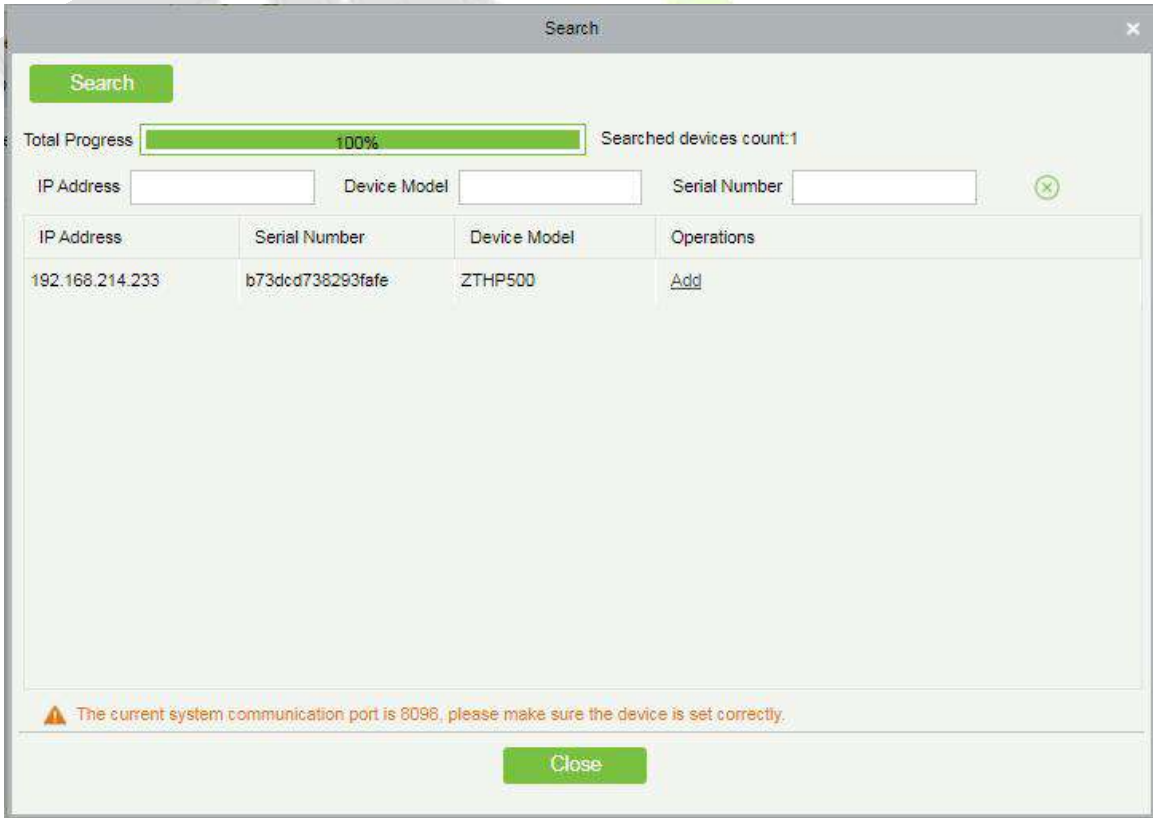


Figure 12- 29

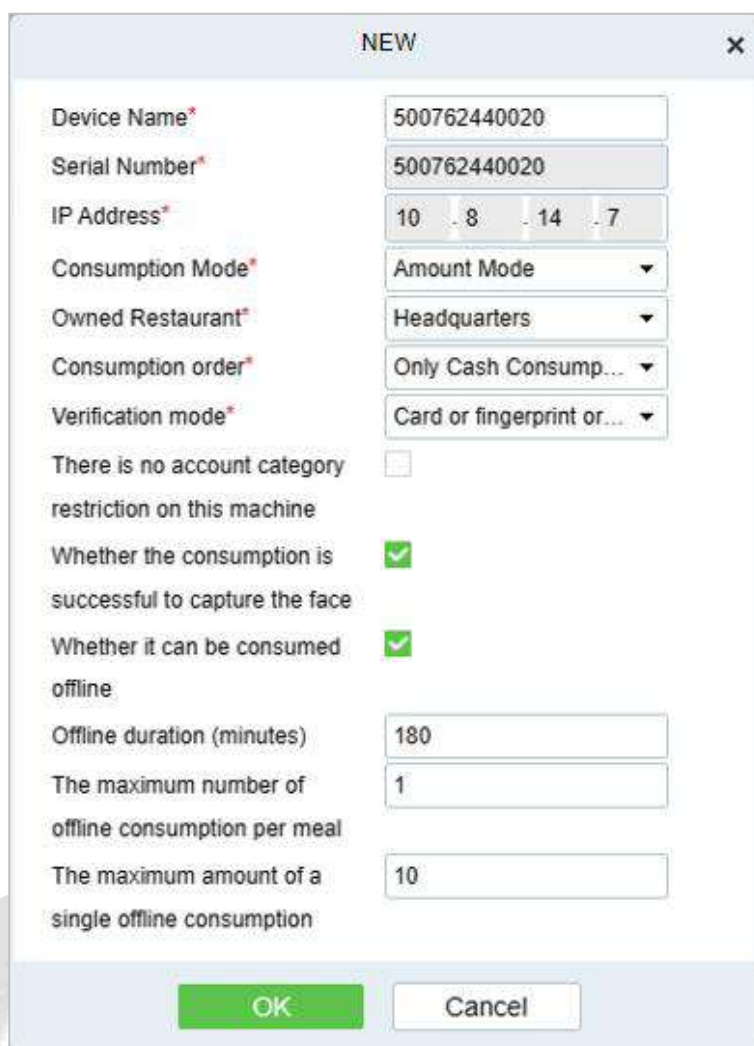Click **Add** to enter the device edit page.



NEW [X]

Device Name*	500762440020
Serial Number*	500762440020
IP Address*	10 . 8 . 14 . 7
Consumption Mode*	Amount Mode ▼
Owned Restaurant*	Headquarters ▼
Consumption order*	Only Cash Consump... ▼
Verification mode*	Card or fingerprint or... ▼
There is no account category restriction on this machine	<input type="checkbox"/>
Whether the consumption is successful to capture the face	<input checked="" type="checkbox"/>
Whether it can be consumed offline	<input checked="" type="checkbox"/>
Offline duration (minutes)	180
The maximum number of offline consumption per meal	1
The maximum amount of a single offline consumption	10

OK Cancel

Figure 12- 30

● Some parameters are explained as follows:

Device Name: Device name, non-special characters, consisting of up to 20 characters.

Serial Number: It get from device, not editable.

IP Address: Device IP address, get from device.

Consumption Mode: Sets the consumption mode used by the device.

Can choose fixed value mode, amount mode, counting mode, commodity mode, timing mode, ordering mode.

The fixed value mode can choose fixed value (input fixed amount) and segmented fixed value (obtained from the basic data > segmented fixed value).

Timing mode to define the time price and time to take the whole number of minutes.

Owned Restaurant: Choose device owned restaurant.

Consumption Oder: Set the device to specify wallet consumption order: cash consumption only, subsidy consumption only, subsidy consumption first, then cash consumption, cash consumption first, then subsidy consumption;

1) Cash consumption only: only consumption of cash, not consumption subsidies, when the balance is insufficient, can continue to consume through the way of recharge;

- 2) Subsidies consumption only: only consumption subsidies, do not consume cash, when the balance is insufficient, you can continue to consume by issuing subsidies;
- 3) Consumption cash first, subsidies second: Consume cash first, and then consume subsidies, through the way of top up or send subsidies to continue the consumption;
- 4) first consume subsidies, then consume cash: can be topped up or issued subsidies to account to continue consumption;

Verification Mode: Set the verification method used by the device. You can select card or fingerprint or face (1: N), card & face, card & fingerprint, fingerprint & face.

Whether it can be consumption offline: To enable the device offline consumption function.

Offline Duration: Define the duration of offline consumption, default is 180 minutes.

The maximum number of offline consumptions per meal: 1-999.

The maximum amount of a single offline consumption: Maximum amount of offline consumption per transaction (1-99999).

12.2.2.2 Edit

Click the device name of the list or the edit column of the operation to pop up the modification dialog box. The items that can be modified in the modification dialog box includes device name, area, consumption mode, owned restaurant, consumption order, whether can be offline work mode, offline duration, consumption mode, whether support scanning box and so on, as shown in the following figure.

The 'Edit' dialog box contains the following fields and options:

- Device Name*: 500762440020
- Serial Number*: 500762440020
- IP Address*: 10 . 8 . 14 . 7
- Consumption Mode*: Amount Mode
- Owned Restaurant*: Headquarters
- Consumption order*: Only Cash Consump...
- Verification mode*: Card or fingerprint or...
- There is no account category restriction on this machine: ☐
- Whether the consumption is successful to capture the face: ☒
- Whether it can be consumed offline: ☒
- Offline duration (minutes): 180
- The maximum number of offline consumption per meal: 1
- The maximum amount of a single offline consumption: 10

Buttons: OK, Cancel

Figure 12- 31

12.2.2.3 Disable/Enable

Select device, click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

12.2.2.4 Synchronize Software Data to Device

Select a device, click this button, it will send data such as setting parameters of the software to the device to achieve the function of synchronization information so that the device can set the properties synchronously.

12.2.2.5 Synchronize Personnel Information to Device

Select a device, click this button, it will send personnel data of the software to the device, as shown below:

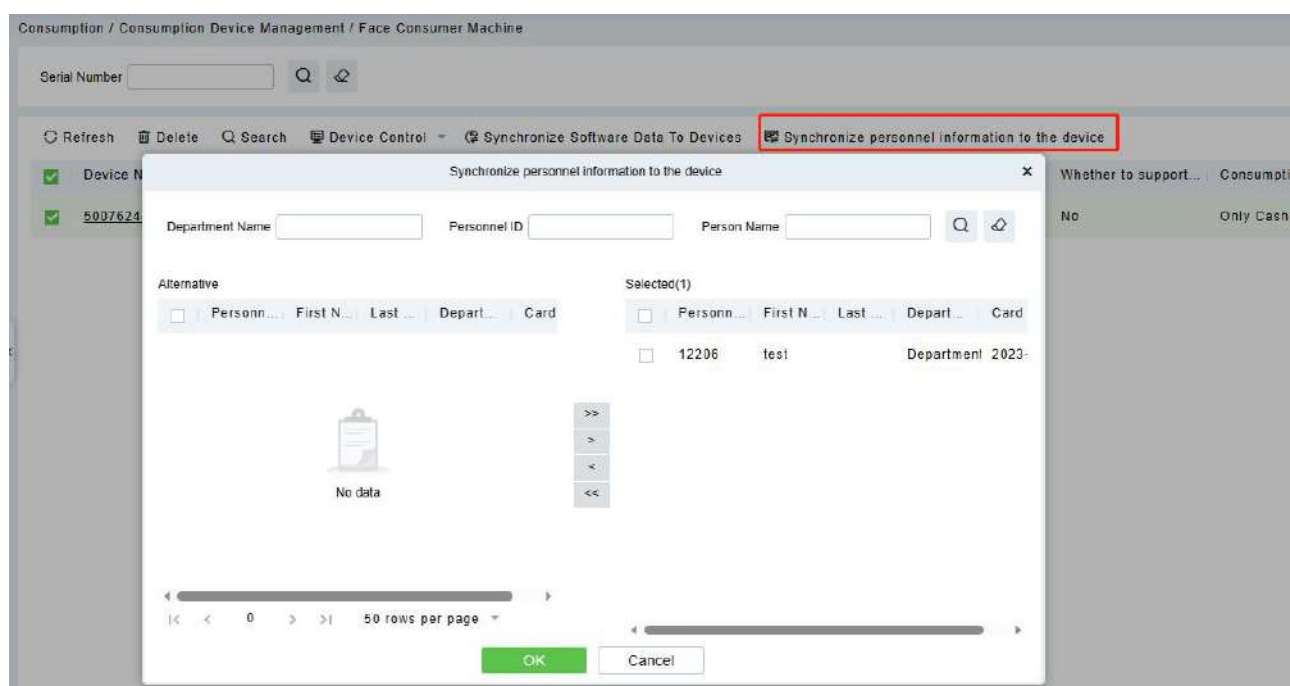


Figure 12- 32

12.3 Consumption Account

12.3.1 Account Service

Using this option to manage staff account, allows to manage top up, refund, account opening, modify card information.

The initial interface of this module is shown below:

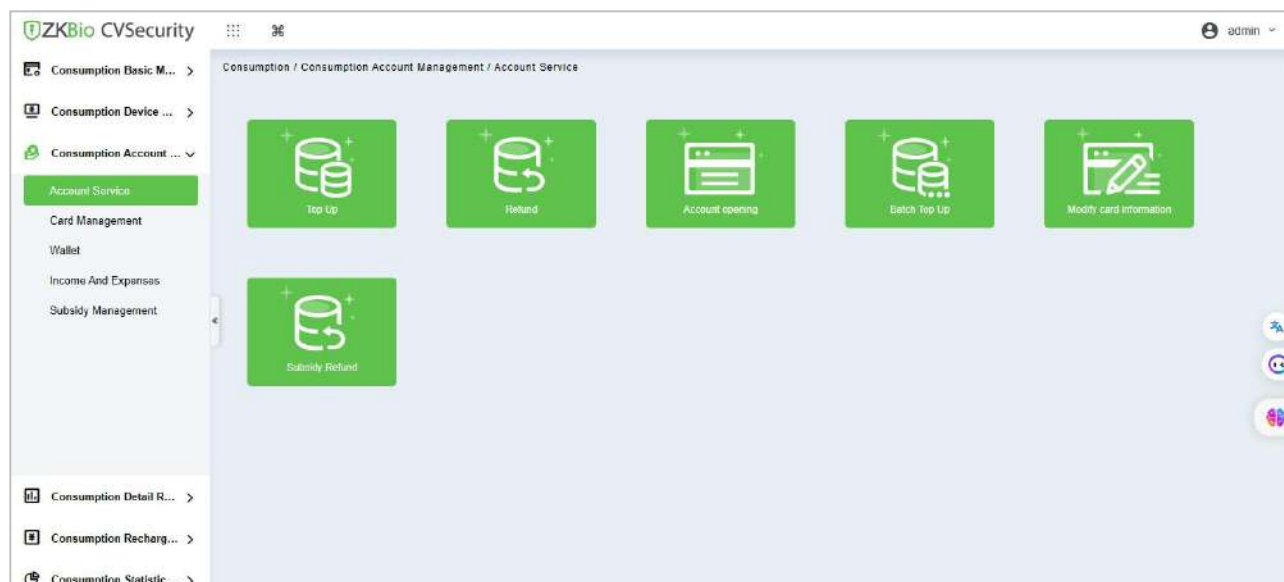


Figure 12- 33

12.3.1.1 Top Up

Top up for staff account, click **Top Up**, choose the account, confirmed the account information in the pop up dialog window, input the to up amount, click **Top Up** to finish the top up recharge .

The 'Top Up' dialog window is shown with the following fields and values:

Field	Value
Personnel ID	12206
Card Number	
Card Account	12206
First Name	test
Last Name	
Department Name	Department Name
Card Information	Employee Card
Account Balance	0.00
Cash Wallet	0.00
Subsidy wallet	0.00
Added Balance	0.00
Card Flow Number	1
Top Up Amount*	0

At the bottom of the dialog are two buttons: 'Top Up' (green) and 'Cancel' (white).

Figure 12- 34

12.3.1.2 Refund

Refund for staff account, click **Refund** to enter refund operation dialog box, choose the staff account, input the refund money, click Refund to finish the refund.



The 'Refund' dialog box contains the following fields and values:

Field	Value
Card Account	12206
Personnel ID	12206
First Name	test
Last Name	
Department Name	Department Name
Card Information	Employee Card
Account Balance	900.00
Cash Wallet	900.00
Subsidy wallet	0.00
Amount After Refund	890.00
Card Flow Number	2
Refund Amount*	10


Buttons: Refund, Cancel

Figure 12- 35

12.3.1.3 Account Opening

Open consumption account for personnel in the system, newly staff will open the account automatically, batch import staff need manually to open his account.

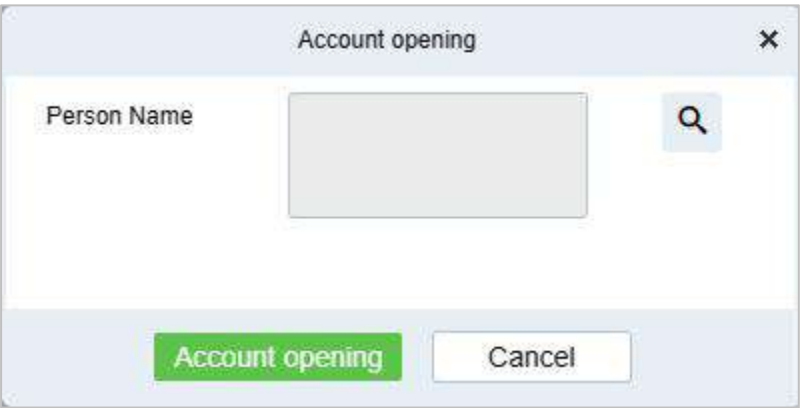Click **Account Opening** to open the account opening dialog box, select the personnel information and click **Account Opening** to finish the process.



The 'Account opening' dialog box contains the following fields and values:

Field	Value
Person Name	

Buttons: Account opening, Cancel

Figure 12- 36

12.3.1.4 Batch Top Up

- Batch recharge employee accounts; click **Batch Top Up**, select multiple personnel, click confirm and enter the recharge amount, click **Top Up**.

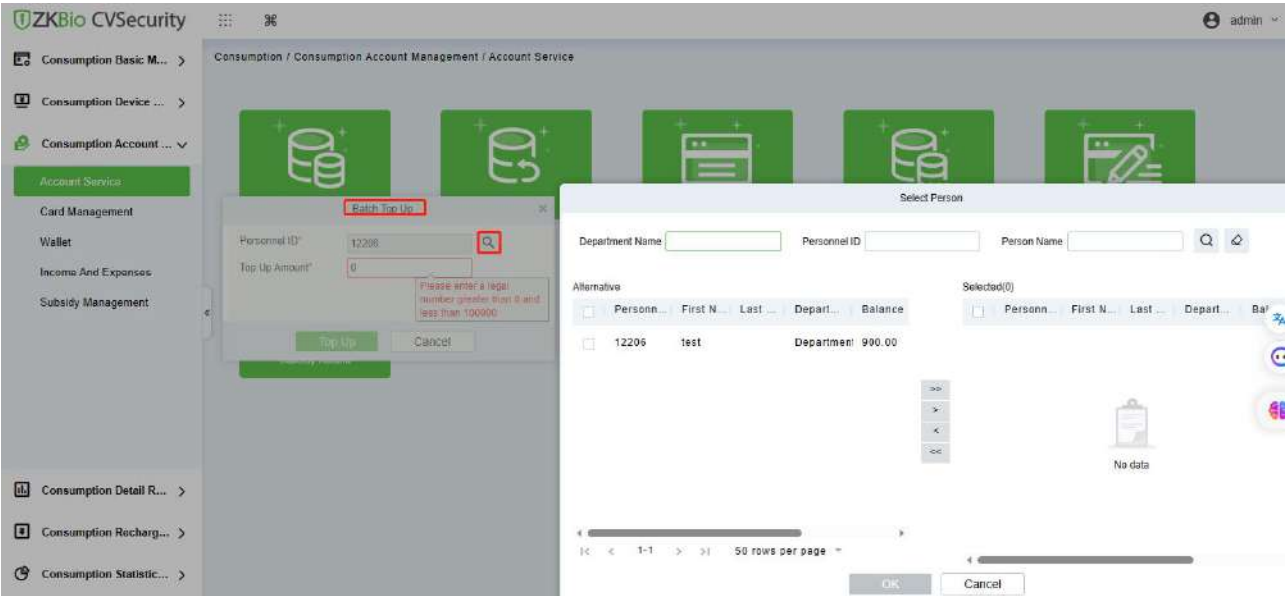


Figure 12- 37

12.3.1.5 Modify Card Information

Select the account, modify the account information.

Modify card information

Personnel Information

Card Account12206

Personnel ID12206

First Name test

Department NameDepartment Name

Last Name

Account information

Account balance900.00

Card Flow Number2

Card Issue Date2023-08-01 14:27:51

Card InformationEmployee Card

Modify

Cancel

Figure 12- 38

All fields are not editable except for the **Card Information** (account category) which can be modified.

12.3.1.6 Subsidy Refund

Subsidized refunds to designated accounts.

Subsidy Refund

Card Account

12206

Personnel ID

12206

First Name

test

Last Name

Department Name

Department Name

Card Information

Employee Card

Account Balance

900.00

Cash Wallet

900.00

Subsidy wallet

0.00

BackSolde Amount

900.00

Card Flow Number

2

Refund Amount*

0

Refund

Cancel

Figure 12- 39

12.3.2 Card Management

This function is used to manage account, such as enable, disable, set operator, modify account category .

ZKBio CVSecurity

admin

Consumption Basic M...

Consumption Device ...

Consumption Account ...

Account Service

Card Management

Wallet

Income And Expenses

Subsidy Management

Consumption Detail R...

Consumption Recharg...

Consumption Statistic...

Consumption Ordering

Consumption / Consumption Account Management / Card Management

Personnel ID Name Card Account More

Refresh

Enable

Disable

Set operator

Set normal user

Export

Edit account category

	Personnel ID	First Name	Last Na...	User Category	Card Information	Balance	Cash Wallet	Subsidy wallet
<input type="checkbox"/>	12*05	t**t		General User	Employee Card	900.00	900.00	0.00
<input type="checkbox"/>	12*05	H***r		General User	Employee Card	0.00	0.00	0.00
<input type="checkbox"/>	12*03	y***g		General User	Employee Card	0.00	0.00	0.00
<input type="checkbox"/>	2*			General User	Employee Card	0.00	0.00	0.00
<input type="checkbox"/>	92*			General User	Employee Card	0.00	0.00	0.00
<input type="checkbox"/>	3*			General User	Employee Card	0.00	0.00	0.00
<input type="checkbox"/>	1*	q*		General User	Employee Card	0.00	0.00	0.00

50 rows per page

Jump To 1

1 Page

Total of 7 records

Figure 12- 40

12.3.2.1 Enable/Disable

These functions are used to enable or disable staff account .

12.3.2.2 Set Operator

Check the account and click this button to set this account as the device operator. The balance of the consumption account of the operator must be 0, and it cannot be consume normally, and it is the operation manager of consumption device.

12.3.2.3 Set Normal User

Check the account and click this button to set this account as the normal user. The normal user is normal consumption user.

12.3.2.4 Export

It exports the current report data.

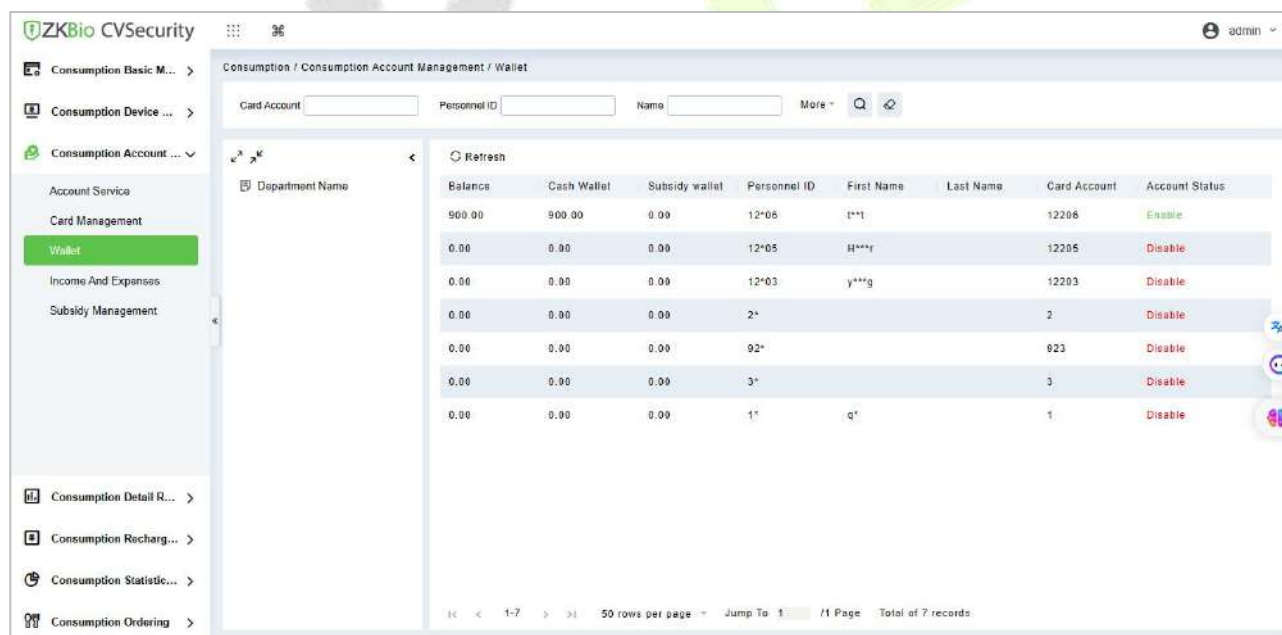
12.3.2.5 Edit Account Category

It allows user to modify the account category, batch editable.

12.3.3 Wallet

This page will show all the accounts information in the system, include status, balance.

Click **Consumption Account Management > Wallet**, as shown below:



Balance	Cash Wallet	Subsidy wallet	Personnel ID	First Name	Last Name	Card Account	Account Status
900.00	900.00	0.00	12*06	t**t		12206	Enable
0.00	0.00	0.00	12*05	H***r		12205	Disable
0.00	0.00	0.00	12*03	y***g		12203	Disable
0.00	0.00	0.00	2*			2	Disable
0.00	0.00	0.00	92*			923	Disable
0.00	0.00	0.00	3*			3	Disable
0.00	0.00	0.00	1*	q*		1	Disable

Figure 12- 41

12.3.4 Income and Expenses

This function will show all the payments and due amount data of all the accounts in the consumption system.

Click **Card Management > Income and Expenses**, as shown below:

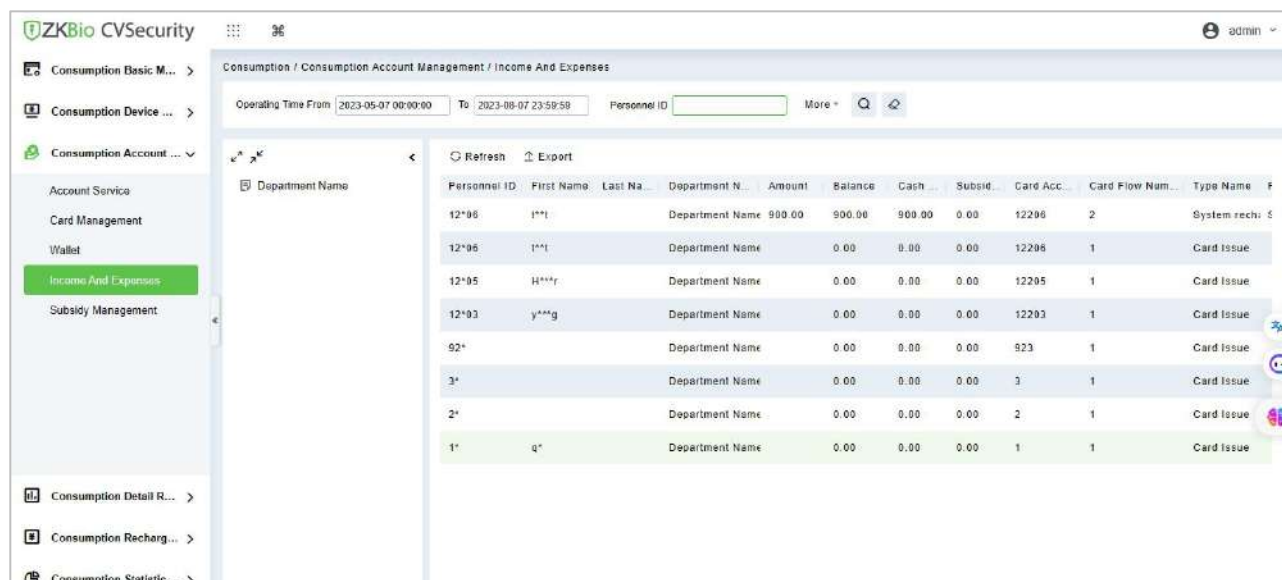


Figure 12- 42

12.3.4.1 Refresh

Click **Refresh** to load the latest account cash receipts and payments data.

12.3.5 Subsidy Management

Click **Subsidy** > **Subsidy Management** to enter the subsidy page, you can perform different function related to subsidy:

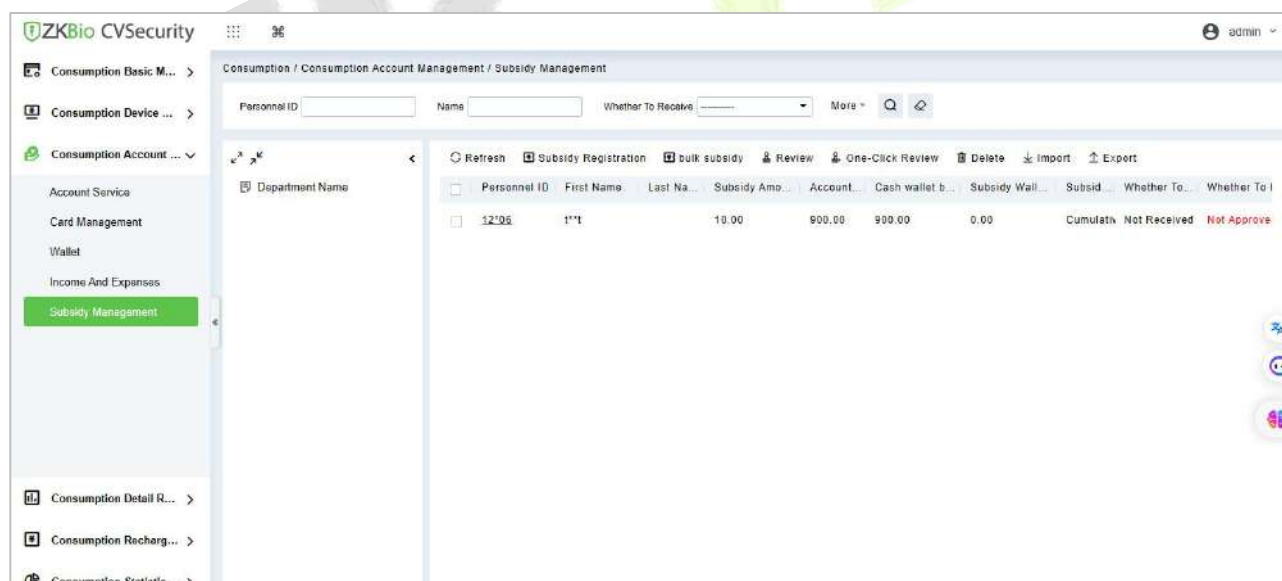


Figure 12- 43

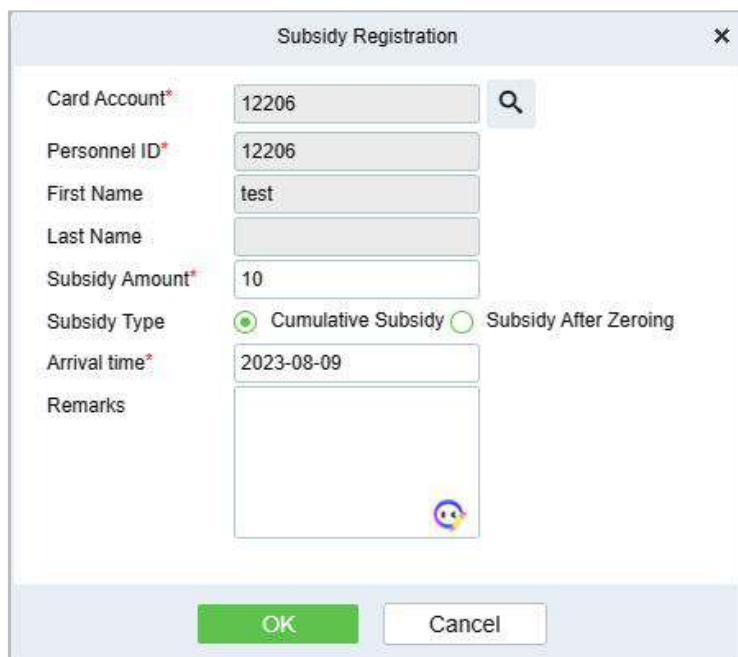
12.3.5.1 Add

Click **Subsidy Management** > **Subsidy Registration** to enter the subsidy registration interface:

Select the account you want to performed, input the subsidy money and type, and select the arrival time, then click OK to finish the subsidy registration.

Accumulated subsidy: the current subsidy amount and the historical subsidy amount are accumulated.

Subsidy After Zeroing: Empty the balance of historical subsidy and write the current subsidy amount.



The 'Subsidy Registration' dialog box contains the following fields and controls:

- Card Account***: Text input with value '12206' and a search icon.
- Personnel ID***: Text input with value '12206'.
- First Name**: Text input with value 'test'.
- Last Name**: Empty text input.
- Subsidy Amount***: Text input with value '10'.
- Subsidy Type**: Radio buttons for 'Cumulative Subsidy' (selected) and 'Subsidy After Zeroing'.
- Arrival time***: Text input with value '2023-08-09'.
- Remarks**: Large text area with a small icon at the bottom right.
- Buttons**: 'OK' and 'Cancel' buttons at the bottom.

Figure 12- 44

12.3.5.2 Review

This function is mainly to review the audit. Before performing audit, you need to select the subsidy (select in the multi-select box). After clicking the review, an audit dialog box will pop up. The dialog box will display the person number and name as selected by the user.




The 'Review' dialog box contains the following fields and controls:

- Personnel ID***: Text input with value '12206'.
- Person Name***: Text input with value 'test()'.
- Buttons**: 'OK' and 'Cancel' buttons at the bottom.

Figure 12- 45

12.3.5.3 One-click Review

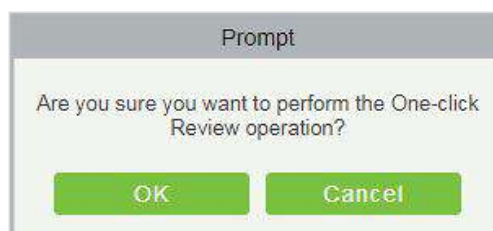This function is mainly to review the unapproved subsidies in the system, and will not deal with the subsidy records that have been approved. During the review process, if the unapproved subsidy cannot be approved for some reason (such as the user has already returned the card), the subsidy will not be processed.



The 'Prompt' dialog box contains the following text and controls:

- Title**: 'Prompt'.
- Text**: 'Are you sure you want to perform the One-click Review operation?'.
- Buttons**: 'OK' and 'Cancel' buttons at the bottom.

Figure 12- 46

12.3.5.4 Delete

Select the required subsidy record(s) and click  **Delete** under the operation bar to delete the subsidy record. It only supports the removal of unapproved subsidy(s).

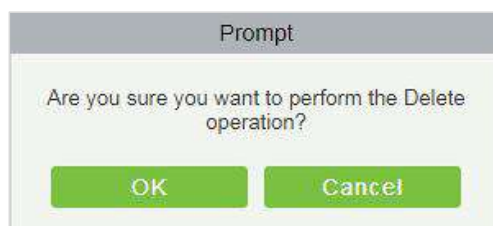


Figure 12- 47

12.3.5.5 Import

This function is used to import subsidies in batches.

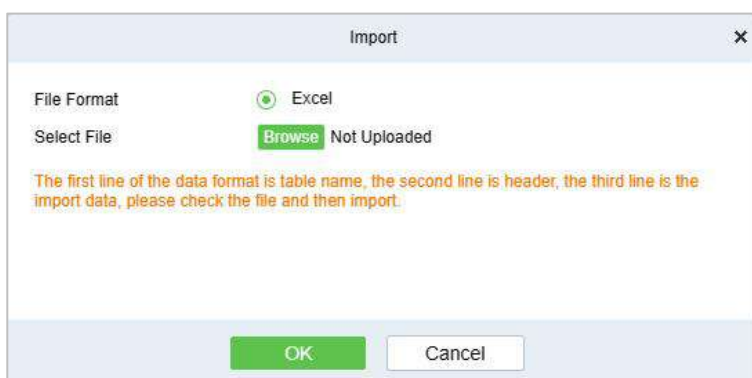


Figure 12- 48

12.3.5.6 Export

This function is used to export the queried subsidies. Click on Export to open the exporting interface.

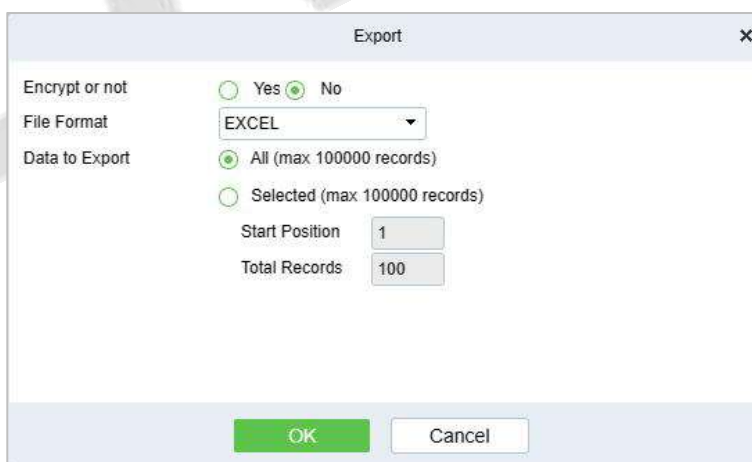


Figure 12- 49

Select the file type and export mode. If you select **All data**, then all query data limited to 40,000 will be exported. If you want to export only few results from the query, then select the second mode and enter the desired start and end points of the required data to be exported.

Click **OK** to finish.

12.4 Consumer Details

12.4.1 Consumption Details Report

Click **Consumption Details > Consumption Details Report**, as shown below:

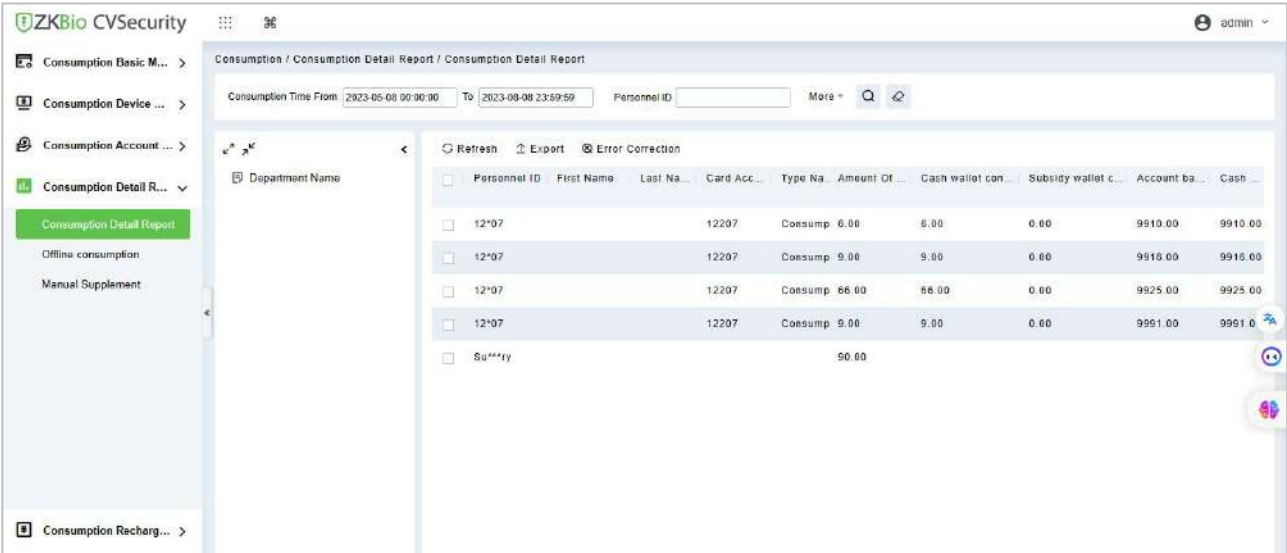


Figure 12- 50

12.4.1.1 Refresh

Click **Refresh** to load the latest consumption details.

12.4.1.2 Export

This feature allows you to export consumption details in EXCEL, PDF, CSV format files.

12.4.1.3 Error Correction

Click **Error Correction**. You can carry out the error correction process on the software. This operation is only valid for the records where the consumption type is the amount mode. Select a consumption record, read out the current balance of the card, enter the correct amount of consumption, and modify the balance of the card.

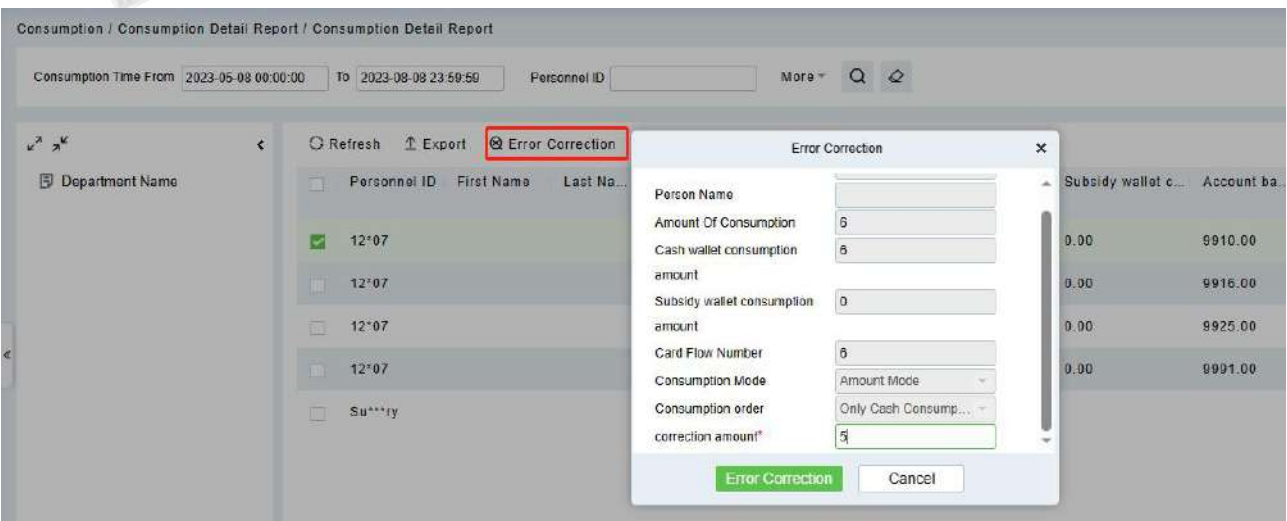


Figure 12- 51

Notes:

- 1) The same consumption record cannot be corrected repeatedly.
- 2) Software error correction automatically produces two new records: One is the record for the system error correction of the return of the original error consumption amount, the other is the correct consumption record of the manual supplement.

12.4.2 Offline Consumption

If the device supports offline consumption, after offline consumption, it will upload the consumption record during the offline period when device connect to software, and allows user manually review it.:

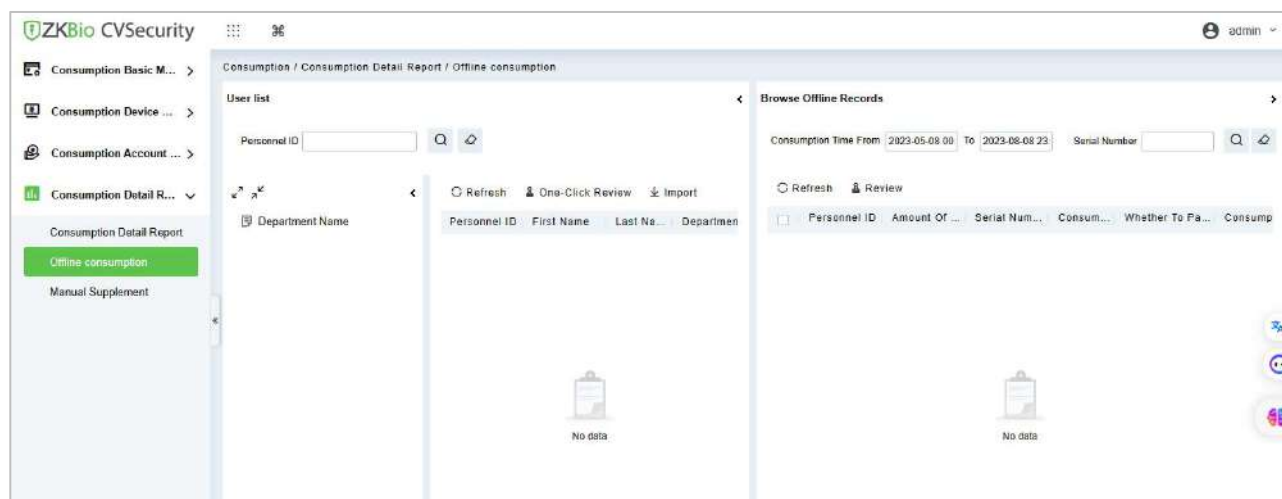


Figure 12- 52

The consumption records uploaded to the software during the offline period have not passed the audit and need to be manually reviewed before recorded.

This function is mainly used to audit offline consumption records. Check the consumption records that have not passed the audit, click "Audit", and the audit dialog box will pop up. Click "OK" to complete the audit.



Note: After offline consumption audit, cash wallet may appear negative, subsidy wallet can not be negative, when the subsidy wallet balance is insufficient to automatically converted to cash wallet deduction.

12.4.3 Manual Supplement


It is used to enter some consumption record details manually in the system.


Note: Before performing this operation, you need to have the relevant operation card.

Consumption Time From: To: Person Number:

More  

The current query conditions: Consumption Time From:(2018-08-28 00:00:00) To:(2018-11-28 23:59:59)

 Refresh

 New

Person Number	First Name	Card Account	Card Flow Number	Card Number	Amount of Consumption	Balance	Meal	Device Serial Number	Consumption Time	Creation Time	Creator
227	king	8579652	4	4117858142	20.0	471.0	Lunch	524145556	2018-11-28 17:42:00	2018-11-28 17:42:16	admin
227	king	8579652	3	4117858142	20.0	491.0	Midnight Snac	522153322	2018-11-28 17:41:00	2018-11-28 17:41:53	admin
227	king	8579652	2	4117858142	10.0	511.0	Dinner	524145556	2018-11-28 17:41:00	2018-11-28 17:41:34	admin
226	kim	45	4	4117804270	20.0	1148.0	Midnight Snac	524145556	2018-11-28 17:35:00	2018-11-28 17:35:24	admin
226	kim	45	3	4117804270	22.0	1168.0	Midnight Snac	522153322	2018-11-28 17:34:00	2018-11-28 17:34:33	admin
226	kim	45	2	4117804270	10.0	1190.0	Dinner	522153322	2018-11-28 17:33:00	2018-11-28 17:34:13	admin

Figure 12- 53

12.5 Consumption Report

The consumption report consists of 4 type of reports: Top Up report, Refund report, Subsidy report, Card Balance report.

12.5.1 Top Up Table

Click Consumption Report > Top Up Table, as shown below:

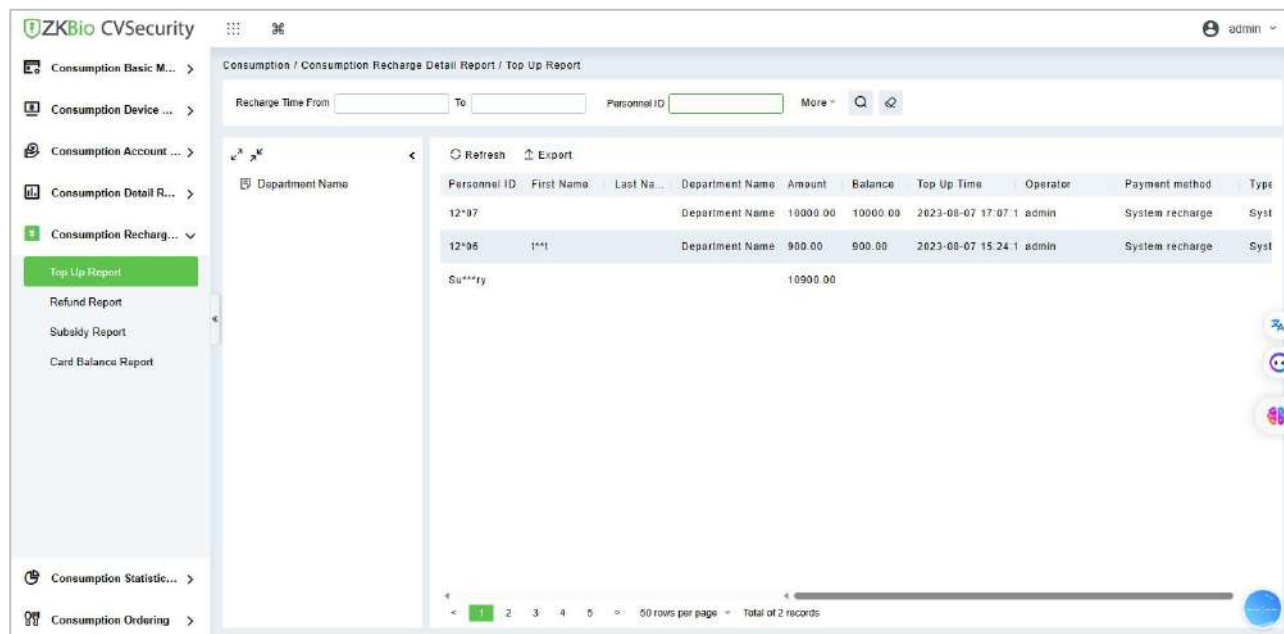


Figure 12- 54

12.5.1.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

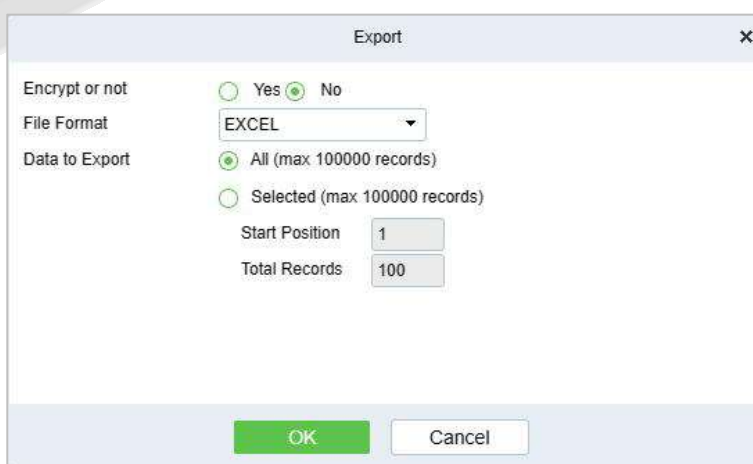


Figure 12- 55

12.5.2 Refund Table

Click Consumption Report > Refund Table, as shown below:

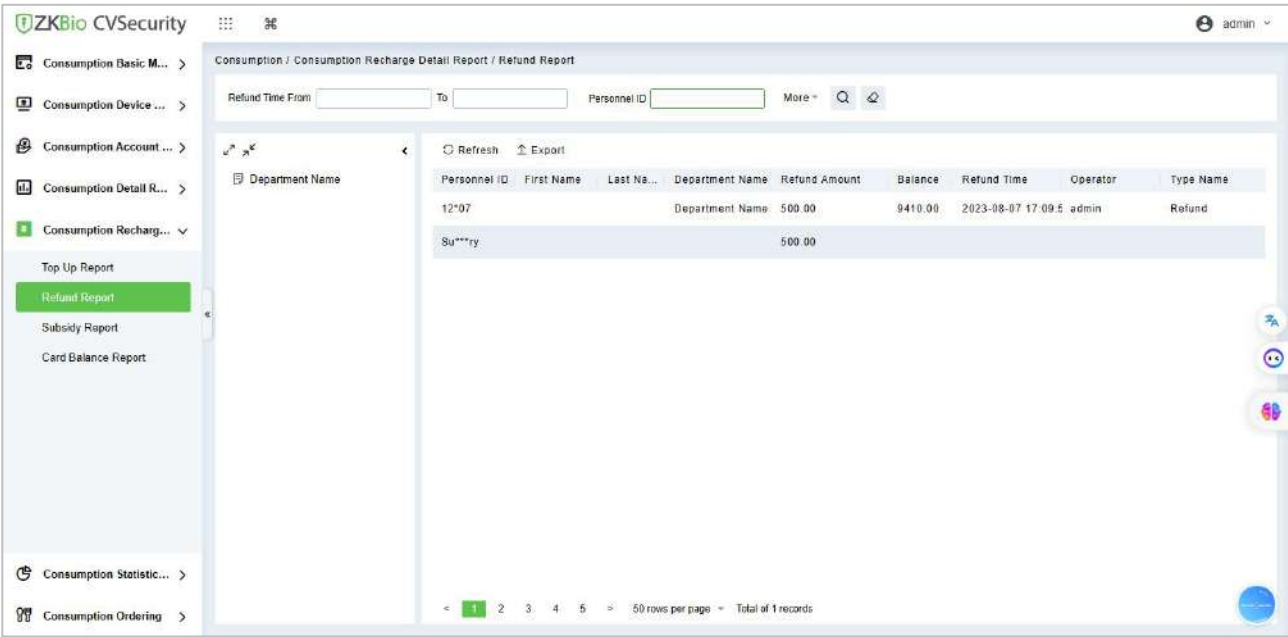


Figure 12- 56

12.5.2.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

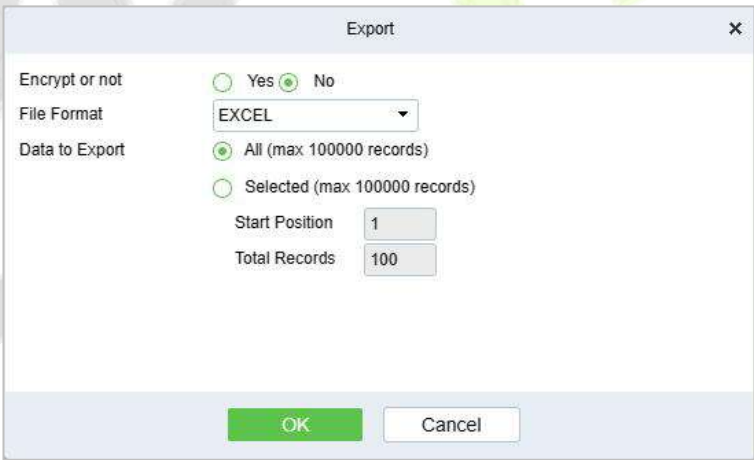


Figure 12- 57

12.5.3 Subsidy Table

Click Consumption Report > Subsidy Table, as shown below:

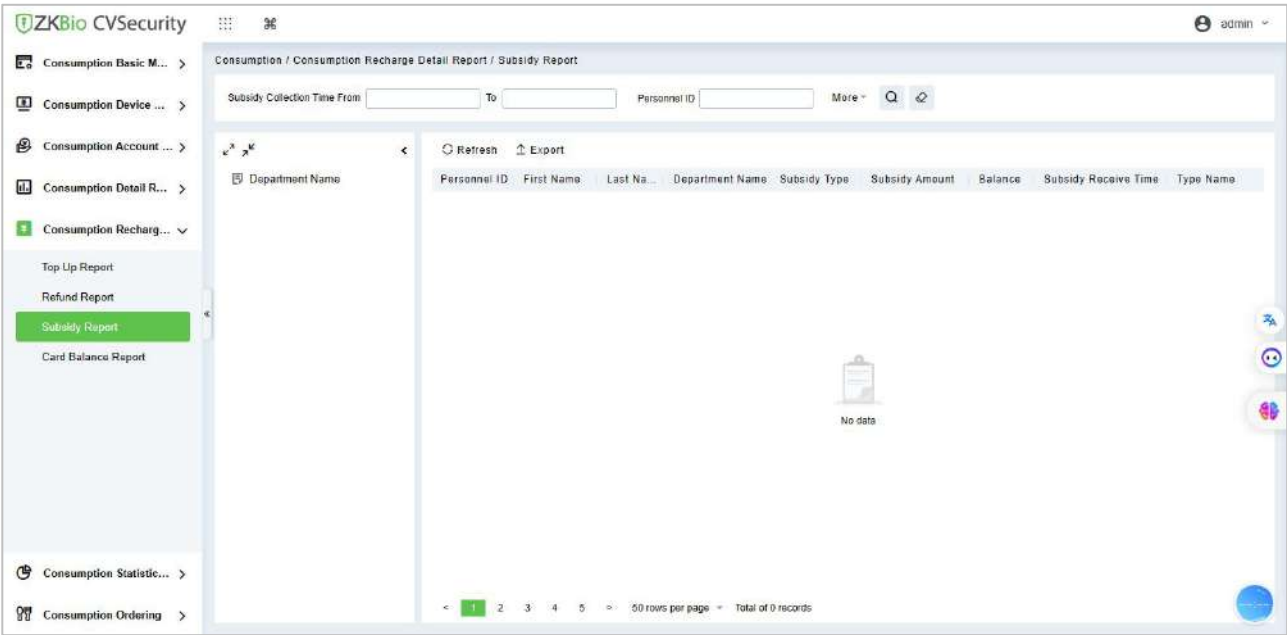


Figure 12- 58

12.5.3.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.5.4 Card Balance Table

Click **Consumption Report > Card Balance Table**, as shown below:

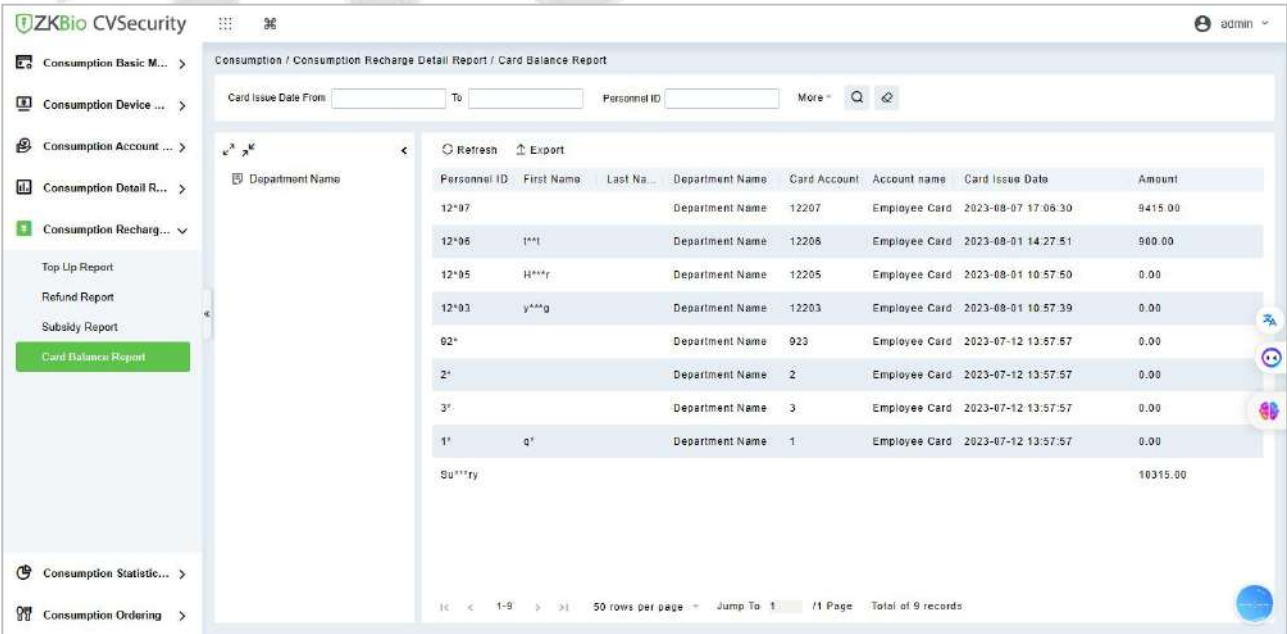


Figure 12- 59

12.5.4.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.6 Statistical Report

The statistical report contains the statistical information of consumption system module.

12.6.1 Personal Consumption Statistics

Click **Statistical Report > Personal Consumption Statistics**, as shown below:

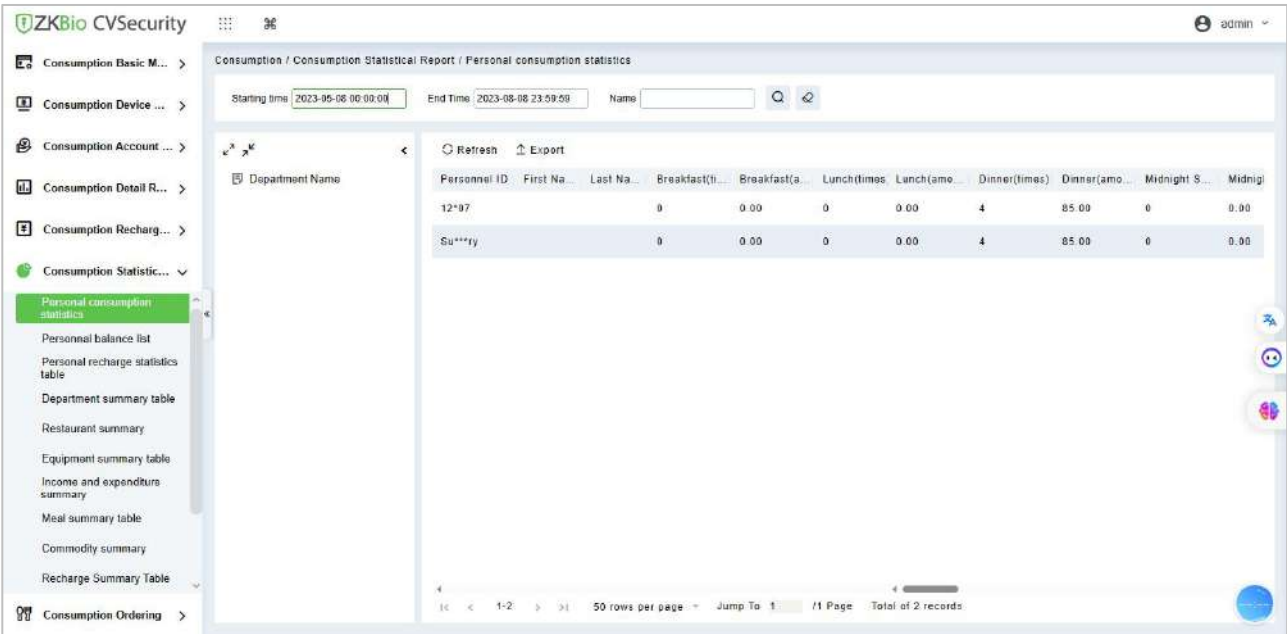



Figure 12- 60

12.6.1.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.6.1.2 Refresh

Click **Refresh** to load the latest personal consumption statistics table data.

Note: If the page personal consumption statistics table data is more, you can also enter the person name, department name, consumption time in the search field, click  to search and query.

The data statistics column includes below information:

✓ Personnel ID	✓ Meal 06(amount)
✓ First Name	✓ Meal 07(times)
✓ Last Name	✓ Meal 07(amount)
✓ Breakfast(times)	✓ Meal 08(times)
✓ Breakfast(amount)	✓ Meal 08(amount)
✓ Lunch(times)	✓ No meal(times)
✓ Lunch(amount)	✓ No meal(amount)
✓ Dinner(times)	✓ Cash wallet consumption amount
✓ Dinner(amount)	✓ Subsidy wallet consumption amount
✓ Midnight Snack(times)	✓ Replenishment order
✓ Midnight Snack(amount)	✓ Total replenishment
✓ Meal 05(times)	✓ Number of error corrections
✓ Meal 05(amount)	✓ Total error correction
✓ Meal 06(times)	✓ Total discount

Figure 12- 61

The following is the calculation formula of the specific column.

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

12.6.2 Personal Balance List

Click **Statistical Report > Personal Balance List**, as shown below:

This report list shows all account balance information.

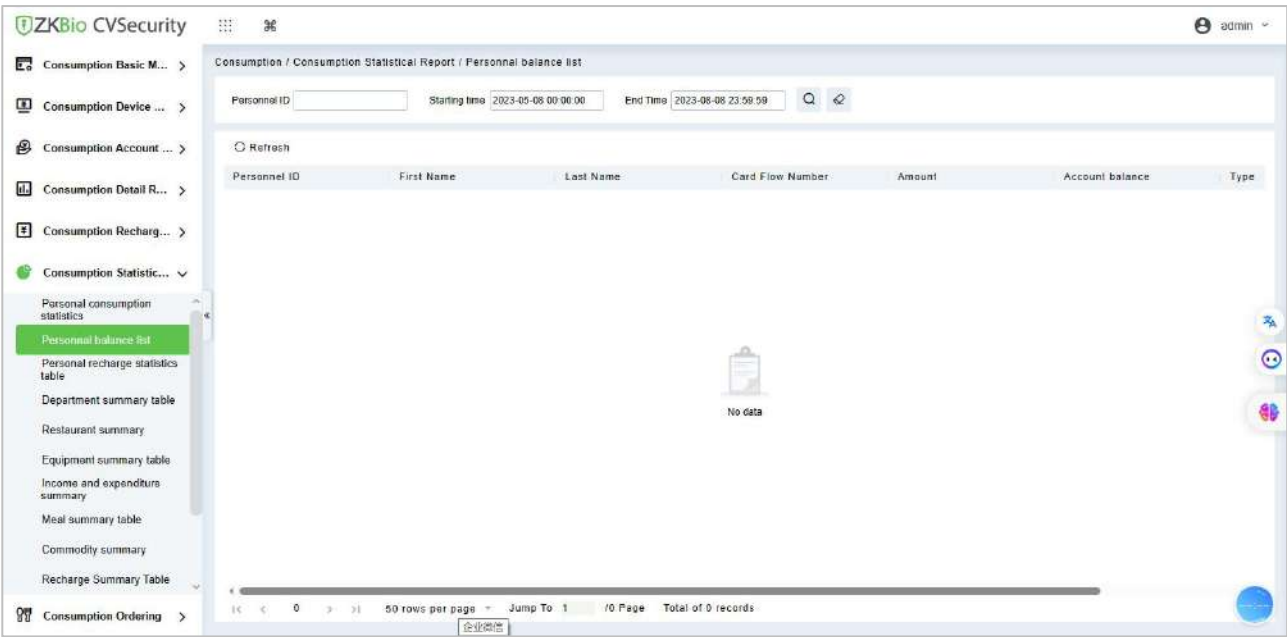


Figure 12- 62

12.6.3 Personal Recharge Statistics

Click **Statistical Report > Personal Recharge List**, as shown below:

This report list shows all account recharge information.

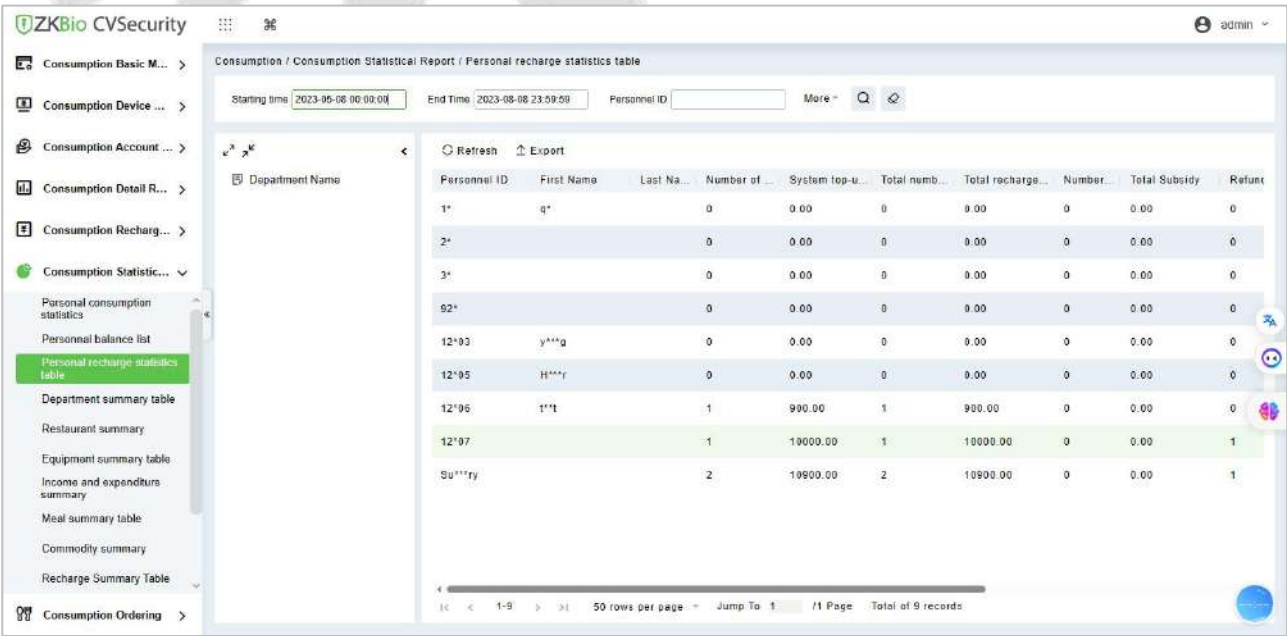


Figure 12- 63

12.6.4 Department Summary Table

Click **Statistical Report > Department Summary Table** as shown below:

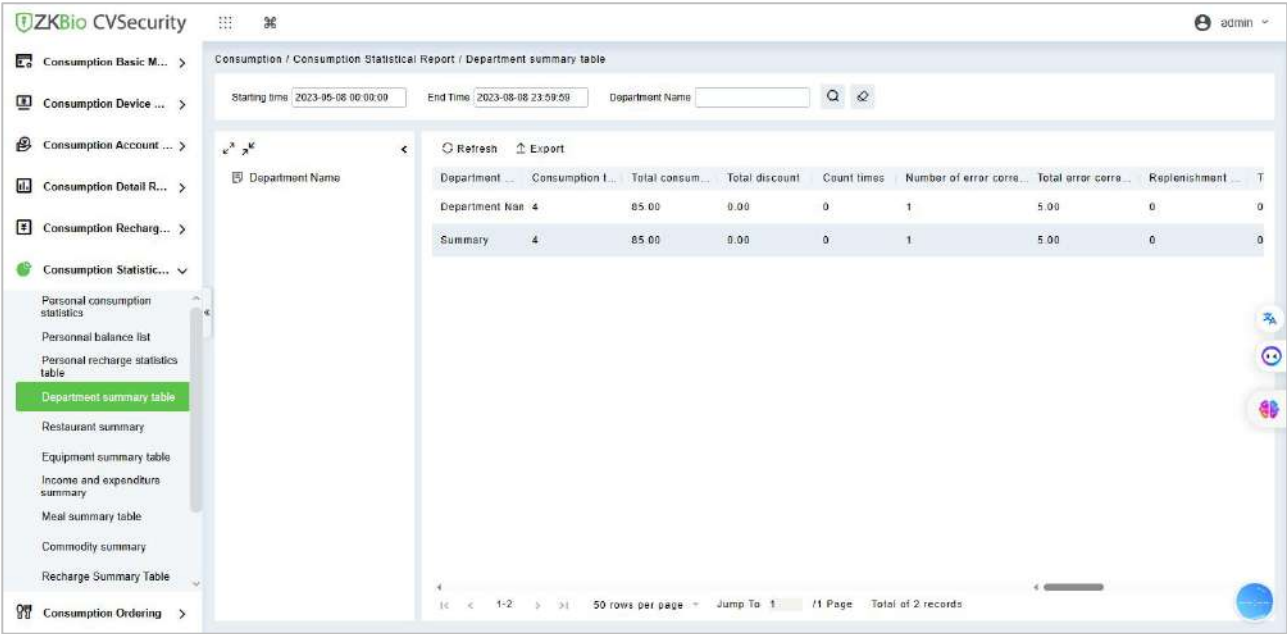



Figure 12- 64

12.6.4.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.6.4.2 Refresh

Click **Refresh** to load the latest department summary table data.

Note: If the page department summary table data is more, you can also enter the department name and consumption time in the search field, and click  to search for the query.

The data statistics column includes:

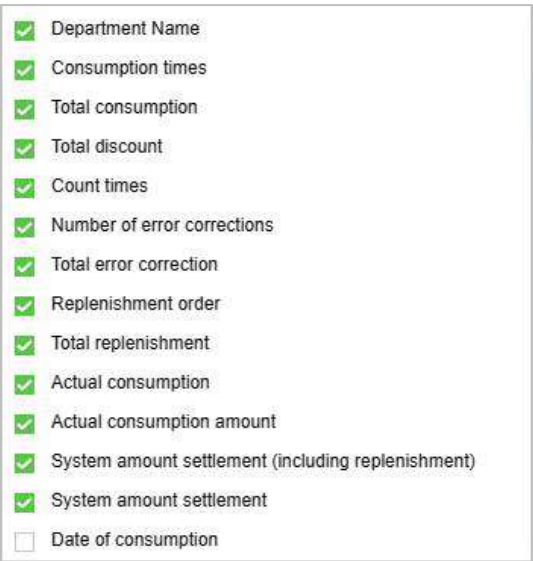


Figure 12- 65

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type.
- **Total Error Correction** = Total amount of error correction for the particular type.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

12.6.5 Restaurant Summary

Click **Statistical Report > Restaurant Summary**, as shown below:

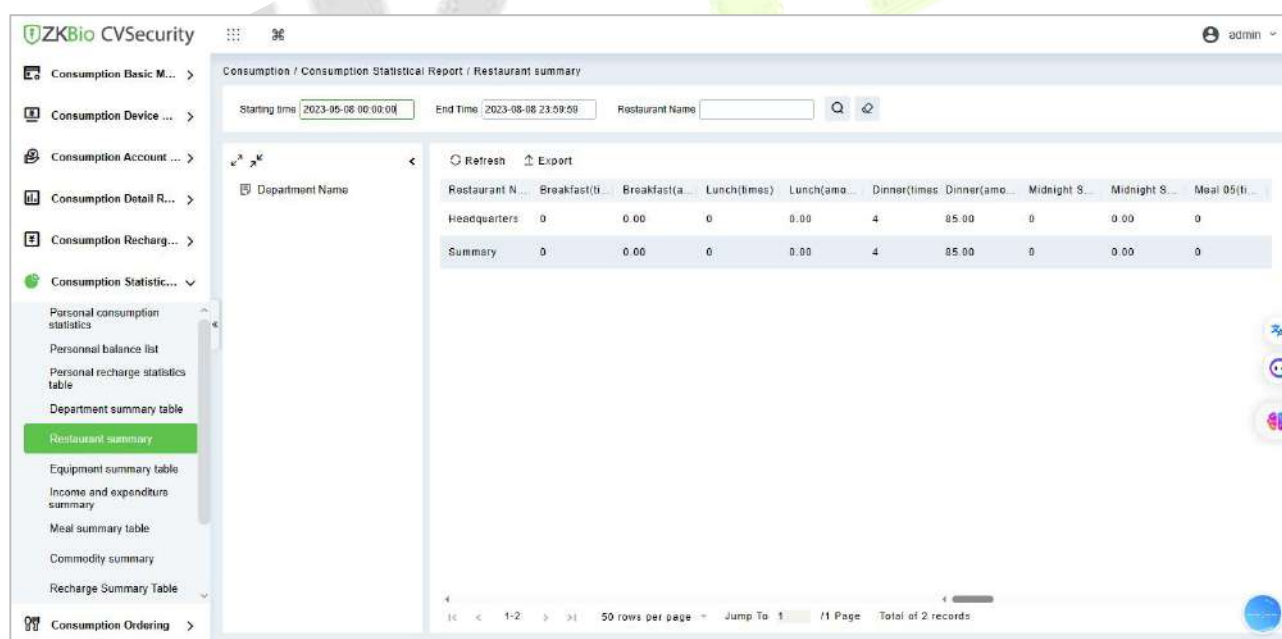



Figure 12- 66

12.6.5.1 Export

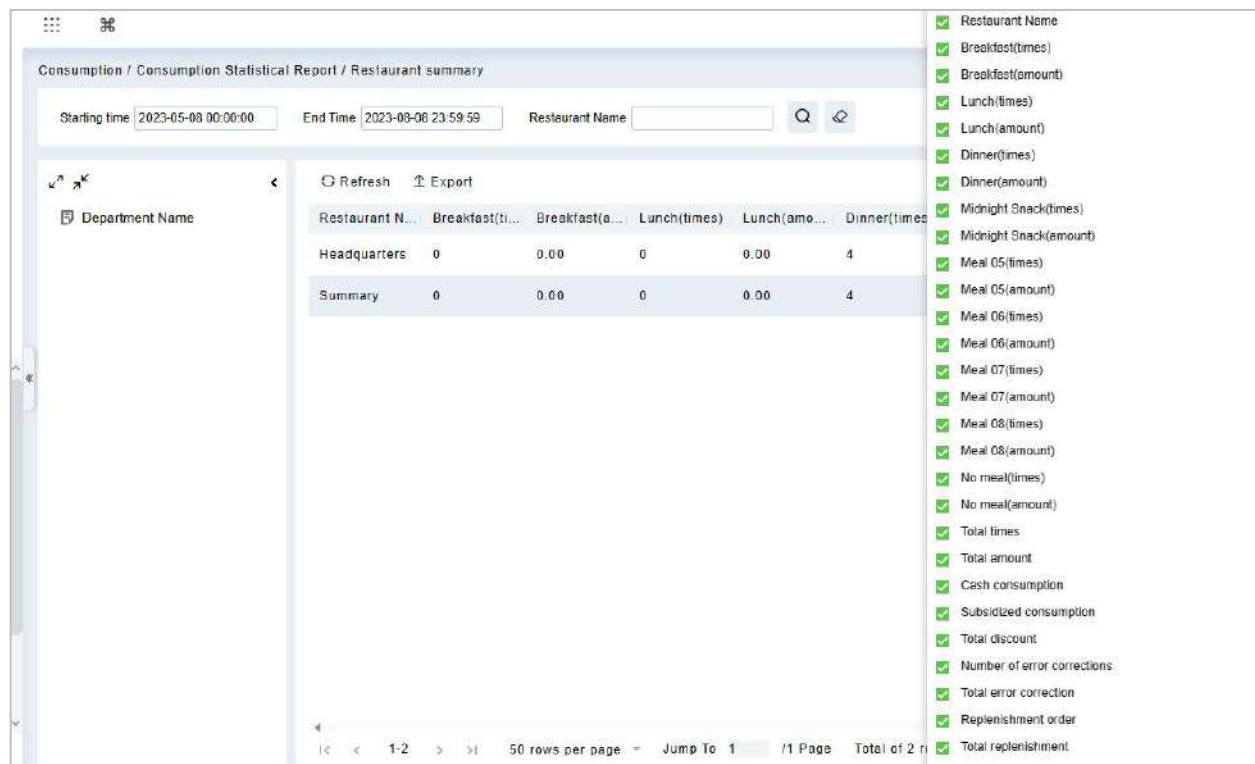
Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.6.5.2 Refresh

Click **Refresh** to load the latest restaurant summary table data.

Note: If the page restaurant summary table data is more, you can also enter the restaurant name, consumption time in the search bar, click  to search and query.

The data statistics column includes:



Restaurant Name	Breakfast(times)	Breakfast(amount)	Lunch(times)	Lunch(amount)	Dinner(times)
Headquarters	0	0.00	0	0.00	4
Summary	0	0.00	0	0.00	4

Figure 12- 67

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

12.6.6 Device Summary Table

Click **Statistical Report > Device Summary Table**, as shown below:

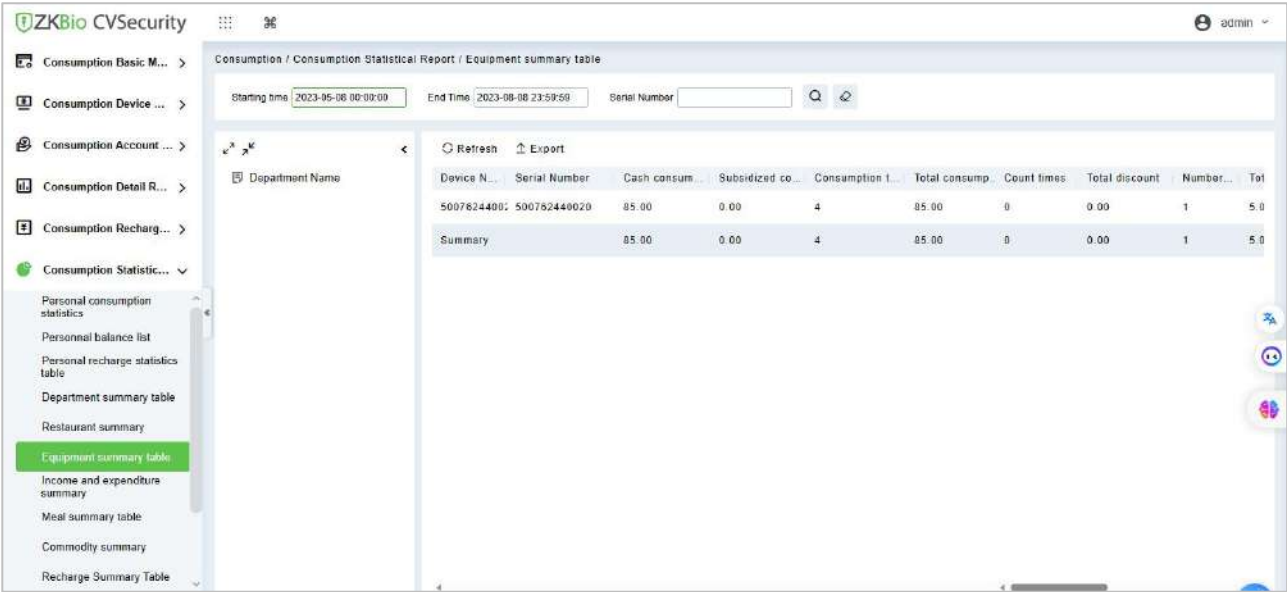



Figure 12- 68

12.6.6.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.6.6.2 Refresh

Click **Refresh** to load the latest equipment summary table data.

Note: If there is more data on the page device summary table, you can also enter the device name and consumption time in the search field, and click  to search for it.

The data statistics column includes:

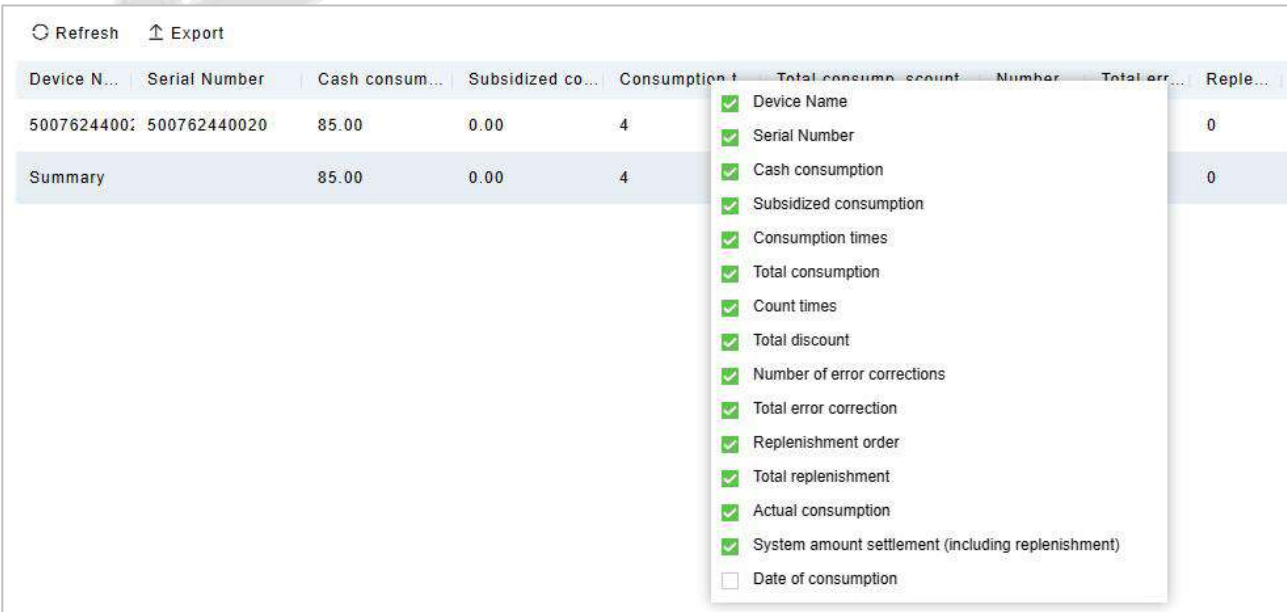


Figure 12- 69

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

12.6.7 Income and Expenditures Summary

Click **Statistical Report > Income and Expenditures Summary**, as shown below:

Consumption / Consumption Statistical Report / Income and expenditure summary

Starting time: 2023-05-05 00:00:00 End Time: 2023-08-08 23:59:59 Creator Name / Device Serial Number

Refresh Export

Creator Name / Device Serial...	Top Up Times	Refund Times	Subsidy Re...	Issue Card Ti...	Total Subsidy	Total Top Up	Total
admin	2	1	0	4	0.00	10900.00	500.00
System	0	0	0	4	0.00	0.00	0.00
Summary	2	1	0	8	0.00	10900.00	500.00

50 rows per page Jump To 1 / 1 Page Total of 3 records


Figure 12- 70

12.6.7.1 Export

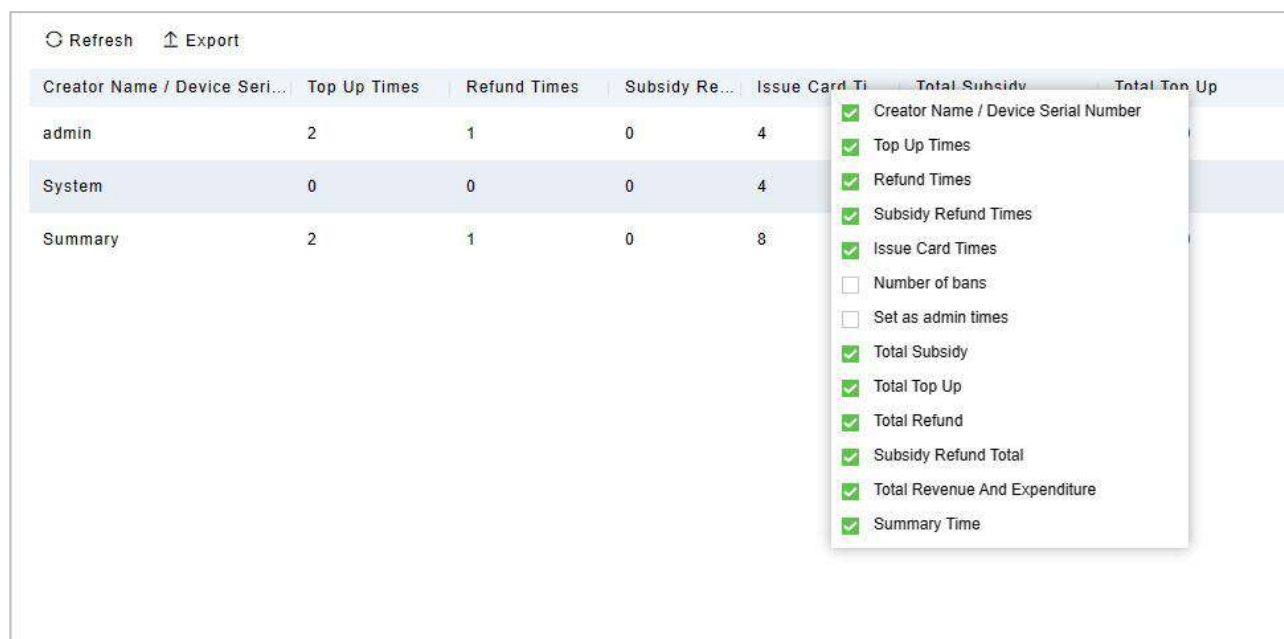
Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.6.7.2 Refresh

Click **Refresh** to load the latest revenue and expenditure summary table data.

Note: If there is more data on the page income and expenditure summary table, you can also enter the creator name/device serial number and summary time in the search field, and click  to search for it.

The data statistics column includes



Creator Name / Device Serial Number	Top Up Times	Refund Times	Subsidy Refund Times	Issue Card Times	Total Subsidy	Total Top Up
admin	2	1	0	4		
System	0	0	0	4		
Summary	2	1	0	8		

☒ Creator Name / Device Serial Number
☒ Top Up Times
☒ Refund Times
☒ Subsidy Refund Times
☒ Issue Card Times
☐ Number of bans
☐ Set as admin times
☒ Total Subsidy
☒ Total Top Up
☒ Total Refund
☒ Subsidy Refund Total
☒ Total Revenue And Expenditure
☒ Summary Time

Figure 12- 71

- **Top up Times** = The total number of counts a card was added extra amount.
- **Refund Times** = The total number of counts a card were refunded.
- **Issue Card Times** = The total number of counts a card were issued.
- **Return Card Times** = The total number of counts the cards were returned.
- **Non-card Return card Times** = The total count of Non-card Return card.
- **Total Issue Card** = The total number of issued card.
- **Total Return Card** = The total number of cards returned.
- **No Card Return Card Total** = The total number of blocked card which are not returned.
- **Total Subsidy** = The total amount of subsidy for the card type.
- **Total Top-Up Offer** = The total amount of top-up discount for the card type.
- **Total Top-Up** = The total amount of top-up for the card type.
- **Total Refund** = The total amount of refund for the card type.
- **Card Cost Support** = The total amount of card cost for the card type.
- **Management Fee** = The total amount of management fee for the card type.
- **Card Cost Expense** = The total amount of card cost for the card type.
- **Total Revenue and Expenditure** = (Total Top up + Card Cost Expense + Total Issue Card + Management fee) - (Total Refund - Total Return Card).

12.6.8 Meal Summary Table

Click **Statistical Report > Meal Summary Table**, as shown below:

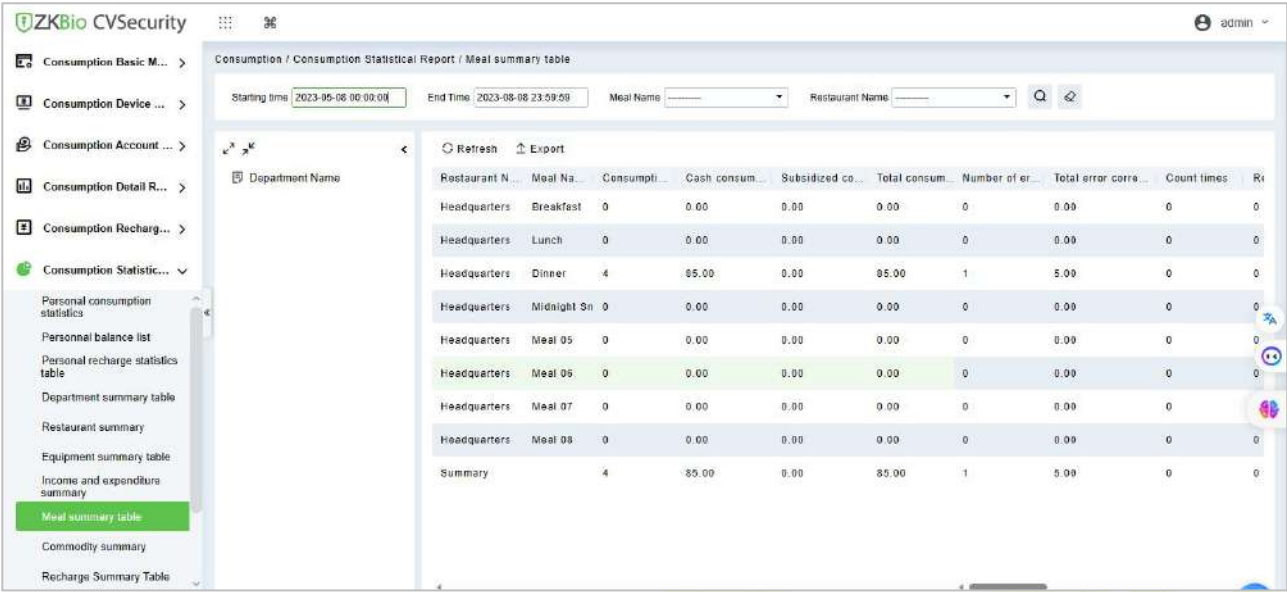



Figure 12-72

12.6.8.1 Export

Click the **Export** button at the top of the list to open an export dialog box, as shown below. Click **OK** to export the data according to the query conditions and export conditions. The export format type can be selected as Excel, PDF, or CSV files.

12.6.8.2 Refresh

Click **Refresh** to load the latest meal summary table data.

Note: If there is more data in the page meal summary table, you can also enter the device name, name, and consumption time in the search field, and click  to search for it.

The data statistics column includes:

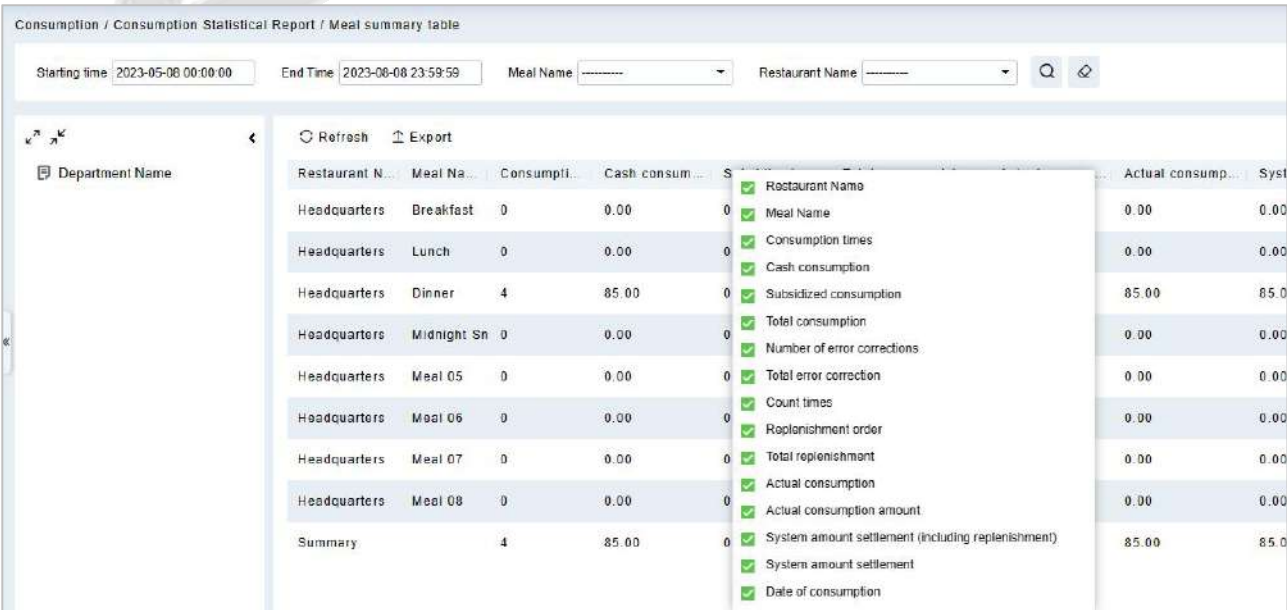


Figure 12-73

The following is the calculation formula of the specific column.

- **Consumption Times** = Total number of count the particular type is consumed.
- **Total Consumption** = Total amount of money consumed for the particular type.
- **Counting Times** = Total number of times the type is counted.
- **Number of Error Corrections** = Total number of error correction for the particular type name.
- **Total Error Correction** = Total amount of error correction for the particular type name.
- **Times of Supplementary Order** = Total count of supplementary order for the particular type.
- **Total Supplementary Order** = Total amount of supplementary order for the particular type.
- **Accounting Times** = Total count of billing for the particular type.
- **Total Accounting** = Total amount of money billed for the particular type.
- **Actual Consumption Times (device)** = Consumption times - Number of error corrections.
- **Actual Consumption Amount (device)** = Total Consumption - Total Error Correction.
- **System Amount Settlement (including supplementary order)** = Total Consumption - (Total Error Correction + Total Supplementary Order).
- **System Amount Settlement (including billing)** = Total Consumption - (Total Error Correction + Total Supplementary Order + Total Accounting).

12.6.9 Commodity Summary

Click **Statistical Report > Meal Summary Table**, as shown below:

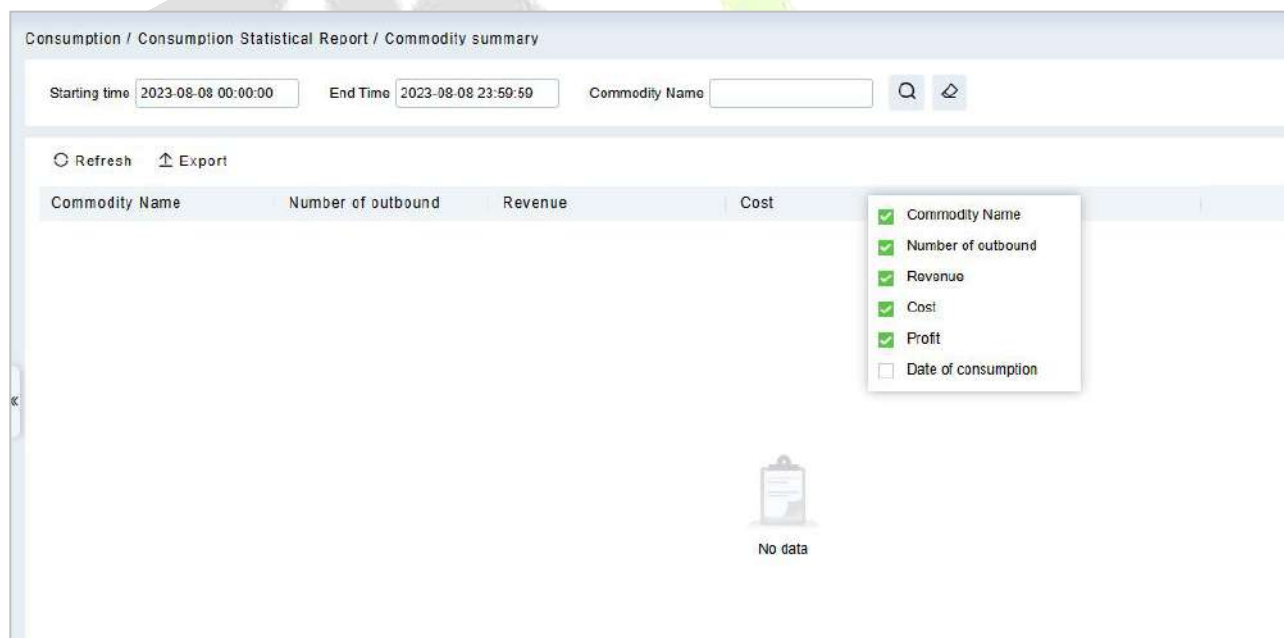


Figure 12- 74

The following is the calculation formula of the specific column.

- **Commodity Name** = Total name of count the name of consumption commodity.
- **Number of Outbound** = Total amount of consumption commodity.
- **Revenue** = Total number of revenue amount of the type is consumption commodity.

- **Cost** = Total number of cost amount of the type is consumption commodity.
- **Profit** = Total number of revenue amount of the type is consumption commodity - Total number of cost amount of the type is consumption commodity.
- **Date of Consumption** = Total name of consumption date of consume commodity.

12.6.10 Recharge Summary Table

Click **Statistical Report > Recharge Summary Table**, as shown below:

The screenshot shows the 'Recharge Summary Table' in the ZKBio CVSecurity system. The interface includes a sidebar with navigation options like 'Consumption Basic M...', 'Consumption Device ...', 'Consumption Account ...', 'Consumption Detail R...', 'Consumption Recharg...', and 'Consumption Statistic...'. The main area displays a table with columns: Date, Total number, Total recharge amo..., Number of allo..., Total Subsidy, Refund Times, and Total Refund. The data is filtered by 'Starting time' (2023-05-08 00:00:00) and 'End Time' (2023-08-08 23:59:59). The table shows records for dates 2023-08-08, 2023-08-07, 2023-08-01, and 2023-07-12, along with a 'Summary' row. A pagination bar at the bottom indicates '50 rows per page' and 'Total of 5 records'.

Date	Total number	Total recharge amo...	Number of allo...	Total Subsidy	Refund Times	Total Refund
2023-08-08	0	0.00	0	0.00	0	0.00
2023-08-07	2	10900.00	0	0.00	1	500.00
2023-08-01	0	0.00	0	0.00	0	0.00
2023-07-12	0	0.00	0	0.00	0	0.00
Summary	2	10900.00	0	0.00	1	500.00

Figure 12- 75

12.6.11 Personnel Meal Summary Table

Click **Statistical Report > Personnel Meal Summary Table**, as shown below:

The screenshot shows the 'Personnel Meal Summary Table' in the ZKBio CVSecurity system. The interface includes a sidebar with navigation options like 'Consumption Basic M...', 'Consumption Device ...', 'Consumption Account ...', 'Consumption Detail R...', 'Consumption Recharg...', and 'Consumption Statistic...'. The main area displays a table with columns: Personnel ID, First Name, Last Name, Department, Breakfast(times), Breakfast(a...), Lunch(times), and Lunch. The data is filtered by 'Consumption Time From' (2023-07-08 00:00:00) and 'To' (2023-08-08 23:59:59). The table shows records for personnel with IDs '12*97' and 'Su***ry'. A dropdown menu on the right lists various meal types and amounts, such as 'Breakfast(times)', 'Breakfast(amount)', 'Lunch(times)', 'Lunch(amount)', 'Dinner(times)', 'Dinner(amount)', 'Midnight Snack(times)', 'Midnight Snack(amount)', 'Meal 05(times)', 'Meal 05(amount)', 'Meal 06(times)', 'Meal 06(amount)', 'Meal 07(times)', 'Meal 07(amount)', 'Meal 08(times)', 'Meal 08(amount)', 'No meal(times)', 'No meal(amount)', 'Total times', and 'Total amount'. A pagination bar at the bottom indicates '50 rows per page' and 'Total of 2 records'.

Personnel ID	First Name	Last Name	Department	Breakfast(times)	Breakfast(a...)	Lunch(times)	Lunch
12*97			Department Nan	0	0.00	0	0.00
Su***ry				0	0.00	0	0.00

Figure 12- 76

12.6.12 Device Meal Summary Table

Click **Statistical Report > Device Meal Summary Table**, as shown below:

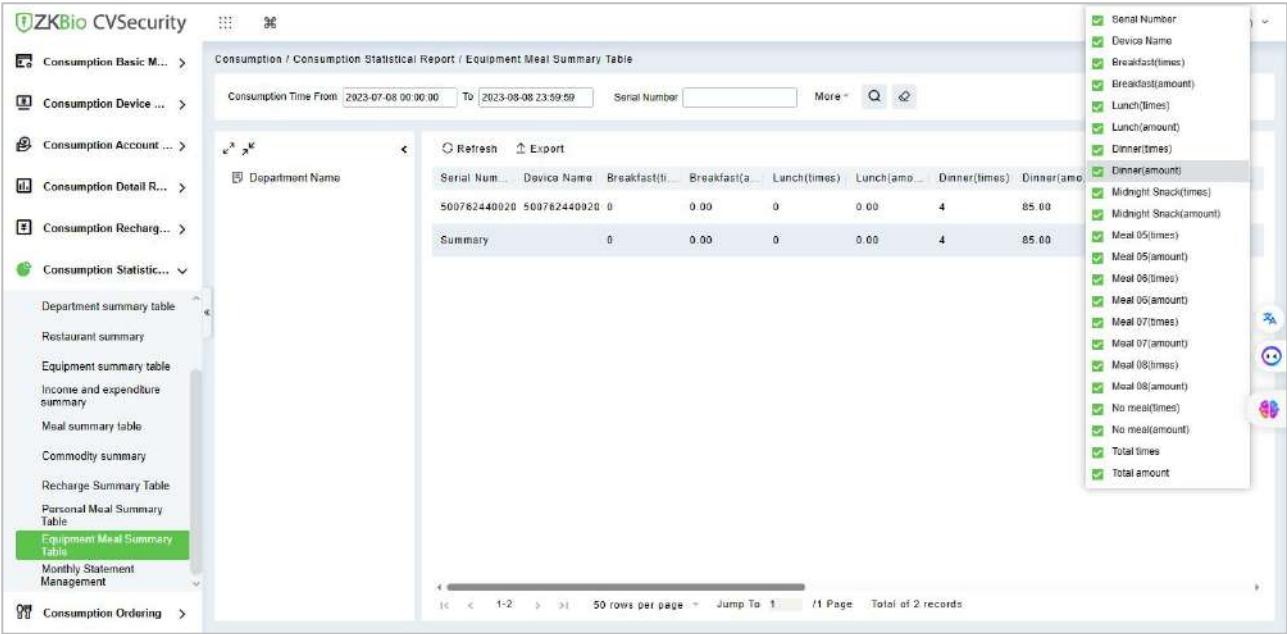


Figure 12- 77

12.6.13 Monthly Statement Management

Click **Statistical Report > Monthly Statement Management**, as shown below:

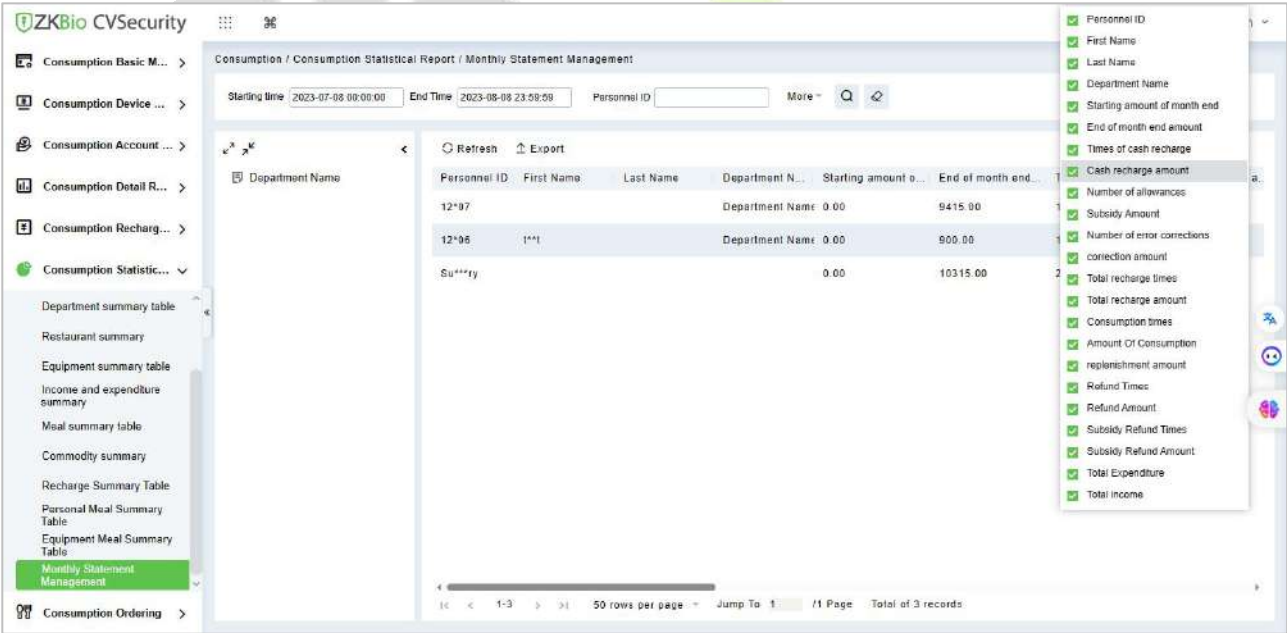


Figure 12- 78

12.7 Consumption Ordering

The platform provides food ordering management, employees can find the administrator to order food in advance.

12.7.1 Order Management

Click **Consumption Ordering > Order Management**, as shown below:

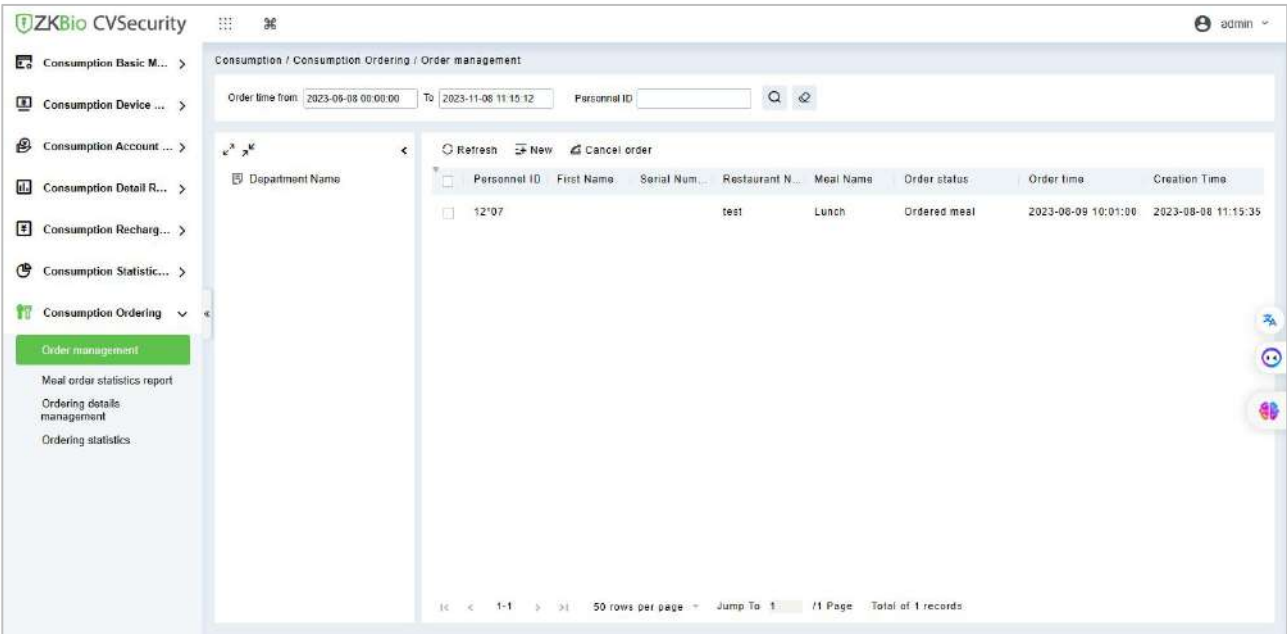


Figure 12-79

12.7.1.1 New

Click **New** and select the personnel or department, fill in the meal ordering details.

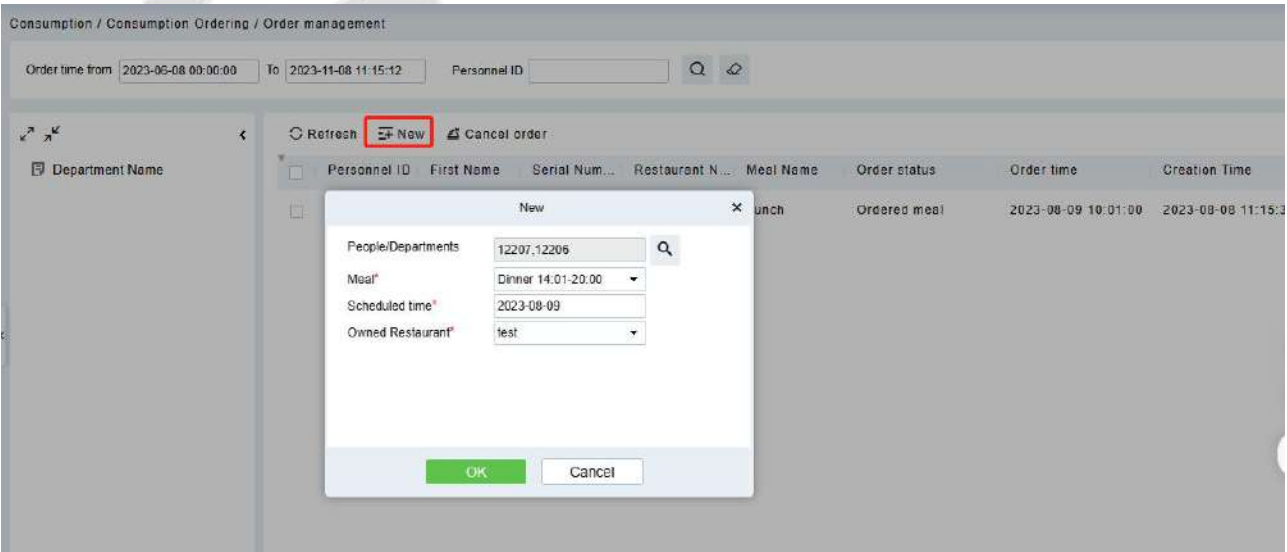


Figure 12-80

12.7.1.2 Cancel Order

Select the personnel, click **Cancel Order** to cancel the order.

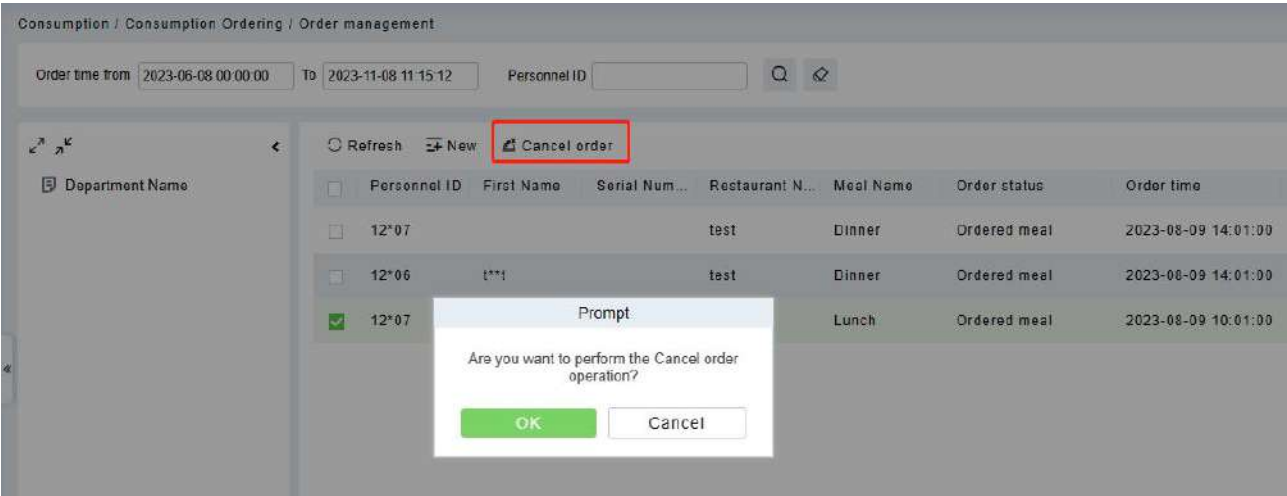


Figure 12- 81

12.7.2 Meal Order Statics Report

Click **Consumption Ordering > Meal Order Statics Report**, as shown below:

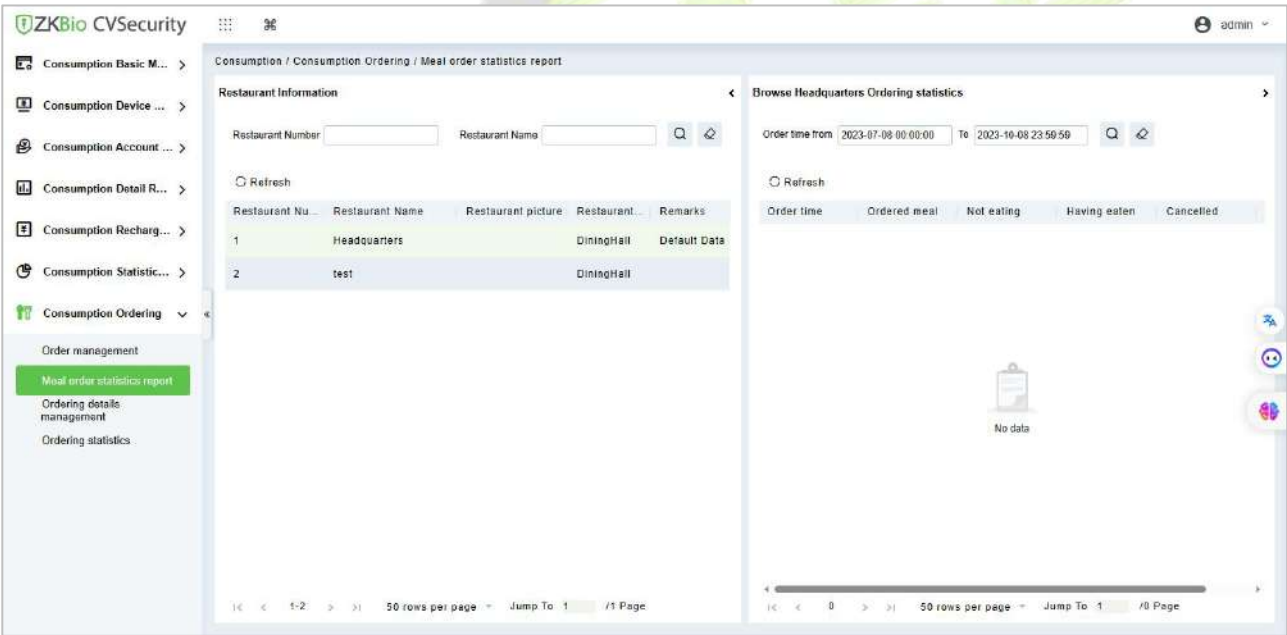


Figure 12- 82

12.7.3 Ordering Details Management

Click **Consumption Ordering > Ordering Detail Management**, as shown below:

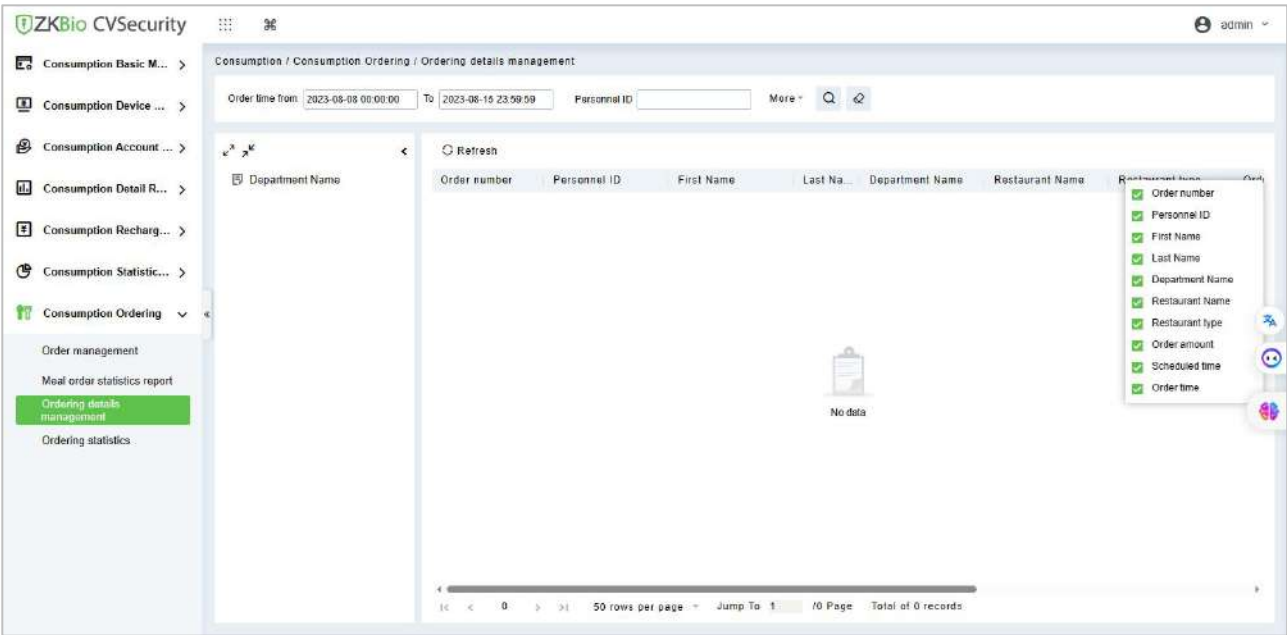


Figure 12- 83

12.7.4 Ordering Statistics

Click **Consumption Ordering > Ordering Statistics**, as shown below:

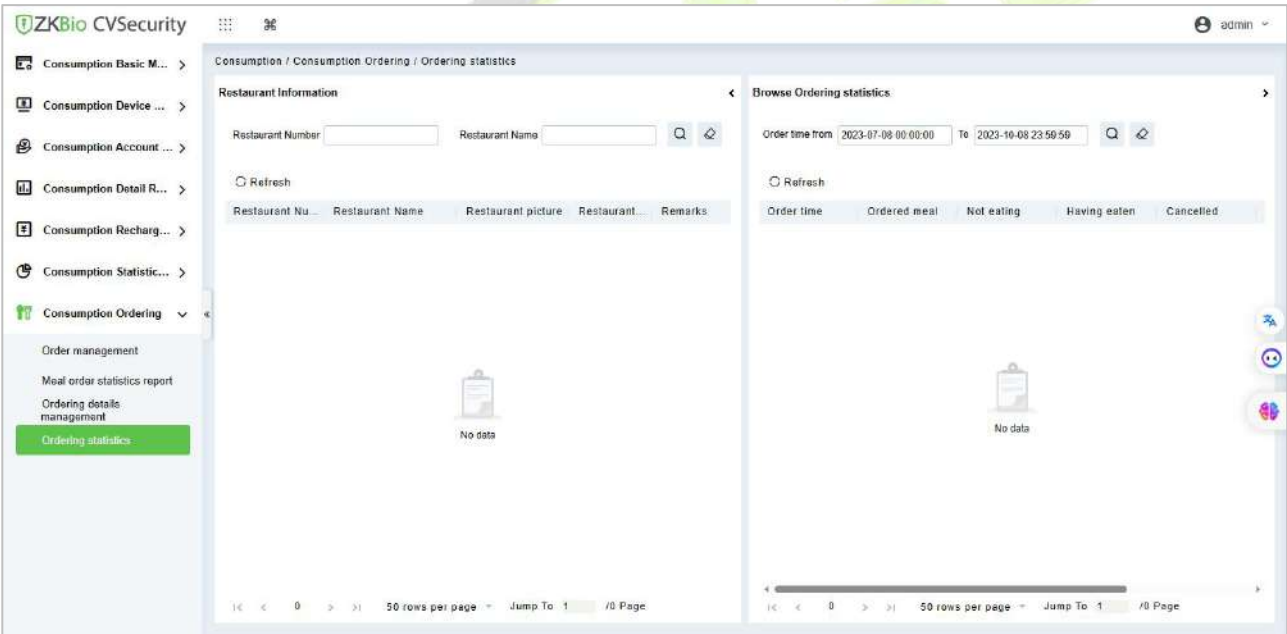


Figure 12- 84

13 Patrol Management

13.1 Operation Scenario

Patrol management business can realize the effective supervision and management of patrol personnel, patrol plan and patrol route by enterprise managers, and at the same time, it can also make regular statistics and analysis on patrol route and results.

13.2 Operation Flow

Introduce the configuration process of patrol management.

The patrol management configuration process is shown in figure below.

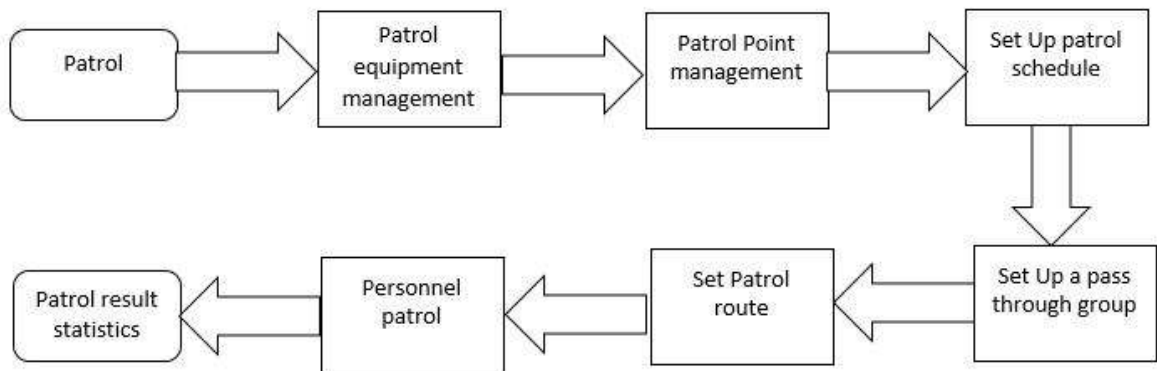


Figure 13- 1 Patrol Configuration Flow

13.3 Patrol Route Monitoring

13.3.1 Patrol Monitoring

Displays all the scheduled routes in the patrol plan on the same day. When the patrol personnel patrol normally as planned, the patrol points in the corresponding patrol routes will turn green; If you don't patrol according to the rules, the patrol point will turn red. This interface is shown in the patrol monitoring interface, as shown in figure below. Refer to Table 12-1 for status description.



Figure 13- 2 Patrol Monitoring




Parameter	Description
Normal Patrol	Personnel complete patrol in a normal time period according to normal sequence rules.
Wrong Patrol	The personnel completed the patrol within the normal time period but did not follow the regular route.
Leakage Patrol	The personnel did not complete the patrol within the normal time period, that is, one or part of the patrol points did not patrol.
Absence	Personnel has not completed the patrol within the normal time period, that is, the whole patrol route has not completed one patrol.
	The patrol route is wrong/missed.
	Normal patrol.
	Not patrolling.

Table 13-1 Patrol Status Description

13.4 Basic Settings (Patrol Basic Management)

13.4.1 Device Addition (Device)

13.4.1.1 Add device (New)

Select a device to be used as the patrol device from the access control devices. Click **Basic Management** > **Device** > **New**. In the **Alternative** box, add available devices and click **OK** to save the setting. The page is displayed as follows:

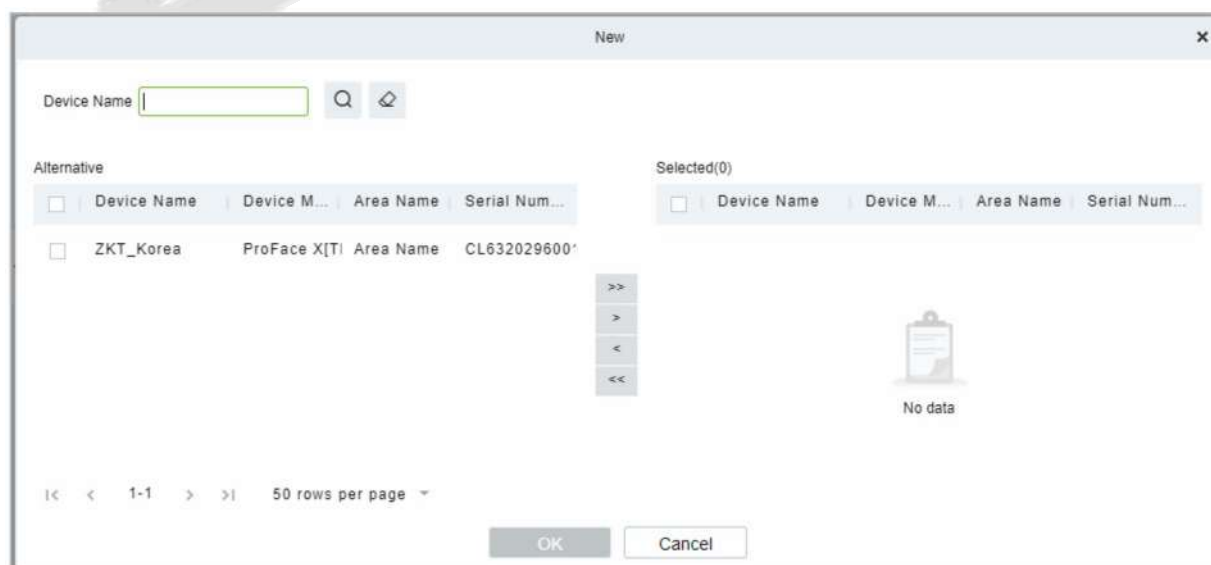


Figure 13- 3 Add Device (New)

●Precondition:

Before the patrol operation, it is necessary to add patrol device in the **Access Control** module and patrol personnel in the **Personnel** module.

Parameters	Instructions
Device Name	Customize the name of this device
Serial Number	Customize the device serial number.
Area Name	Divide the area for the device.
Device Model	Manufacturer of the device.

Table 13-2 Access Control

13.4.1.2 Delete

Select personnel in the list on the right and click **Delete** above the list to delete the personnel from the patrol group

13.4.1.3 Edit

Click a device name or Edit in the operation column to go to the Edit page. Make modifications and click OK to save modifications.

13.4.2 Checkpoint

13.4.2.1 Add Checkpoint (New)

Step 1: Click **Basic Management > Checkpoint > New**. The page is displayed as follows:

Figure 13- 4 New Checkpoint

Step 2: After the setting (parameters with * are mandatory), click **OK** to save the setting. You can also click **Save and New** to save the current setting and add another checkpoint. Click **Cancel** to cancel the setting and return to the upper-level menu.

Parameters	Description
Checkpoint	Unique name which can identify a route.
Device Module	Displays the device number.
Area Name	It can support typing anything alphabet but can't typing the common.
Device Name	Manufacturer of the device.
Patrol Tag	Currently, only access control readers are supported
Installation Position	Set a suitable name for the position. Any character, maximum combination of 100 characters. Position names should not be repeated.
Operations	The patrol operation, it is necessary to add patrol device in the Access Control module.

Table 13-3 New Checkpoint

13.4.2.2 Delete

Select personnel in the list on the right and click **Delete** above the list to delete the personnel from the checkpoint

13.4.2.3 Edit

Click a device name or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

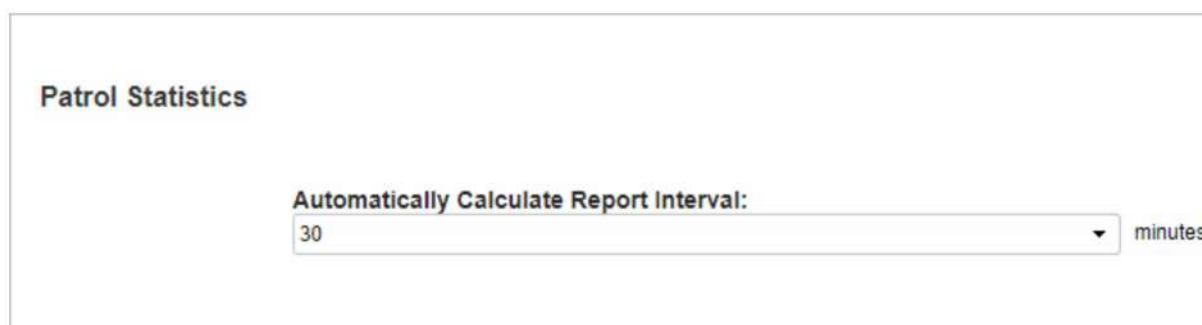
Note: Patrol tags that have been used by checkpoints cannot be used again when you add another checkpoint.

13.4.3 Parameters

Step 1: Click **Patrol > Basic Management > Parameters**.

Step 2: Set the interval for patrol statistics collection.

Step3: Click **OK** to save the setting.



Patrol Statistics

Automatically Calculate Report Interval:

30 minutes

Figure 13- 5 Parameters

13.5 Patrol Management

13.5.1 Set Up a Patrol Plan

13.5.1.1 Add Plan (New)

●Operating Steps:

Step 1: In the Patrol module, select "**Patrol Management > Patrol Plan**" and click New.

Step 2: In the **New** window that pops up, configure the patrol plan information, as shown in figure below, and describe the key parameters as shown in Table 12-1.

Figure 13- 6 Patrol Plan

Parameter	Instructions
Time Period	You can set the time to be set in a day, or you can set it across days.
By Date	The patrol plan is scheduled daily. Check by Date to set the start date and end date of the patrol plan.
By Week	The patrol plan is scheduled on a weekly basis.
By Month	The patrol plan is scheduled monthly. There are two ways to implement the monthly plan: daily implementation or regular implementation. Choose the patrol plan to perform the patrol task every day in the selected month; If you choose to perform regularly, you will perform the patrol task within the specified date in the month.

Table 13-4 Parameter Setting Description

Step 3: Click **OK**.

Parameter	Instructions
Plan Name	Customize the Plan Name.

Cycle Type	Customize the Cycle Type.
Plan	A maximum of three patrol shifts can be added for a patrol plan.
Time Zone	This abnormal event is triggered if a user with the floor opening right punches his/her card beyond the effective periods
Operations	The patrol operation, it is necessary to add patrol device in the Access Control module.

Table 13-5 Parameter Setting

13.5.2 Designated Patrol Personnel Group (Patrol Group)

13.5.2.1 Add Patrol Group (New)

● Operating Steps:

Step 1: In the Patrol module, select "**Patrol Management > Patrol Group**" and click New.

Step 2: In the pop-up **New** window, configure the patrol personnel group information, as shown in figure below.

Figure 13- 7 Patrol Personnel Group

Step 3: Click **OK**.

Step 4: Under the operation of the patrol group interface, click "**Add Personnel**".

Step 5: In the **Add Person** window that pops up, configure the person information, as shown in figure below.

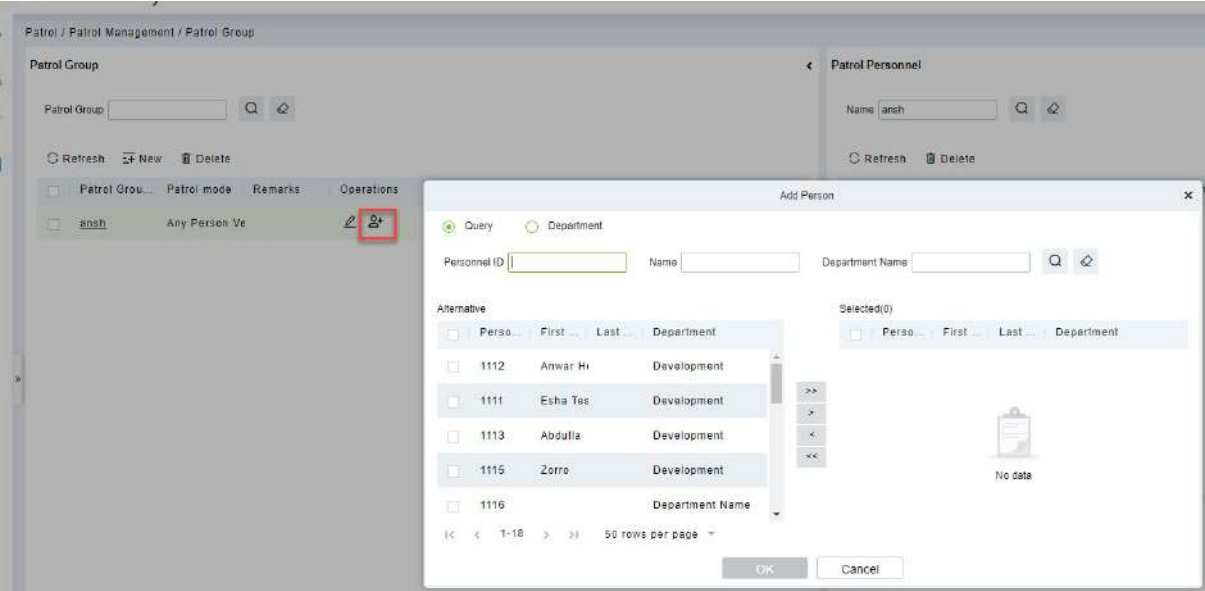


Figure 13- 8 Adding Patrol Team Personnel

Step 6: Click **OK**.

13.5.2.2 Delete

Select personnel in the list on the right and click **Delete** above the list to delete the personnel from the patrol group.

Parameters	Instructions
Patrol Group	Click a patrol group from the list on the left. Personnel in the patrol group are displayed in the list on the right.
Patrol Mode	A patrol group cannot be edited or deleted when it is used by a patrol route.
Remarks	Custom Setting Notes Description.
Operations	The patrol operation, it is necessary to add patrol device in the Access Control module.
Personnel ID	Click Add Personnel under Operation in the list on the left. The page for adding personnel is displayed (or adding by department). Add personnel to the list on the right and click OK to finish the setting.
First Name/ Last Name	The maximum length cannot exceed 50, does not support comma; value sources Personnel field, cannot add, modify, delete.
Department Name	Select from the pull-down menu and click OK . If the department was not set previously, only one department named Company Name will appear.

Table 13-6 Delete Personnel

13.5.3 Set Up Patrol Routes (Route)

13.5.3.1 Add Route (New)

●Operating Steps:

Step 1: In the Patrol module, select "**Patrol Management > Patrol Route**" and click Add.

Step 2: In the pop-up **Add** window, configure the patrol route information as shown in Figure 12-9 and figure below, and describe the key parameters as shown in Table 12-7.

The 'New' window is a light blue dialog box with a close button (X) in the top right corner. It contains the following fields and controls:

- Route Name***: A text input field.
- Plan Name***: A dropdown menu with a dashed line indicating a selection.
- Limited Time***: A text input field with the value '0' and a 'minutes' label.
- Deviation***: A text input field with the value '0' and a 'minutes' label.
- Patrol Subject***: A dropdown menu showing 'Select patrol personnel' and a checkbox labeled 'Patrol Group'.
- Buttons**: A green 'Next Step' button and a white 'Cancel' button at the bottom.

Figure 13- 9 The First Step of The Patrol Route

The 'Route Definition' window is a light green dialog box with a close button (X) in the top right corner. It contains the following elements:

- Filters**: 'Route Order' (dropdown set to 'Order') and 'Checkpoint' (text input). 'Area Name' is also present with a dropdown and search icon.
- Query Conditions**: A section stating 'The current query conditions: None'.
- Alternative**: A section with a checkbox and the label 'Checkpoint'.
- Selected(4)**: A list of four checkpoints (1, 2, 3, 4) with checkboxes. Arrows (>>, >, <, <<) are used for selection.
- Footer**: Navigation buttons 'Previous Step', 'Complete', and 'Cancel'.

Figure 13- 10 The Second Step of The Patrol Route

Parameters	Instructions
Route Name	Customize the Route Name.
Plan Name	Customize the plan Name.
Patrol Subject	Select the patrol personnel.

Checkpoint Order	In the patrol route, all checkpoints are 2 types of order and disorder routes.
Limited Time	Set up the desired Limited Time.
Deviation	Set up the required Deviation Time.
Route Status	Displays the route status.
Sort Type	Fill in the number of the superior department.
Operations	The patrol operation, it is necessary to add patrol route in the Access Control module.

Table 13-7 Second Step of Patrol Route

13.5.3.2 Delete

Select personnel in the list on the right and click **Delete** above the list to delete the personnel from the patrol route.

13.5.3.3 Enable/ Disable

Select device, click **Enable/Disable** to stop/start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click **Enable** to reconnect the device and restore device communication.

Parameter	How to set
Error	Allowable error time setting for patrol. Assuming that the patrol plan is not 9:00-12:00, and the allowable error time is 5 minutes before and after, then the records in the period of 8:55-12:05 are valid records, and those beyond the above range are invalid records, which will not be counted. As long as the patrol is not within the above time range, it is invalid.
Orderly Route	When carrying out the patrol plan, there is no time limit between the patrol points, and the patrol personnel can complete the patrol work of each patrol point in sequence according to their own habits within the limited time of the route.
Unordered Route	<ul style="list-style-type: none"> Complete disorder: There is no order in all patrol points of the patrol route, and the patrol personnel can complete the patrol work of each patrol point within the total time limit according to their own habits. Disorder outside the first point: in the patrol route, other patrol points except the designated patrol starting point are disordered. Disorder outside the tail point: in the patrol route, other patrol points except for the last patrol point of the designated patrol route are disordered. Disorder outside the beginning and end points: In the patrol route, except for the first and last patrol points in the designated patrol route, other patrol points are out of order.

Table 13-8 Parameter Setting Description

13.6 Result Validation (Patrol Reports)

In the patrol report, you can query the "All Records", "Patrol Records Today's", "Patrol Route Statistics" and "Patrol Personnel Statistics" report. You can choose to export all or export records after querying.

This paper introduces the configuration Steps of report query and export, taking the "all records" report operation as an example.

13.6.1 All Transactions

Click **Reports > All transactions** to view all transactions, that is, all event records generated by the patrol device.

You can export all transactions into an Excel, PDF, or CSV file. See the following figure.

● Operating Steps:

Step 1: In the Patrol module, select **Report > All Records**.

Step 2: In the All Records interface, fill in the corresponding query information and click the **Query** symbol to complete the query of all record tables, as shown in figure below.

Figure 13- 11 All Records

Step 3: In the full record interface, click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and Click **OK**, as shown in figure below.

Figure 13- 12 Report Export Interface

Step 4: After selecting the address where the corresponding file is stored, the export of the file can be completed.

ZKTECO All Transactions												
Time: 2017-09-16 00:00:00 - 2017-12-15 23:59:59												
Time	Device Name	Personnel ID	First Name	Last Name	Card Number	Device Module	Route Name	Checkpoint	Verification Mode	Area Name	Remark	
2017-12-15 13:50:51	192.168.218.90	8	Glori	Liu	8189100	Access	Route1	checkpoint1	Only Card	Area Name		
2017-12-15 13:53:51	192.168.218.90	9	Glori	Liu	8189106	Access	Route1	checkpoint2	Only Card	Area Name		
2017-12-15 13:59:49	192.168.218.90	9	Glori	Liu	8189106	Access	Route1	checkpoint2	Only Card	Area Name		
2017-12-15 13:50:49	192.168.218.90	8	Glori	Liu	8189100	Access	Route1	checkpoint1	Only Card	Area Name		
2017-12-15 13:53:48	192.168.218.90	7	Jacky	Xiang	8323004	Access	Route1	checkpoint2	Only Card	Area Name		
2017-12-15 13:59:45	192.168.218.90	7	Jacky	Xiang	8323994	Access	Route1	checkpoint1	Only Card	Area Name		
2017-12-15 11:54:19	192.168.218.90	8	Glori	Liu	8189106	Access	route1	checkpoint1	Only Card	Area Name		

Figure 13- 13 Report Export File

Parameters	Instructions
Time	Set the start and end time in each time interval. Time period includes one week and three holiday-type time intervals.
Personnel ID	Displays the Personnel ID number.
Device Name	Manufacturer of the device.
Name	Select the desired name.
Route Name	Displays the Route name.
Verification Mode	You can set verification mode as following options: Automatic Recognition, Fingerprint, PIN, Password, Card, Fingerprint/ Password, Fingerprint/Card, PIN+Fingerprint, Fingerprint+Password etc.
Card Number	The max length is 10, and it should not be repeated.
Checkpoint	Displays the Type of checkpoint.
Area Name	Customize the Area name.

Table 13-9 Report Export File

13.6.2 Patrol Records Today

Click **Reports > Patrol Records Today** to view event records generated by the patrol device today.

You can export patrol records today into an Excel, PDF, or CSV file. See the following figure.

ZKTECO Patrol Records Today											
Time	Device Name	Personnel ID	First Name	Last Name	Card Number	Device Module	Route Name	Checkpoint	Verification Mode	Area Name	Remark
2017-12-15 13:53:51	192.168.219.60	8	Glori	Liu	6189108	Access	Route1	checkpoint1	Only Card	Area Name	
2017-12-15 13:53:51	192.168.219.60	8	Glori	Liu	6189108	Access	Route1	checkpoint2	Only Card	Area Name	
2017-12-15 13:53:49	192.168.219.60	8	Glori	Liu	6189108	Access	Route1	checkpoint2	Only Card	Area Name	
2017-12-15 13:53:48	192.168.219.60	8	Glori	Liu	6189108	Access	Route1	checkpoint1	Only Card	Area Name	
2017-12-15 13:53:46	192.168.219.60	7	Jacky	Xiang	6323994	Access	Route1	checkpoint2	Only Card	Area Name	
2017-12-15 13:53:46	192.168.219.60	7	Jacky	Xiang	6323994	Access	Route1	checkpoint1	Only Card	Area Name	
2017-12-15 11:54:18	192.168.219.60	8	Glori	Liu	6189108	Access	route1	checkpoint1	Only Card	Area Name	
2017-12-15 11:54:17	192.168.219.60	8	Glori	Liu	6189108	Access	route1	checkpoint2	Only Card	Area Name	
2017-12-15 11:54:15	192.168.219.60	7	Jacky	Xiang	6323994	Access	route1	checkpoint2	Only Card	Area Name	
2017-12-15 11:54:14	192.168.219.60	7	Jacky	Xiang	6323994	Access	route1	checkpoint1	Only Card	Area Name	
2017-12-15 11:54:10	192.168.219.60	6	Neol	Ye	13290079	Access	route1	checkpoint2	Only Card	Area Name	
2017-12-15 11:54:10	192.168.219.60	6	Neol	Ye	13290079	Access	route1	checkpoint1	Only Card	Area Name	
2017-12-15 11:54:08	192.168.219.60	2	Lucky	Tan	6155268	Access	route1	checkpoint1	Only Card	Area Name	
2017-12-15 11:54:07	192.168.219.60	2	Lucky	Tan	6155268	Access	route1	checkpoint2	Only Card	Area Name	
2017-12-15 11:53:49	192.168.219.60	2	Lucky	Tan	6155200	Access	route1	checkpoint1	Only Card	Area Name	
2017-12-15 11:53:47	192.168.219.60	2	Lucky	Tan	6155268	Access	route1	checkpoint2	Only Card	Area Name	
2017-12-15 11:53:44	192.168.219.60	2	Lucky	Tan	6155268	Access	route1	checkpoint1	Only Card	Area Name	
2017-12-15 11:53:43	192.168.219.60	2	Lucky	Tan	6155268	Access	route1	checkpoint2	Only Card	Area Name	

Created on: 2017-12-15 18:45:48
Created from ZKBioSecurity software. All rights reserved.

Figure 13- 14 Patrol Records Today

Parameters	Description
Personnel ID	Displays the Personnel ID number.
Card Number	Displays the Card Number.
Name	Select the required Name.
Device	Manufacturer of the device.
Verification Mode	Displays the Automatic Recognition, Fingerprint, PIN, Password, Card, Fingerprint/Password, Fingerprint/Card, PIN+Fingerprint, Fingerprint+Password etc.
Route Name	Displays the Route name.
Checkpoint	Displays the Type of checkpoint.
Area Name	Customize the Area name.
Time	Set the start and end time in each time interval. Time period includes one week and three holiday type time intervals.
Remarks	Custom Setting Notes Description.

Table 13-10 Patrol Record Today

13.6.3 Patrol Route Statistics

Click **Reports > Patrol Route Statistics** to view all normal and abnormal situations collected during the patrol process.

You can export patrol route statistics into an Excel, PDF, or CSV file. See the following figure.

ZKTECO								
Patrol Route Statistics								
Route Name	Plan Name	Statistics time	Supposed Patrol Times	Real patrol times	Missed patrol times	Wrong patrol number	Absence times	Patrol Subject
route1	plan1	2017-12-15 13:30:00	2	2	0	0	0	Amber Lin,Necol Ye,Jacky Xiang, Glori Liu,Lilian Mei, Jerry Wang,Berry Cao,Lucky Tan, Sherry Yang,Leo Hou,
Route1	plan1	2017-12-15 16:00:00	2	2	0	1	0	Lucky Tan,Jerry Wang,Necol Ye, Leo Hou,Sherry Yang,Lilian Mei, Berry Cao,Amber Lin,Jacky Xiang, Glori Liu,

Figure 13- 15 Patrol Route Statistics

Parameters	Description
Route Name	Displays the required route name.

Plan Name	Displays the type of plan name.
Statistics time	Displays the Time and date of patrol route statistics.
Supposed Patrol Times	Number of times that the patrol personnel should normally patrol.
Real Patrol Times	Number of times that the patrol personnel patrol
Wrong Patrol Times	Number of times that the patrol personnel do not patrol based on the patrol route.
Missed Patrol Times	Number of times that the patrol personnel miss one or more checkpoints in the patrol route within the patrol time.
Absence Times	Number of times that the patrol personnel do not patrol.

Table 13-11 Patrol Route Statistics

13.6.4 Patrol Personnel Statistics

Click **Reports > Patrol Personnel Statistics** to view patrol statistics of patrol personnel.

You can export patrol personnel statistics into an Excel file. See the following figure.

Patrol Personnel Statistics									
Personnel ID	Person Name	Route Name	Plan Name	Statistics time	Supposed Patrol Times	Real patrol times	Missed patrol times	Wrong patrol number	Absence times
4	Berry Cao	route1	plan1	2017-12-15 13:30:00	2	2	0	0	0
3	Leo Hou	route1	plan1	2017-12-15 13:30:00	2	2	0	0	0
8	Glori Liu	route1	plan1	2017-12-15 13:30:00	2	2	0	0	0
2940	Sherry Yang	route1	plan1	2017-12-15 13:30:00	2	2	0	0	0
6	Amber Lin	route1	plan1	2017-12-15 13:30:00	2	2	0	0	0
5	Nicol Ye	route1	plan1	2017-12-15 13:30:00	2	2	0	0	0
7	Jacky Xiang	route1	plan1	2017-12-15 13:30:00	2	2	0	0	0
6	Amber Lin	Route1	plan1	2017-12-15 16:00:00	2	2	0	0	0
4	Berry Cao	Route1	plan1	2017-12-15 16:00:00	2	2	0	0	0
1	Jerry Wang	Route1	plan1	2017-12-15 16:00:00	2	2	0	0	0
9	Lilian Mei	Route1	plan1	2017-12-15 16:00:00	2	2	0	0	0
7	Jacky Xiang	Route1	plan1	2017-12-15 16:00:00	2	2	0	1	0

Figure 13- 16 Patrol Personnel Statistics

Parameters	Description
Supposed Patrol Times	Number of times that the patrol personnel should normally patrol.
Real Patrol Times	Number of times that the patrol personnel patrol
Wrong Patrol Times	Number of times that the patrol personnel do not patrol based on the patrol route.

Missed Patrol Times	Number of times that the patrol personnel miss one or more checkpoints in the patrol route within the patrol time.
Absence Times	Number of times that the patrol personnel do not patrol.

Table 13-12 Patrol Personnel Statistics



14 Entrance Control

14.1 Operation Scenario

This system connects the gate control board through channel Device (such as TDA integrated machine), and directly controls the relevant parameters of the gate through software, thus controlling the entry and exit of the gate and realizing the automatic management of the gate.

14.2 Operation Flow

Introduce the configuration process of channel service.

The channel business configuration process is shown in figure below.

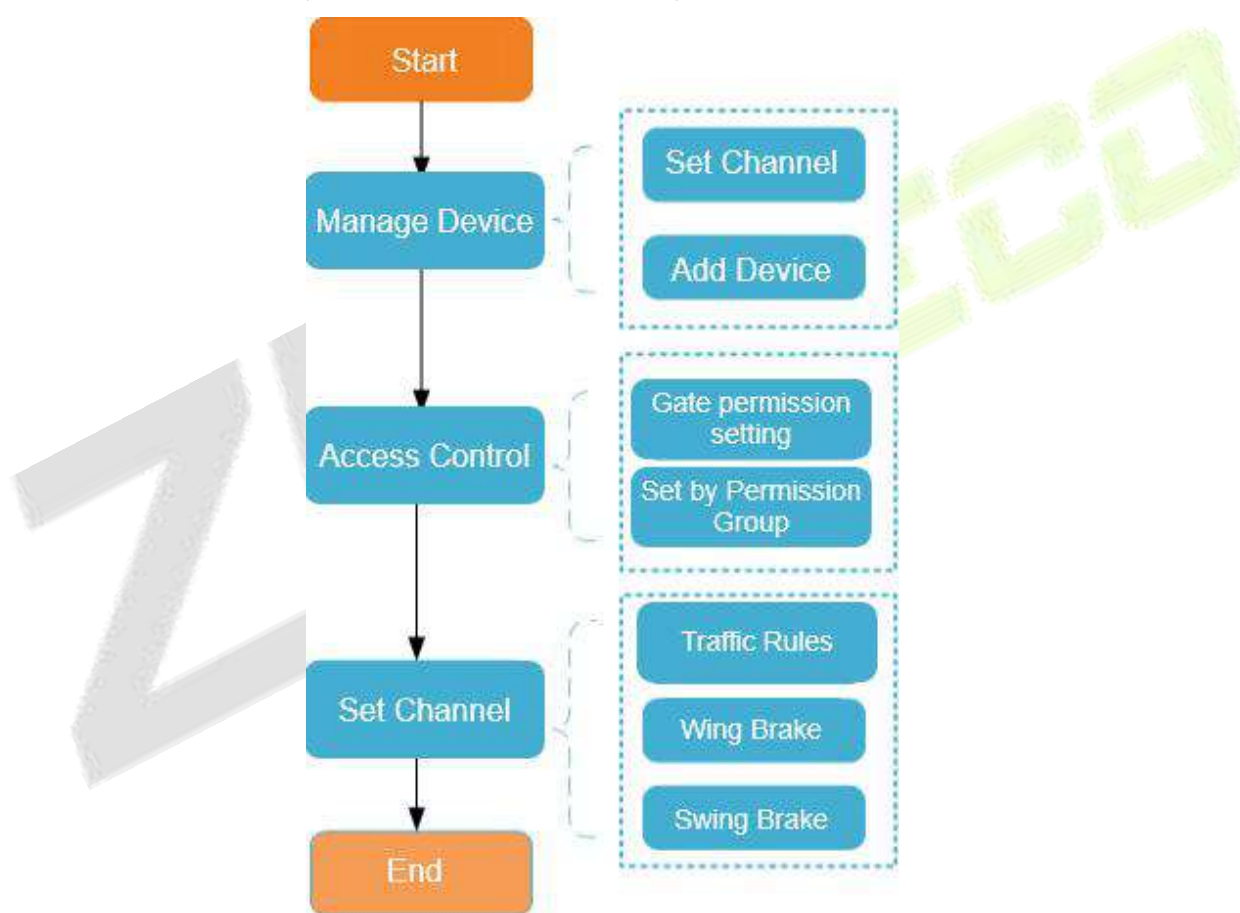


Figure 14- 1 Channel Configuration Flow

14.3 Channel Device

Add channel integrated machine Device, and the integrated machine communicates with the gate control board through RS485 to control the gate

14.3.1 Passage

Setting the area to which the channel belongs is convenient for users to manage the channel Device in a specific area. After setting the channel, the Device under the channel can be filtered according to the area during real-time monitoring.

This paper introduces the Steps of creating and configuring channels in ZKBio CVSecurity.

14.3.1.1 To Add Passage (New)

●Operating Steps:

Step 1: In the Entrance Control module, select **Channel Device > Passage**.

Step 2: In the channel interface, click **New** and fill in the relevant parameters, as shown in figure below. Please refer to Table 13-1 for parameter description.

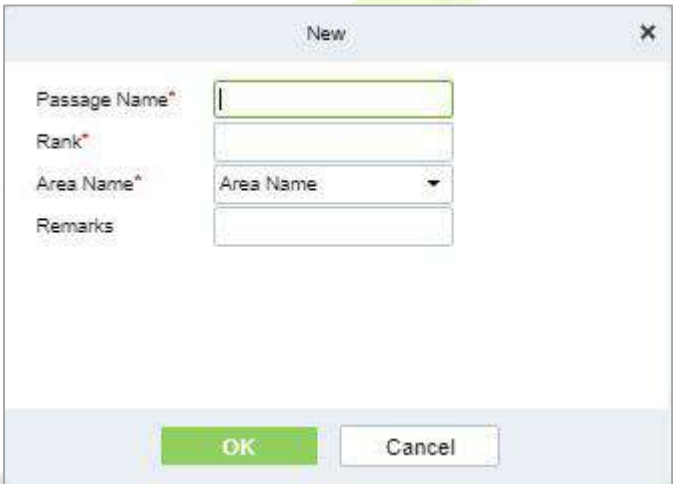


Figure 14- 2 New Channel Interface

Parameter	How to set
Passage Name	Any character, a combination of up to 20 characters, cannot be repeated.
Rank	Only numbers are supported, up to six digits, and repeatable. The smaller the ranking, in real-time monitoring, the display will move forward.
Area Name	Select the region to which the channel belongs.
Remarks	Any character with a maximum character length of 100.

Table 14-1 Description of New Channel Parameters

Step 3: Click **OK** to complete the channel setting.

14.3.1.2 Delete Passage

● Operation Steps:

Step 1: In the **Entrance Control** module, select **Channel Device** > **Passage** and select the template to be deleted.

Step 2: Click **Delete** to delete the selected template. Click **OK** to perform the delete operation

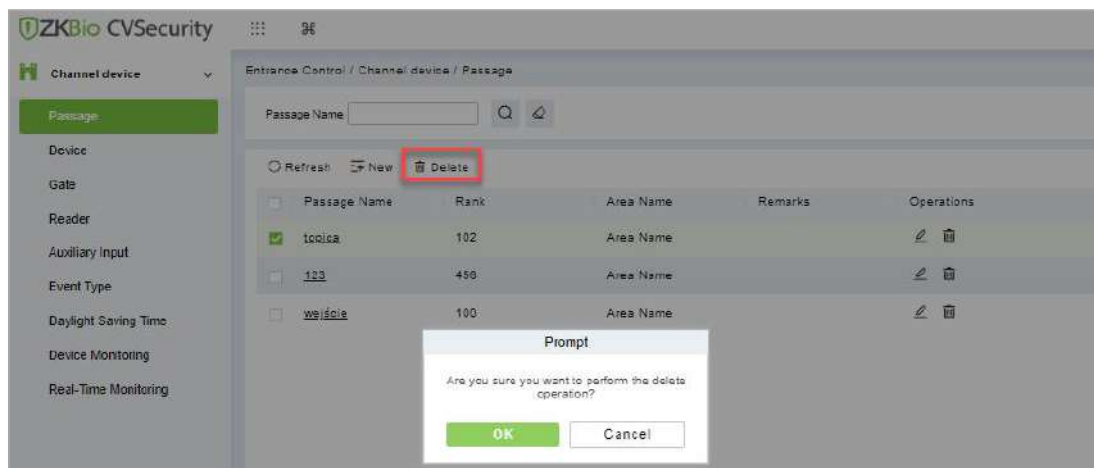


Figure 14- 3 To Delete Passage

14.3.2 Device

14.3.2.1 Searching for Additional Channel Devices (Search)

Introduces the configuration Steps of searching for additional channel devices in ZKBio CVSecurity.

● Precondition:

1. Set up IP allocation before adding channel devices.
2. Before searching and adding the device, it is necessary to set the address pointing to the server in advance and set the IP address and port of the current server, that is, the IP address and port installed by the current.

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Device** > **Devices**.

Step 2: In the device interface, click "**Search**" to pop up the search box.

Step 3: Click **Search** in the search box to display the channel devices that can be added, as shown in figure below.

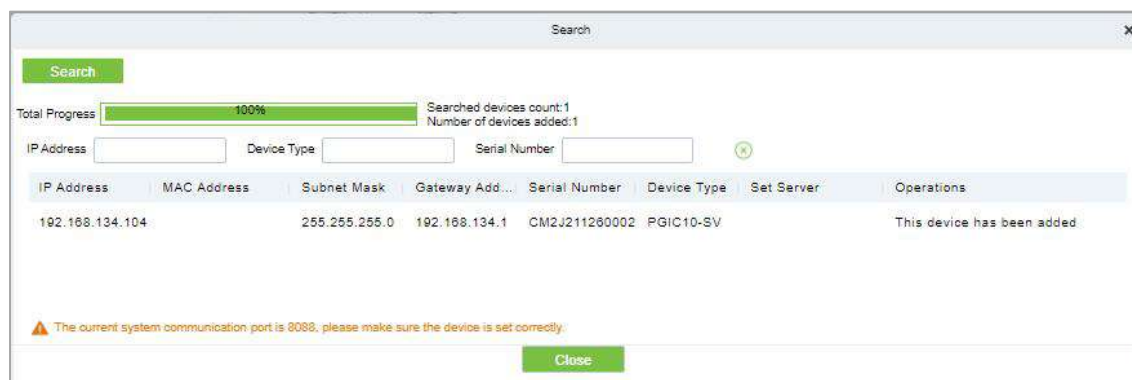


Figure 14- 4 Device Search Interface

Step 4: For the channel Device found, click the **Add** button in the operation bar to **Add** the device, and

fill in the parameters of device addition, as shown in figure below. Please refer to Table 13-2 for parameter description.

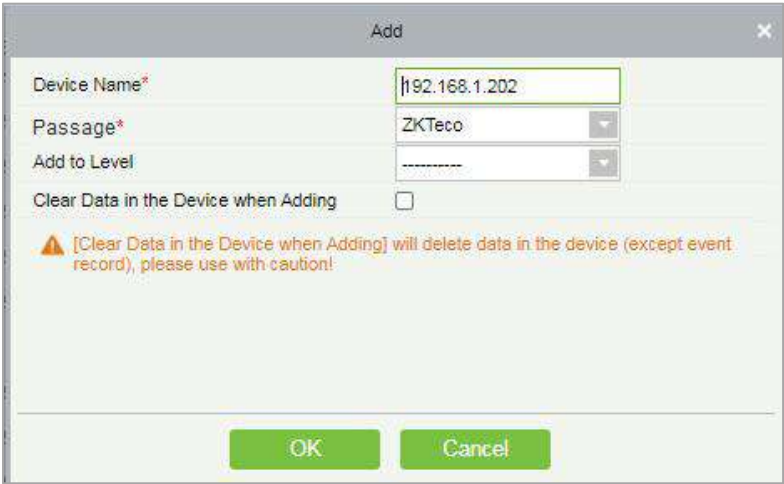


Figure 14- 5 Device Addition Interface

Parameter	Description
Device Name	Any character, a combination of up to 20 characters, cannot be repeated.
Channel	Select the channel to which the device belongs.
Add to Permission Group	Automatically adds the device to the selected permission group.
Delete Data in Device When Adding	When the device is added, the data in the device except the event record is deleted.

Table 14-2 Description of Device Addition Parameters

Step 5: Click **OK** to complete the addition of channel device.

14.3.2.2 Delete

● Operation Steps:

Step 1: In the Entrance Control, click **Channel Device > Device** and select device to be deleted.

Step 2: Click **Delete** to delete the device.

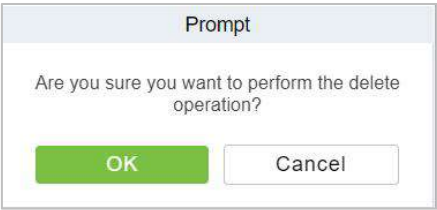


Figure 14- 6 Delete Device

Step 3: Click **OK** to perform the delete operation.

14.3.2.3 Control

In this option admin can upgrade firmware and LCD screen firmware. Also, this option helps to reboot the device, enable and disable the devices, and synchronize time and all data.

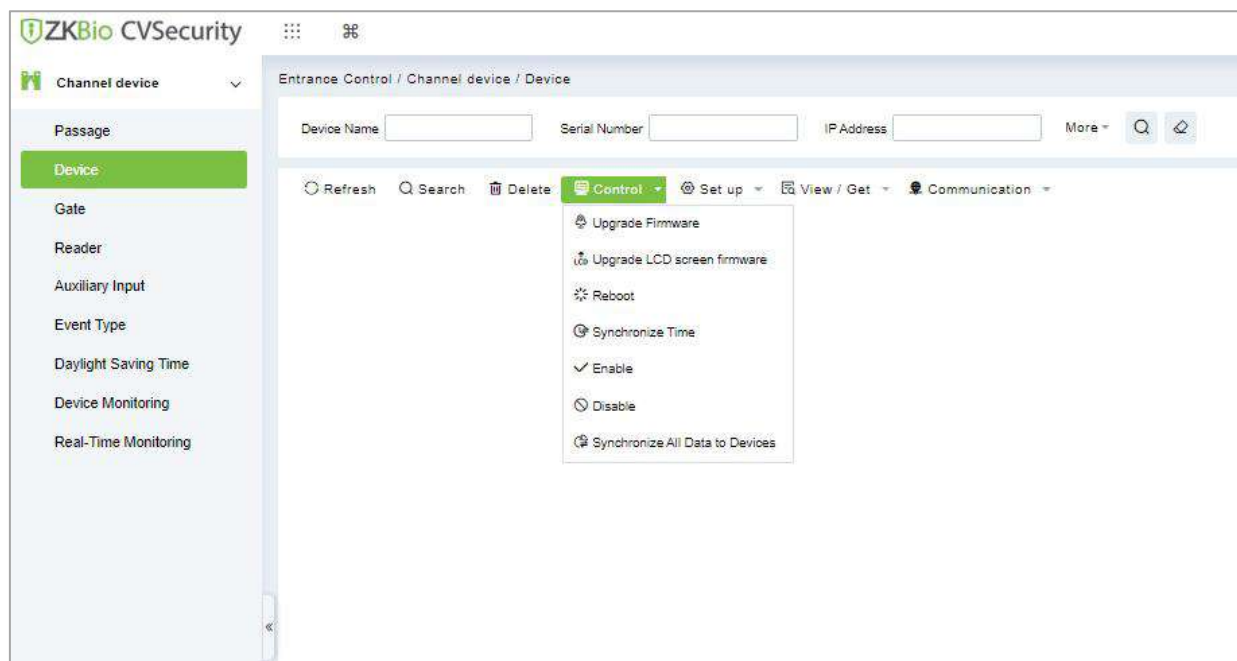


Figure 14- 7 Device Control Interface

Upgrade Firmware

Select the device to be upgraded and click **Upgrade Firmware** to open the setting page. Click **Browse**, select the firmware upgrade file (file name is emfw.cfg). Click **Start** to start upgrading the firmware.

Notes:

Please be cautious while upgrading the firmware. If the firmware has not been updated properly, it may lead to device failure. If you have any queries, please contact the representative or pre-sales technical support team.

Upgrade LCD Screen Firmware

Admin can upgrade LCD screen firmware of device using this option. Select the device to be upgraded and click **Upgrade LCD Screen Firmware** to open the settings page. Click **Browse** and select the firmware upgrade file. Click **Start** to start upgrading the firmware.

Reboot the Device

Admin can send a restart command to the device to automatically restart. Select the device to be reboot and click **Reboot** to restart the device.

Synchronize Time

When the device's time is not accurate, select the device to be synchronized and then click **Synchronize Time** to synchronize the server time to the device.

Disable/Enable

Select the device and click **Disable/Enable** to stop/start using the device. When communication between the device and the system is interrupted or there is a problem with the device, the device may be automatically displayed as disabled. After adjusting the network or device, click **Enable**. The system reconnects to the device, and the communication status of the device is restored.

Synchronize All Data to Devices

This option synchronizes the data in the system to the device. Select the device, click **Synchronize All Data to Devices**, and click the **Synchronize** button to synchronize data:

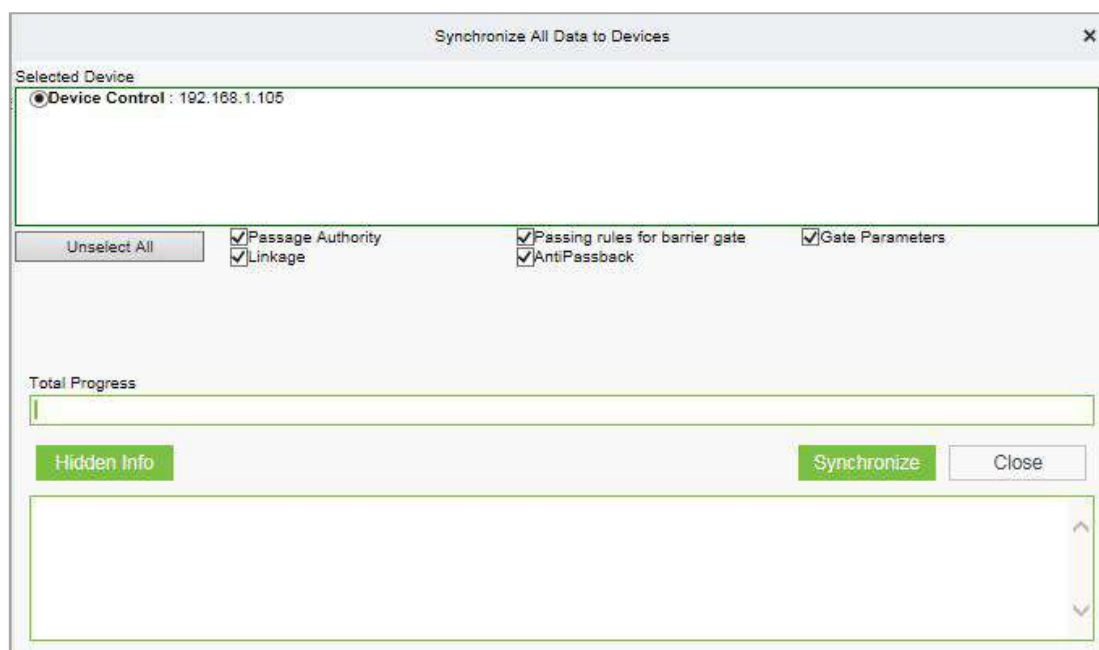


Figure 14- 8 Synchronize All Data to Devices Interface

Notes:

The operation of synchronizing all data will first delete the existing data in the device (excluding event records) and then download all the setting information again. When performing this operation, please try to ensure that the network is unblocked and avoid power failure. When the device is running normally, please use this operation with caution. It is recommended to synchronize the data when the device is unused.

14.3.2.4 Set up

In this interface help you to set the time zone, registration, daylight saving time, fingerprint identification information and LCD screen display of the selected device.

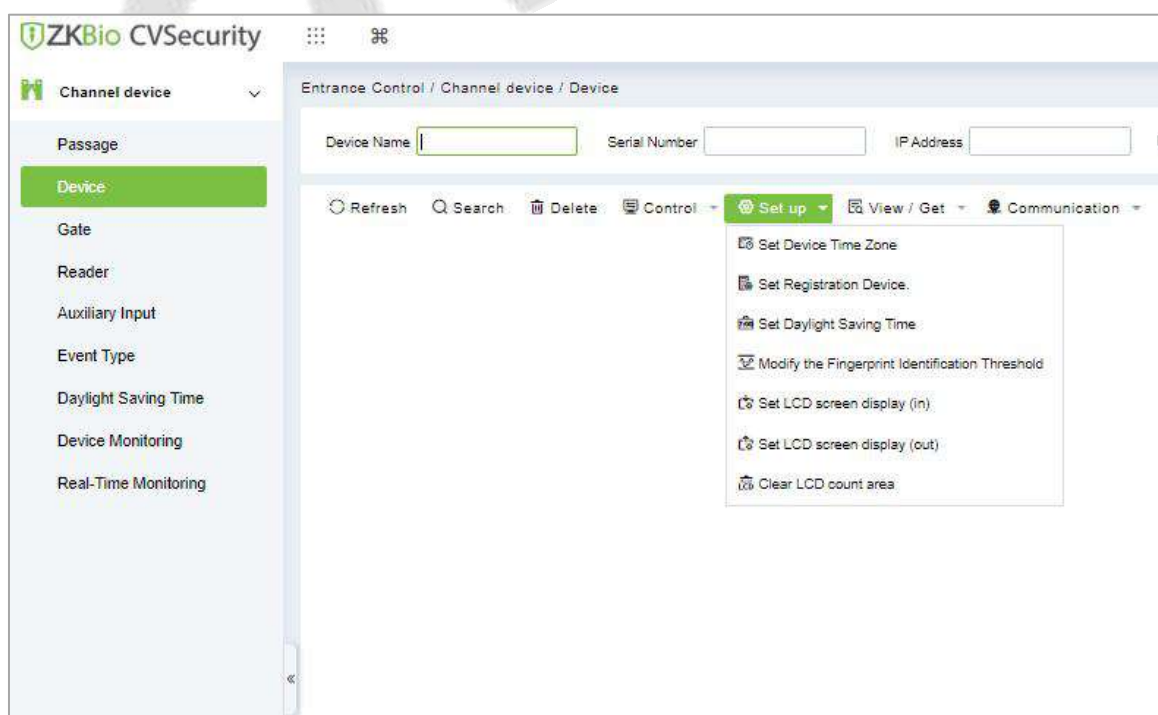


Figure 14- 9 Set up Options

Set Device Time Zone

Set Device Time Zone allows you to set the accurate time zone, if device shows wrong time zone. For that in **Entrance Control** interface, click **Channel Device > Device > Set-up**, select the device to be set up. Then click **Set Device Time Zone** to set up the selected device.

Set Registration Device

The passage standalone device can only automatically upload the personnel and other data entered by the device when the registration device is set. For that in **Entrance Control** interface, click **Channel Device > Device > Set-up**, select the device to be set up. Then click **Set Registration Device** to set up the selected device.

Set Daylight Saving Time

DST, also called the Daylight-Saving Time, is a system to adjusting the official prescribe local time to save energy. To meet the DST requirement, a special function can be customized. You may adjust the clock one hour forward at XX (hour) XX (day) XX (month) and one hour backward at XX (hour) XX (day) XX (month) if necessary.

In the **Entrance Control** interface, click **Channel Device > Device > Set-up** and select the device to be set Daylight Saving Time. Then click **Set Daylight Saving Time** to set up the selected device.

Modify the Fingerprint Identification Threshold

The user can modify the fingerprint comparison threshold in the device, ranging from 35 to 70, and the factory default value is 55. When a new device is added, the system will read the value from the device, and the user can view the current fingerprint comparison threshold size through the device list (Please make sure the device supports the fingerprint function).

In the **Entrance Control** interface, click **Channel Device > Device > Set-up** and select the device to be modify the fingerprint identification. Then click **Modify the Fingerprint Identification Threshold** to set up the selected device.

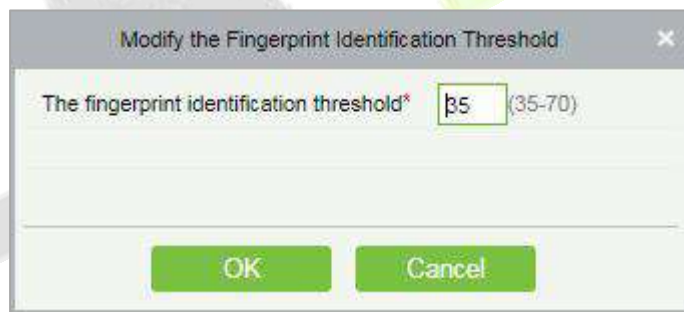


Figure 14- 10 Modify the finger Identification Option

Set LCD Screen Display (In)/(Out)

Select the device and set the LCD screen display (in/out). The upper part is the video area 30%, the middle part is the gate channel display area 30%, and the lower part is the picture cycle 40%. Each area can be corresponding to the video and background, The image browsing and clearing operations are confirmed and sent to the LCD screen of the controller for display.

In the **Entrance Control** interface, click **Channel Device > Device > Set-up** and select the device to be set LCD screen display. Then click **Set LCD Screen Display (In)/(Out)** to set up the selected device.

Clear the LCD Counting Area

Select the device, clear the middle counting area of the LCD screen, and restart counting.

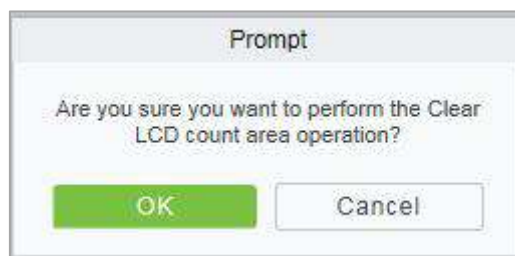


Figure 14- 11 Clear LCD Counting Area

In the Entrance Control interface, click **Channel Device > Device > Set-up** and select the device to clear the LCD counting area. Then click **Clear the LCD Counting Area** to clear counting area the selected device.

14.3.2.5 View/ Get

In this interface admin can view device options, personal information and transaction details

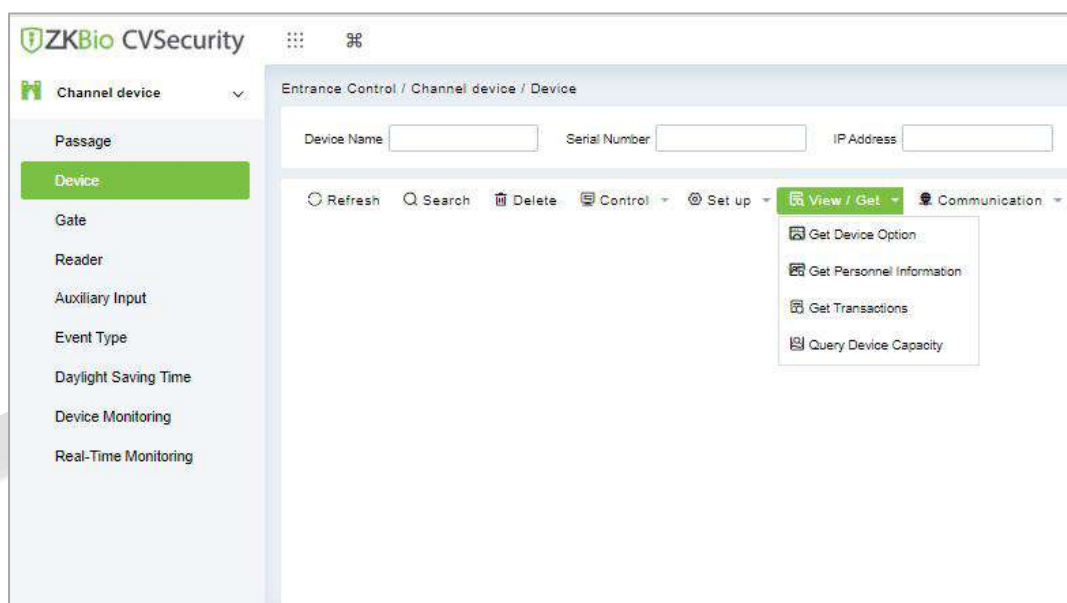


Figure 14- 12 View/Get Option

Get Device Option

This option allows you to view the common parameters of the device. For example, get the firmware version after the device is updated.

In the **Entrance Control** interface, click **Channel Device > Device > View/Get** and select the device to view device options. Then select **Get Device Option** to view device options.

Get Personnel Information

This function obtains the data of Persons, Fingerprints, and Palm prints in the device or obtains the corresponding number.

In the **Entrance Control** interface, click **Channel Device > Device > View/Get** and select the device to view personnel information. Then select **Get Personnel Information** to view personnel information.

Get Transaction

This function obtains the event records in the device to the system, and the user can choose to obtain new records or all the records.

In the **Entrance Control** interface, click **Channel Device > Device > View/Get** and select the device to get transaction. Then select **Get Transaction** to view transaction information.

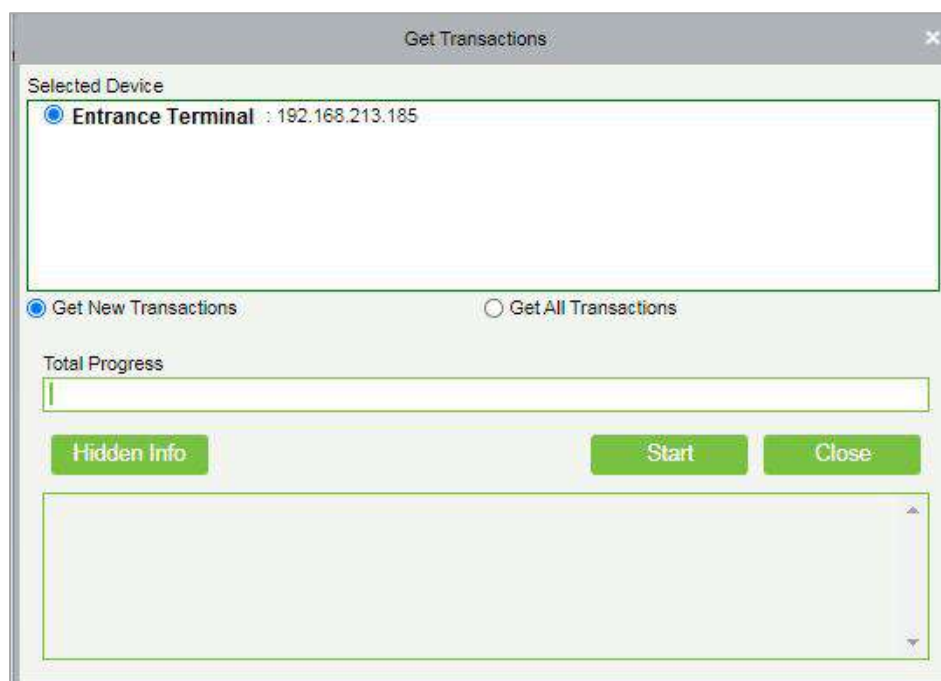


Figure 14- 13 Get Transactions

When the network is in good condition and the communication between the system and the device is normal, the system will obtain the event record in the device in real-time and saves it in the database. When the communication is interrupted, the event record in the device is not uploaded to the system in real-time. At this time, the user can perform this operation to manually obtain the event records in the device.

Query Device Capacity

Here, the user can view the capacity information of the device in the software and manually obtain the usage information (person, fingerprint, finger vein, face, imprint) in the device. When the user finds that the information obtained from the software and the device is inconsistent, the user can manually synchronize the data.

In the **Entrance Control** interface, click **Channel Device > Device > View/Get** and select the device to view the capacity information of the device. Then select **Query Device Capacity** to view the user can view the capacity information of the device in the software and manually obtain the usage information.

14.3.2.6 Communication

In the **Entrance Control** interface, click **Channel Device > Device > Communication** to modify IP address and communication password.



Figure 14- 14 Communication Option

Modify IP Address

Select a device and click **Modify IP address** to open the modification interface. It will obtain a real-time

network gateway and subnet mask from the device. (Failed to do so, you cannot modify the IP address). Then enter a new IP address, gateway, and subnet mask. Click **OK** to save and quit. This function is the similar as Modify IP Address Function in Device.

Modify Communication Password

Select a device and click **Modify Communication Password** to open the modification interface. The system will ask for the old communication password before modifying it. After verification, input the new password twice, and click **OK** to modify the communication password.

Note: Communication passwords shouldn't contain spaces; it is recommended to use a combination of numbers and letters. Communication password settings can improve the device's security. It is recommended to set communication passwords for each device.

14.3.3 Gate

In the Entrance Control module, select Channel Device > Gate.

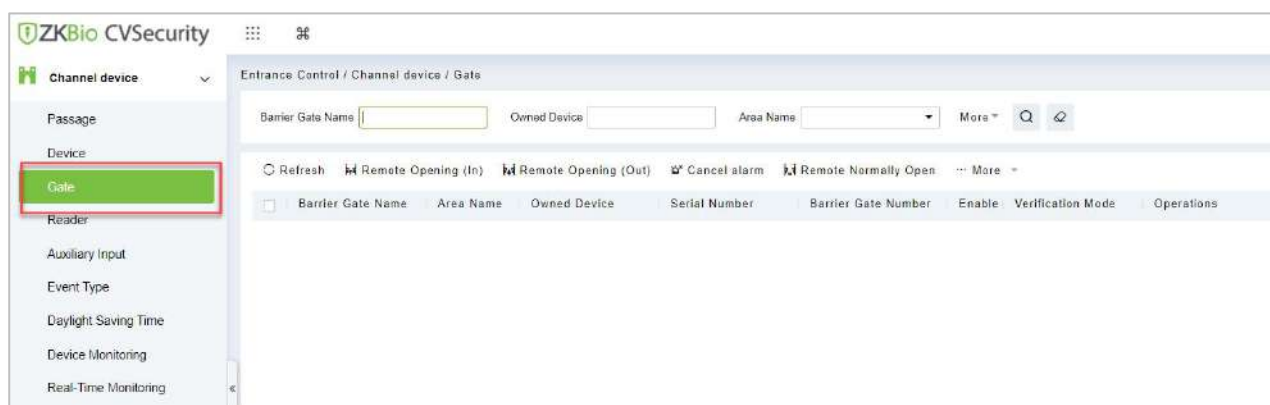


Figure 14- 15 Channel Device Gate

14.3.3.1 Remote Gate Opening (in)/(out)

In the **Entrance Control** interface, click **Channel Device > Gate** interface allows the user to control one gate or all gates. To control a single gate right-click over it and click **Remote Opening (In/Out)** in the pop-up dialog box. To control all gates, directly click **Remote Opening (In/Out)** behind Current All.

14.3.3.2 Cancel the Alarm

Once an alarm door is displayed on the interface, the alarm sound will be played. Alarm cancellation can be done for a single gate or all gates.

In the **Entrance Control** interface, click **Channel Device > Gate** and select the alarm gate to be modified. Then click **Cancel the Alarm** to cancel the alarm.

Note: If **Cancel the Alarm** fails, check if any devices are disconnected. If found disconnected, check the network.

14.3.3.3 Remote Normally Open

It will set the gate as normal open by remote.

In the **Entrance Control** interface, click **Channel Device > Gate** and select the gate to be set as normal open. Then click **Remote Normal Open** to set the gate as normal open by remote.

14.3.3.4 More Options

In the **Entrance Control** interface, click **Channel Device > Gate > More** to activate the door lockdown

status (remote lock and unlock).

Remote Lock:

It will remotely set the door status to locked status. After this, the door wouldn't receive any operations, such as card reading and remote operations. This function is supported only by certain devices.

Remote Unlock:

It will unlock a locked door. This function is supported only by certain devices.

Enable / Disable Intraday Passage Mode Time Zone

In remote opening, user can define the door opening duration (The default is 15s). You can select **Enable Intraday Passage Mode Time Zone** to enable the intraday door passage mode time zones, or set the door to Normal Open, then the door will not be limited to any time zones (open for 24 hours).

To close a door, select **Disable Intraday Passage Mode Time Zone** first, to avoid enabling other normal open time zones to open the door, and then select **Remote Closing**.

14.3.4 Reader

Each Entry device has a reader, user can view the reader information in this interface.

●Operating Steps

Click **Entrance Control > Channel Device > Reader** to view the reader information such as reader name, barrier gate name, bound camera and it in/out details.

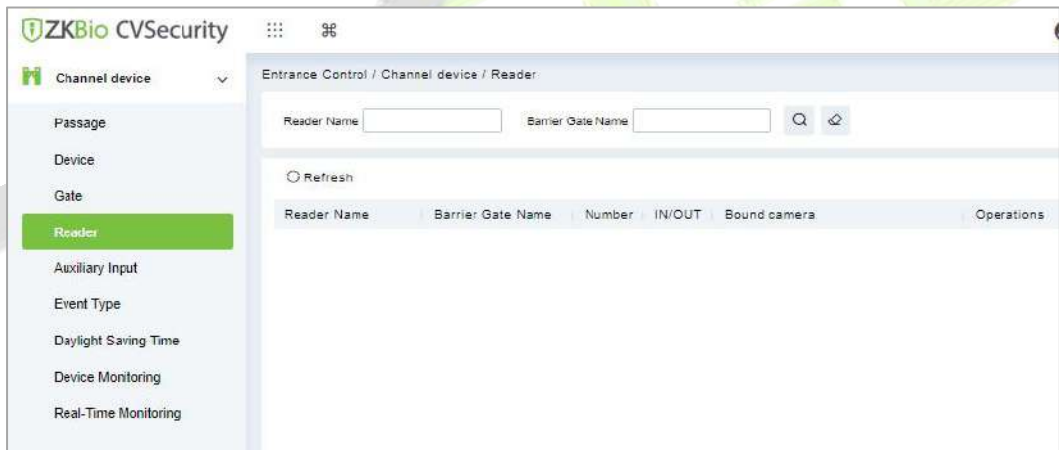


Figure 14- 16 Reader Interface

14.3.5 Auxiliary Input

It is mainly used to connect to the devices, such as the infrared sensors or smog sensors.

Click **Entrance Control > Channel Device > Auxiliary Input**, to access below shown interface.



Figure 14- 17 Auxiliary input

Bind/Unbind Camera

Through this option, the reader can be connected to the cameras, and the system will make a video linkage (pop-up videos, videos, or screenshots) once there is a corresponding event occurs. For this, the interaction setting in Linkage or in Global Linkage should be done before.

Note: An auxiliary input point can bind more than one channel.

14.3.6 Event Type

The Event Type is mainly used to display various event types included in the channel device. Click **Entrance Control > Channel Device > Event Type**, and the following interface appears

<input type="checkbox"/>	Event Name	Event Number	Event Level	Device Name	Serial Number	Operations
<input type="checkbox"/>	Normal verification opening	0	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Verify during normal open time per	1	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Emergency password opening	4	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Opening during normal open time p	5	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Linkage event triggered	6	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Cancel alarm	7	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Disable intraday normal open time p	10	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Enable intraday normal open time p	11	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Remote open auxiliary output	12	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Remote close auxiliary output	13	Normal	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Illegal time period	22	Exception	192.168.1.105	CM2J205360032	Edit
<input type="checkbox"/>	Illegal access	23	Exception	192.168.1.105	CM2J205360032	Edit

Figure 14- 18 Event Type

Set the sound

Here, the user can set the event sound. First, select the event to be set sound and then click **Set up**

Sound on the page.

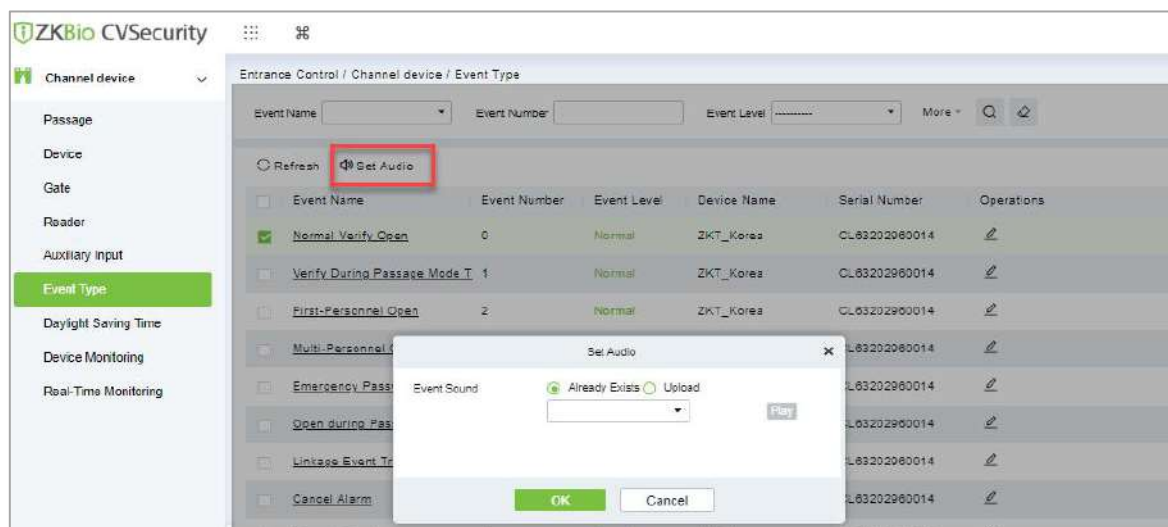


Figure 14- 19 Set Sound Option

The audio file can be uploaded locally. The file must be in wav or mp3 format, and the size cannot exceed 10MB.

14.3.7 Daylight Saving Time

DST, also called the Daylight-Saving Time, is a system to adjusting the official prescribe local time to save energy. The unified time adopted during the implementation of known as the "DST". Usually, the clocks are adjusted forward one hour in the summer to make people sleep early and get up early. It can also help to save energy. In autumn, clocks are adjusted backwards. The regulations are different in different countries. At present, nearly 70 countries adopt DST.

To meet the DST requirement, a special function can be customized. You may adjust the clock one hour forward at XX (hour) XX (day) XX (month) and one hour backward at XX (hour) XX (day) XX (month) if necessary.

14.3.7.1 Add DST (New)

● Operation Steps:

Step 1: Click Entrance Control > Channel Device > Daylight saving Time > New.

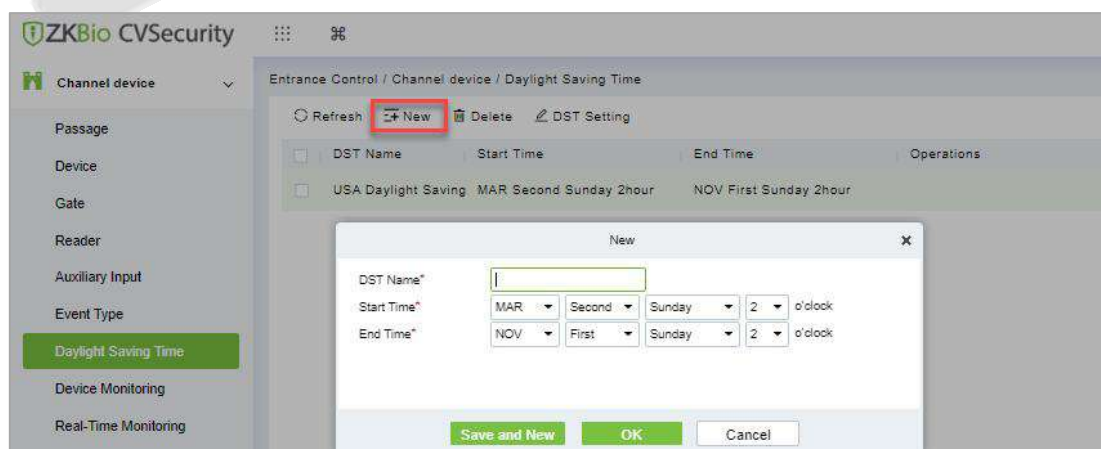


Figure 14- 20 Daylight Saving Mode

Set as "Month-Weeks-week hour: minute" format. The start time and end time is needed. For example, the start time can be set as "second Monday in March, 02:00". The system will be advanced one hour at the start time. The system will go back to the original time at the end time.

Parameter	Description
DST Name	Any character, a combination of up to 20 characters, cannot be repeated.
Start and End Time	Enter the start and end time. Set as Month-Weeks-week hour: minute format.

Table 14-3 Description of New DST Parameters

14.3.7.2 Delete

● Operation Steps:

Step 1: Click **Entrance Control > Channel Device > Daylight saving Time** and select DST information to be delete.

Step 2: Click **Delete** and click **OK** to delete the DST.

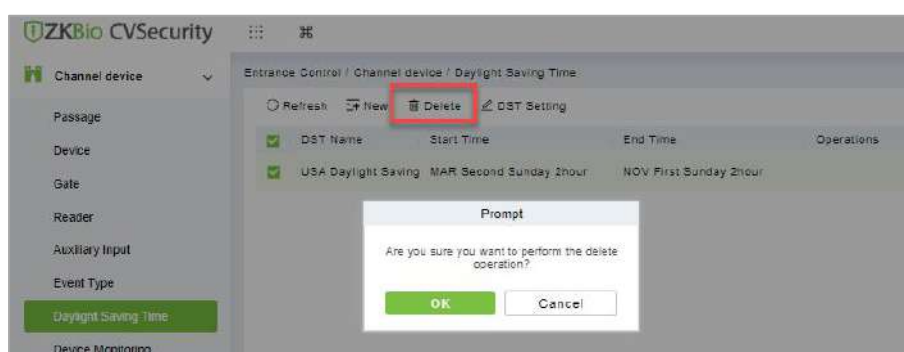


Figure 14- 21 Daylight Saving Mode Delete

14.3.7.3 DST Setting

● Operation Steps:

Step 1: Click **Entrance Control > Channel Device > Daylight Saving Time** and select DST information to be modify.

Step 2: Click **DST Setting** and select device from the appeared window.

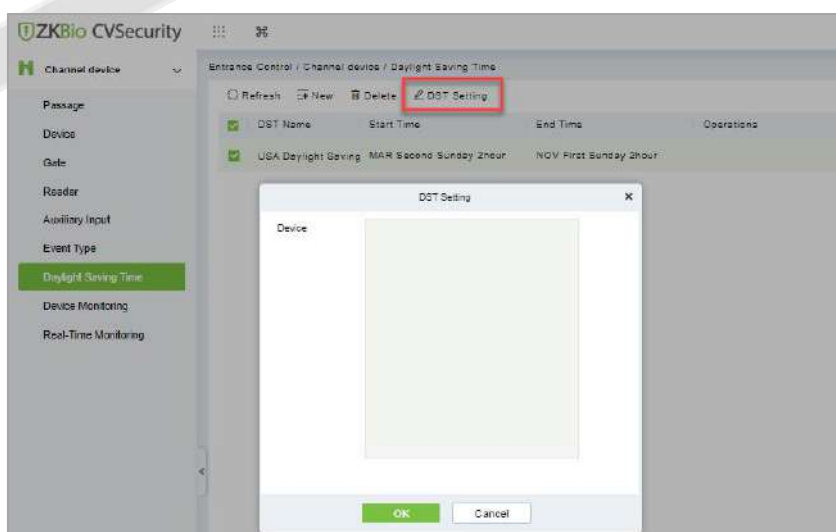


Figure 14- 22 DST Setting

Step 3: Click **OK** to save the settings.

14.3.8 Device monitoring

By default, it monitors all devices within the current user's level. You may click **Entrance Control > Channel Device > Device Monitoring** to view a list of operation information of devices: Device Name, Serial No., Area, Operation Status, Current status, Commands List, and Related Operation.

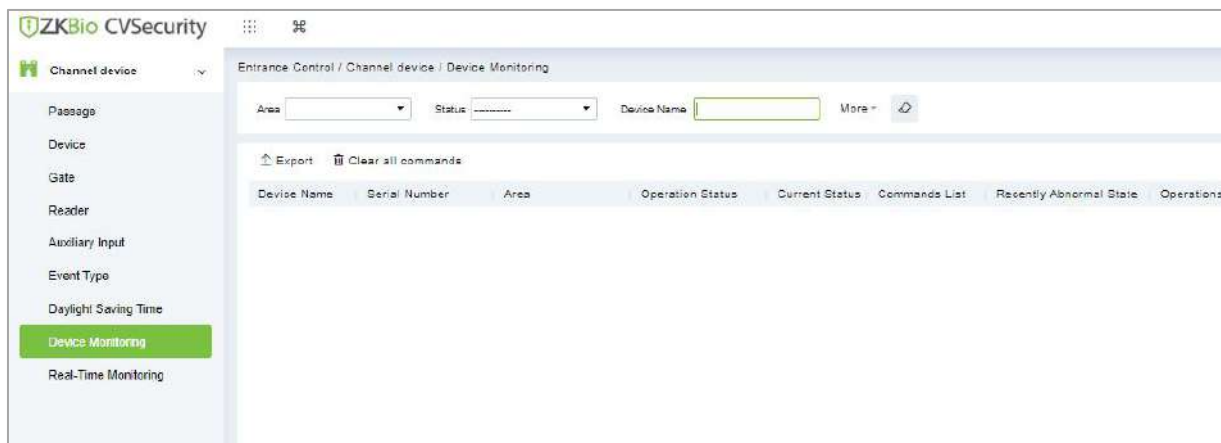


Figure 14- 23 Device monitoring interface

14.3.8.1 Export

Device commands can be exported in EXCEL, PDF, CSV file format.

Click Entrance Control > Channel Device > Device Monitoring > Export to export the device commands.

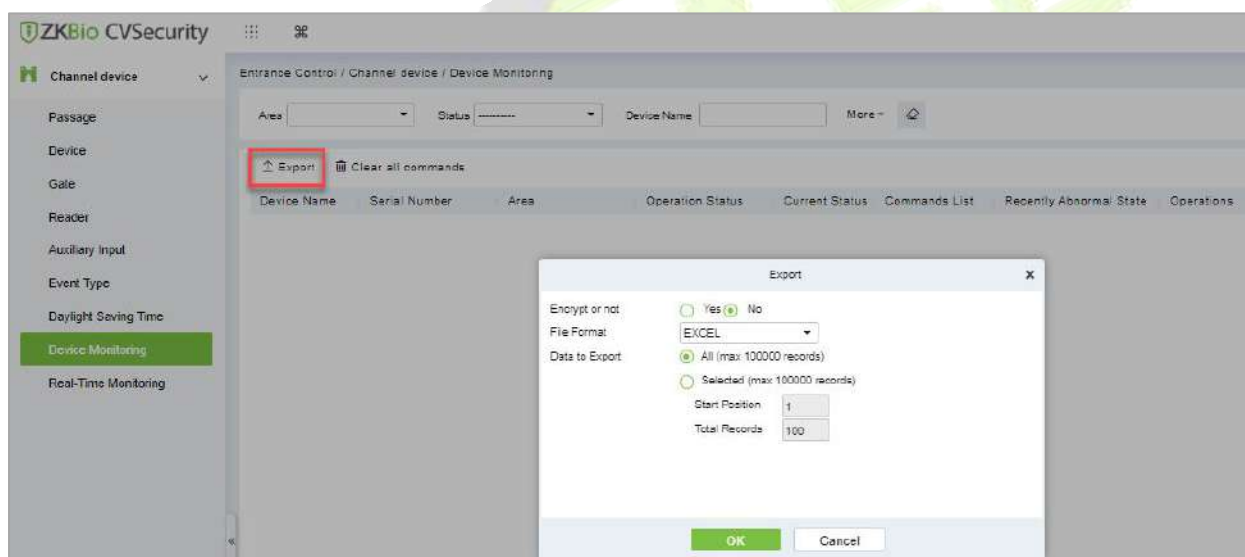


Figure 14- 24 Device monitoring Export Option

14.3.8.2 Clear Command

This option allows the users to clear the unwanted command. Click **Entrance Control > Channel Device > Device Monitoring** and select the commands to be delete. Click **Clear Command** in operations column.

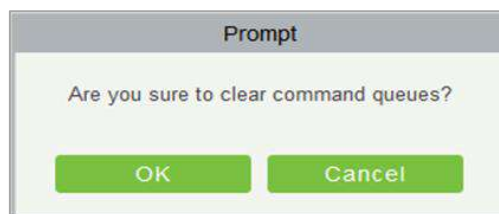


Figure 14- 25 Device monitoring Clear command

Click **OK** to clear selected commands.

14.3.9 Real-Time monitoring

On the real-time management screen, the status of the added device is displayed, and the device can be opened or closed. At the same time, the dynamic of real-time events is monitored. If the gate opening can be verified and corresponding access control events can be generated, the access control management service configuration is complete.

14.3.9.1 Remote Gate Opening (In)/(Out)

In the **Entrance Control** interface, click **Channel Device > Real Time Monitoring** interface allows the user to control one gate or all gates.

● Operation Steps:

Step 1: Check whether the device is online. Check whether the icon status of the added device is online. Click **Barrier Gate** to check and modify the real-time status of the added devices

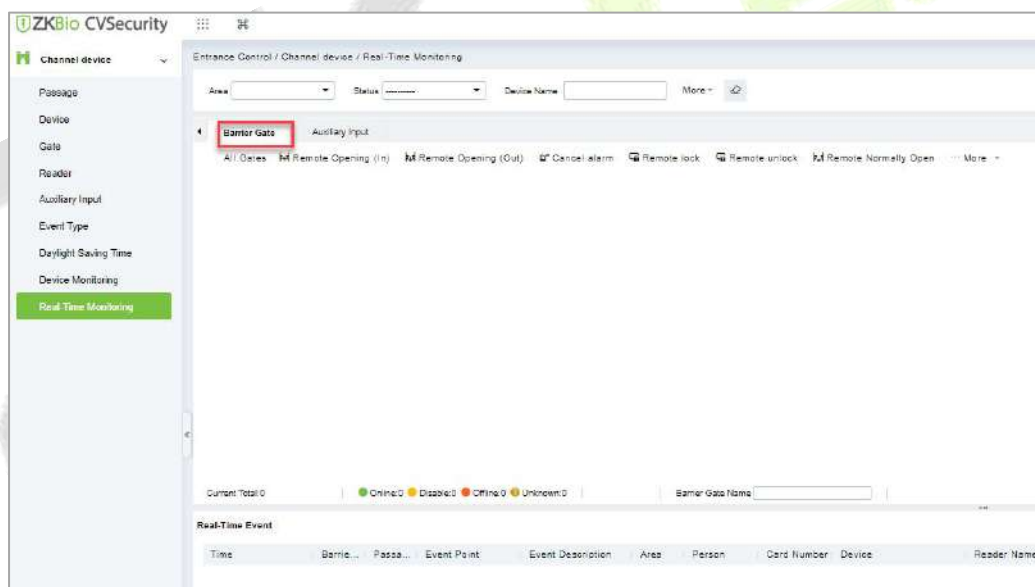


Figure 14- 26 Barrier Gate Option in Real-Time Monitoring Interface

Step 2: Remote opening in/out verification, taking remote opening in as an example. Select the online barrier gate device, click **Remote opening in**, enter the user password in the pop-up security verification, and click **OK**.

On the remote door opening screen, enter the time to open the door and tap **OK**. If Operation succeeded in is displayed, the remote door opening Operation is complete.

14.3.9.2 Cancel the Alarm

In the **Entrance Control** interface, click **Channel Device > Real Time Monitoring** interface and select the alarm gate to be modified. Then click **Cancel the Alarm** to cancel the alarm.

Note: If **Cancel the Alarm** fails, check if any devices are disconnected. If found disconnected, check the

network.

14.3.9.3 Remote Lock

In the **Entrance Control** interface, click Channel Device > Real-Time Monitoring and select the barrier to modify the lock status Then click Remote Lock to activate the door lockdown status (remote lock and unlock).

It will remotely set the door status to locked status. After this, the door wouldn't receive any operations, such as card reading and remote operations. This function is supported only by certain devices.

14.3.9.4 Remote Unlock

In the **Entrance Control** interface, click **Channel Device > Real-Time Monitoring** and select the barrier to modify the lock status Then click **Remote Unlock** to activate the door lockdown status (remote lock and unlock).

It will unlock a locked door. This function is supported only by certain devices.

● Auxiliary Input:

In this interface, the user can identify real-time connected sensor devices such as infrared sensors or smog sensors.

To view the list of real-time connected devices, click **Entrance Control > Channel Device > Real-Time Monitoring** and select **Auxiliary Inputs**.

14.4 Entrance Control

By setting the gate authority group and assigning it to the corresponding personnel, the gate authority of the personnel can be controlled. At the same time, it is also possible to set the response rules to the gate through Anti-Passback and linkage, to meet the requirements of different entry and exit scenarios.

14.4.1 Barrier Gate Permission Group

Gates added to the system should be set in the form of permission groups. Set the corresponding permission group, add gates to the permission group, and define the area where the permission group belongs.

14.4.1.1 To Add Gate Permission (New)

● Operating Steps:

Step 1: In the **Entrance Control** module, select **Entrance Control > Barrier Gate Permission Group**. In the barrier gate permission group interface, click **New** in the left column of the mouse to pop up the gate permission group adding interface.

Step 2: In the **New** interface of gate permission group, set the corresponding content according to the new requirements, as shown in figure below. Please refer to Table 13-3 for parameter filling instructions.




Figure 14- 27 Add Gate Permission Group Interface

Parameter	How to set
Level Name	Any character, consisting of up to 30 characters, cannot be repeated.
area	Permission groups belong to a zone to which users assigned permissions can manage permission groups under the zone.

Table 14-4 Description of Added Gate Permission Parameters

Step 3: Click **OK** to complete the configuration of the access control authority group.

Step 4: In the gate permission group interface, click **Add Barrier Gate** icon  on the right side of the created gate permission group, and the interface of selecting Add Gate will pop up, and the corresponding gate will be added according to the requirements, as shown in figure below.

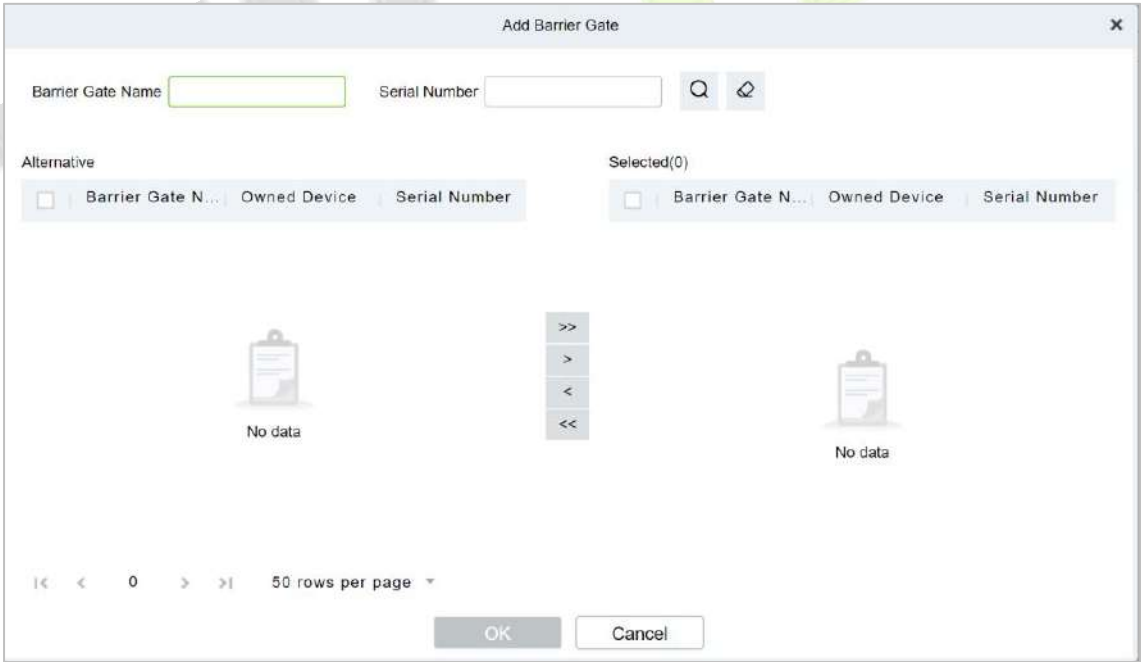


Figure 14- 28 Adding Gate Interface

Step 5: Click **OK** to complete the setting of gate permissions.

14.4.1.2 Delete

● Operation Steps:

Step 1: Click **Entrance Control > Entrance Control > Barrier Gate Permission Group** and select gate permission group to be delete.

Step 2: Click **Delete** and click **OK** to delete gate permission group.

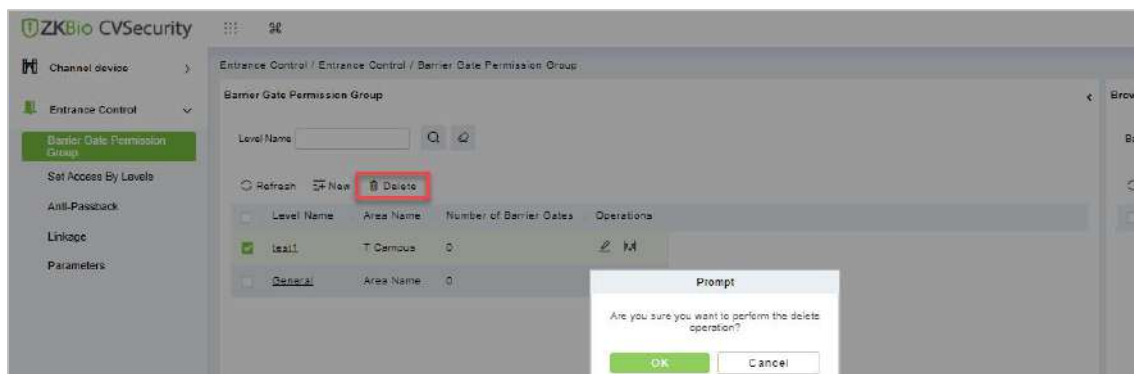


Figure 14- 29 Deleting Gate Interface

14.4.1.3 Delete Barrier Gate

● Operation Steps:

Step 1: Click **Entrance Control > Entrance Control > Barrier Gate Permission Group** and select barrier gate name to be delete.

Step 2: Click **Delete** and click **OK** to delete barrier gate from the group.

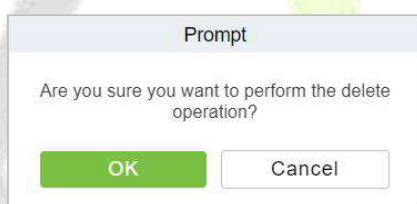


Figure 14- 30 Delete Barrier Gate

14.4.1.4 Export

You can export barrier gate details into an Excel, PDF, or CSV file. See the following figure below.

● Operating Steps:

Step 1: In **Entrance Control > Entrance Control > Barrier Gate Permission Group > Export** to export the barrier gate records to Excel sheet or PDF or CSV. Enter the User password in the prompt.

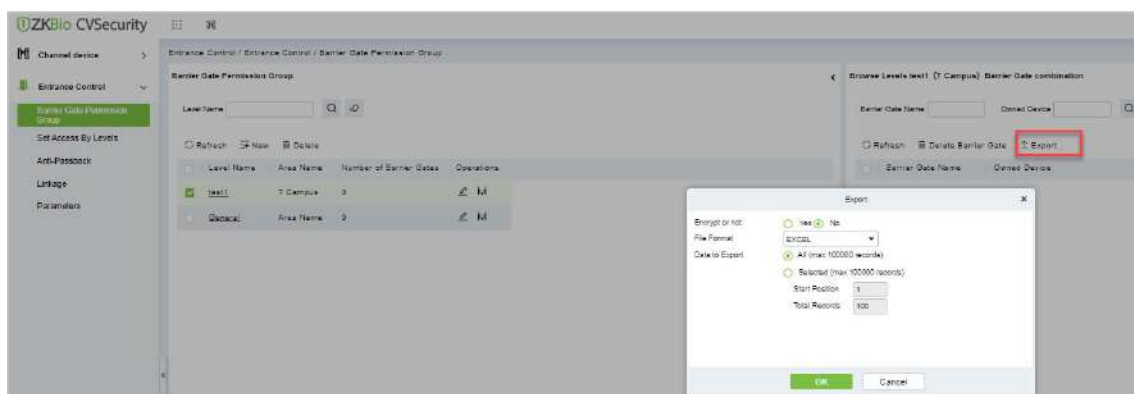


Figure 14- 31 Export Interface

Step 2: Select the file format and click **OK**.

14.4.2 Set Access by Levels


Assign the added gate permission group to the person.

Introduces the operation Steps of allocating personnel authority according to authority group in ZKBio CVSecurity.

14.4.2.1 Add Person

● Operating Steps:

Step 1: In the Entrance Control module, click **Entrance Control > Set Access By Levels**.

Step 2: Click **Add Person** icon  in the operation bar of the corresponding permission group to open the interface of adding person. Select the corresponding person as needed, as shown in figure below.

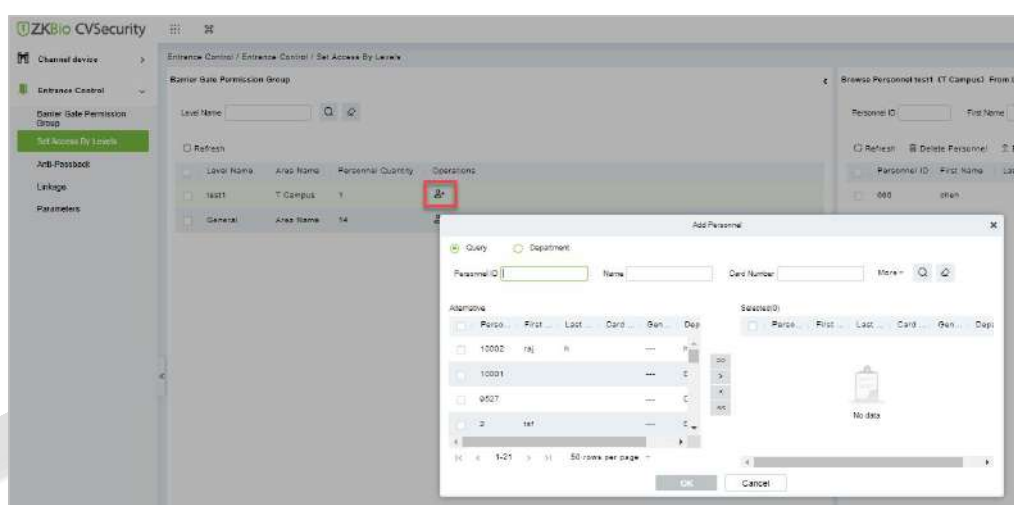


Figure 14- 32 Add Person Option

Step 3: Click **OK** to complete the assignment of personnel permissions.

14.4.2.2 Delete Personnel

● Operation Steps:

Step 1: Click **Entrance Control > Entrance Control > Set Access By Levels** and select person to be delete.

Step 2: Click **Delete Personnel** and click **OK** to delete barrier gate from the group.

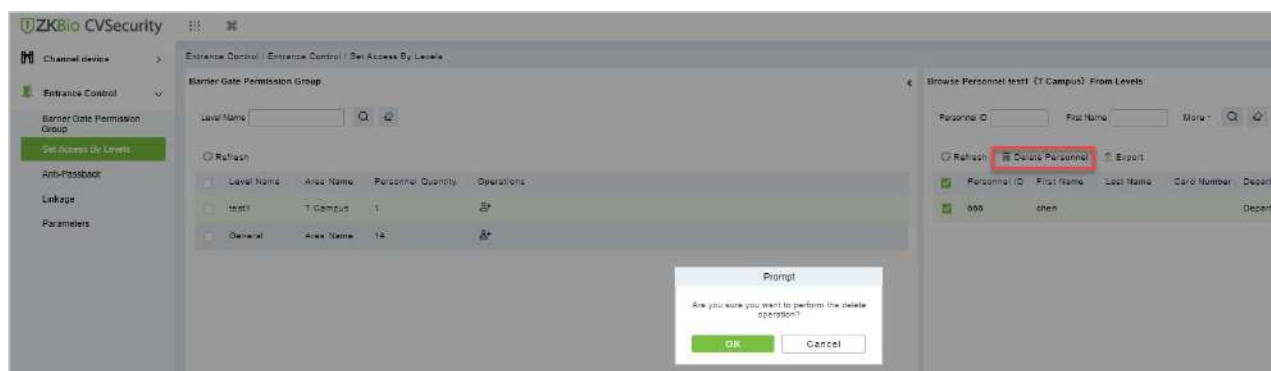


Figure 14- 33 Delete Person

14.4.2.3 Export

You can export barrier gate details into an Excel, PDF, or CSV file. See the following figure below.

● Operating Steps:

Step 1: In **Entrance Control > Entrance Control > Set Access by Levels > Export** to export the persons records to Excel sheet or PDF or CSV. Enter the User password in the prompt.

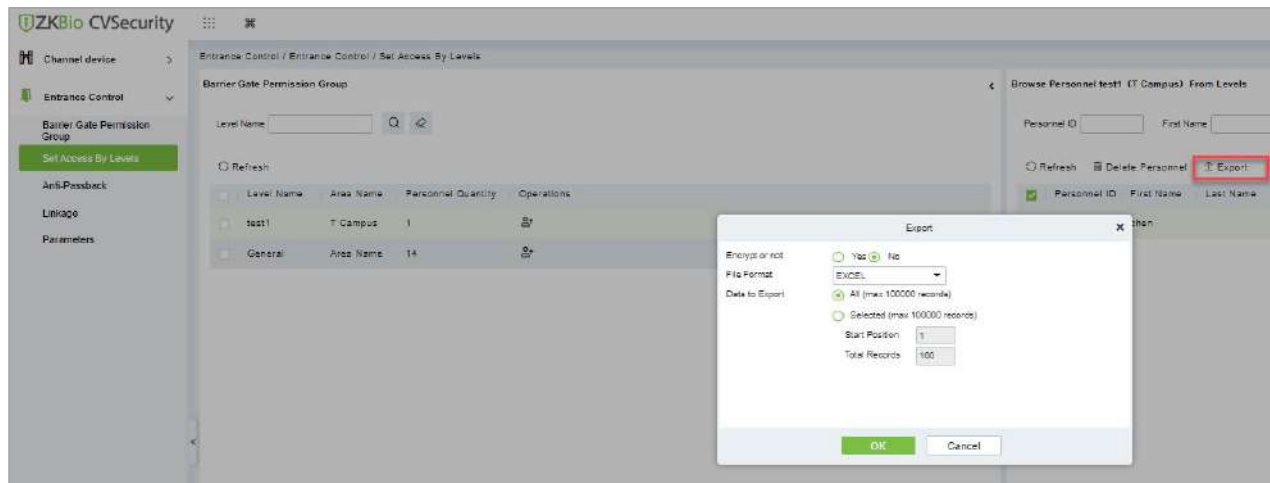


Figure 14- 34 Export Interface

Step 2: Select the file format and click **OK**.

14.4.3 Anti-Passback

At present, it supports Anti-Passback in and out. On some occasions, people who require card swiping verification must swipe their cards from another channel when they come in from one channel, and the card swiping records must be strictly corresponding to one entry and one exit. Users can use this function when they enable it in settings, which is generally used in special units, scientific research, bank vaults and other occasions.

14.4.3.1 To Add Anti-Passback

This paper introduces the configuration Steps of adding Anti-Passback effect in.

● Operating Steps:

Step 1: In the Entrance Control module, select **Entrance Control > Anti-Passback** and Click New.

Step 2: Select the specified device.

Description:

When adding Anti-Passback, you can't see the device that has been set up in Anti-Passback in the device list. After deleting the set Anti-Passback information, the device returns to the device list.

Anti-Passback settings of all-in-one machine: Anti-Passback, Anti-Passback and Anti-Passback.

Step 3: Select the Anti-Passback rule and click **OK** to complete the setting, as shown figure below. The newly added Anti-Passback settings are displayed in the list of selected Anti-Passback rules.

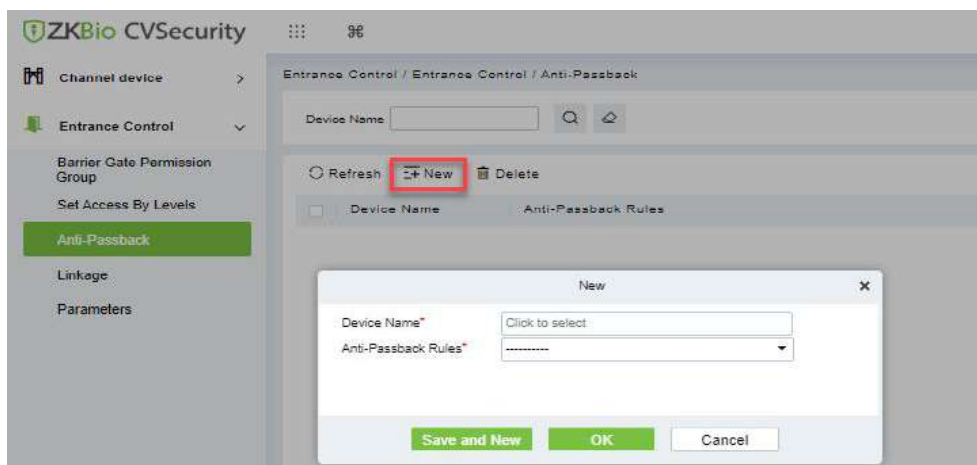


Figure 14- 35 Add Anti-Passback Interface

14.4.3.2 Delete

● Operation Steps:

Step 1: Click **Entrance Control** > **Entrance Control** > **Anti-Passback** and select device name to be delete.

Step 2: Click **Delete** and click **OK** to delete Anti-passback from the group.

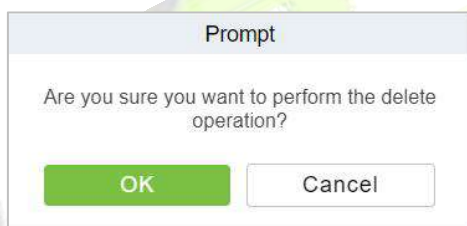


Figure 14- 36 Delete Anti-Passback

14.4.4 Linkage Setting

After a specific event is triggered at a certain input point in the channel system, a linkage action will be generated at the specified output point to control the events such as verification opening, alarm and anomaly in the system, which will be displayed in the corresponding event list monitored.

● Precondition:

Before linking new configurations, you need to do the following:

1. Gate device, input point, output point, read head binding camera add settings.
2. Mailbox parameter configuration.

14.4.4.1 Add Linkage

●Operating Steps:

Step 1: In the Entrance Control module, select **Entrance Control > Linkage**.

Step 2: In the linkage setting interface, select and click the **New** button to fill in the corresponding parameters, as shown in figure below. Please refer to Table 13-4 for linkage parameters.

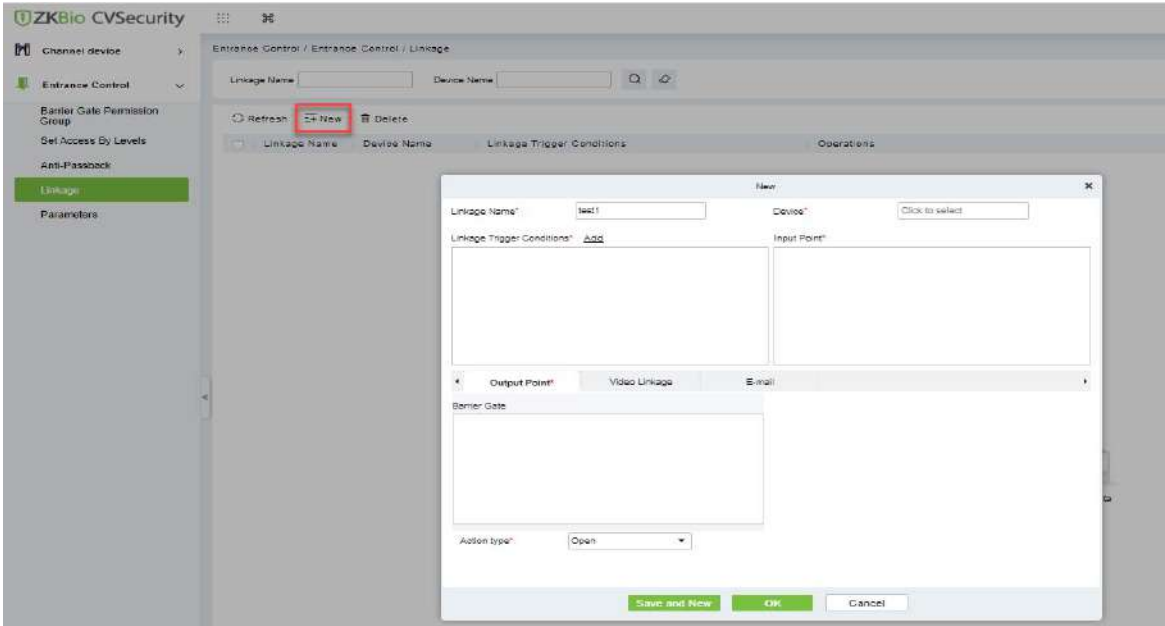


Figure 14- 37 New Linkage Interface

Parameter	Description
Linkage Name	Custom setting linkage name for easy reference.
Device	Customize and select the added access control device.
Linkage Trigger Conditions	Select the condition under which the linkage operation is triggered, that is, the type of event generated by the selected device.
Input Point	Select the input point to set the device input.
Output Point	Select the output point to set the output of the device.
Action Type	Choose to set up linkage action, including device operation of output point, video linkage and mail. Refer to Table 13-5 for configuration description of the three modes.

Table 14-5 Description of New Linkage Parameters

Parameter	Description
Output Point	Set the action type of output point: closed, open and normally open. Sets the delay time if the output point action is on.
Video Linkage	Pop-up video, display duration: check the pop-up video in the real-time monitoring

Parameter	Description
	interface and set the pop-up duration. Video recording and video recording duration: Check to record and set the video recording duration. Capture: Set whether the linkage action takes pictures: If you take pictures, you also need to set whether it pops up in the real-time monitoring interface and the display time.
E-mail	Set the email address of the received linkage content when the linkage event occurs.

Table 14-6 Explanation of Output Action Parameters

Step 3: Click **OK** to complete the linkage configuration.

14.4.4.2 Delete

● Operation Steps:

Step 1: Click **Entrance Control > Entrance Control > Linkage** and select the linkage name to be delete.

Step 2: Click **Delete** and click **OK** to delete linkage.

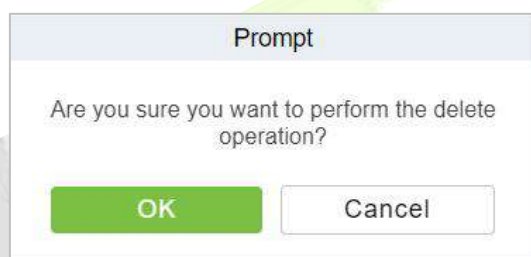


Figure 14- 38 Delete Linkage

14.4.5 Parameters

Click **Entrance Control > Entrance Control> Parameter** to enter the parameter setting interface.

The screenshot displays the configuration interface for ZKBio CVSecurity. It is divided into three main sections:

- Type of Getting Transactions:**
 - Radio button for **Periodically** is selected.
 - An **Interval** input field is set to **1** hour(s).
 - A section for **Set the Time for Obtaining New Transactions** includes a **Select All** button and a **Cancel** button.
 - A grid of checkboxes for times from 0:00 to 23:00. The 0:00 checkbox is checked.
 - A warning message states: "Getting transactions and synchronization time will be done at the same time."
- Real Time Monitoring:**
 - A label reads: "The Real Time Monitoring Page Pop-up Photo Size: Max Height".
 - An input field for height is set to **140**, with a range indicator "px(80 - 500)".
 - A warning message states: "Refresh the real-time monitoring page after setting Height."
- Alarm Monitoring Recipient's Mailbox:**
 - An input field contains the example text: "Example:123@xxx.com;456@xxx.com".
 - A warning message states: "Enter multiple mailboxes, separated by commas(,) or semicolons(,)."

Figure 14- 39 Add Parameters

● **Type of Getting Transactions:**

Periodically

Start from the setting and efficient time, the system attempts to download new transactions every time interval.

Set the Time for Obtaining New Transactions

The selected Time is up, the system will attempt to download new transactions automatically.

The Real Time Monitoring Page Pop-up Staff Photo Size: When an access control event occurs, the personnel photo will pop up. The size of pop photos shall be between 80 to 500 pixels.

Alarm Monitoring Recipient Mailbox: The system will send email to alarm monitoring recipient's mailbox if there is any event.

14.5 Passage Settings

By maintaining the gate traffic rules (control time period and traffic mode) and setting the gate parameters corresponding to the gate, the gate function can be directly controlled by software.

14.5.1 Barrier Gate Passing Rules

Set the passage time and passage mode of the gate, so that the gate can set different entry and exit passage modes in different time periods. It can be applied to flap Barrier and swing Barrier.

14.5.1.1 Add Barrier Gate Passing Rules

This paper introduces the configuration Steps of gate traffic rules in ZKBio CVSecurity.

● **Operating Steps:**

Step 1: In the Entrance Control module, select **Passage Settings > Barrier Gate Passing Rules**.

Step 2: Click **New** with the mouse, and the interface for adding gate traffic rules will pop up.

Step 3: In the new interface, set the corresponding contents according to the new requirements, as shown in figure below. Please refer to Table 13-6 for parameter setting instructions.

New

Name of the Barrier Gate Passing Rule *

Remarks

Date	Time	Interval 1			Interval 2			Interval 3		
		Start Time	End Time	Pass Mode	Start Time	End Time	Pass Mode	Start Time	End Time	Pass Mode
Monday		00 : 00	00 : 00		00 : 00	00 : 00		00 : 00	00 : 00	
Tuesday		00 : 00	00 : 00		00 : 00	00 : 00		00 : 00	00 : 00	
Wednesday		00 : 00	00 : 00		00 : 00	00 : 00		00 : 00	00 : 00	
Thursday		00 : 00	00 : 00		00 : 00	00 : 00		00 : 00	00 : 00	
Friday		00 : 00	00 : 00		00 : 00	00 : 00		00 : 00	00 : 00	
Saturday		00 : 00	00 : 00		00 : 00	00 : 00		00 : 00	00 : 00	
Sunday		00 : 00	00 : 00		00 : 00	00 : 00		00 : 00	00 : 00	

Copy Monday's Setting to Others Weekdays:

Save and New

OK

Cancel

Figure 14- 40 Interface of Adding Gate Traffic Rules

Parameter	Description
Name of Gate Traffic Rules	Any character, up to 30 characters.
Remarks	The explanation of the current time period and the main application occasions shall consist of 5 0 characters at most.
Time Interval	A gate passage rule contains up to five-time intervals in a week.
Time Interval-Start/End Time	Set the start and end time in each time interval.
Pass Mode	Set the traffic mode in each time interval and select it from drop-down. There are 10 traffic modes by default: "Two-way controlled", "free entry and exit controlled", "controlled entry and exit free", "two-way freedom", "forbidden entry and exit controlled", "forbidden entry and exit free entry", "free entry and exit forbidden entry", "two-way prohibition", "remote normal opening".
Copy Monday Time to Other Working Days	You can quickly copy Monday settings to other workdays.

Table 14-7 Parameter Description of Gate Traffic Rules

Step 4: Click **OK** to complete the addition of the gate traffic rules.

14.5.1.2 Delete Passage

● Operation Steps:

Step 1: In the Entrance Control module, select **Passage Settings > Barrier Gate Passing Rules**, and select the rule to be deleted.

Step 2: Click **Delete** to delete the selected rule.

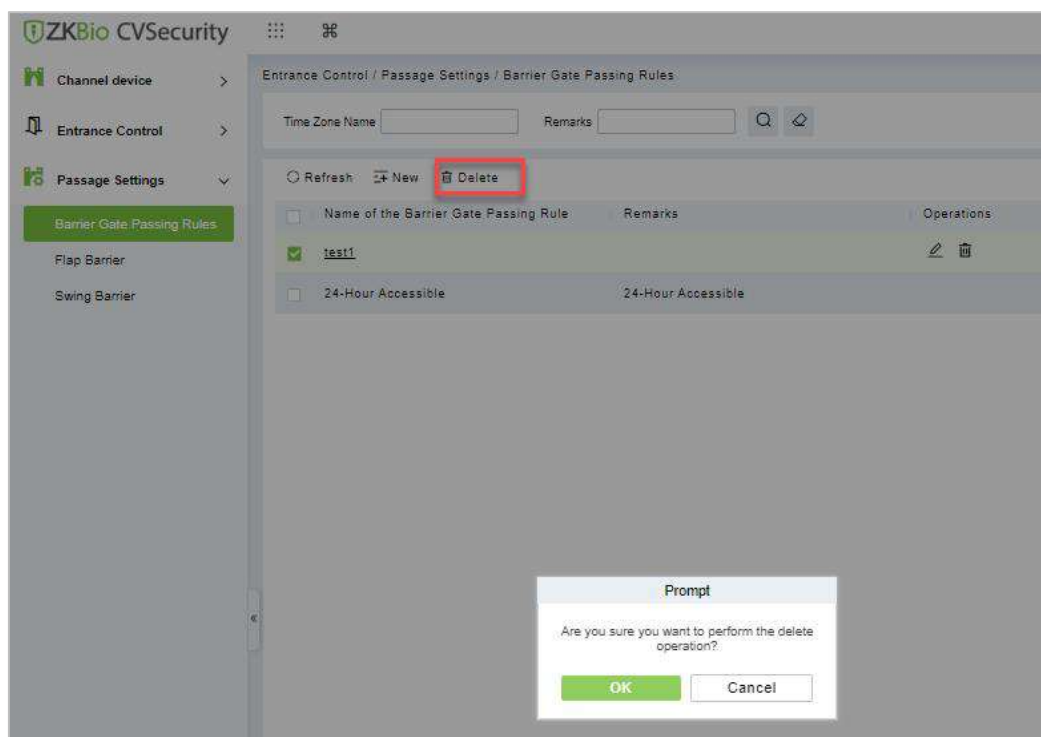


Figure 14- 41 To Delete Barrier Gate Passage Rule

Step 3: Click **OK** to perform the delete operation.

14.5.2 Flap Barrier

Introduces the parameter configuration Steps of wing Barrier in ZKBio CVSecurity.

● Operating Steps:

Step 1: In the Entrance Control module, select **Passage Settings > Flap Barrier**.

Step 2: In the flap Barrier interface, click the **Edit** button under the name or operation of the flap Barrier to enter the flap Barrier parameter editing interface, as shown in figure below. Please refer to Table 13-7 for parameter description.

Edit

Device Name*

192.168.255.241

Barrier Gate Name*

192.168.255.241

Barrier Gate Passing Rules*

24-Hours

Opening Speed

Low

Closing Speed

Low

Gate Closing Delay Time

10

S (0-10)

Unattended Time

10

S (5-60)

Verification in Passage

☒

OK

Cancel

Figure 14- 42 Flap Barrier Parameter Configuration Interface

Parameter	How to set
Device Name	Name of flap Barrier device, non-editable.
Barrier Gate Name	Custom Setting Notes Description.
Barrier Gate Traffic Rules	Drop-down selection, the option is taken from the data of Passage Setting > Barrier Gate Passing Rules.
Opening Speed/ Closing Speed	Low speed, medium speed and high speed, set the speed of opening and closing the gate.
Gate Closing Delay Time	After passing through the last pair of infrared channels, set the delay closing time. You can set 0 to 10s, and the default is 0s.
Unattended Time	The maximum waiting time after verification is 5 to 60s, and the default value is 10s. If no pedestrians pass beyond the set time, the gate will be closed.
Verification in Passage	No authentication in the channel is allowed. <ul style="list-style-type: none">When checked the verification in the channel can open the gate;If it is not checked, the gate cannot be opened for verification in the channel, and the gate can be verified only after exiting the gate.

Table 14-8 Explanation of Flap Barrier Parameters

Step 3: Click **OK** to complete the configuration of flap Barrier parameters.

14.5.3 Swing Barrier

This paper introduces the parameter configuration Steps of swing Barrier in ZKBio CVSecurity.

● Operating Steps:

Step 1: In the Entrance Control module, select **Passage Settings > Swing Barrier**.

Step 2: In the swinging interface, click the **Edit** button under the swinging name or operation to enter the swinging parameter editing interface, as shown in figure below. Please refer to Table 13-8 for parameter description.

Figure 14- 43 Swing Barrier Parameter Configuration Interface

Parameter	How to set
Device Name	The name of the swing Barrier device cannot be edited.
Barrier Gate Name	The gate name corresponding to the swing gate device is generally one all-in-one device corresponding to one gate, which cannot be edited.
Barrier Gate Traffic Rules	Drop-down selection, the option is taken from the data of Passage Setting > Barrier Gate Passing Rules.
Opening Speed/ Closing Speed	Low speed, medium speed and high speed, set the speed of opening and closing the gate.
Gate Closing Delay Time	After passing through the last pair of infrared channels, set the delay closing time. You can set 0 to 10s, and the default is 0s.
Unattended Time	The maximum waiting time after verification is 5 to 60s, and the default value is 10s. If no pedestrians pass beyond the set time, the gate will be closed.
Verification in Passage	Whether authentication in the channel is allowed. <ul style="list-style-type: none"> When checked the verification in the channel can open the gate; If it is not checked, the gate cannot be opened for verification in the channel, and the gate can be verified only after exiting the gate.

Table 14-9 Description of Swing Barrier Parameters

Step 3: Click **OK** to complete the configuration of wing Barrier parameters.

14.6 Channel Reports

In the Channel report, you can query the All Transactions, Today's Access Records, Person's Last Access Location, and All Exception Events. You can choose to export all or export records after querying.

14.6.1 All Transactions

This paper introduces the configuration Steps of report query and export in, taking All Transaction report operation.

14.6.1.1 Export

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Reports> All Transactions**.

Step 2: In the All Records interface, fill in the corresponding query information and click the **Query** symbol to complete the query of all record tables, as shown in figure below.

Figure 14- 44 All Transactions

Step 3: In the full record interface, click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and Click **OK**, as shown in figure below.

Figure 14- 45 Report Export Interface

Step 4: After selecting the address where the corresponding file is stored, the export of the file can be completed.

14.6.1.2 Clear All Data

This option allows user to clear all data available in all transaction interface.

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Reports> All Transactions**.

Step 2: Click the **Clear All Data** to clear all transactions.

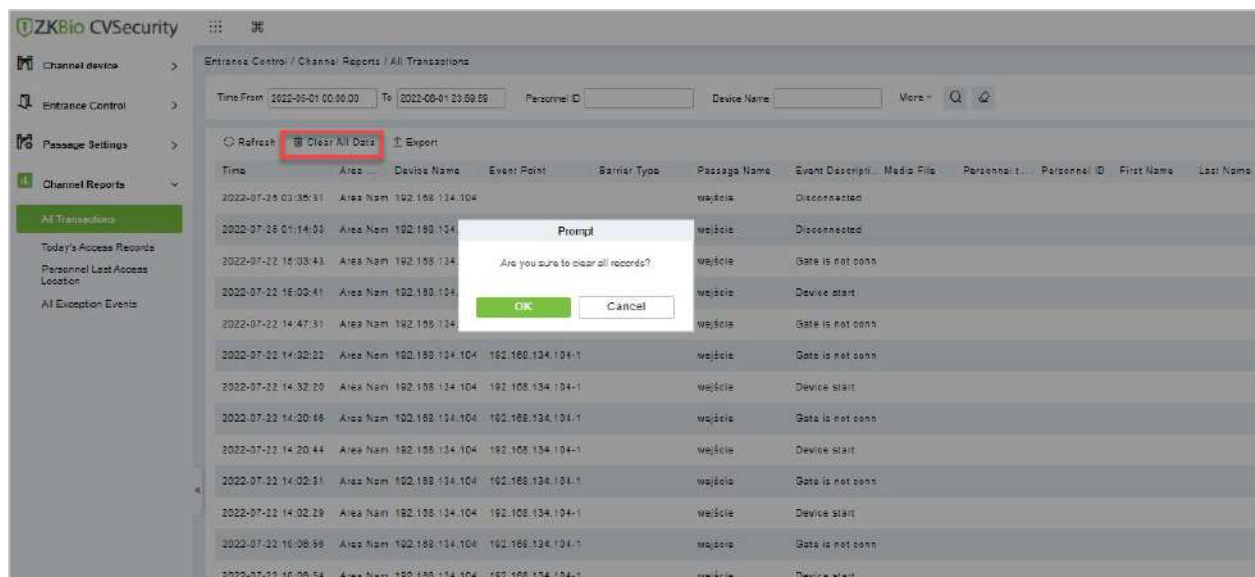


Figure 14- 46 Clear All Data Option

Step 3: Click **OK** to clear all records.

14.6.2 Today's Access Record

The access records for today are displayed in this option.

14.6.2.1 Export

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Reports > Today's Access Record**.

Step 2: In Today's Access Record interface, fill in the corresponding query information and click the **Query** symbol to complete the query of access record tables, as shown in figure below.

The screenshot shows the 'Entrance Control / Channel Reports / Today's Access Records' interface. It contains several input fields for querying access records:

- Personnel ID:
- Device Name:
- Retract:
- Department Number:
- Department Name:
- First Name:
- Area Name:
- Verification Mode:
- Reader Name:
- Name:
- Event Description:
- Card Number:
- Event Point:

Figure 14- 47 Today's Access Record

Step 3: In the access record interface, click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and Click **OK**, as shown in figure below.

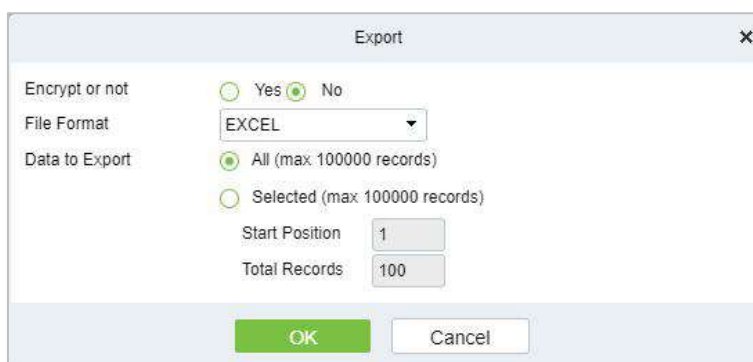


Figure 14- 48 Report Export Interface

Step 4: After selecting the address where the corresponding file is stored, the export of the file can be completed.

14.6.2.2 Clear All Data

This option allows users to clear all data available in today's access record interface.

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Reports> Today's Access Record**.

Step 2: Click the **Clear All Data** to clear access records.

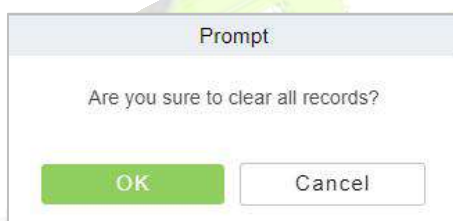


Figure 14- 49 Clear All Data Option

Step 3: Click **OK** to do the delete operation.

14.6.3 Personnel Last Access Location

Displays the last location visited by persons with access rights. It is convenient for users to quickly locate the location of personnel.

14.6.3.1 Export

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Reports > Personnel Last Access Location**.

Step 2: In Personnel Last Access Location interface, fill in the corresponding query information and click the **Query** symbol to complete the query of access record tables, as shown in figure below.

Figure 14- 50 Today's Access Record

Step 3: In the access location interface, click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and Click **OK**, as shown

in figure below.

The 'Export' dialog box contains the following fields and options:

- Encrypt or not:** Radio buttons for 'Yes' and 'No'. 'No' is selected.
- File Format:** A dropdown menu showing 'EXCEL'.
- Data to Export:** Radio buttons for 'All (max 100000 records)' and 'Selected (max 100000 records)'. 'All' is selected.
- Start Position:** A text input field with the value '1'.
- Total Records:** A text input field with the value '100'.
- Buttons:** 'OK' and 'Cancel' buttons at the bottom.

Figure 14- 51 Report Export Interface

Step 4: After selecting the address where the corresponding file is stored, the export of the file can be completed.

14.6.3.2 Clear All Data

This option allows users to clear all data available in Personnel Last Access Location interface.

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Reports > Personnel Last Access Location**.

Step 2: Click the **Clear All Data** to clear the access location records of the persons, as shown in figure below.

Step 3: Click **OK** to do the delete operation.

14.6.4 All Exception Events

Click **Channel Report > All Exception Events** to view the abnormal events (including alarm events) such as unregistered persons, illegal entry, gate opening timeout, and failure to connect to the server under specified conditions (including alarm events).

14.6.4.1 Export

● Operating Steps:

Step 1: In the Entrance Control module, select Channel Reports > All Exception Events.


Step 2: In All Exception Events interface, fill in the corresponding query information and click the **Query** symbol to complete the query of access record tables, as shown in figure below.

The 'All Exception Events' interface includes the following search filters:

- Time Range:** 'Time From' (2022-05-01 00:00:00) and 'To' (2022-08-01 23:59:59).
- Personnel ID:** A text input field.
- Device Name:** A text input field.
- Retract:** A button with a plus icon.
- Search:** A magnifying glass icon and a refresh icon.
- Department Number:** A text input field.
- Department Name:** A text input field.
- Event Description:** A dropdown menu.
- Reader Name:** A text input field.
- Verification Mode:** A dropdown menu.
- Area Name:** A text input field.
- Name:** A text input field.
- Card Number:** A text input field.
- Event Point:** A text input field.

Figure 14- 52 All Exception Events

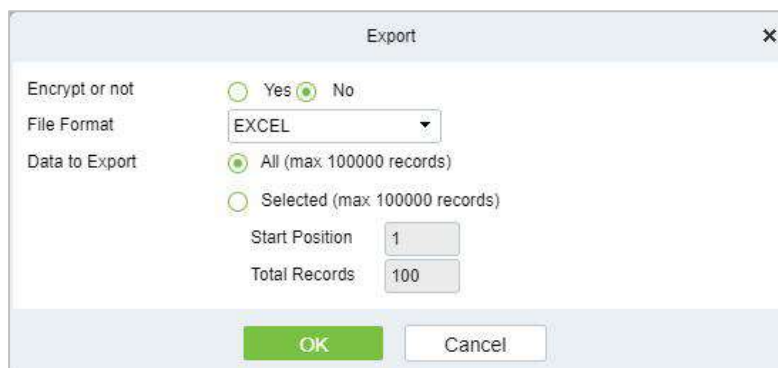Step 3: In the All-Exception Events interface, click **Export**, enter the user password in the pop-up security verification, and click **OK**. Select whether to encrypt and export the file format, and Click **OK**, as shown in figure below.



Export dialog box with the following options:

- Encrypt or not: ☐ Yes ☒ No
- File Format: EXCEL (dropdown)
- Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)
- Start Position: 1
- Total Records: 100
- Buttons: OK, Cancel

Figure 14- 53 Report Export Interface

Step 4: After selecting the address where the corresponding file is stored, the export of the file can be completed.

14.6.4.2 Clear All Data

This option allows users to clear all data available in All Exception Events interface.

● Operating Steps:

Step 1: In the Entrance Control module, select **Channel Reports> All Exception Events**.

Step 2: Click the **Clear All Data** to clear exception events record.

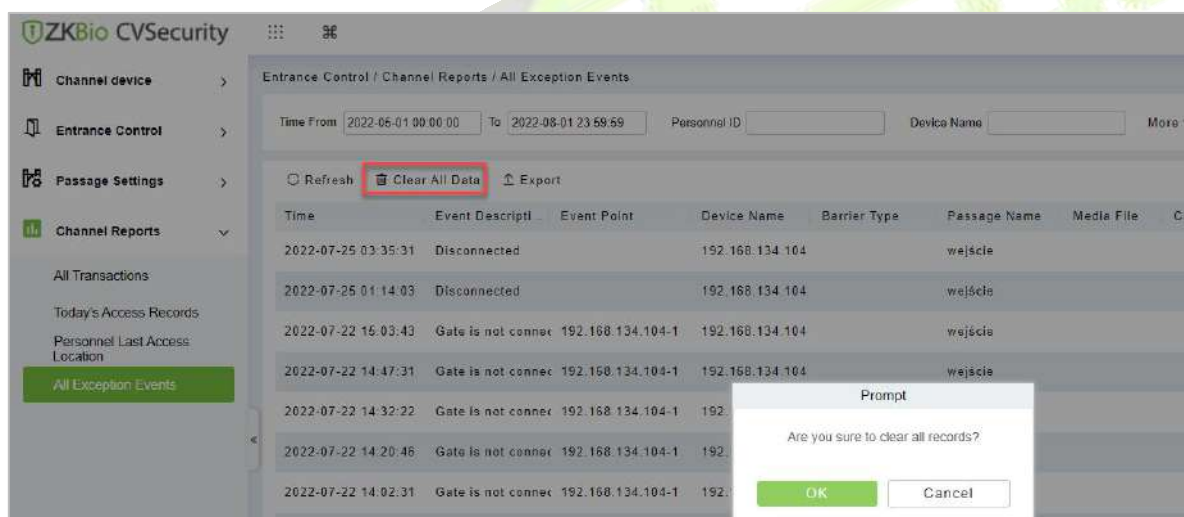


Figure 14- 54 Clear All Data Option

Step 3: Click **OK** to do the delete operation.

15 FaceKiosk

15.1 Facekiosk Device

15.1.1 Device



Figure 15- 1 Device

15.1.1.1 Delete

Select one or more devices and click **Delete** at the upper part of the list and click **OK** to delete the selected facekiosk device. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single device.

15.1.1.2 Search Device

In the tool bar, select the "**Search device**" menu. Add the device to the software server.

Note: User need to entry the hardware device and setting some parameters which is supported to setting the software server address.

15.1.1.3 Control

Click **FaceKiosk Device > Device**, then select Control to Enable/ Disable, Reboot, synchronize software Data, and Issued QRCode Address of the device.

Function	Description
Enable/ Disable	Select device, click Disable/ Enable to stop/ start using the device. When communication between the device and the system is interrupted or device fails, the device may automatically appear in disabled status. After adjusting local network or device, click Enable to reconnect the device and restore device communication.
Reboot Device	It will reboot the selected device
Synchronize software Data to the Device	Synchronize data of the system to the device. Select device, click Synchronize All Data to Devices and click OK to complete synchronization.
Issued QRCode Address	Select the Issued QRCode Address.

Table 15-1 Device Control

15.1.1.4 View / Get

Click **FaceKiosk Device > Device**, then select View/Get to Get Device Option, View Device Parameters, Re-upload Data, and to Gets the Specified Person Data.

Parameters	Description
Get Device Option	It gets the common parameters of the device. For example, get the firmware version after the device is updated.
View Device Parameters	Show the capacity detail.
Re-upload Data	Select the device in which you want to upload data. Click to enter the check box to upload the data type: attendance record/personnel information/attendance photo, click the confirmation to get such information again from the device.
Gets the Specified Person Data	It gets the Specified person Data from the device.

Table 15-2 Device View/Get

15.1.1.5 Clear Device Data

Click **FaceKiosk Device > Device**, then select Clear Device Data to clear Device Command, Verification Photo and Validation Record.

Parameters	Instruction
Clear Device Command	Select the device to be cleared. It clears the operation command issued by the software in the setting.
Clear Verification Photo	Select the device. This function will clear all the verification photo records from the device.
Clear Validation Record	Select the device. This function will clear all the validation data records from the device.

Table 15-3 Clear Device Data

15.1.1.6 Edit

Click advertisement resources or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

15.1.2 Set Attendance by Area

Click FaceKiosk > FaceKiosk Device, then Select Set Attendance by Area.



Figure 15- 2 Set Attendance by Area

15.1.2.1 Synchronize People in the Area

Click > FaceKiosk > FaceKiosk Device > Set Attendance by Area, then select Synchronize People in The Area.

Click **OK** to save and exit.

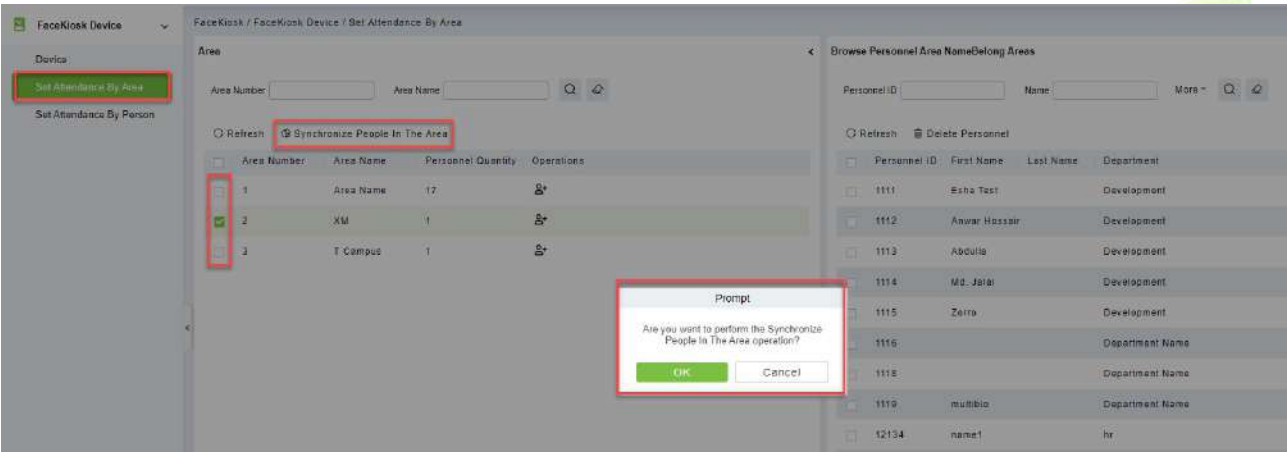


Figure 15- 3 Set Attendance by Area

15.1.3 Set Attendance by Person

Click > FaceKiosk > FaceKiosk Device, then Select Set Attendance by Person.

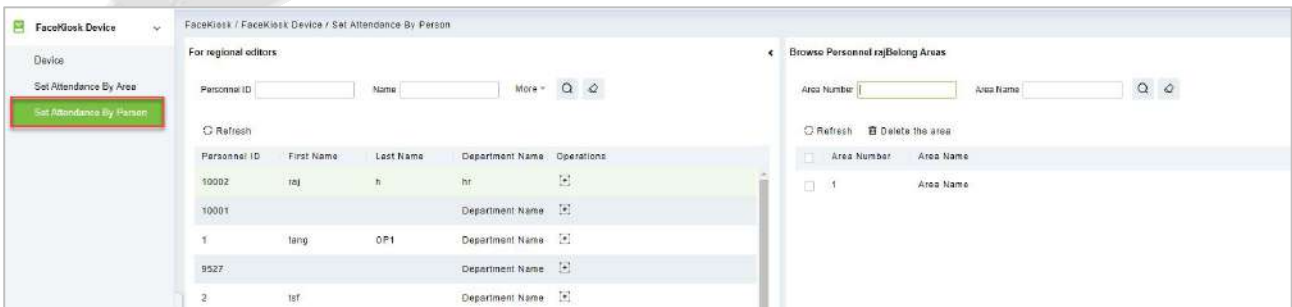


Figure 15- 4 Set Attendance by Person

15.2 Media Advertisement Resources

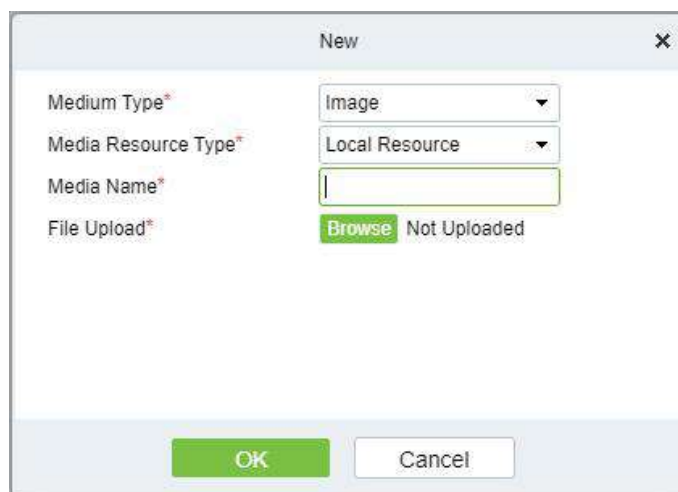
15.2.1 Advertisement Resources

Click > FaceKiosk > Media Advertisement Resources, then Select Advertisement Resources.

In the Advertisement resources module, it can support to create/edit/delete advertisement resources.

15.2.1.1 Add (New)

Support to upload some new advertisement resources to software server.



A dialog box titled "New" with a close button (X) in the top right corner. It contains four fields: "Medium Type*" with a dropdown menu showing "Image"; "Media Resource Type*" with a dropdown menu showing "Local Resource"; "Media Name*" with an empty text input field; and "File Upload*" with a green "Browse" button and the text "Not Uploaded". At the bottom, there are two buttons: a green "OK" button and a white "Cancel" button.

Figure 15- 5 Media advertisement Resources

15.2.1.2 Edit

Click device name or **Edit** in the operation column to go to the Edit page. Make modifications and click **OK** to save modifications.

15.2.1.3 Delete

Select one or more advertisement resources and click **Delete** at the upper part of the list and click **OK** to delete the selected advertisement resources. Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single advertisement resource.

15.2.2 Advertisement Settings

Click > FaceKiosk > Media Advertisement Resources, then Select Advertisement Settings.

This module support to create **Edit** and **Delete** the advertising.



The screenshot shows the "ZKBio CVSecurity" application interface. On the left is a sidebar with a tree view containing "FaceKiosk Device" and "Media Advertisement Resources". Under "Media Advertisement Resources", "Advertisement Settings" is selected and highlighted in green. The main content area is titled "FaceKiosk / Media Advertisement Resources / Advertisement Settings". It features a "FaceKiosk Device" section with a "Device Name" input field and search icons. Below this is a "Refresh" button and a table with columns "Device Serial Number", "Device Name", and "Operations". The table contains one row with the serial number "CGWD295060010", the name "CGWD295060010", and an edit icon. On the right side of the main area, there is an "Ad" section with a "Media Name" input field and search icons, a "Refresh" button, a "Delete" button, and a table with columns "Media Name" and "Medium Type". This table contains one row with the name "test" and the type "Image".

Figure 15- 6 Advertisement settings

15.3 FaceKiosk Reports

15.3.1 Verification Record

Click > **FaceKiosk** > **FaceKiosk Reports**, then **Verification Record** to view specified events in specified condition.



Figure 15- 7 Verification Record

15.3.1.1 Export

Export the operation log records, save to local. You can export to an Excel, PDF, TXT or CSV file. Click Export See the following figure.

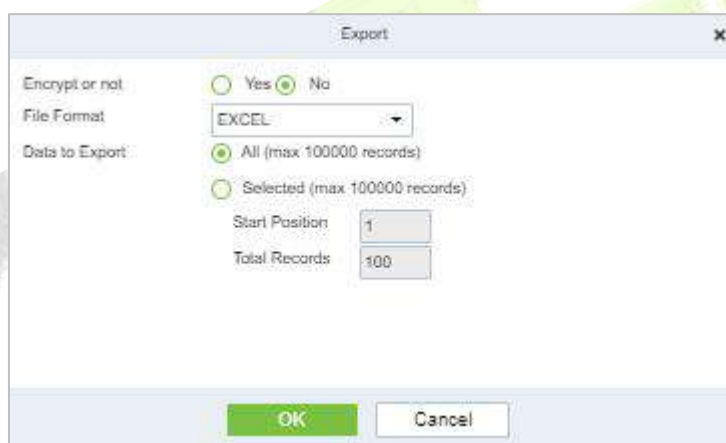


Figure 15- 8 Verification Record

16Locker

16.1 Locker Device Management

16.1.1 Device

16.1.1.1 Add Devices (New)

Step 1: Go to **Locker> Locker Device Management > Device**.

Step 2: Click **New**, the interface for adding a device will pop up.

Step 3: In the interface for adding a device, fill in the corresponding parameters according to the adding requirement, as shown in the figure below. Please refer to Table 19-1 for the description of parameter.

The image shows a 'New' dialog box with a close button (X) in the top right corner. It contains five input fields, each with a red asterisk indicating it is required: 'Device Name', 'IP Address', 'Serial Number', 'Communication password', and 'Area Name'. The 'Area Name' field is a dropdown menu currently showing 'Area Name'. At the bottom of the dialog are three buttons: 'Save and New' (green), 'OK' (green), and 'Cancel' (white with a grey border).

Figure 16- 1 Adding Device Interface

Parameter	Description
Device Name	Customize the name of the device.
IP Address	Fill in the IP address of the device.
Serial Number	Fill the device serial number.
Communication Password	Fill in the communication password of the device. You can add it only after the verification is successful.
Area Name	Divide the area for the device.

Table 16- 1 Adding Device Parameters

16.1.1.2 Delete

Step 1: Go to Locker> Locker Device Management > Device.

Step 2: Select device, click **Delete**, then click **OK** to delete device.



Figure 16- 2 Delete Device

16.1.1.3 Control

●Set Administrator:

Administration has permission to set the administrator permission to device. Select the person, click >, and click **OK**.

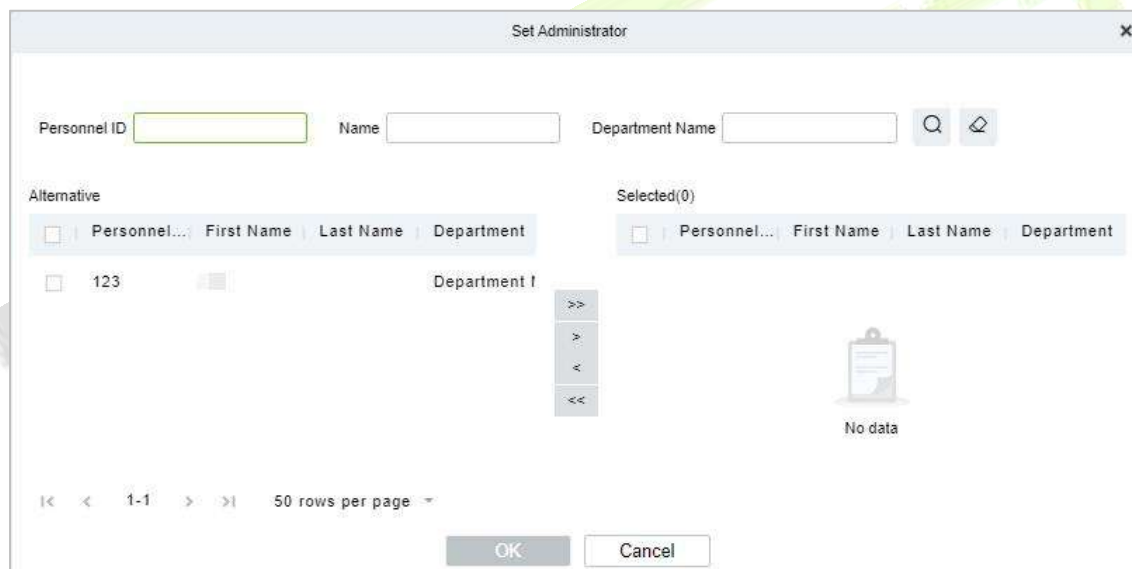


Figure 16- 3 Set Administrator Interface

●Clear Administrator:

Administration has permission to clear the administration permission from device.

●Reboot Device:

It will reboot the selected device.

●Synchronize Time:

It will synchronize device time with server's current time.

●Synchronize All Data to Devices:

Synchronize data of the system to the device. Select device, click **Synchronize All Data to Devices** and click **Synchronize** to complete synchronization.

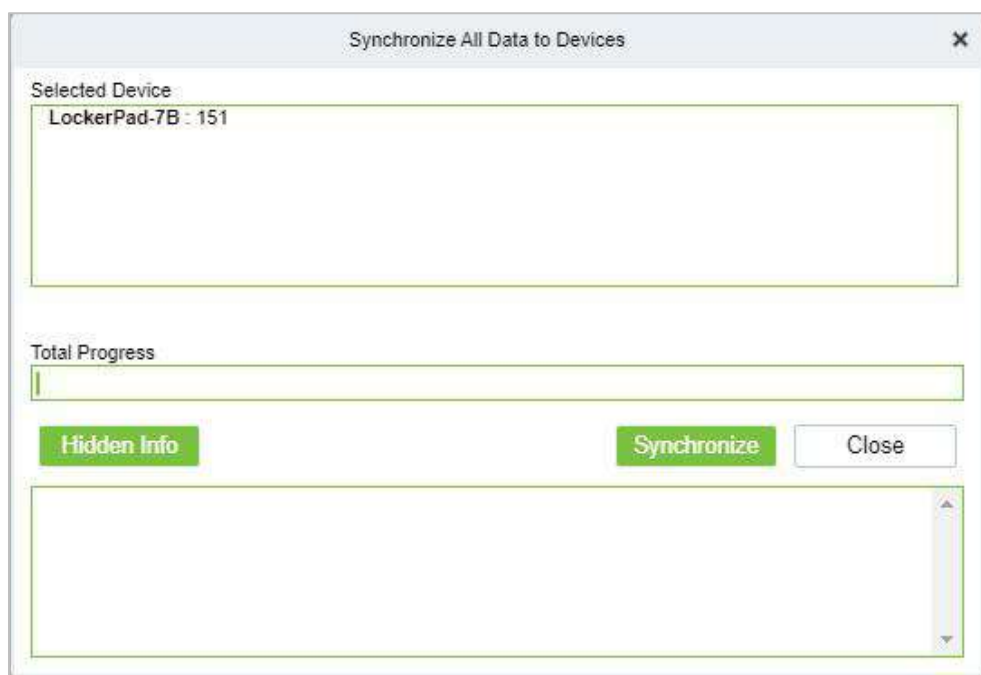


Figure 16- 4 Synchronize All Data to Devices Interface

● **Distribute Advertising Resources:**

Administrator selects the AD resource on the computer and delivers it to lockerpad-7b. Click **Distribute Advertising Resources**, click **Browser**, then select the picture or video and click **OK**.



Figure 16- 5 Distribute Advertising Resources Interface

● **Clear All Ads:**

Clears all ads resources from the selected device.

16.1.1.4 Binding/Unbinding the Camera

● **Steps:**

Step 1: In Locker module, select **Locker Device Management > Device**.

Step 2: Choose device, click icon .

Step 2: Select **Channel**, click > and click **OK**.

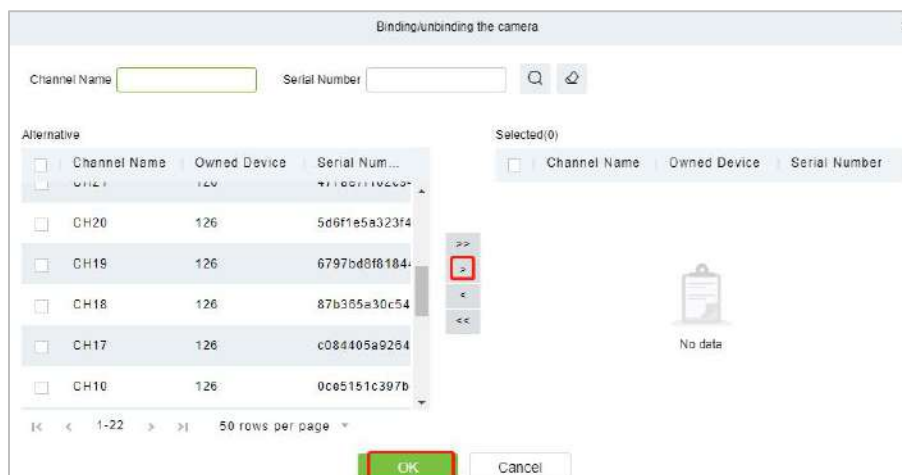


Figure 16- 6 Binding Camera

16.1.2 Parameters

In **Locker** module, click Locker **Device Management** > **Parameter** to set the parameters.

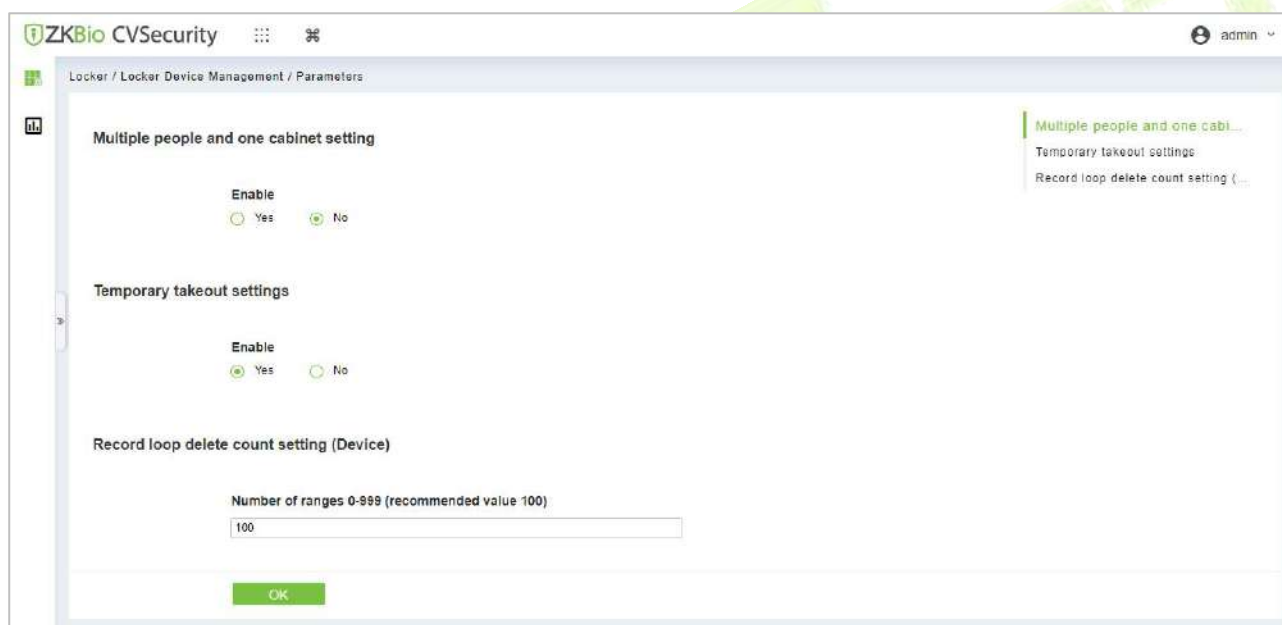


Figure 16- 7 Parameter

Item	Description
Multiple people and one cabinet setting	Multiple users can share a cabinet when it is enabled.
Temporary takeout settings	When enabled, users can remove objects without losing access to the cabinet
Record loop delete count setting (Device)	When a specified number of stored records is reached, a certain number of records will be deleted from the beginning, the number of records you fill in the space.

Table 16- 2 Parameter Description

16.1.3 Visual Panel

In this function, admin can bind users in the software to the corresponding cabinet.

16.1.3.1 Distribution Cabinet

●Steps:

Step 1: In the Locker module, select **Locker Device Management > Visual Panel**, as shown in figure below.



Figure 16- 8 Visual Panel

Step 2: Select a panel, click , and the interface of Select Person will pop up, as shown in figure below.

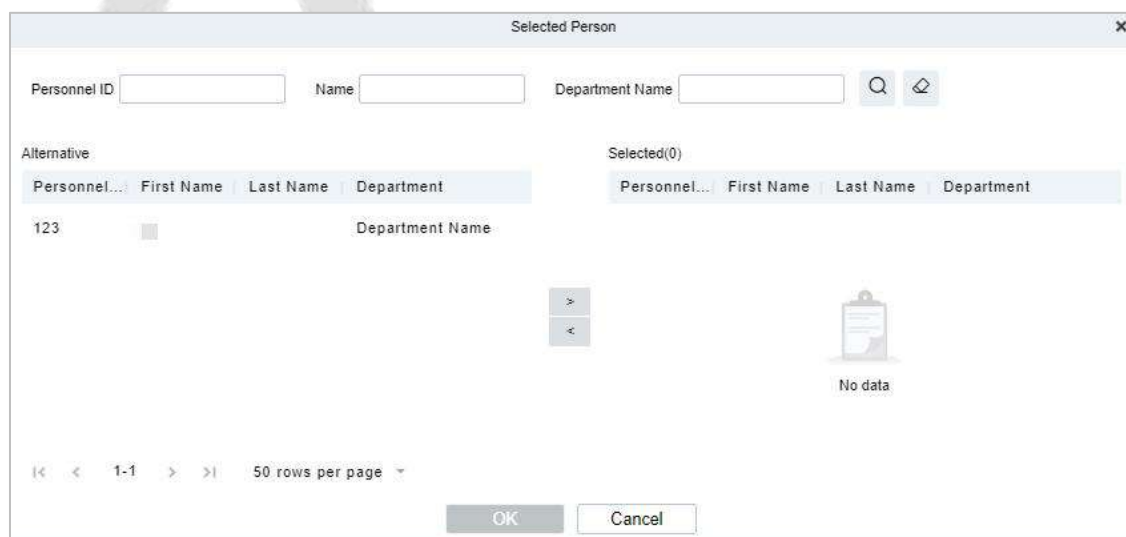


Figure 16- 9 Select Person Interface

Step3: Select the user that the admin wants to bind with the cabinet. Then click > and **OK**.

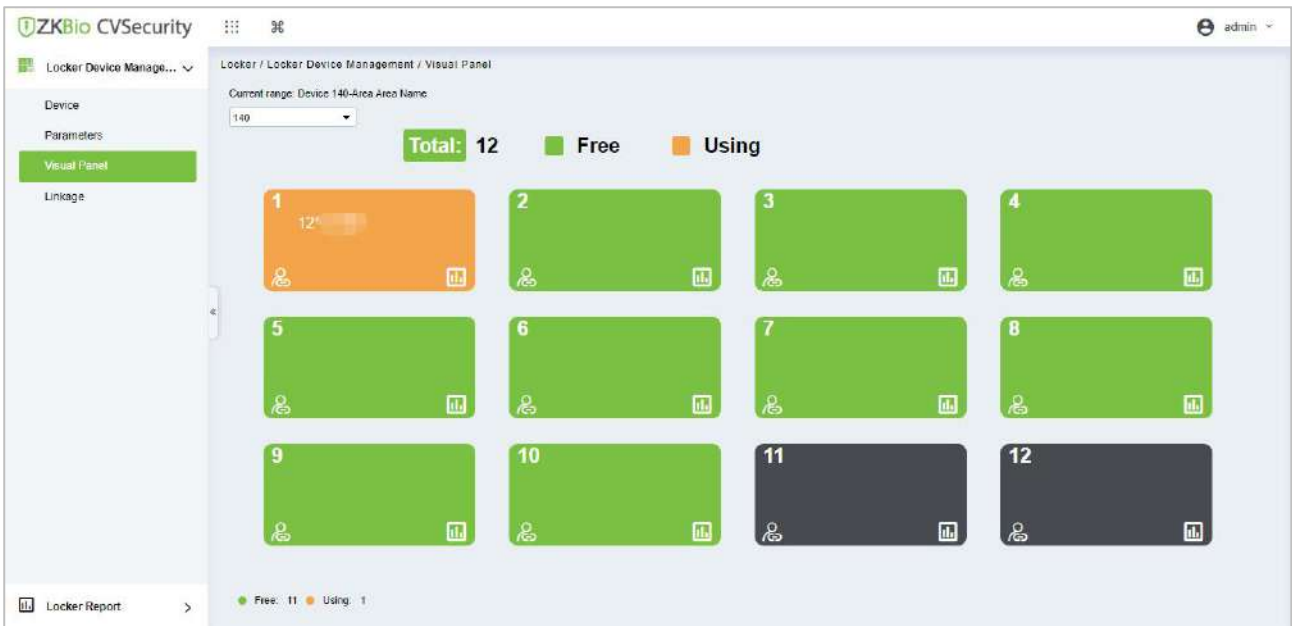



Figure 16- 10 Visual Panel Interface

16.1.3.2 View the Last 5 Records

●Steps:

Step 1: In the Locker module, select **Locker Device Management > Visual Panel**.

Step 2: Select a panel, click , and the interface of View the last 5 records will pop up, as shown in figure below.

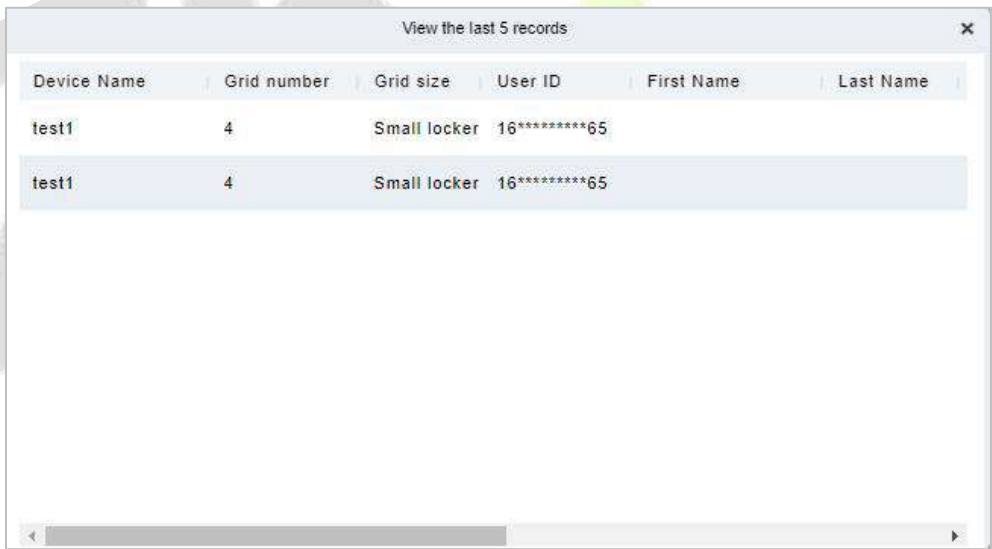


Figure 16- 11 Visual Panel Interface

 **Notes:**

Color definition:



Figure 16- 12 Enable, no person has bound, available.



Figure 16- 13 Enable, personnel have been bound, unavailable.

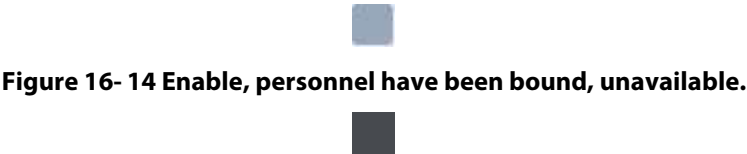


Figure 16- 15 Not enabled, can be manually enabled.

16.1.4 Linkage

The use method and scenario of linkage are flexible. After a specific event is triggered by an input point in the locker system, a linkage action will be generated at the specified output point to control events such as video recording and send e-mail in the system.

This section describes how to add Step to the linkage effect in ZKBio CVSecurity.

16.1.4.1 Add

●Preconditions:

Before adding a linkage configuration, the system needs to have an intrusion device.

●Steps:

Step 1: In the Locker module, choose **Locker Device Management > Linkage**.

Step 2: On the linkage setting screen, click **Add**, as shown in figure below. Table 15-2 and Table 15-3 refer to the linkage parameters.

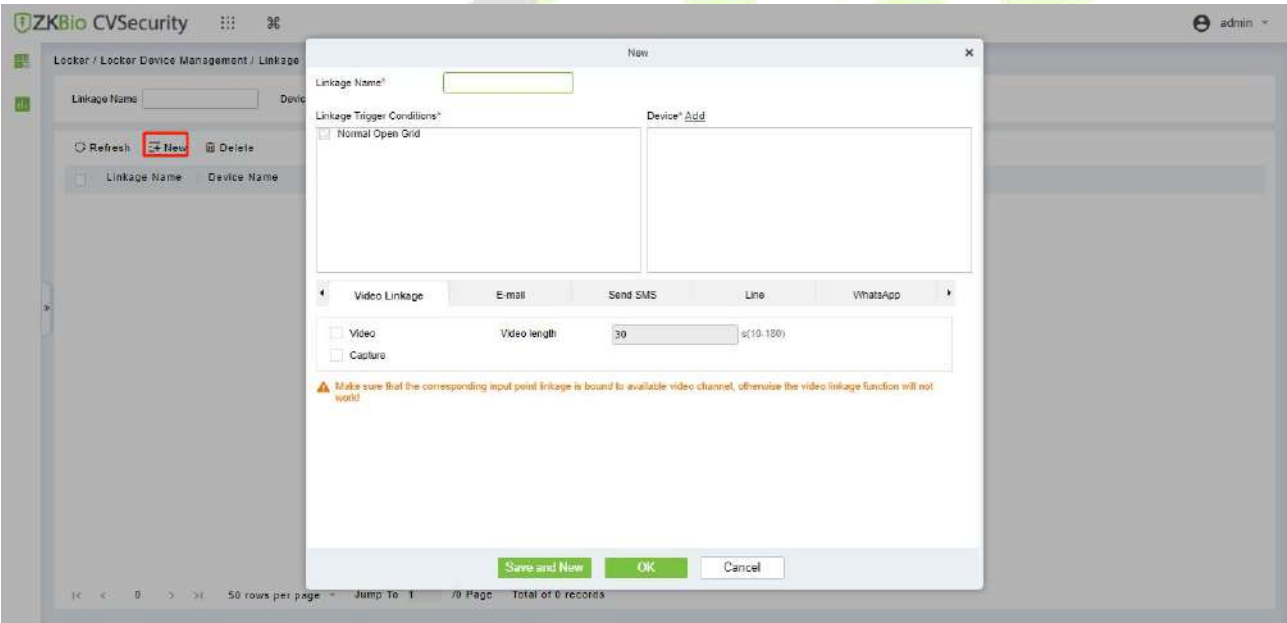


Figure 16- 16 Adding Linkage

Parameter		Description
Linkage Name		You can customize the linkage name for easy query.
Linkage Trigger Conditions		Select the condition triggered by the linkage Operation, that is, the event type generated by the selected device.
Device		Select the locker to be linked.

Table16-3 Linkage parameters

Parameter	Description
Video Linkage	Pop-up video and display duration: Select pop-up video on the real-time monitoring screen and set the pop-up duration. Video recording and Video Duration: Select Video recording to set the video duration. Capture: Set linkage action whether to take a photo: If a photo is taken, you also need to set whether to pop up on the real-time monitoring interface and the display duration
Mail	Set the email address that receives the linkage content when a linkage event occurs.

Table 16-4 Linkage parameters

16.1.4.2 Delete

●Steps:

Step 1: Select **linkage**, click **Delete**, and click **OK** to delete the linkage.

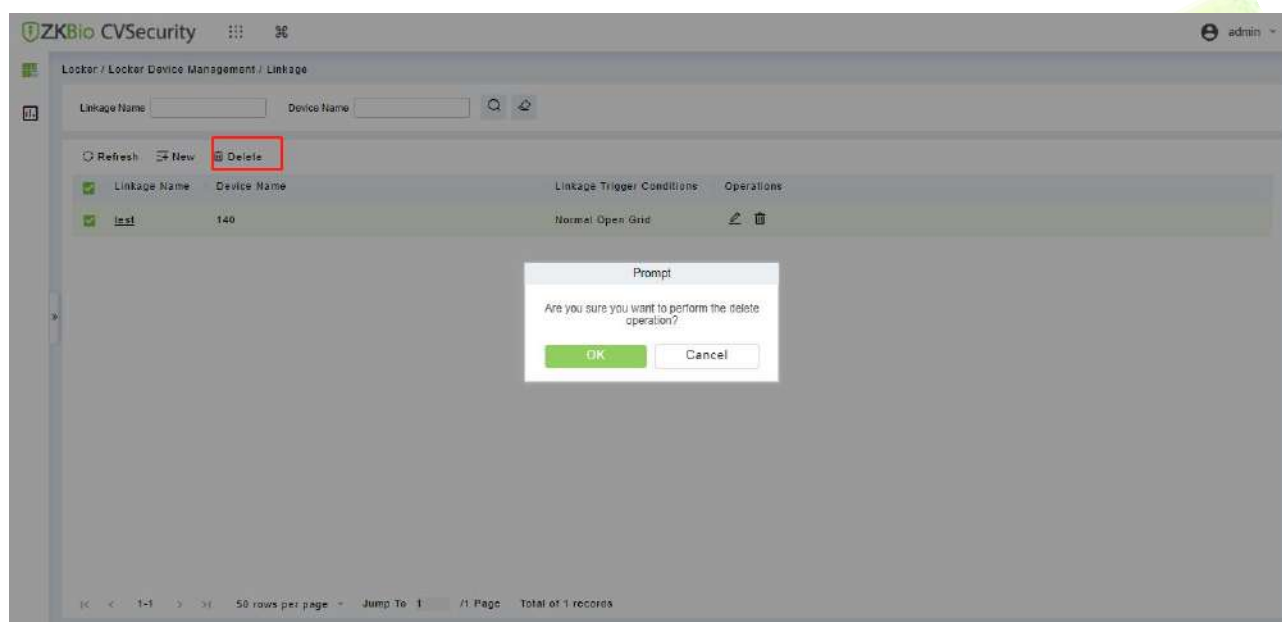


Figure 16- 17 Delete Linkage

16.2 Locker Report

16.2.1 All Transaction

● Steps:

Step 1: Go to **Locker > Locker Report > All transaction**.

Step 2: On the **All Records** interface, fill in the corresponding query information and click **Search** symbol to complete the query of all records.

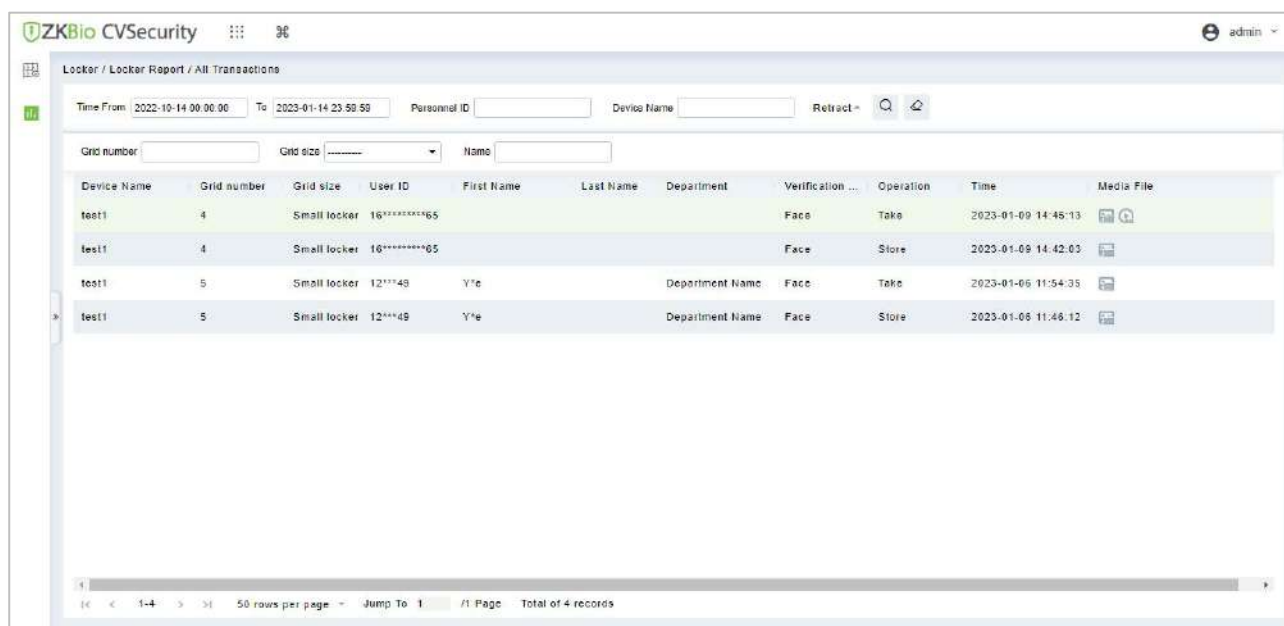



Figure 16- 18 Report Query Page

✎ **Notes:**

 : Click on this icon and it will show the image taken by LockerPad-7b when the cabinet was opened.

 : Click on this image and it will show the video taken by the bound camera when the linkage is triggered.

16.2.1.1 Export

On the **All Records** interface, click **Export**, enter the admin password in the displayed security verification dialog box, and click **OK**. Select whether to encrypt the file and the file format to export, and Click **OK**.

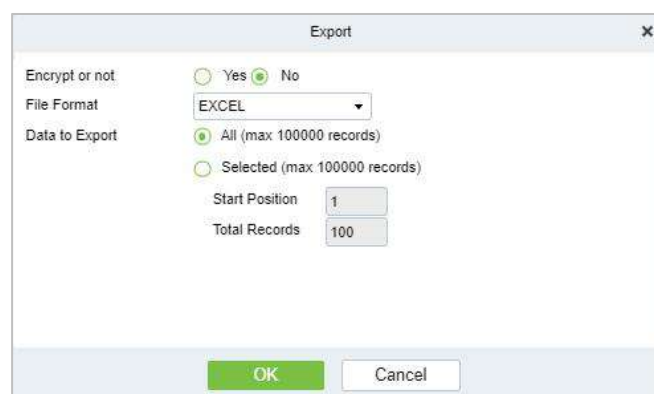


Figure 16- 19 Report Export Page

	A	B	C	D	E	F	G
1					All Transactions		
2	Device Name	Grid number	Grid size	User ID	First Name	Last Name	Department
3	196	1	Small locker	1			
4	196	1	Small locker	1			
5	196	1	Small locker	1665310457633			
6	196	1	Small locker	1665310457633			
7	151	8	Small locker	1665194322753			
8	151	8	Small locker	1665194322753			

Figure 16- 20 Event Export

16.2.1.2 Clear All Data

Click **Clear All Data**, then click **OK** to clear all transactions on the **Prompt** interface.

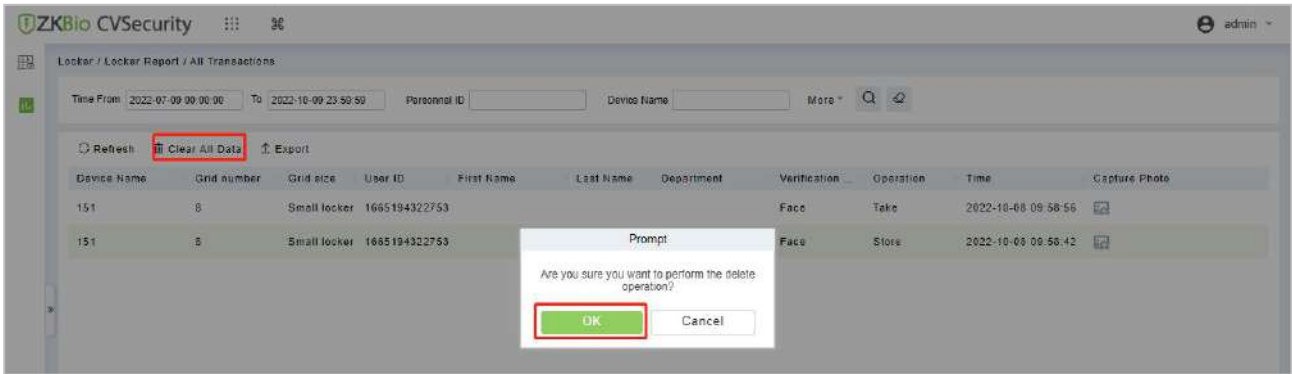


Figure 16- 21 Report Clear All Data

17 Energy Saving

The module is designed to automatically detect the usage of meeting rooms, offices, and other areas through smart sensors. When these spaces are unoccupied, the system automatically turns off the lighting and air conditioning to conserve energy and reduce emissions. This solution not only helps enterprises cut costs and improve efficiency but also supports their progress along the path to digital transformation. Through this innovative initiative, companies can optimize energy usage, lower operational costs, and move toward a greener, smarter future.

Note: Currently, only devices from the Lifesmart brand are supported.

17.1 Device Management

The user needs to first add a gateway, and then add terminal devices to it.

17.1.1 Gateway

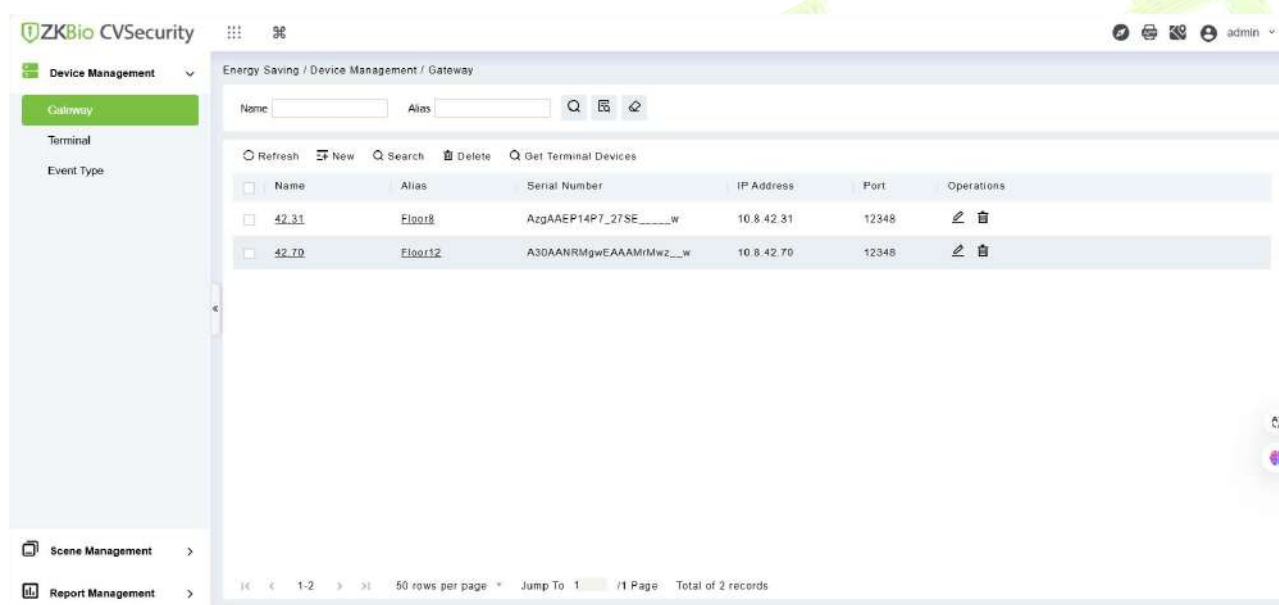


Figure 17- 1 Gateway

17.1.1.1 New

Click on **Device Management > Gateway > New** enter the required details and then click **Ok** to add a new gateway.

New

Name*

42.31

IP Address*

10 . 8 . 42 . 31

Serial Number*

AzgAAEP14P7_27SE

Alias*

Floor8

Gateway Port*

12348

Token*

Gdwn8TKk1NumkuteplcV

Model*

OD_ZKTECO_SOHOMO

Please contact sales to obtain Token and Model!

OK

Cancel


Figure 17- 2 New Gateway

Parameter	Description
Name	Enter name of the gateway
Alias	Enter the gateway's alias, which can be displayed in the ZKBio Zexus APP
IP Address	Enter IP address of the gateway
Gateway Port	Gateway port number, default is 12348
Serial Number	The serial number of the gateway The gateway's Token value verification. Can be generated through the Lifesmart APP. Verification of the gateway's Model value, also generated through the Lifesmart app.
Token	The serial number of the gateway The gateway's Token value verification. Can be generated through the Lifesmart APP The gateway's Model value verification. Can be generated through the Lifesmart app.
Model	The serial number of the gateway The gateway's Token value verification. Can be generated through the Lifesmart APP The gateway's Model value verification. Can be generated through the Lifesmart app.

Table17-1 Linkage parameters


17.1.1.2 Search

Click **Search** allows you to add items through the search function.

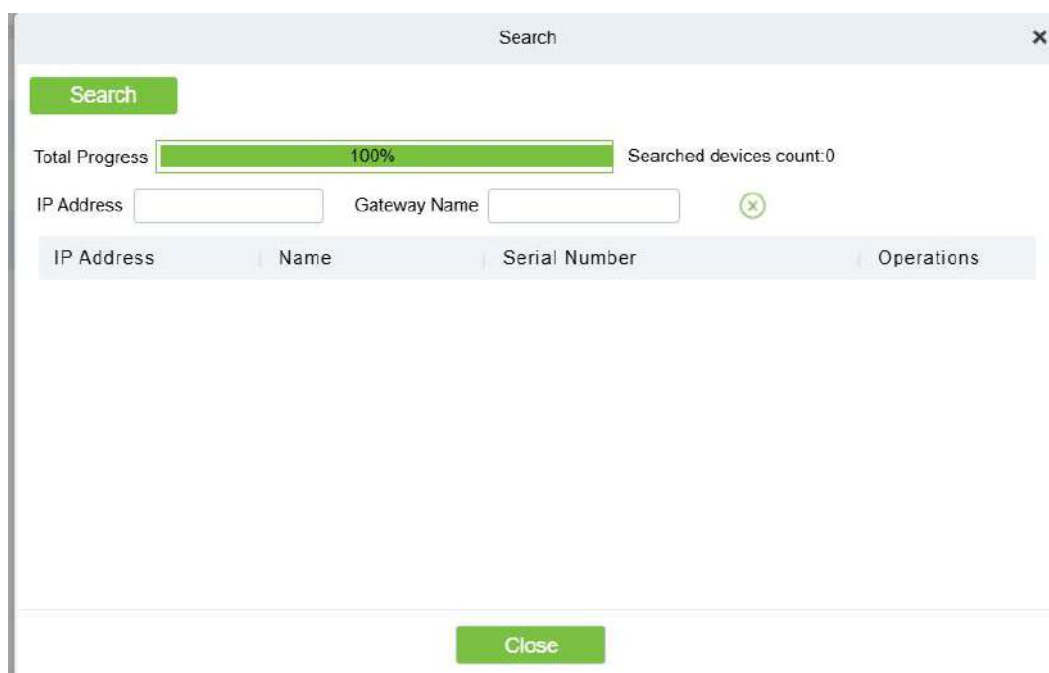**Figure 17- 3 New Gateway**

17.1.1.3 Delete

Click **Delete** removes the gateway.

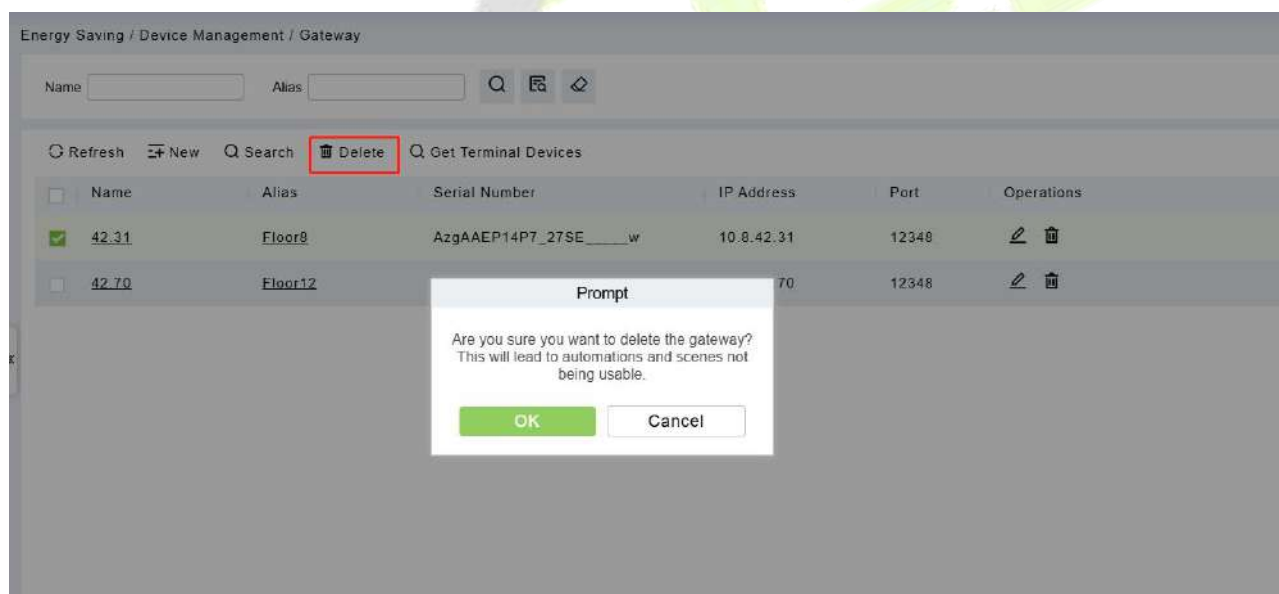**Figure 17- 4 Delete Gateway**

17.1.1.4 Get Terminal Device

If the user has already added terminals to this gateway through the Lifesmart app, they can click 'Get Terminal Devices' to display all terminals connected to the gateway in the **Energy Saving -> Device Management -> Terminal** list.

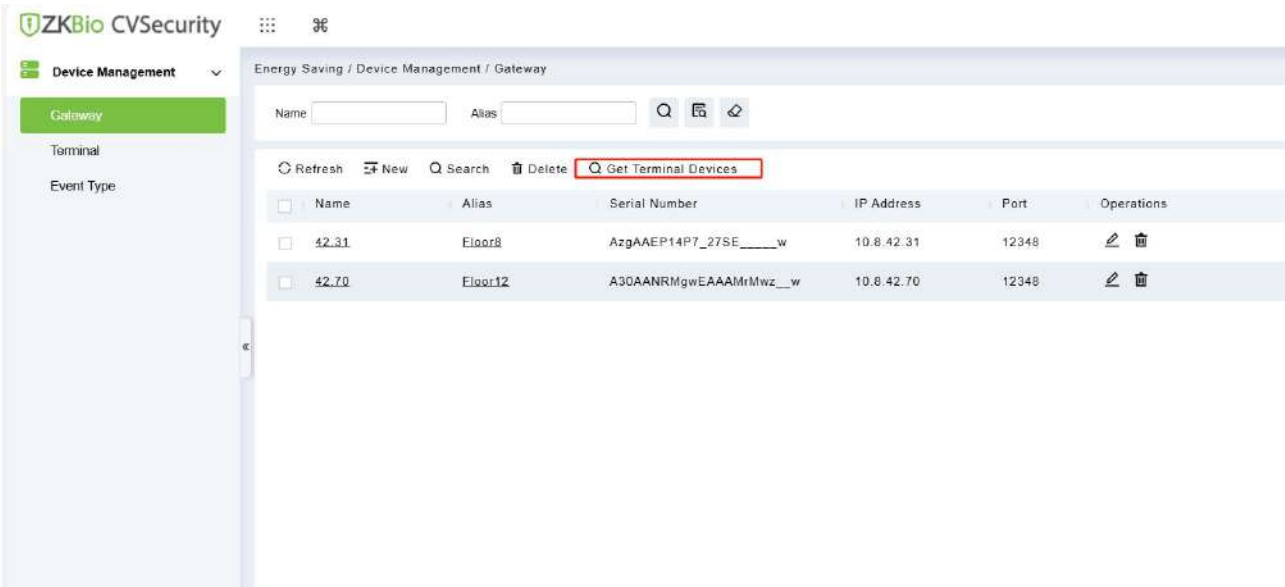


Figure 17- 5 Get Terminal Device

17.1.2 Terminal

Terminals must be added to the gateway through the app and cannot be added directly through the software.

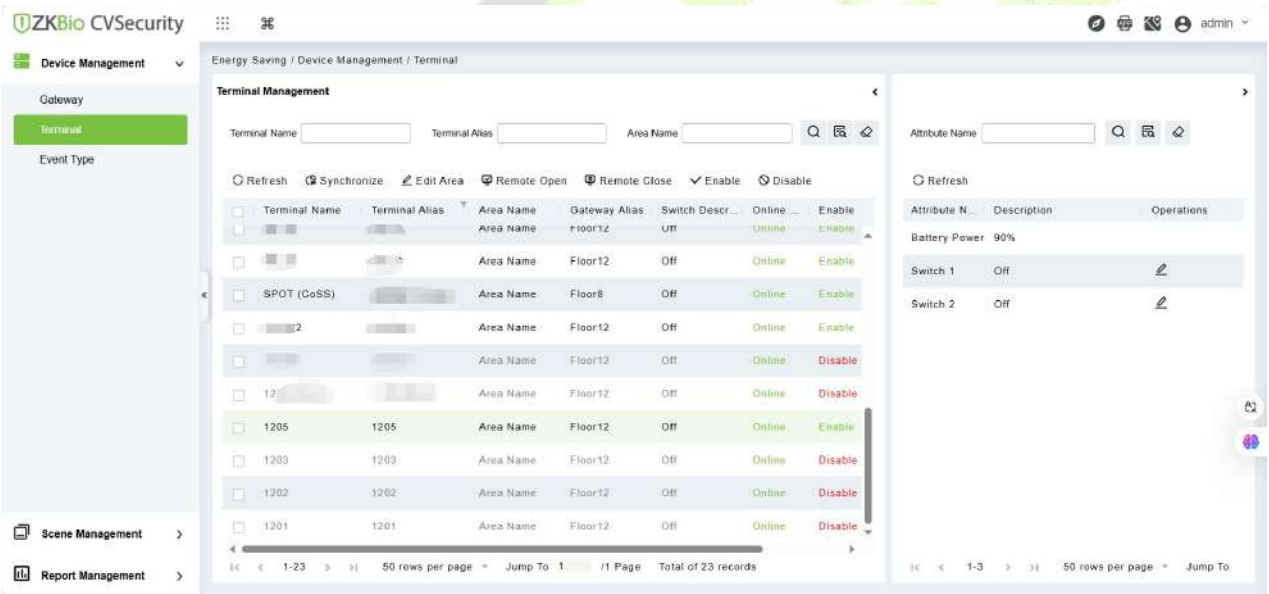


Figure 17- 6 Terminal

17.1.2.1 Synchronize

Clicking the **Synchronize** button will displays the terminal devices added to the gateway in the list.

17.1.2.2 Edit Area

Modify the location area of the terminal.

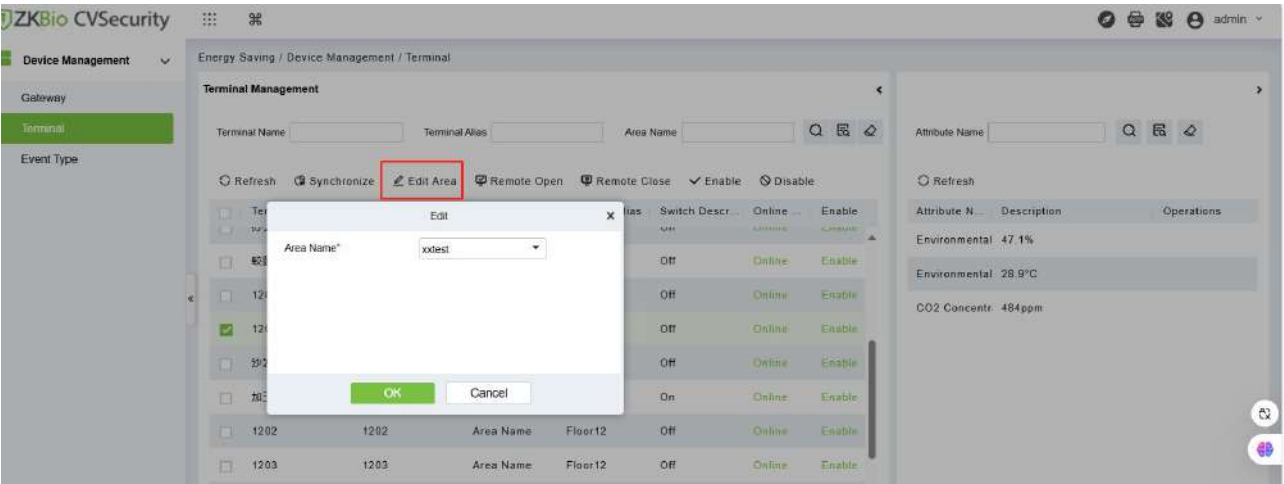


Figure 17- 7 Edit Area

17.1.2.3 Remote Open / Close

Remotely turn terminals on/off, such as air conditioners, lights, and other devices.

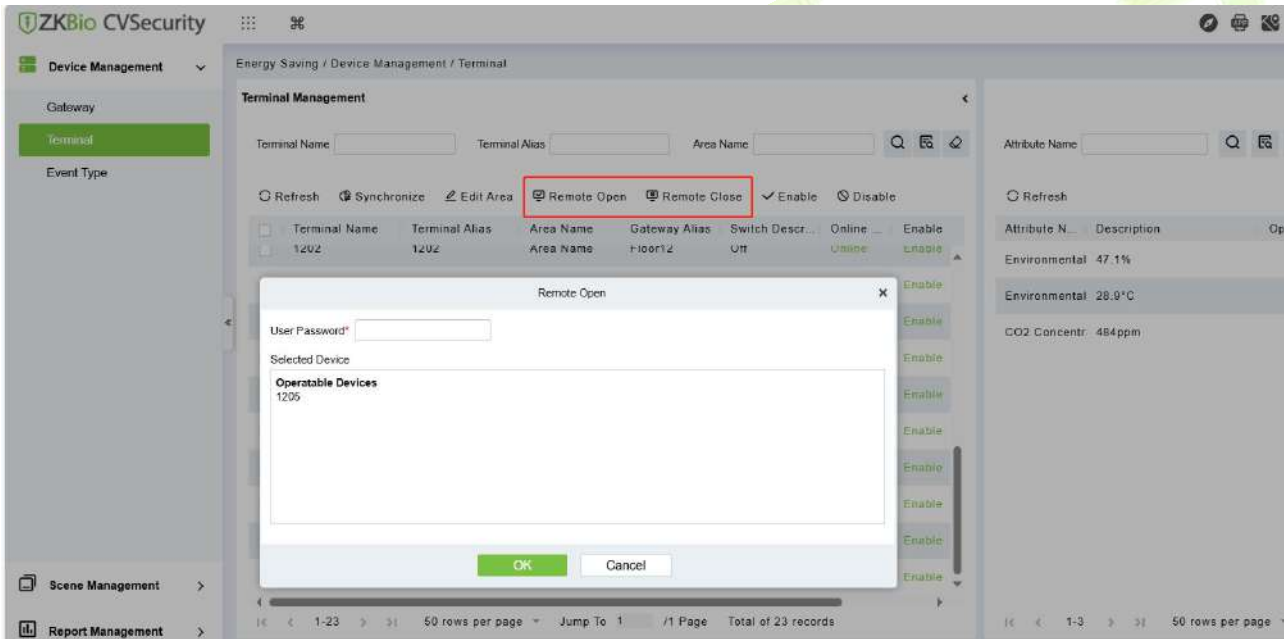


Figure 17- 8 Remote Open

17.1.2.4 Enable / Disable

Remotely enable or disable terminals.

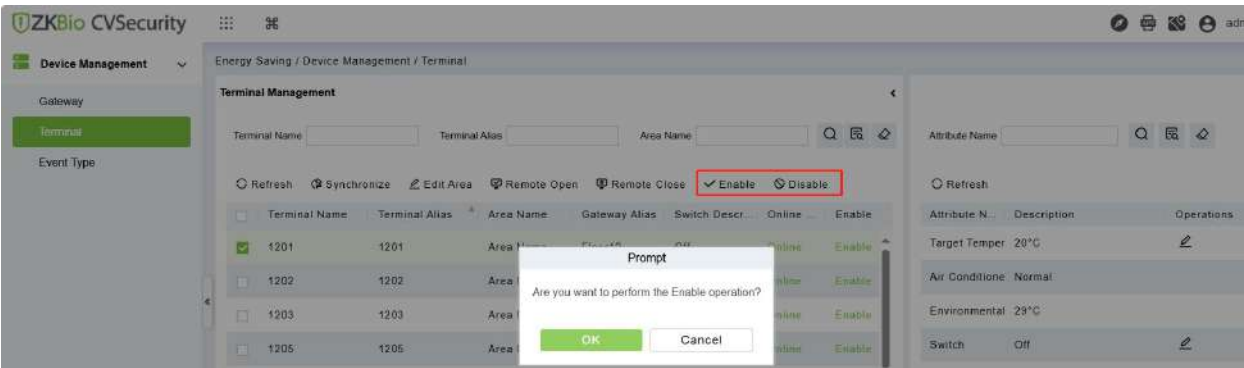


Figure 17- 9 Enable / Disable

17.1.2.5 Terminal Control

Once a terminal is selected, its current status will be displayed in the window on the right.

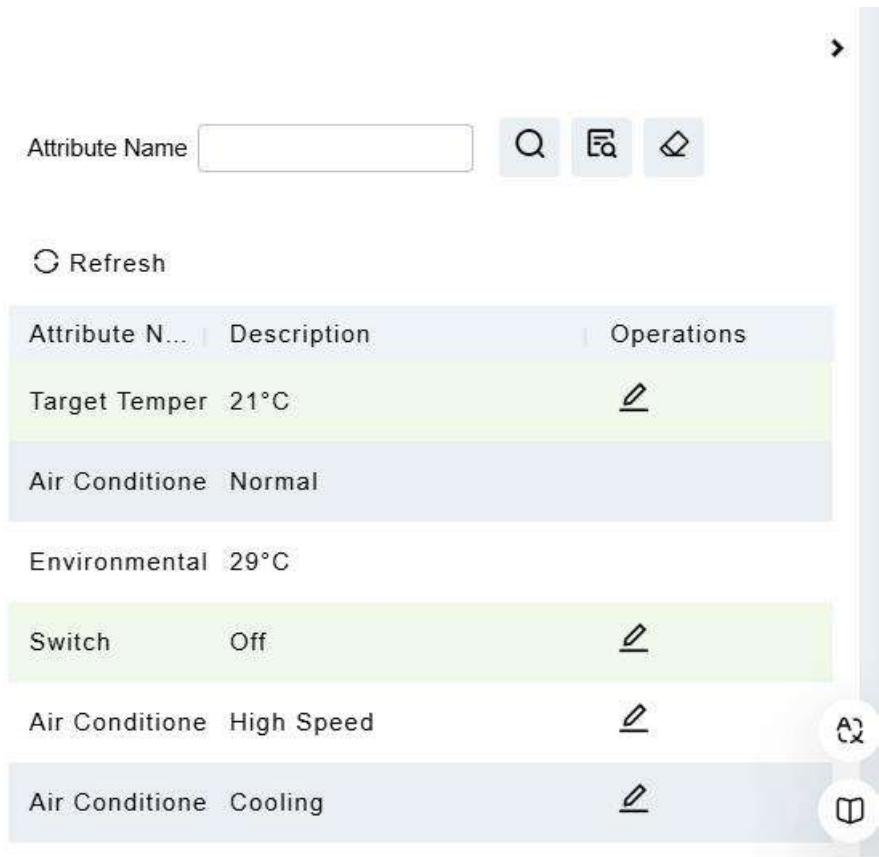


Figure 17- 10 Terminal Control

Click the edit button to adjust the terminal.

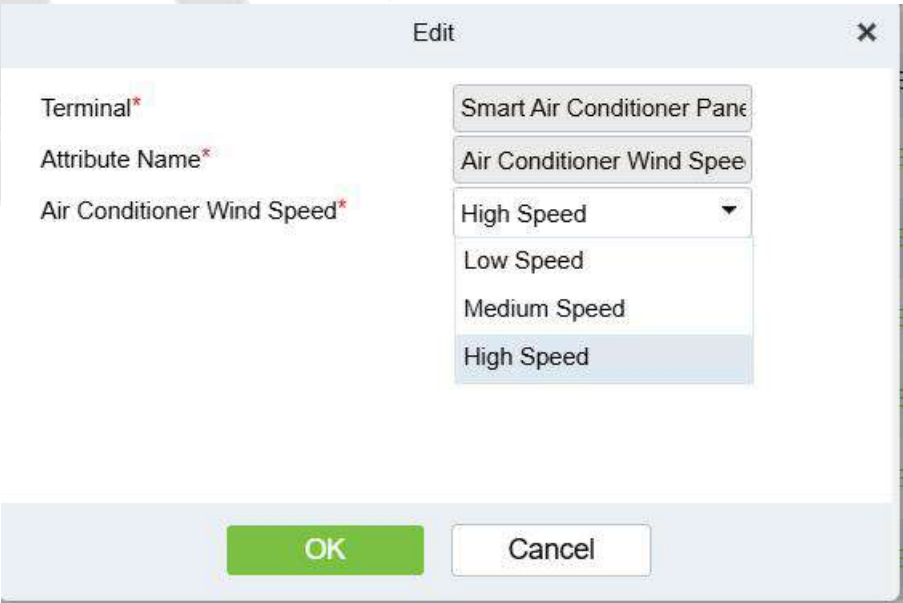


Figure 17- 11 Terminal Control

17.1.3 Event Type

The event type display all event types of the module, allowing administrators to edit event values, such as setting triggers for alarms when CO2 levels exceed a specified threshold.

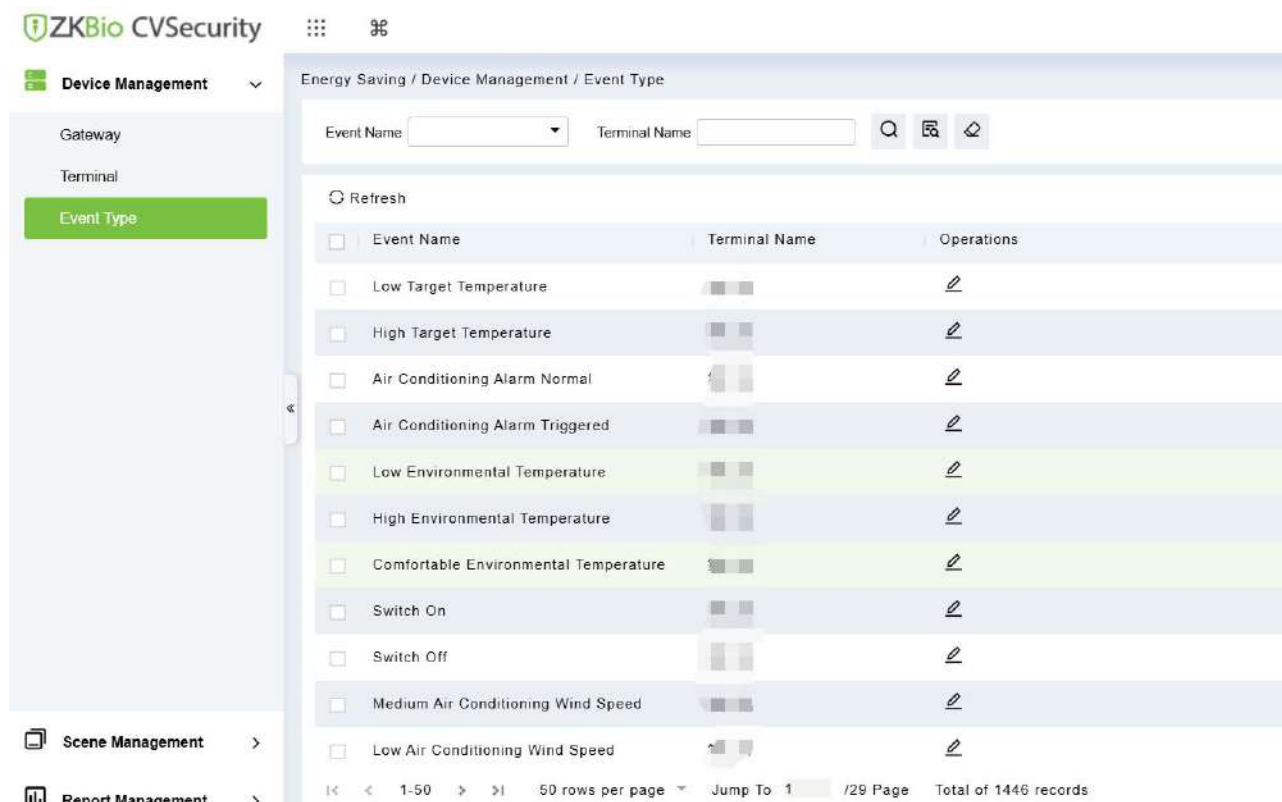



Figure 17- 12 Event Type

Click on the  icon to edit the values of specific event types.

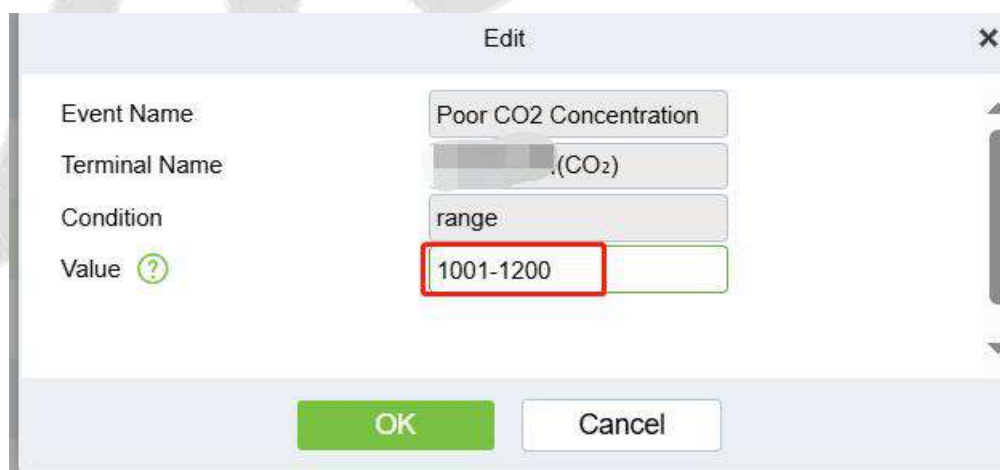


Figure 17- 13 Event Type

17.1.4 Scene Management

Linkage: By configuring the terminal's attribute values to meet specific conditions, certain scene functions can be triggered simultaneously. For example, when a human sensor detects that no one is present in a given area, the lights and air conditioning can be automatically turned off.

Scene Configuration: Configure the attribute values to trigger a scene mode through linkage. It can also be integrated with other modules, such as space management (e.g., meeting rooms), to activate a

scene, such as triggering a specific scene after a meeting check-in.

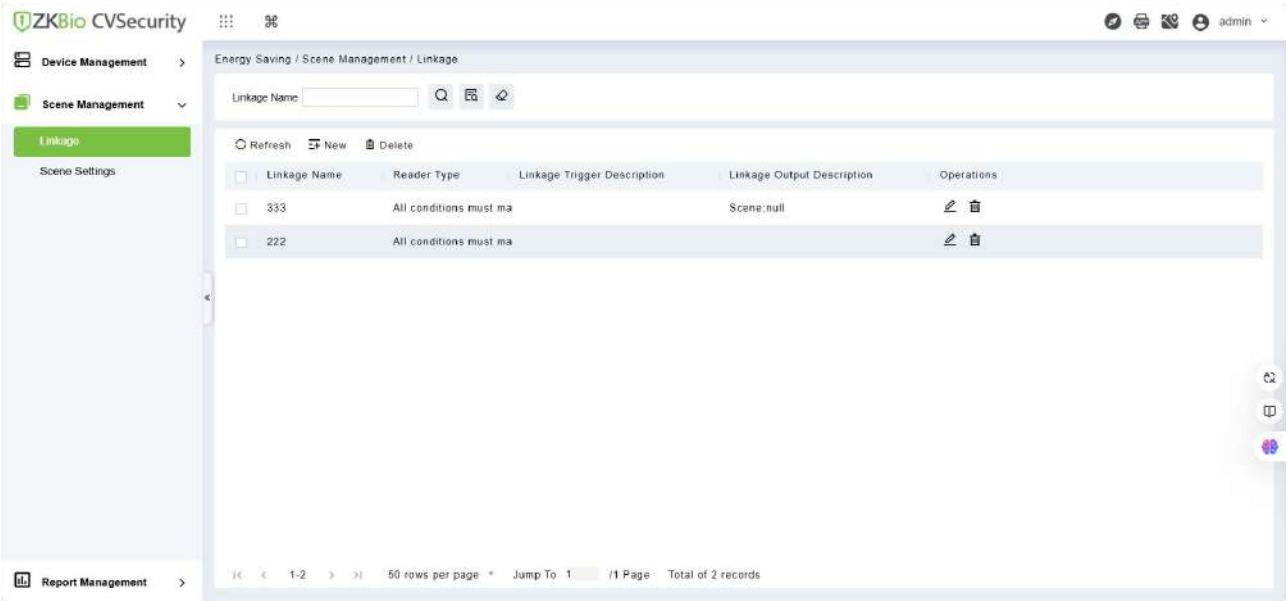


Figure 17- 14 Linkage

17.1.4.1.1 Create a New Linkage

Click on the **Scene Management > Linkage > New** it will displays the new linkage interface here, enter the required details click **OK** to create a new linkage.

Figure 17- 15 Linkage

Linkage Trigger List: Configure the conditions that activate the linkage.

Attribute Value: Configure the corresponding output actions.

Scene: Select the scene mode to be triggered (please configure this in advance under Scene Settings).

17.1.4.1.2 Delete Linkage

After selecting the linkage name, click the **Delete** button to remove it.

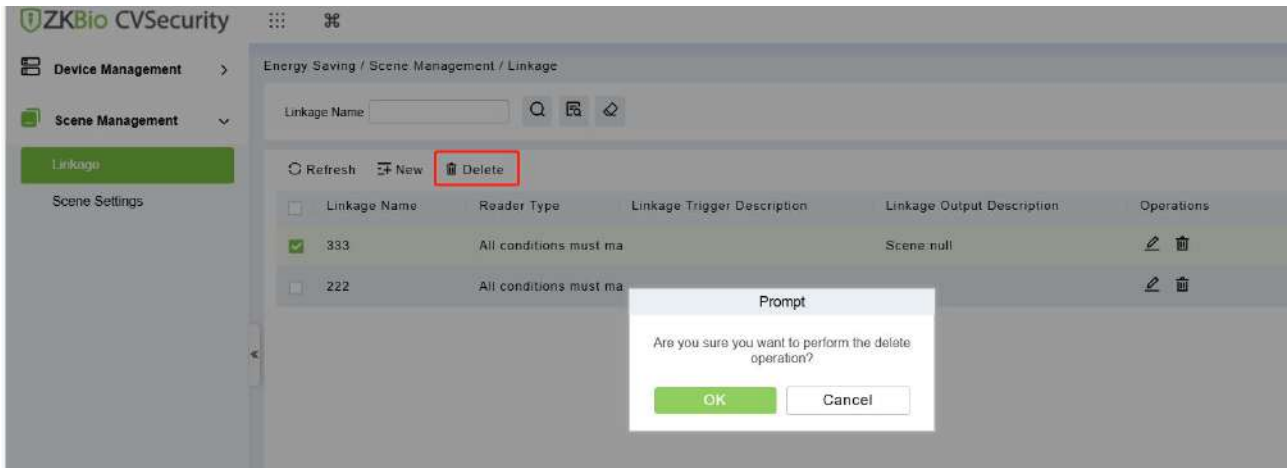


Figure 17- 16 Delete Linkage

17.1.4.2 Scene Setting



Figure 17- 17 Scene Setting

17.1.4.2.1 New Scene

Configure the scene name and attribute values for the scene mode, as shown in the figure below.

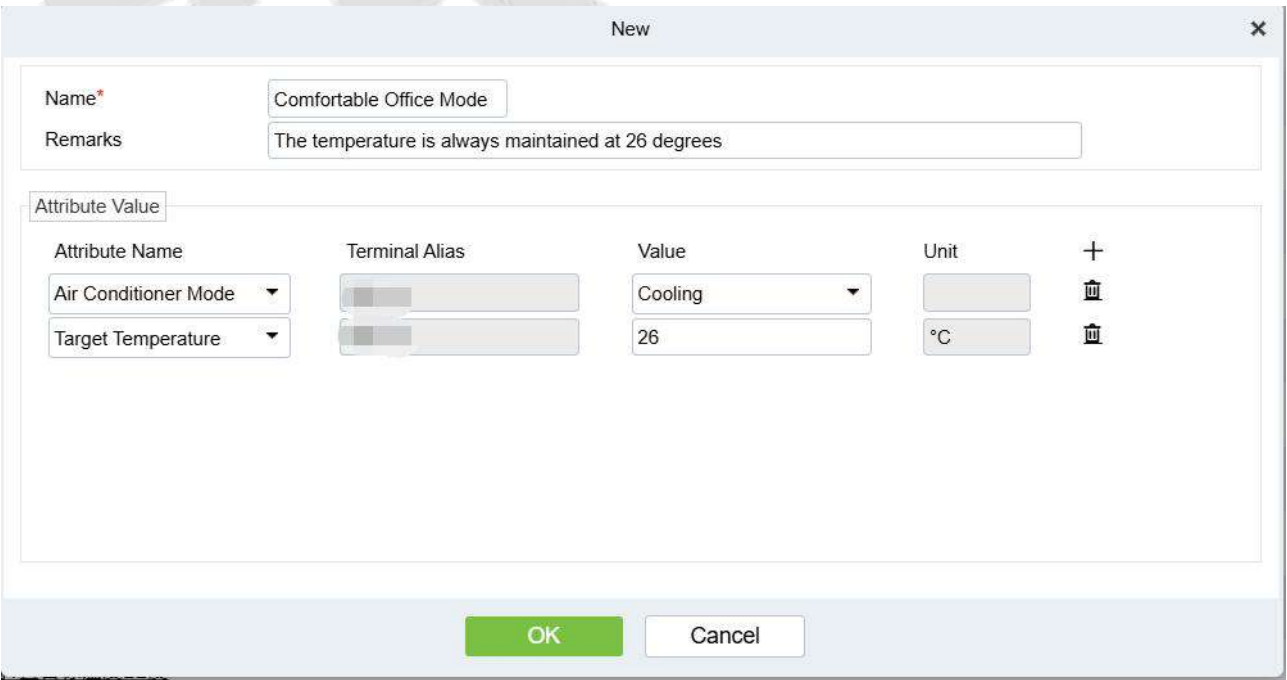


Figure 17- 18 New Scene

17.1.4.2.2 Delete Scene

Select the scene then click **Delete** button to delete the scene mode.

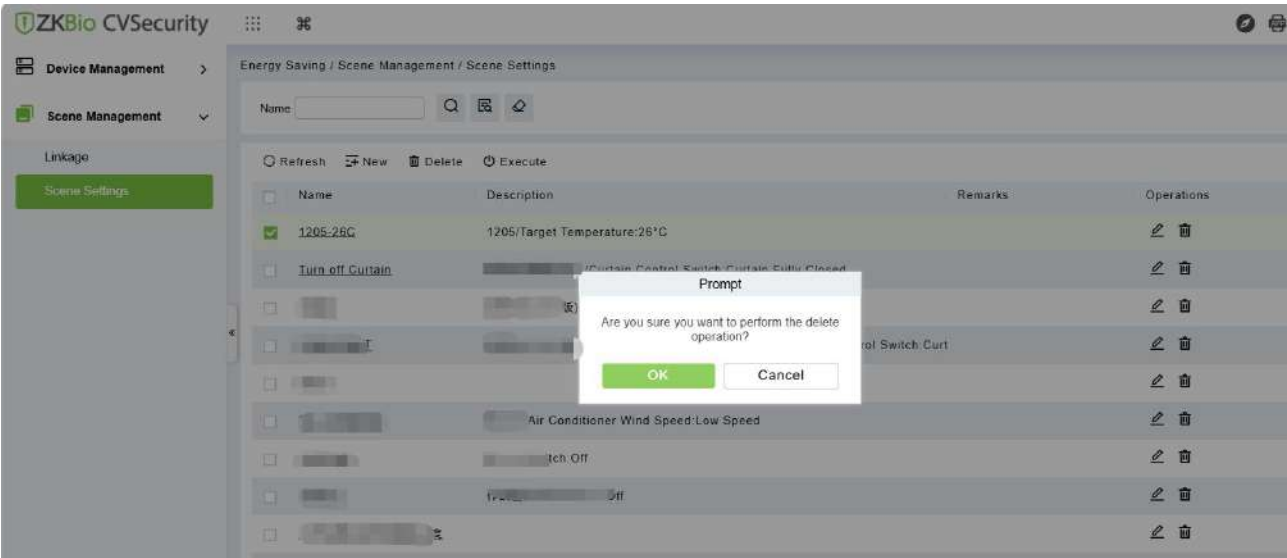


Figure 17- 19 Delete Scene

17.1.4.2.3 Execute Scene

Click the **Execute** button, enter the password, and then immediately activate the scene mode without waiting for the linkage conditions to be triggered.

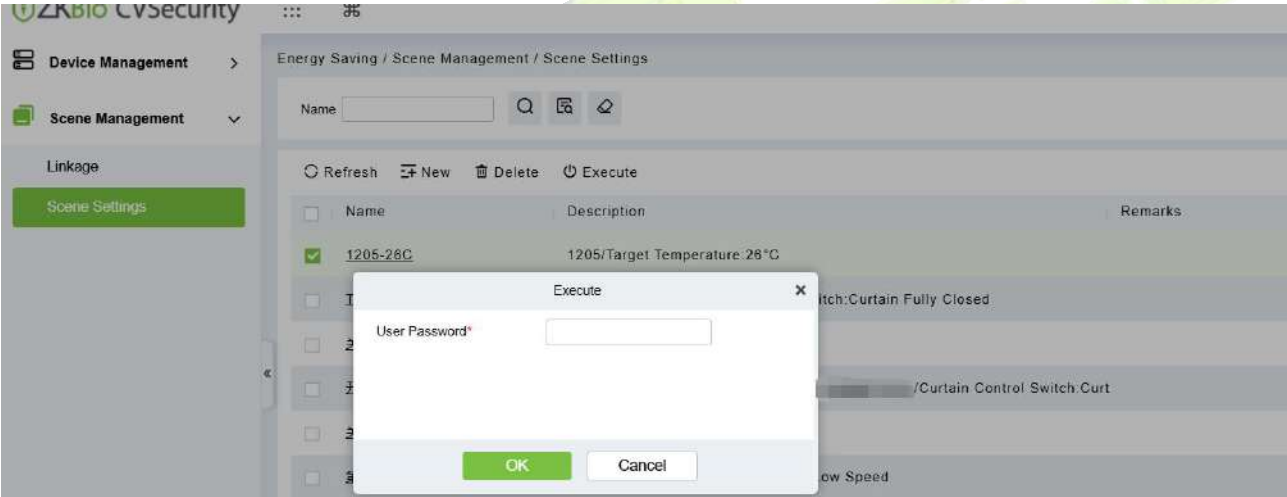


Figure 17- 20 Execute Scene

17.1.5 Report Management

17.1.5.1 Linkage Report

Click on the **Report Management > Linkage Report** to view the linkage report.

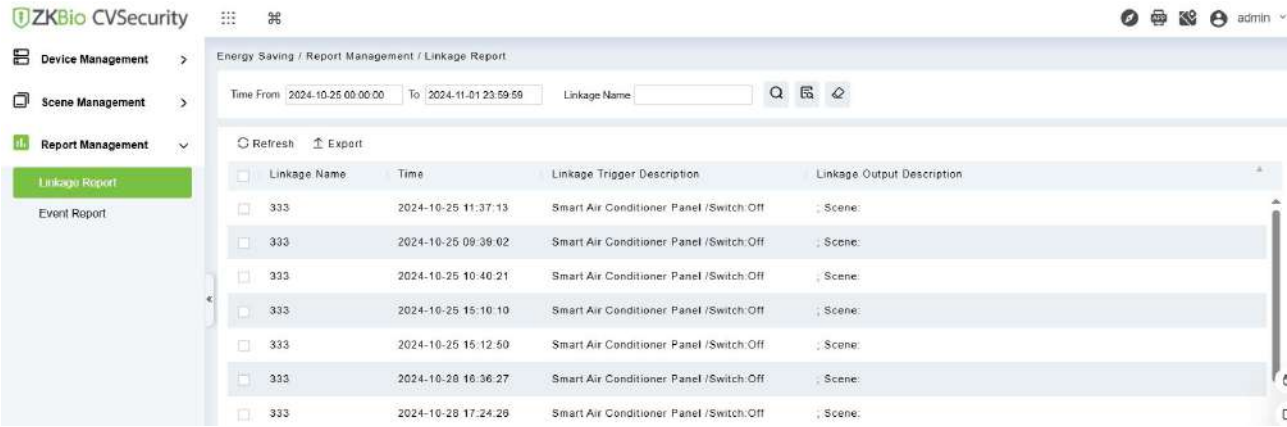


Figure 17- 21 Linkage Report

Export Linkage Report

Click on the **Report Management > Linkage Report > Export** to export the linkage reports.

Linkage Report			
Linkage Name	Time	Linkage Trigger Description	Linkage Output Description
333	2024-10-25 11:37:13	Smart Air Conditioner Panel /Switch:Off	: Scene:
333	2024-10-25 09:39:02	Smart Air Conditioner Panel /Switch:Off	: Scene:
333	2024-10-25 10:40:21	Smart Air Conditioner Panel /Switch:Off	: Scene:
333	2024-10-25 15:10:10	Smart Air Conditioner Panel /Switch:Off	: Scene:
333	2024-10-25 15:12:50	Smart Air Conditioner Panel /Switch:Off	: Scene:
333	2024-10-28 16:36:27	Smart Air Conditioner Panel /Switch:Off	: Scene:
333	2024-10-28 17:24:26	Smart Air Conditioner Panel /Switch:Off	: Scene:

Figure 17- 22 Export Linkage Report

17.1.5.2 Event Report

Click on the **Report Management > Event Report** to view the event report.

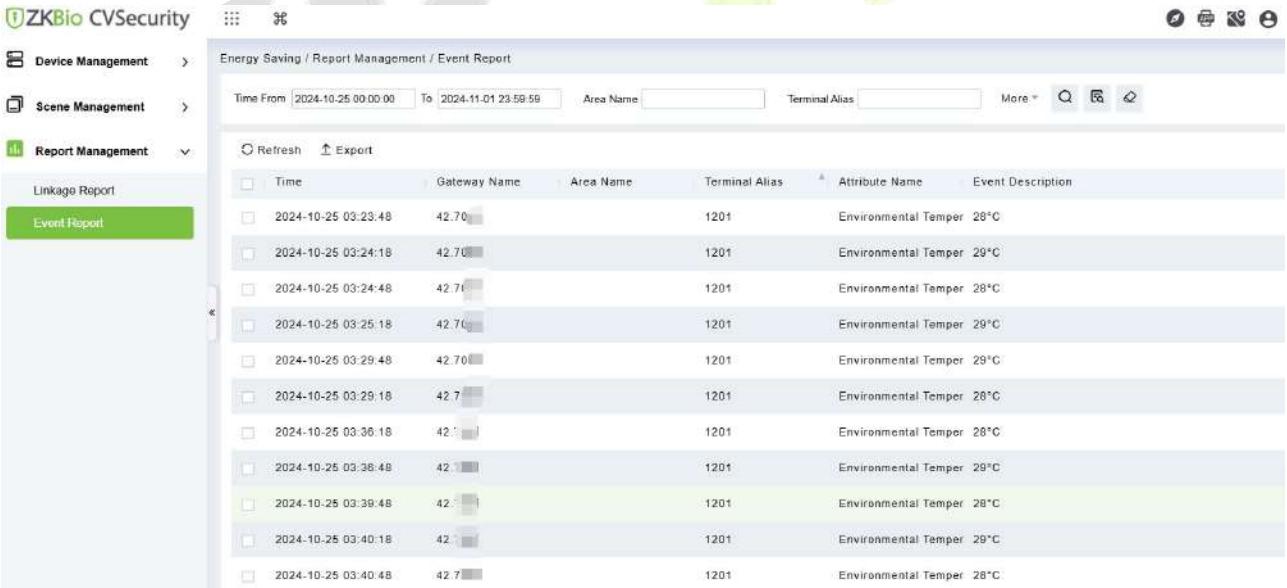


Figure 17- 23 Event Report

Export Event Report

Click on the **Report Management > Event Report > Export** to export the event reports.

Event Report					
Time	Gateway Name	Area Name	Terminal Alias	Attribute Name	Event Description
2024-10-25 03:23:48	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:24:18	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:24:48	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:25:18	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:29:48	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:29:18	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:36:18	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:36:48	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:39:48	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:40:18	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:40:48	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:41:18	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:42:48	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:43:18	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:51:18	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:51:48	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:54:18	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:54:48	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:56:18	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:56:48	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:57:18	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:57:48	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:58:48	42.7		1201	Environmental Temperature	28° C
2024-10-25 03:59:18	42.7		1201	Environmental Temperature	29° C
2024-10-25 03:59:48	42.7		1201	Environmental Temperature	28° C
2024-10-25 04:00:18	42.7		1201	Environmental Temperature	29° C
2024-10-25 04:01:18	42.7		1201	Environmental Temperature	29° C

Figure 17- 14 Export Event Report

18 System Management

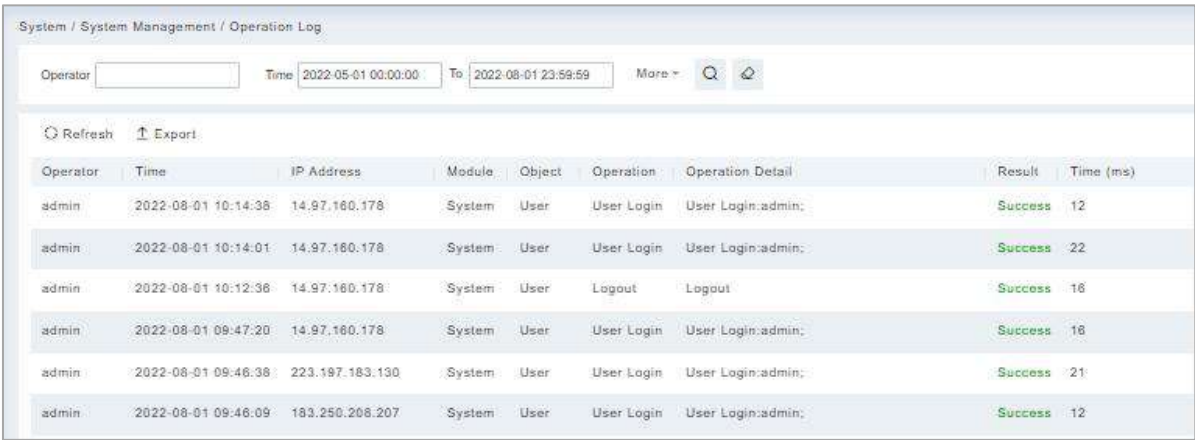
18.1 System Management

System settings primarily include assigning system users (such as company management user, registrar, access control administrator) and configuring the roles of corresponding modules, managing database, setting system parameters and view operation logs, etc.

18.1.1 Operation Log

● Operation Step

Step 1: Click System > System Management > Operation Log.



Operator	Time	IP Address	Module	Object	Operation	Operation Detail	Result	Time (ms)
admin	2022-08-01 10:14:38	14.97.160.178	System	User	User Login	User Login:admin;	Success	12
admin	2022-08-01 10:14:01	14.97.160.178	System	User	User Login	User Login:admin;	Success	22
admin	2022-08-01 10:12:38	14.97.160.178	System	User	Logout	Logout	Success	18
admin	2022-08-01 09:47:20	14.97.160.178	System	User	User Login	User Login:admin;	Success	18
admin	2022-08-01 09:46:38	223.197.183.130	System	User	User Login	User Login:admin;	Success	21
admin	2022-08-01 09:46:09	183.250.208.207	System	User	User Login	User Login:admin;	Success	12

Figure 18- 1 Operation Log Interface

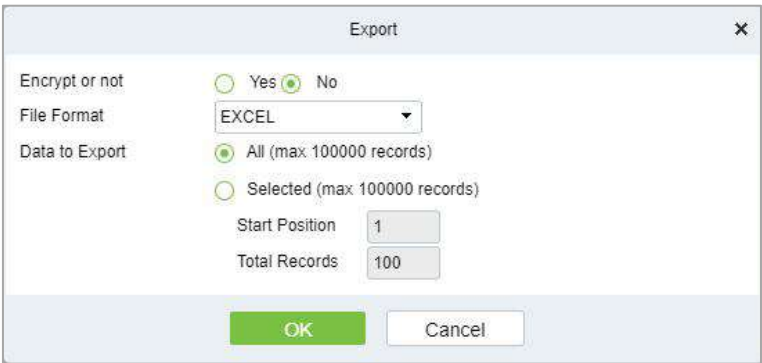
All operation logs are displayed in this page. You can query specific logs by conditions.

18.1.1.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the operation log.

18.1.1.2 Export

Export the operation log records, save to local. You can export to an Excel, PDF, TXT or CSV file. See the following figure.



Export

Encrypt or not

☐ Yes ☒ No

File Format

EXCEL

Data to Export

☒ All (max 100000 records)
☐ Selected (max 100000 records)

Start Position

1

Total Records

100

OK

Cancel

Figure 18- 2 Export Option

18.1.2 Database Management

● Operation Step

Step 1: Click **System > System Management > Database Management**.

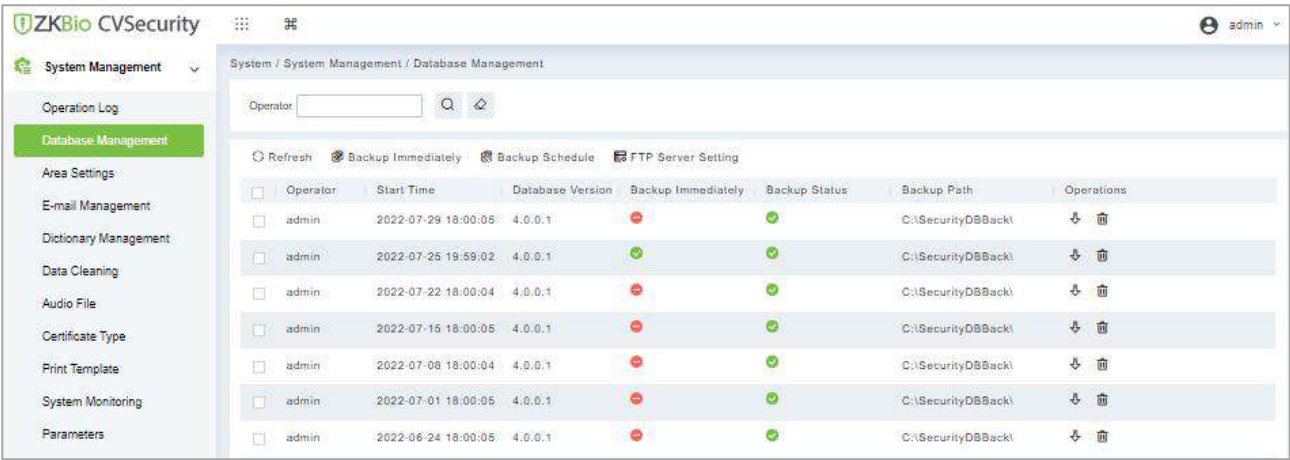


Figure 18- 3 Database Management Interface

All history operation logs about database backup are displayed in this page. You can refresh, backup and schedule backup database as required.

18.1.2.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the operation log.

18.1.2.2 Backup Immediately

Step 1: Click **Backup Immediately**.

Backup database to the path set in installation right now.

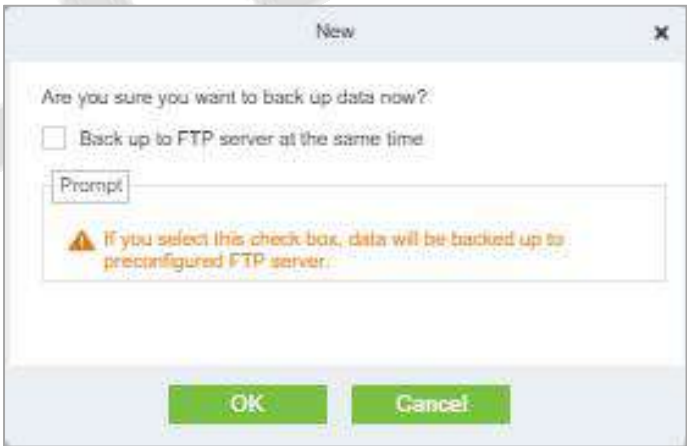


Figure 18- 4 Back up Immediately Option

⚠ **Note:** The default backup path for the system is the path selected during the software installation. For details, refer to '*Software Installation Guide*'.

18.1.2.3 Backup Schedule

Step 1: Click **Backup Schedule**:

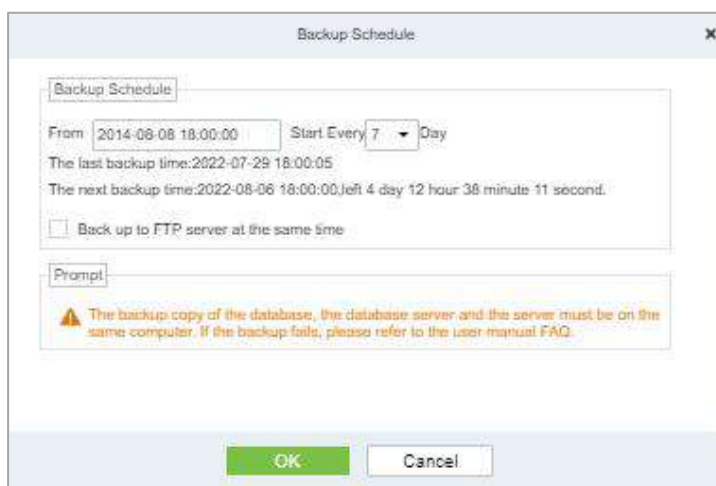


Figure 18- 5 Back up Schedule Option

Step 2: Set the start time, set interval between two automatic backups, click **OK**.

18.1.2.4 FTP Server Setting

When send mode is FTP Send Method, FTP parameters should be set. The parameters are FTP Server Address, Server Port, Folder Location, Username, and Password.

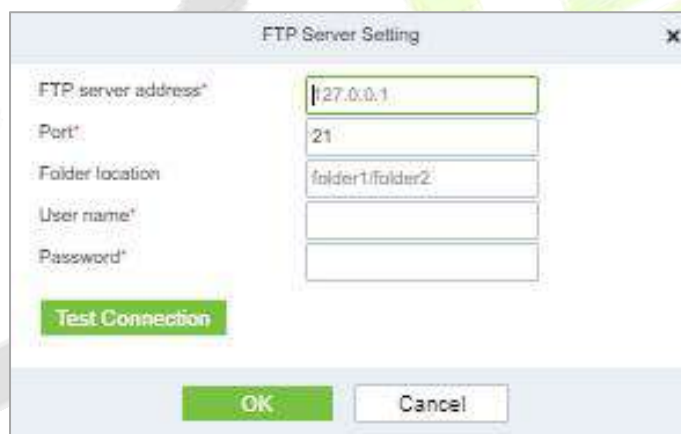


Figure 18- 6 FTP Server Setting

Parameter	Description
FTP Server Address	Enter the address FTP Server Address E.g.: such as 192.168.1.10.
Port	Enter the port number.
Folder Location	<ul style="list-style-type: none"> Enter the Folder location.
Username	Enter the Username of the FTP server.
Password	<ul style="list-style-type: none"> Enter the password for the FTP server.

Test Connection	<ul style="list-style-type: none">After configuring the FTP parameters, click Test Connection to test whether the FTP server is communicating normally.
-----------------	--

Table 18-1 Description of FTP Server Setting Parameters

After the setup is completed, click the **OK** button, save and return to the Database Management interface.

18.1.3 Area Settings

Area is a spatial concept which enables the user to manage devices in a specific area. After area setting, devices (doors) can be filtered by area upon real-time monitoring.

The system, by default, has an area named **Headquarters** and numbered **1**.

18.1.3.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the area setting page.

18.1.3.2 New

Step 1: Click **System > System Management > Area Setting > New**.

Step 2: Click **OK** to finish adding.



Figure 18- 7 Area Setting

Parameter	Description
Area Number	Enter the area number. It must be unique.
Area Name	Enter the area name. Any characters with a length less than 30.
Parent Area	<ul style="list-style-type: none">Determine the area structure of system.

Table 18-2 Description of area Setting Parameters

18.1.3.3 Export

Export the operation log records, save to local. You can export to an Excel, PDF, TXT or CSV file. Click Export See the following figure.

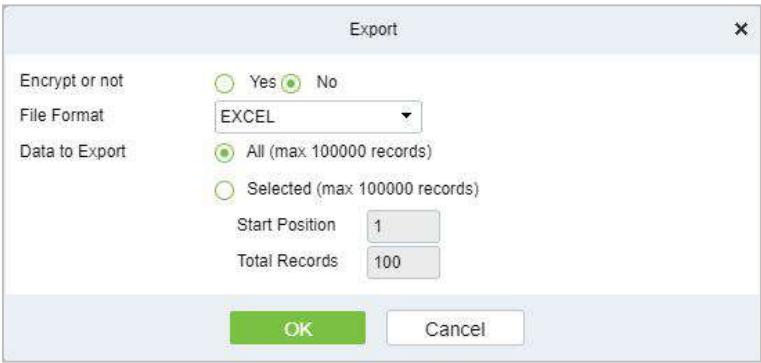


Figure 18- 8 Export Option

18.1.3.4 Edit/Delete an Area

Click **Edit** or **Delete** as required under **Operation** to go to the edit or delete page. Then click **OK** to save the setting.

18.1.3.5 Import

If there is a personnel file in your computer, you can Import it into the system.

Step 1: Click **Import**.

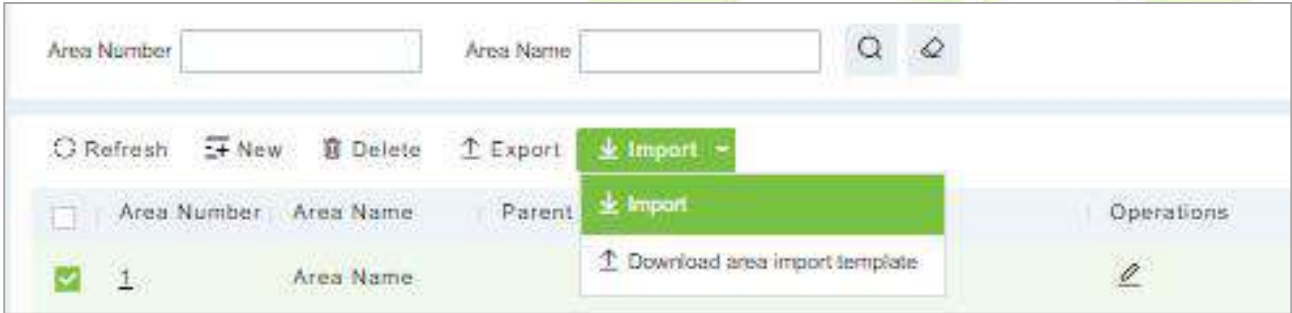


Figure 18- 9 Import Interface

Step 2: Select the file format to be imported (default is Excel) and choose the file to be imported.



Figure 18- 10 Import Option

Step 3: If you want to download the sample template excel file for importing, click the **Download Area Import Template**.

area import template				
Area Number	Area Name	Parent Area Number	Parent Area Name	Remarks

Figure 18- 11 Area Import Template

Step 4: Once the sample excel is downloaded, you can fill your data into it and save it. Then upload the saved file.

18.1.4 E-mail Management

Set the email sending server information. The recipient e mail should be set in Linkage Settings.

Step 1: Click System > **System Management** > **Email Management**

18.1.4.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the Email management page.

18.1.4.2 Delete

Click **Delete** as required under operation to go to the edit or delete page. Then click **OK** to save the setting.

18.1.4.3 Outgoing Mail Server Settings

Click System > **System Management** > **Email Management** > **Outgoing Mail Server Settings**.


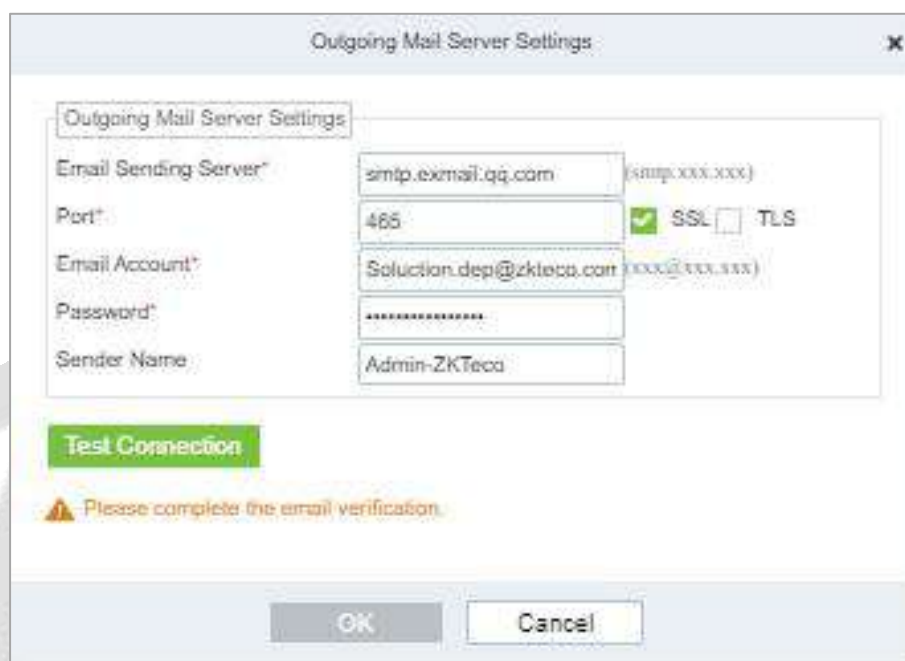


Figure 18- 12 Outgoing Mail Server Setting

Note: The domain name of E-mail address and E-mail sending server must be identical. For example, the Email address is test@gmail.com, and the E-mail sending server must be smtp.gmail.com.

18.1.4.4 Export

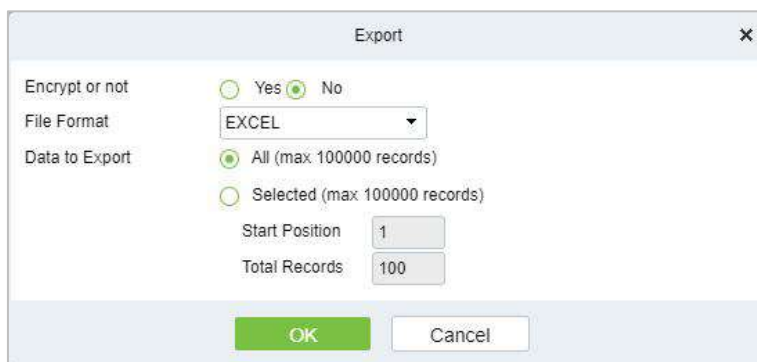Export the operation log records, save to local. You can export to an Excel, PDF, TXT or CSV file. Click Export See the following figure.




Export dialog box with the following options:

- Encrypt or not: ☐ Yes ☒ No
- File Format: EXCEL (dropdown)
- Data to Export: ☒ All (max 100000 records) ☐ Selected (max 100000 records)
- Start Position: 1 (input field)
- Total Records: 100 (input field)
- Buttons: OK, Cancel

Figure 18- 13 Export Option

18.1.5 Dictionary Management

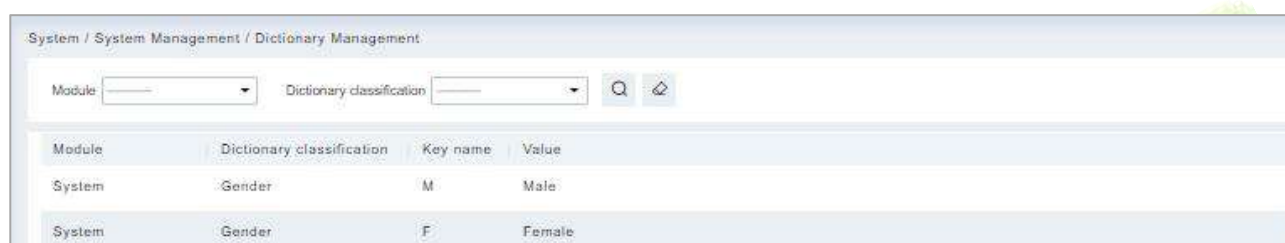Data dictionary management function, users can find the meaning of error code and self-check software errors.



System / System Management / Dictionary Management

Module: Dictionary classification:

Module	Dictionary classification	Key name	Value
System	Gender	M	Male
System	Gender	F	Female

Figure 18- 14 Dictionary Management Interface

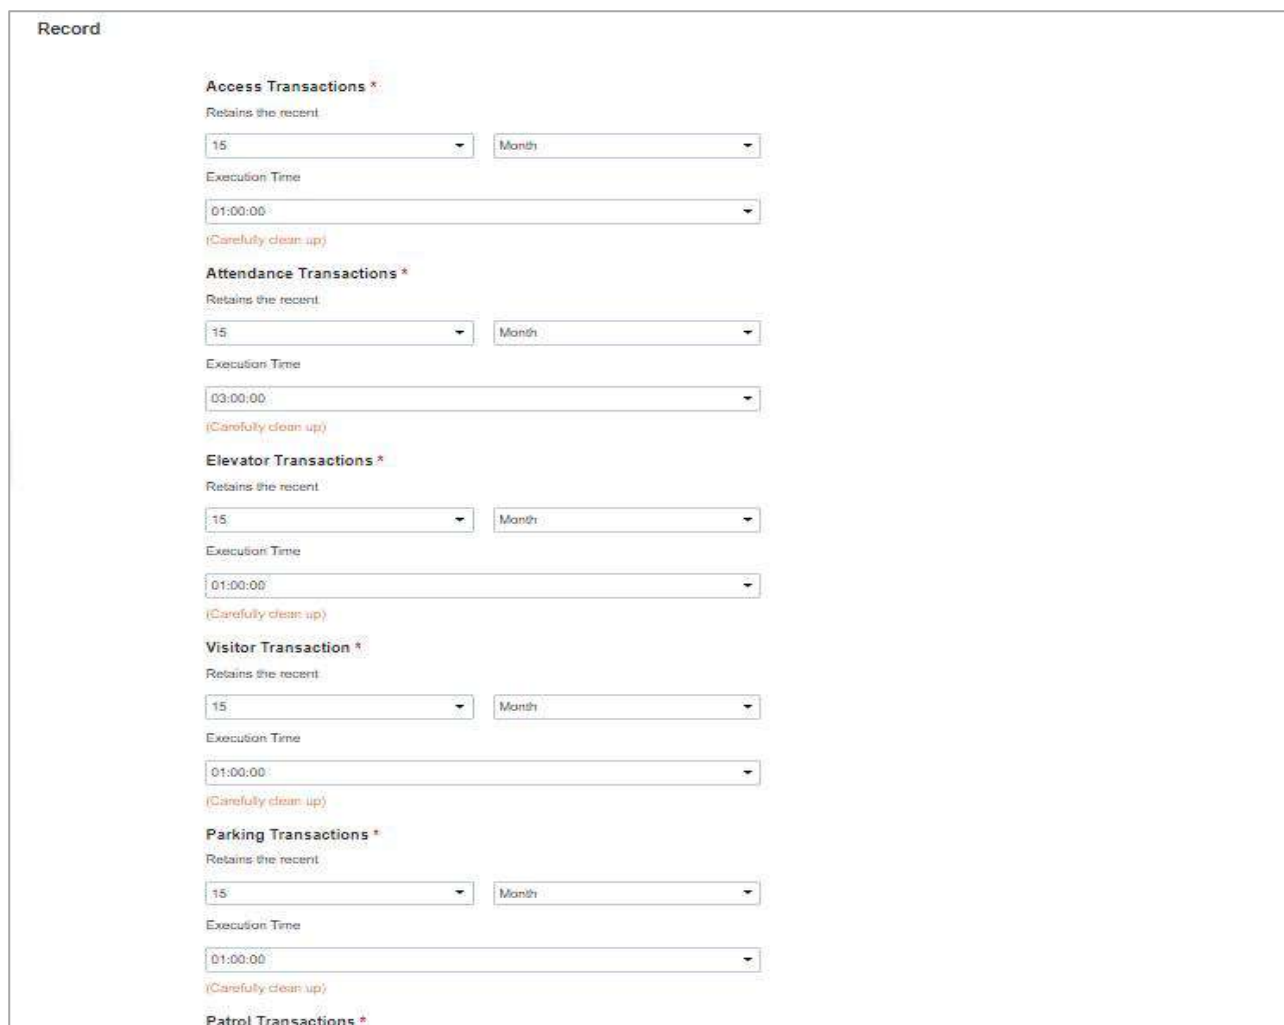
18.1.6 Data Cleaning

To save disk storage space, the expired data generated by the system must be cleaned up regularly

Click **System** > **System Management** > **Data Cleaning**. The data cleaning frequency can be set to Day/Week/Month.

18.1.6.1 Record

This option helps you to set the frequency of retain the recent data of the access transaction, attendance transaction, elevator transactions and visitor transactions etc.

The screenshot shows a 'Record' configuration page with five transaction types: Access Transactions, Attendance Transactions, Elevator Transactions, Visitor Transaction, and Parking Transactions. Each type has a 'Retains the recent' section with a numeric dropdown (all set to 15) and a unit dropdown (all set to Month). Below each is an 'Execution Time' dropdown (all set to 01:00:00) and a red warning text '(Carefully clean up)'. A 'Patrol Transactions' label is at the bottom without associated controls.

Record

Access Transactions *
Retains the recent
15 Month
Execution Time
01:00:00
(Carefully clean up)

Attendance Transactions *
Retains the recent
15 Month
Execution Time
03:00:00
(Carefully clean up)

Elevator Transactions *
Retains the recent
15 Month
Execution Time
01:00:00
(Carefully clean up)

Visitor Transaction *
Retains the recent
15 Month
Execution Time
01:00:00
(Carefully clean up)


Parking Transactions *
Retains the recent
15 Month
Execution Time
01:00:00
(Carefully clean up)

Patrol Transactions *

Figure 18- 15 Record Interface

18.1.6.2 Disk Space Cleanup

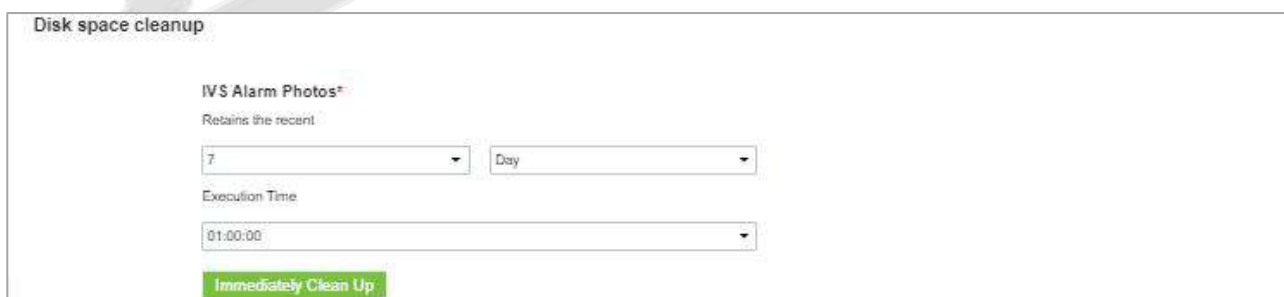In this option you can set the frequency of the retains the recent and also clean up the selected days data.

The screenshot shows a 'Disk space cleanup' configuration page. It has a section for 'IVS Alarm Photos*' with a 'Retains the recent' dropdown set to 7 and a unit dropdown set to Day. Below is an 'Execution Time' dropdown set to 01:00:00. At the bottom is a green 'Immediately Clean Up' button.

Disk space cleanup

IVS Alarm Photos*
Retains the recent
7 Day
Execution Time
01:00:00
Immediately Clean Up

Figure 18- 16 Space Cleanup Interface

18.1.6.3 System

This option helps you to clean up the system operation log, device commands and database backup file.

System

System Operation Log *

Retains the recent

15

months of data

Execution Time

03:00:00

(Continually clean up)

Device Commands *

Retains the recent

8

months of data

Execution Time

02:00:00

Immediately Clean Up

Database Backup File *

Retains the recent

8

months of data

Execution Time

04:00:00

Figure 18- 17 System Interface

18.1.7 Resource File

Click **System > Basic Management > Audio File** to open the following interface:

ZKBio CVSecurity

System Management

Operation Log

Database Management

Area Settings

E-mail Management

Dictionary Management

Data Cleaning

Audio File

System / System Management / Audio File

File Alias

Refresh New Delete

File Alias	Size	Suffix	Operations
Alarm	20KB	wav	

Figure 18- 18 Audio File Interface

18.1.7.1 New

- Operation Steps

Step 1: Click **System > System Management > Audio File > New**, the following window appears:

New

File Upload* Browse Not Uploaded Play

File Alias*

Size

Suffix

Please upload a wav or MP3 file, the size of 0 to 10MB!

Save and New OK Cancel

Figure 18- 19 New Option

Step 2: Browse to upload an audio file locally. The file format must be in WAV or mp3 format and must not exceed 10MB in size.

Parameter	Description
File Alias (Name)	Enter the file name. Any character, up to 30 characters.
Size	After uploading the file, the file size is automatically generated.
Suffix	●After uploading the file, the suffix of the file is automatically generated.

Table 18-3 Description New option parameter

18.1.7.2 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the Audio file page.

18.1.7.3 Edit

Click the file name or **Edit** to edit the audio file details which support replacing the audio files and editing the file name. The "size" and "suffix" automatically change depending on the size and type of audio file being uploaded. After editing, click **OK** and **Exit**.

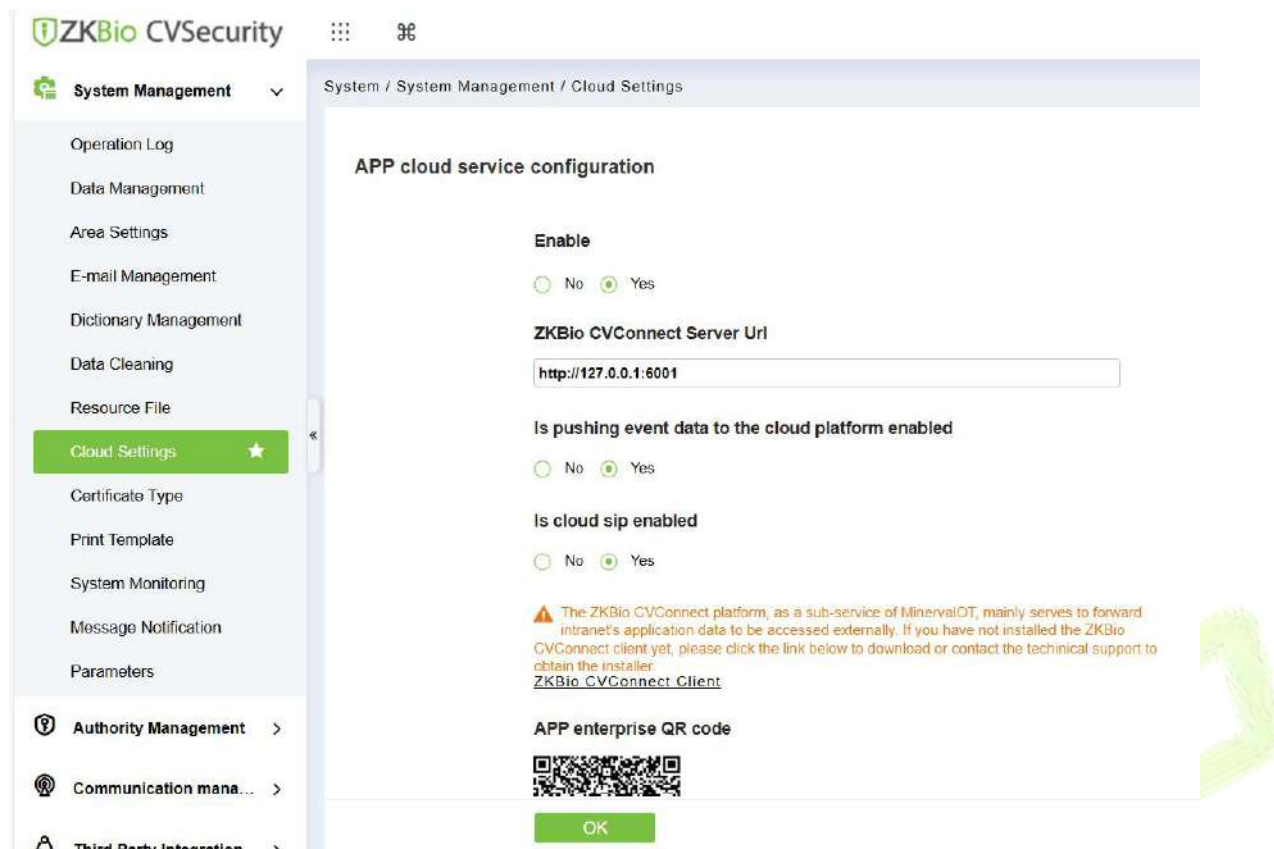
18.1.7.4 Delete

Select the specified audio file to delete and click Delete. Then click **OK** to save the setting.

18.1.8 Cloud Setting

Enable hybrid cloud services and then use the Mobile APP.

Please refer to the attachment for the operation steps of the Mobile APP.[ZK_ZKBio CVSecurity Mobile APP UM_EN v2.0_20240719.pdf](#)



Parameter Description

- **Enable:** Whether to enable hybrid cloud services, enabling them allows users to start using the Mobile APP.
- **ZKBio CVConnect Server Url:** The address of the ZKBio CVConnect Client that you need to bind.
- **Is pushing event to the cloud platform enabled:** Whether to store data on the cloud platform, the default is No, data will not be stored in the cloud, it will only be forwarded to the APP.
- **Is Cloud Sip enabled :** Whether to enable the cloud SIP feature, after enabling it, you can configure the extension number for use in the visual intercom module, refer to the [Extension Management](#)
- **APP enterprise QR Code :** The QR code for APP login generated after registering and activating in the ZKBio CVConnect.

18.1.9 Certificate Type

The system initializes 9 certificate types. User can add the required certificate type for personnel and visitor registration.

Step 1: Click System> Basic Management > Certificate Type.



Figure 18- 20 Certificate Type Interface

18.1.9.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the certificate type page.

18.1.9.2 New

● Operation Step:

To add the certificates, click System > Basic Management > Certificate Type> New:

Certificate Name: Enter the certificate name.

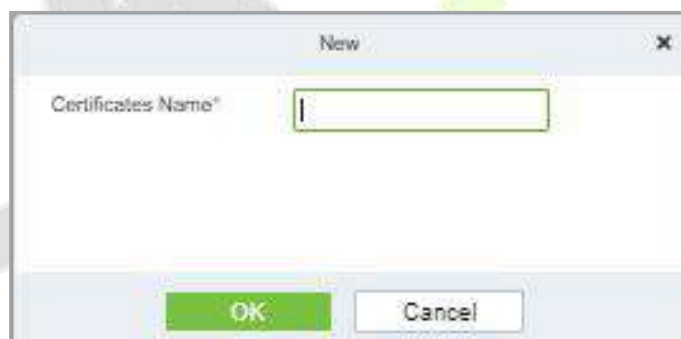


Figure 18- 21 New Option

18.1.9.3 Delete

Select the specified certificate to delete and click **Delete**. Then click **OK** to save the setting.

18.1.10 Print Template

You can manage the template for different cards: Personnel card template, Visitor receipt template/Card template are all configured here. The system initializes 5 types of personnel and visitor print templates.

Step 1: Click System> Basic Management> Print template.

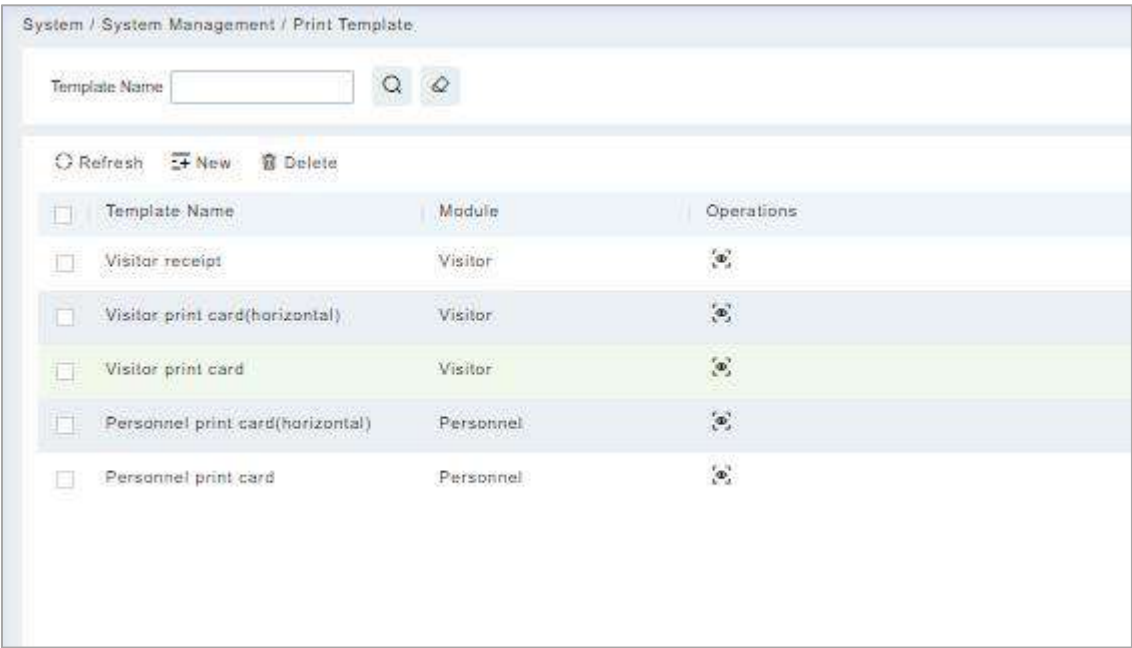


Figure 18- 22 Print Template

18.1.10.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the Print Template page

18.1.10.2 Add

Step 1: To add the certificates, click System > System Management > Print Template> New:

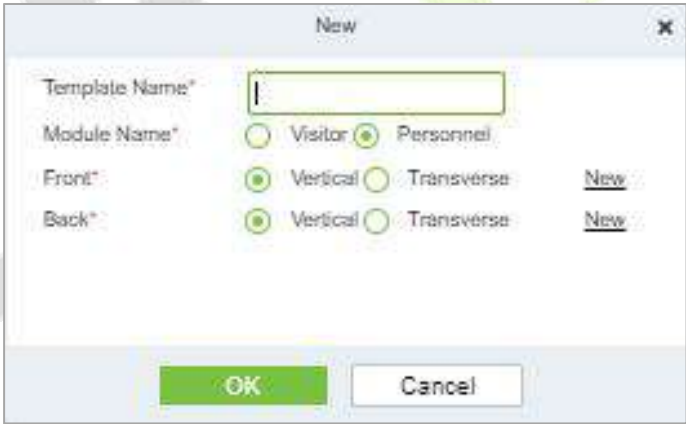


Figure 18- 23 New Option

18.1.10.3 Delete

Select the specified template to delete and click **Delete**.

18.1.11 System Monitoring

The system monitoring function displays the server processor usage, host memory usage, processor information, memory information, java virtual machine memory usage and other information.

Step 1: Click System> System Management > System Monitoring.

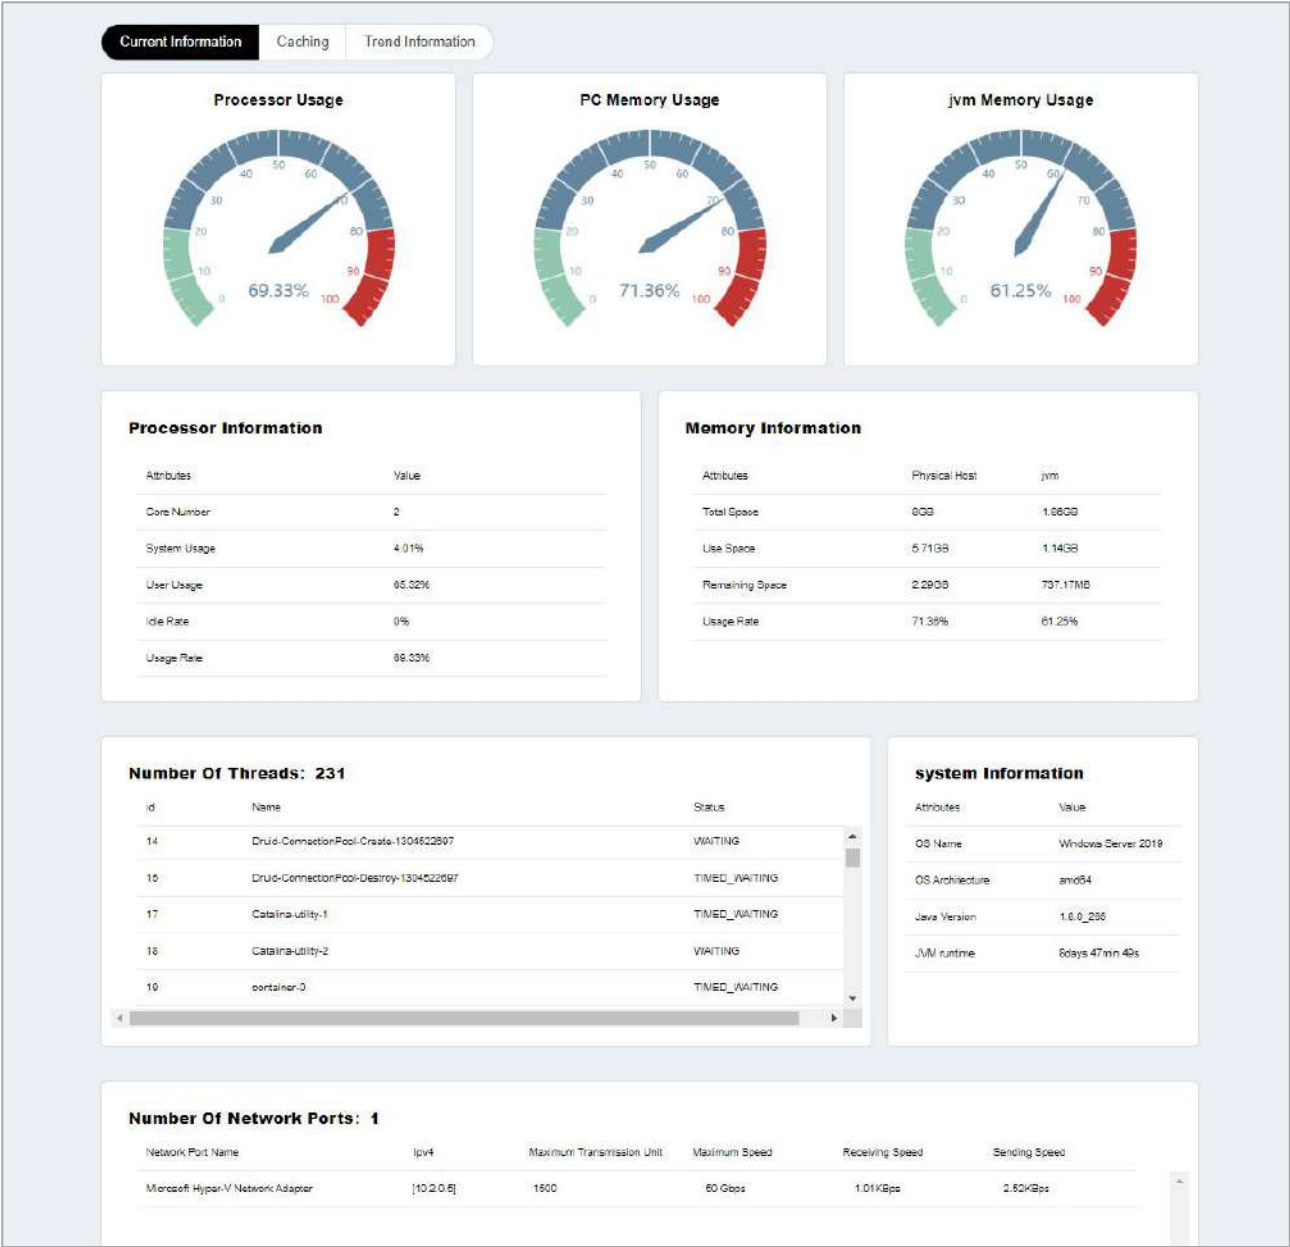


Figure 18- 24 System Monitoring Interface

18.1.11.1 Caching

This option helps you to know about memory information, Redis information, client information and also current data base.

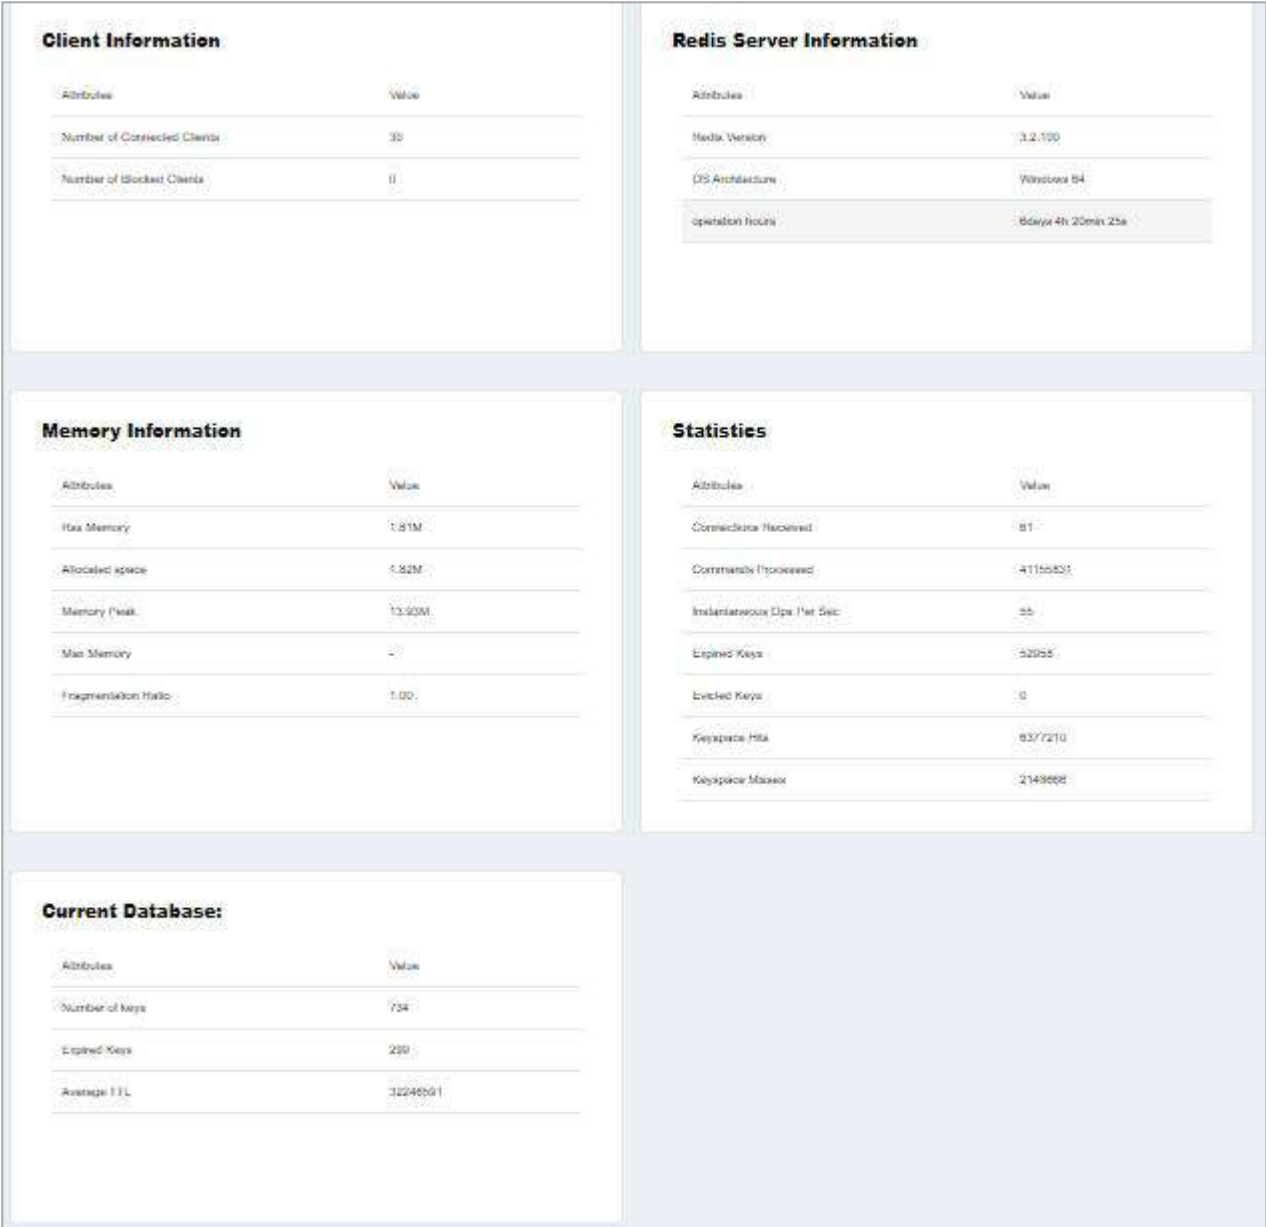


Figure 18- 25 Caching Interface

18.1.11.2 Trend Information

This option shows the graphical representation of processor usage, PC memory usage and JV memory usage.

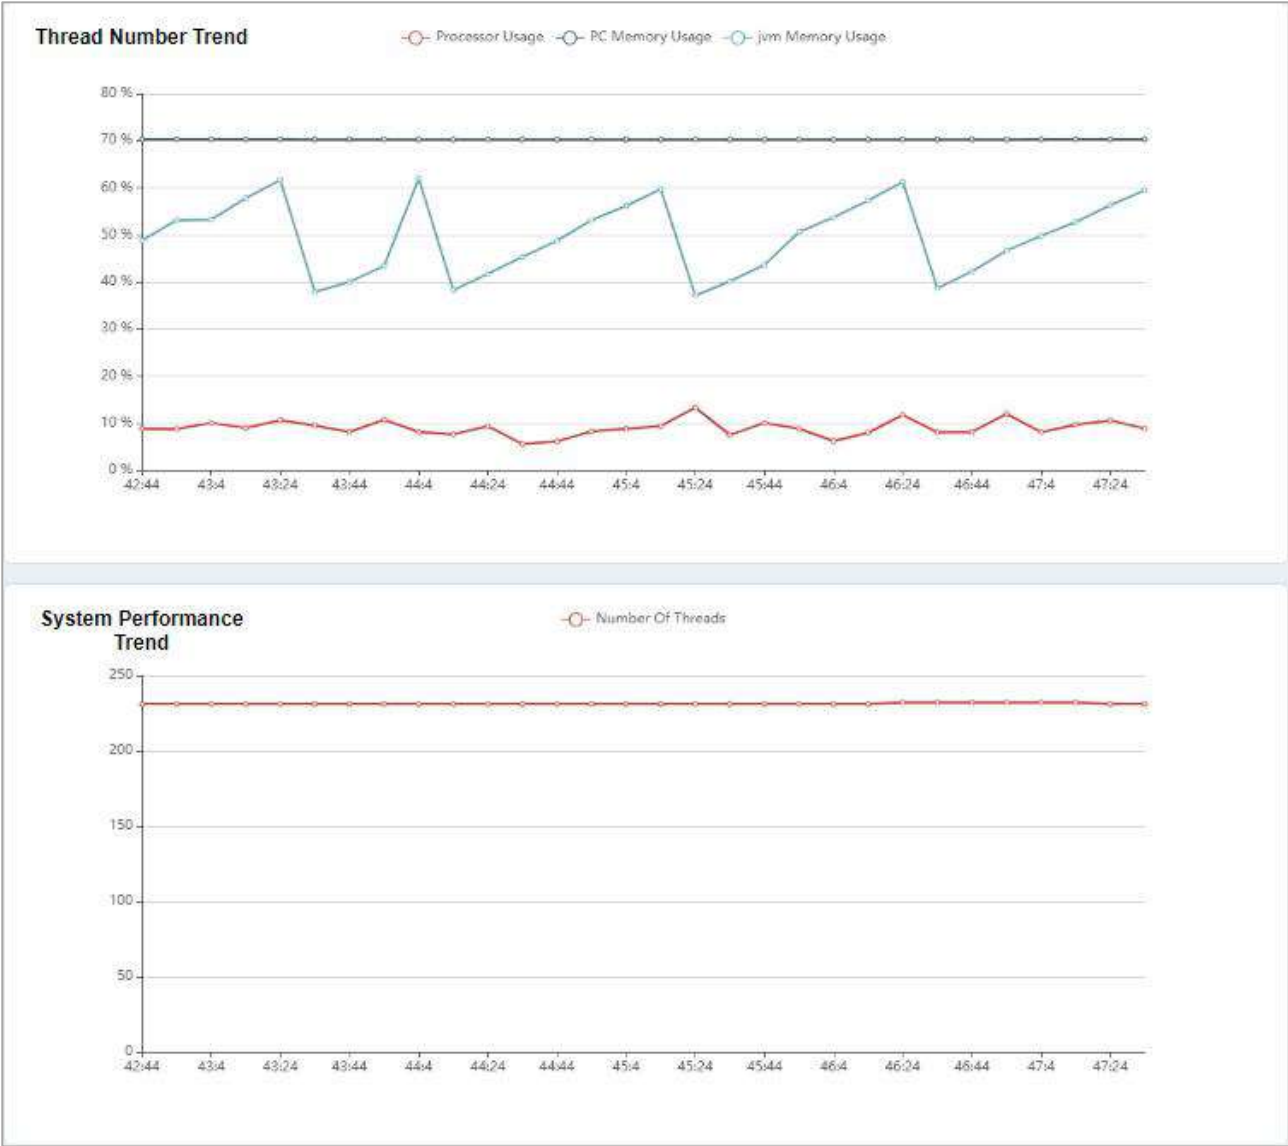


Figure 18- 26 Trend Information Interface

18.1.12Parameters

18.1.12.1 QR Code Setting

Step 1: Click **System> System Management > Parameter > QR Code Setting**.

The screenshot shows the 'QR Code Setting' interface. It has a title bar 'QR Code Setting' and a sidebar with 'QR Code Setting', 'DateTime Format Settings', and 'Video watermark'. The main content area contains three sections: 'Enable QR Code' with radio buttons for 'No' and 'Yes' (selected), 'Qrcode Type' with radio buttons for 'Static' and 'Dynamic' (selected), and 'Valid Time:' with a text input field containing '300' and a unit selector set to 'second(30-300)'. A warning message at the bottom states: 'Switch between static QR code and dynamic QR code should be careful, frequent switch may lead to device error'.

Figure 18- 27 QR Code Setting interface

Step 2: Enable QR code Click **System> System Management > Parameter > YES** or **NO** for Enable the

QR code

Step 3: Enable QR code If YES click **YES > Static**. It will be fixed the QR information same manner for the rest of time.

Step 4: Enable QR code If YES click **YES > Dynamic > Valid Time**. It will generate new QR code every 30 seconds.

18.1.12.2 Date Time Format Setting

Here you can set the date and time format.



The screenshot shows a window titled "DateTime Format Settings". Inside, there are two dropdown menus. The first is labeled "Date" and shows the value "2022-01-01". The second is labeled "Time" and shows the value "00:00:00".

Figure 18- 28 Date and Time Format Setting Interface

18.1.12.3 Video Watermark

This option helps you to add watermark and tile to your videos.



The screenshot shows a window titled "Video watermark". It contains two sections. The first section is "Enable watermark" with two radio buttons: "No" and "Yes". The "Yes" button is selected. The second section is "Enable tiling" with two radio buttons: "No" and "Yes". The "Yes" button is selected.

Figure 18- 29 Video Watermark Setting

18.2 Authority Management

18.2.1 User

18.2.1.1 New

This section describes how to configure Step to add an administrator user in ZKBio CVSecurity.

● Operation Step

Step 1: In the System module, choose **Authority Management > User**.

Step 2: Click **Add** to pop up the new user interface.

Step 3: On the Add role page, set role rights as required, as shown in the figure below and the below Table describes parameters to be set.

New

Username*

Username should be composed between 1-30 characters and in letters,numbers,or symbols (@/./-/+/_).

Password*

Password is a composition of 4 to 16 characters,default is 111111.

Confirm Password*

State

Enable

Multiple Login

☐

Maximum Number

Limit multiple login for the same account.

Superuser State

☐

Role

Auth Department

If you don't select department you will not have full departmental permission.

Authorize Area

If you don't select zone you will not have full zone permission.

Email

First Name

Save and New

OK

Cancel

Figure 18- 30 Adding User Interface

Parameter	How to set up
User Name/Password	You can customize the user’s name and password used for login.
State	Set whether the user can log in and operate the system.
Connection Limit/Maximum Logins	If this parameter is not selected, the number of simultaneous logins is not limited.
Superuser Status	This parameter specifies whether the user has all rights by default. If you click this parameter, the user is a super user, and no role is required.
Role	Set a role for the user. The user has all Operation permissions configured for the role.
Authorize Department	Authorization Sets the department permissions of the user.
Authorized Permission	Authorization Sets the area rights that the user has.
Email	Customizes this user’s mailbox, which can be used to retrieve the password.
The Name	Custom sets the name of this user.
The Fingerprint Registration	Register this user’s fingerprint.

Table 18-4 Parameters for Adding a User

Step 4: Click **OK** to finish configuring the new user.

18.2.1.2 Edit/Delete

Click **Edit** or **Delete** as required.

18.2.2 Role

When using the system, the super user needs to assign different levels to new users. To avoid setting users one by one, you can set roles with specific levels in role management and assign appropriate roles to users when adding users. A super user has all the levels, can assign rights to new users and set corresponding roles (levels) according to requirements.

18.2.2.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the user page.

18.2.2.2 New

● Operation Steps:

Step 1: Click **System > Authority Management > Role > New**.

Step 2: Set the name and assign permissions for the role.

Step 3: Click **OK** to save.

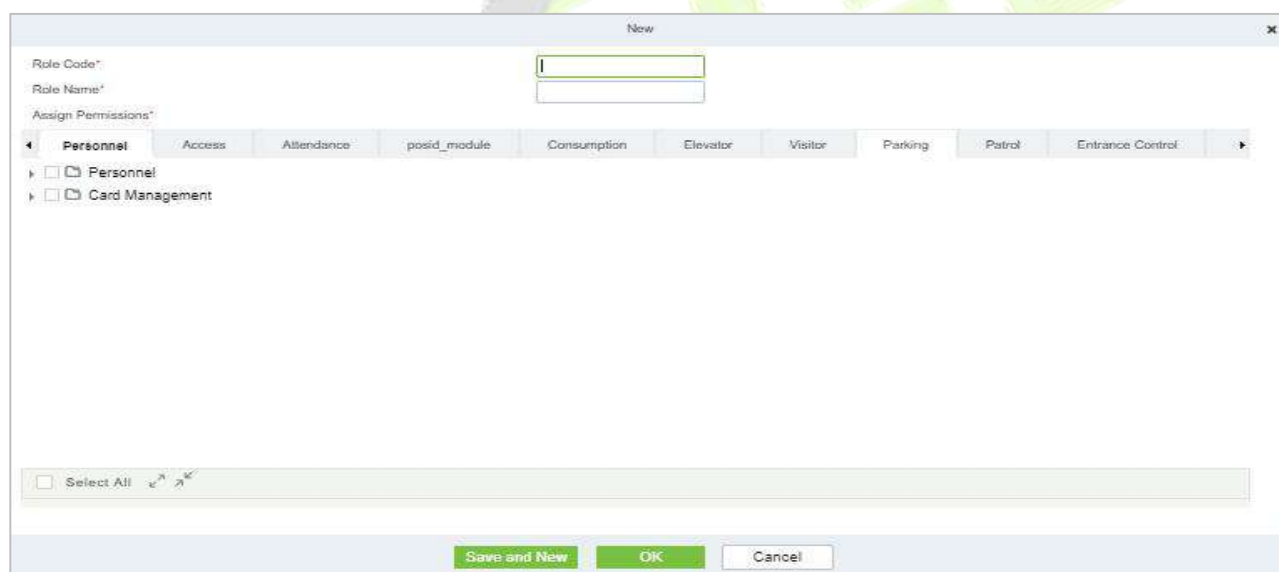


Figure 18- 31 Add Role Option

18.2.2.3 Edit/Delete

Click **Edit** or **Delete** as required.

18.2.3 API Authorization

18.2.3.1 Refresh

Click **Refresh** at the upper part of the list to get the most updated version of the API authorization page.

18.2.3.2 New

Operation Steps:

Step 1: Log in to the system (as the super user, for exportation.min) to enter the software. Click **System > Authority Management > API Authorization > New**, which must be unique, and a client secret, which will be used when the API is invoked.

Step 2: Only when the client ID and secret are added can the next API operation page be displayed normally. Otherwise, the access is abnormal):

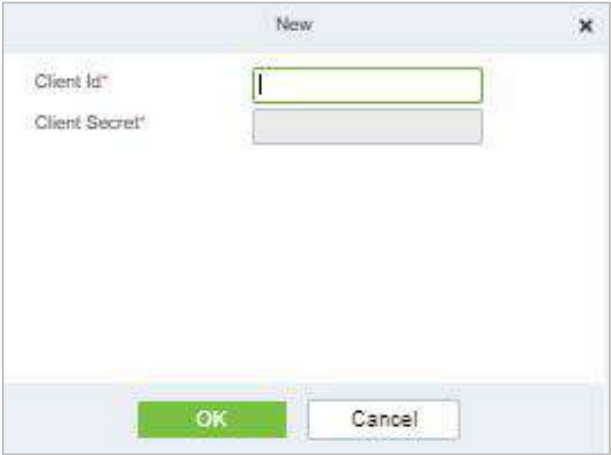


Figure 18- 32 API Authorization Option

18.2.3.3 Browse the API

After the client ID and secret are added, click Browse API on the API Authorization page to skip to the API operation page (The page of the ZKBio CVSecurity system must be open for normal access of the API operation page). This page provides multiple API.

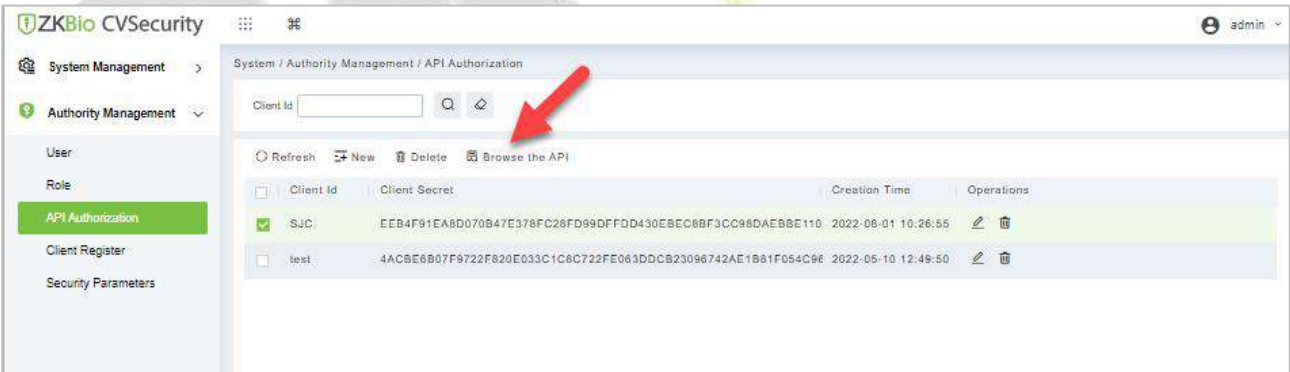


Figure 18- 33 Browse the API

ZKBio CVSecurity		https://20.115.34.69/api/api-docs	Explore
AccDevice : acc device	Show/Hide	List Operations	Expand Operations
AccDoor : acc door	Show/Hide	List Operations	Expand Operations
AccLevel : acc level	Show/Hide	List Operations	Expand Operations
AccReader : acc reader	Show/Hide	List Operations	Expand Operations
AccTransaction : acc transaction	Show/Hide	List Operations	Expand Operations
AdMedia : ins adMedia	Show/Hide	List Operations	Expand Operations
AttApply : att apply	Show/Hide	List Operations	Expand Operations
AttAreaPerson : att area person	Show/Hide	List Operations	Expand Operations

Figure 18- 34 ZKBIO CV Security API Interface

When API are invoked, URLs of all request API must contain the access token parameter, whose value is determined by the client key configured on the background (if there are multiple keys, only one is selected), for example:



Figure 18- 35 Request URL

The access token parameter must be added when the API is invoked (one request URL can be invoked):
`http://localhost:8091/system/swagger/index.html?clientId=1653914953805#!/Person/getByPinUsingGET`.

18.2.3.4 Edit

Click the **Edit** icon to edit the API Authorization details. Enter the required Details. After editing, click **OK** and exit.

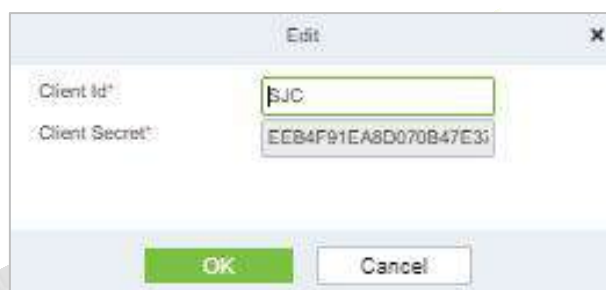


Figure 18- 36 Edit Option

18.2.3.5 Delete

Select the specified Client id to delete and click **Delete**. Then Click **OK** to confirm the operation.

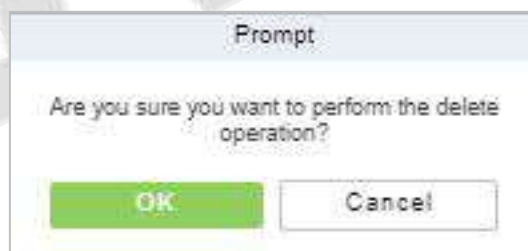


Figure 18- 37 Delete Option

18.2.4 Client Register

You can add client types for the system and generate registration codes for client registrations of each module function. The number of allowed clients is controlled by the number of allowed points.

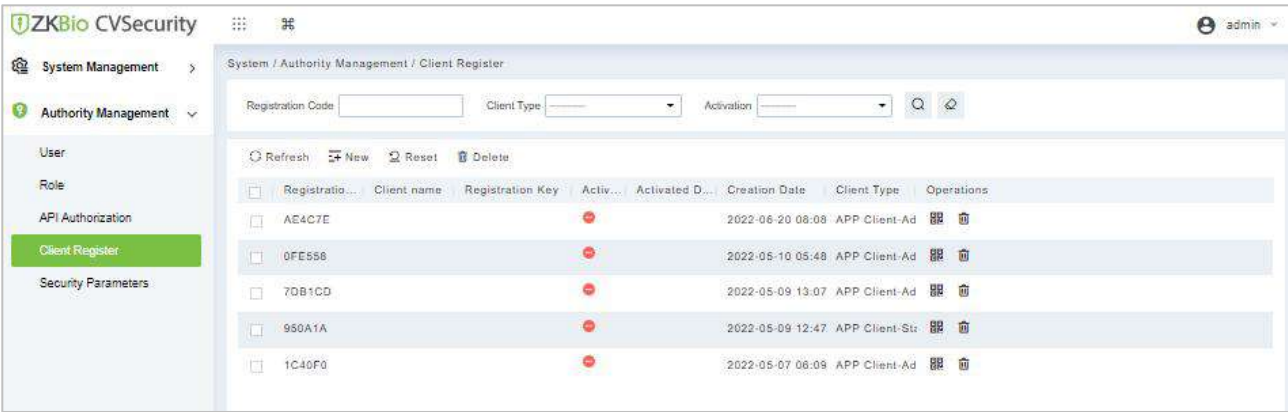


Figure 18- 38 Client Register Interface

18.2.4.1 New

Step 1: Click System Management > Authority Management > Client Authorization > New to go to the New page.

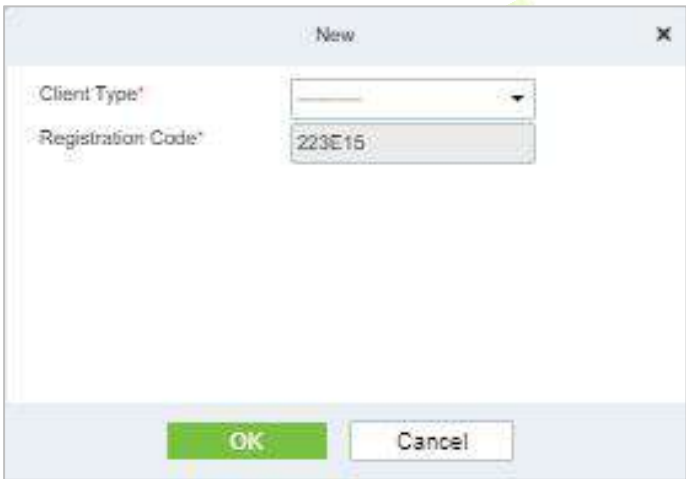


Figure 18- 39 Add Client Register

Parameter	Description
Client Type	The value can be APP Client, OCR-Personnel, OCR-Visitor, ID Reader-Personnel, ID Reader-Visitor or Signature- Visitor, Card Printing- Personnel, Card Printing-Visitor.
Registration Code	The registration code for APP Client is used under Network Settings on the APP login page and that for Print Card-Personnel is used under Parameter Settings > Client Registration . Only new registration codes added on the server are authorized and one registration code can be used by only one client.

Table 18-5 Description Add Client Register parameter

18.2.4.2 Reset

To reset a client, select the client and click **Reset**.

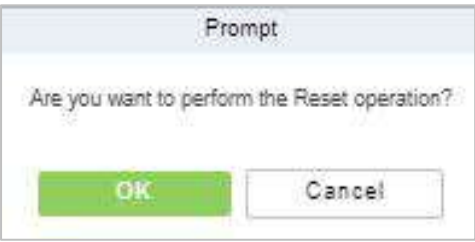


Figure 18- 40 Reset Option

18.2.4.3 Delete

To delete a client, select the client and click **Delete**.

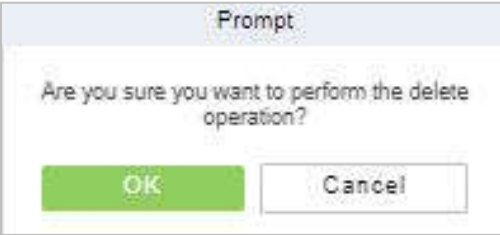


Figure 18- 41 Delete Option

Click **OK** to delete the client.

18.2.5 Security Parameters

Click System Management > Authority Management > Set Security Parameters.

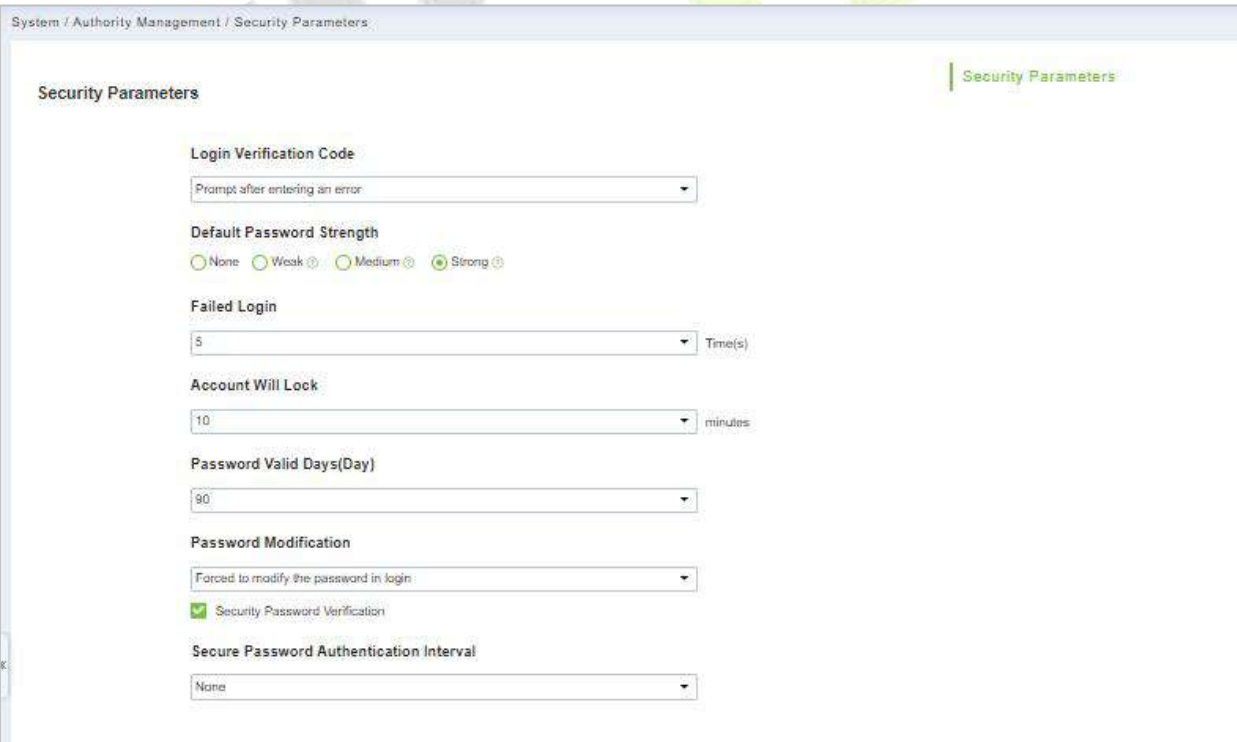


Figure 18- 42 Security Parameter Interface

Login Verification Code Setting

It includes None, always prompt verification code, Prompt after entering an error.

Do not open verification code: The system allows no verification code

Open verification code: Users must fill in the verification code when logging in to the software.

Open after input error: The system will pop-up a verification box after filling in the wrong Username and password.

Password Strength Setting

The path is System -> Authority Management-> Set Security Parameter.

The screenshot shows a section titled "Default Password Strength". Below the title, there are four radio button options: "None", "Weak", "Medium", and "Strong". The "Strong" option is selected, indicated by a green dot inside the radio button.

Figure 18- 43 Password Strength Option

Lock Account

The account will be locked if user fails to login the system as per the software setting. For example, if the system allows user fill in wrong username and password for 2 times. The system will be locked for 10 minutes after exceeding 2 times of operation.

The screenshot shows two settings. The first is "Failed Login" with a dropdown menu set to "5" and the unit "Time(s)". The second is "Account Will Lock" with a dropdown menu set to "10" and the unit "minutes".

Figure 18- 44 Lock Account

Password Valid Day (s)

Users can set the validity as 30 days, 60 days or permanent. If password gets expired, user cannot login to the system.

The screenshot shows a section titled "Password Valid Days(Day)". Below the title, there is a dropdown menu set to "90".

Figure 18- 45 Password Valid Days

Password Modification

There are 2 options that user can set. Not mandatory and forced to modify the next time you login.

Not mandatory: The system does not need to modify the initial password.

Forced to modify the next time you login: It is compulsory to modify the initial password after the second login.

The screenshot shows a section titled "Password Modification". Below the title, there is a dropdown menu set to "Forced to modify the password in login". Below this, there is a checkbox labeled "Security Password Verification" which is checked.

Figure 18- 46 Password Modification Option

Secure Password Authentication Interval


The screenshot shows a section titled "Secure Password Authentication Interval". Below the title, there is a dropdown menu set to "None".

Figure 18- 47 Secure Password Authentication Interval

18.3 Communication Management

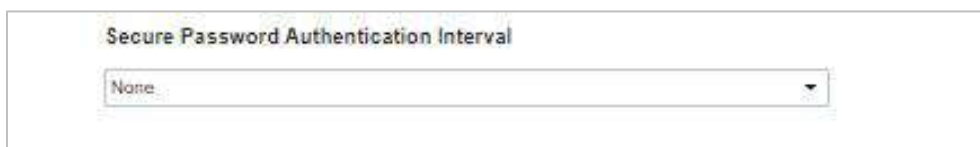18.3.1 Device Commands

Step 1: Click **System** > **Communication Management** > **Device Commands**, the commands lists will be displayed.

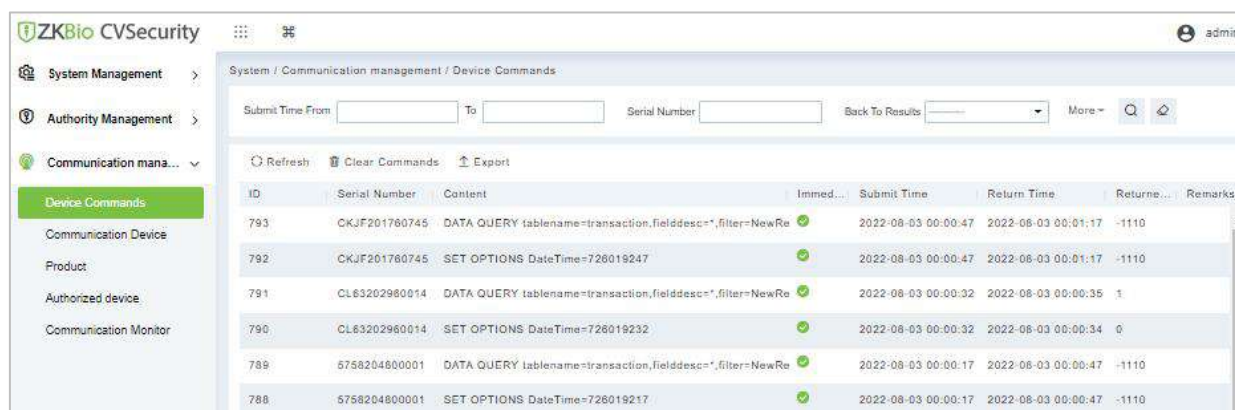


Figure 18- 48 Device Command interface

If the returned value is more than or equal to 0, the command is successfully issued. If the returned value is less than 0, the command is failed to be issued.

18.3.1.1 Export

Export the command lists to the local host. You can export it to an Excel file. See the following figure.

Device Commands						
ID	Serial Number	Content	Immediately Cmd	Submit Time	Return Time	Returned Value
1504	20100501999	DATA UPDATE userauthorize Pin=2AuthorizeTi mezoneld=1Auth orizeDoorId=1 Pin=1AuthorizeTi mezoneld=1Auth orizeDoorId=1 ...	false	2017-12-18 10:51:15	2017-12-18 10:51:21	0
1502	20100501999	DATA UPDATE mulcarduser Pin=2CardNo=5d ec02LossCardFla g=0CardType=0 Pin=1CardNo=44 12c5LossCardFla g=0CardType=0 ...	false	2017-12-18 10:51:14	2017-12-18 10:51:21	0

Figure 18- 49 Export File

18.3.1.2 Refresh

Click **Refresh** at the upper part of the list to load new temporary Device Commands.

18.3.1.3 Clear Commands

Click **Clear Commands** to clear the command lists.

18.3.2 Communication Device

Step 1: Click **System > Communication Management > Communication**, you can view all equipment information and communication in the system. Detailed information such as accessed module, serial number, firmware version, IP address, communication status, and command execution can be viewed.

System / Communication management / Communication Device

Module Device Serial Number Device Name More

<input type="checkbox"/>	Module	Device Serial ...	Device Firmware	Device Name	Device IP A...	Subnet Mask	Gateway	Enable	Status	Executory Command C...
<input type="checkbox"/>	acc	CL64203960188	ZAM170-NF-1.5.12-TI-7364-03	ProFace X[TI]	10.10.20.73	255.255.254.0	10.10.20.1	<input checked="" type="checkbox"/>	Offline	21
<input type="checkbox"/>	acc	5758204800001	ZAM170-NF-Ver1.8.17	xFace800	192.168.134.1	255.255.255.0	192.168.134.1	<input checked="" type="checkbox"/>	Offline	12
<input type="checkbox"/>	acc	CKJF201760745	ZAM170-NF-Ver1.5.7	SpeedFace-V5	10.10.20.144	255.255.254.0	10.10.20.1	<input checked="" type="checkbox"/>	Offline	29
<input type="checkbox"/>	ins	CGWD205080010	3.5.74	FaceKiosk-H11	121.12.147.15			<input checked="" type="checkbox"/>	Offline	2

Figure 18- 50 Communication Device Interface

18.3.2.1 View Authorized Device

View the authorized device information.

View authorized device

IP Address Device Type Device Serial Number

IP Address	MAC Address	Subnet Ma...	Gateway Addr...	Serial Number	Module ...	Server Address	Device Type	Communic...
60.249.195.11				668721340000	att			<input checked="" type="checkbox"/>
192.168.2.179		255.255.255.0	192.168.2.1	CMWN2147600	acc		SpeedFace-V5	<input checked="" type="checkbox"/>
192.168.1.219		255.255.255.0	192.168.1.1	660620510000	acc		Speedface-V5	<input checked="" type="checkbox"/>
171.103.248.1				CGGG1931600	pos		ProMerc-10	<input checked="" type="checkbox"/>
192.168.134.1		255.255.255.0	192.168.134.1	575820480000	acc		xFace800	<input checked="" type="checkbox"/>
0.0.0.0		255.255.255.0	192.168.0.1	AYGZ19168000	acc		ProCapture-W	<input checked="" type="checkbox"/>
10.8.14.198		255.255.255.0	10.8.14.1	BRID20168014	acc		inBio480 Pro	<input checked="" type="checkbox"/>
0.0.0.0				CNN721506000				<input checked="" type="checkbox"/>
0.0.0.0				2022053112				<input checked="" type="checkbox"/>
192.168.0.141		255.255.255.0	192.168.0.1	CL6320296001	acc		ProFace X[TI]	<input checked="" type="checkbox"/>

50 rows per page

/1 Page

Total of 18 records

Figure 18- 51 View Authorized Device Interface

18.3.2.2 Refresh

Click **Refresh** at the upper part of the list to load the new temporary Communication Device.

18.3.3 Product

Step 1: Click **System > Communication Management > Product**, and the product lists will be displayed.

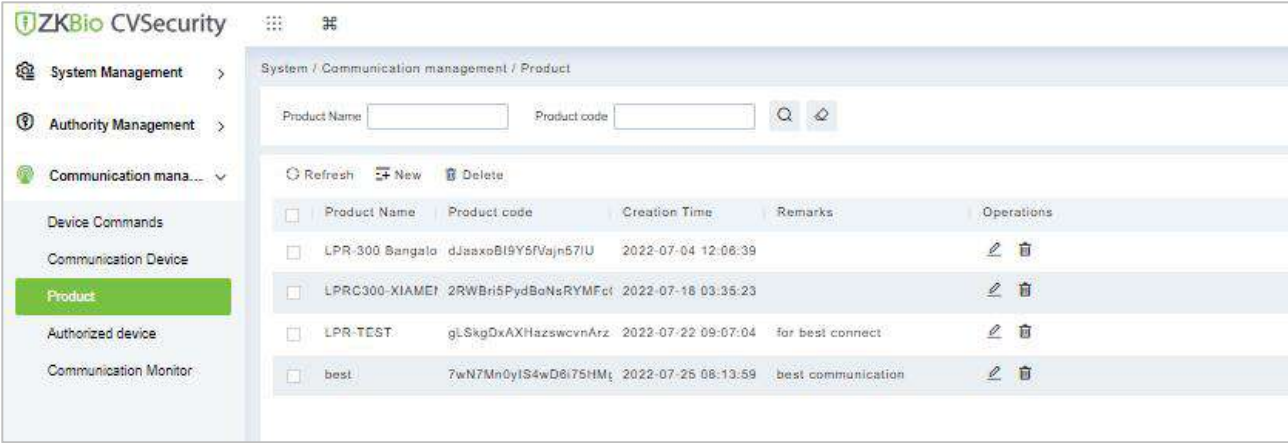


Figure 18- 52 Product Interface

18.3.3.1 New

Click **System** > **Communication** Management > **Product** > **New**, to add the new product name.

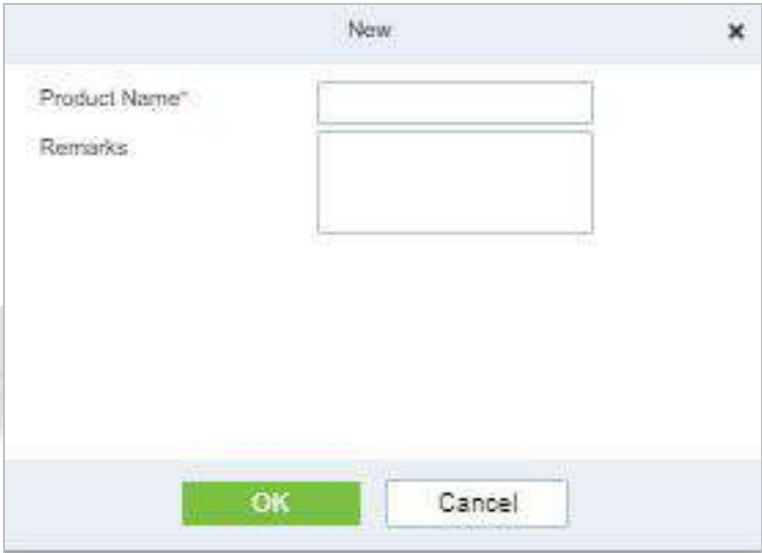


Figure 18- 53 Add Product Option

18.3.3.2 Delete

Click **Delete** to delete the Product Operation.


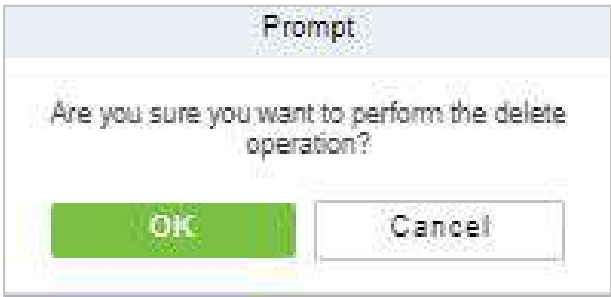


Figure 18- 54 Delete Product Option

18.3.3.3 Edit

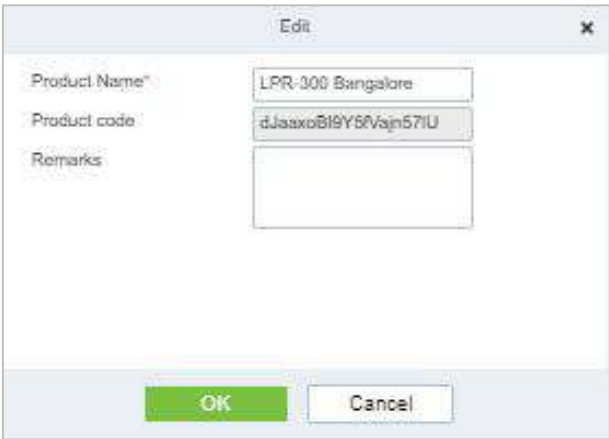Click **Edit** to delete the Product information.




The 'Edit' dialog box contains three input fields: 'Product Name' with the value 'LPR-300 Bangalore', 'Product code' with the value 'dJaaxoB19Y5fVajn57IU', and an empty 'Remarks' text area. At the bottom are 'OK' and 'Cancel' buttons.

Figure 18- 55 Edit Product Information

18.3.4 Authorized Device

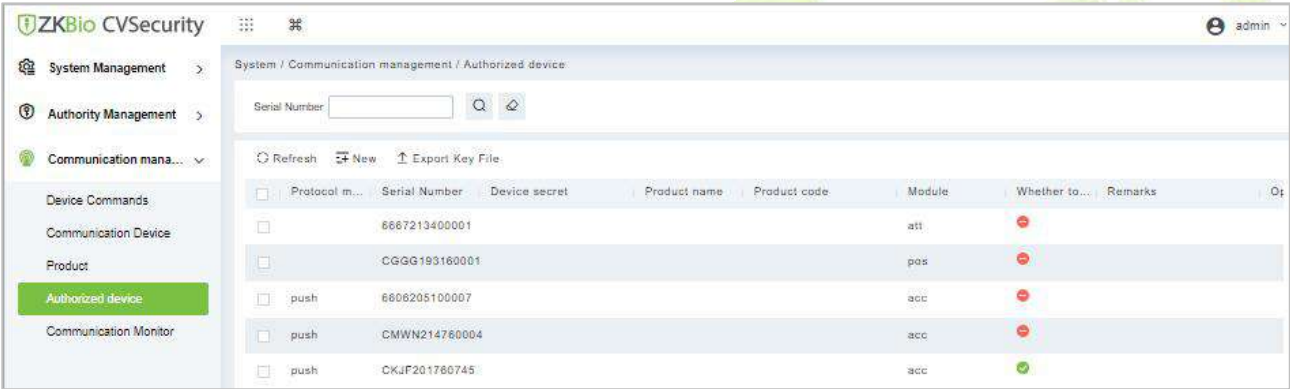Click **System > Communication Management > Authorized Device**, and the product lists will be displayed.




The screenshot shows the 'Authorized device' interface with a table of device information. The table has columns for Protocol mode, Serial Number, Device secret, Product name, Product code, Module, Whether to..., Remarks, and an 'Op' column.

Protocol mode	Serial Number	Device secret	Product name	Product code	Module	Whether to...	Remarks	Op
<input type="checkbox"/>	6667213400001				att			
<input type="checkbox"/>	CGGG193160001				pos			
<input type="checkbox"/>	push	6606205100007			acc			
<input type="checkbox"/>	push	CMWN214760004			acc			
<input type="checkbox"/>	push	CKJF201760745			acc			

Figure 18- 56 Authorized Device Interface

18.3.4.1 New

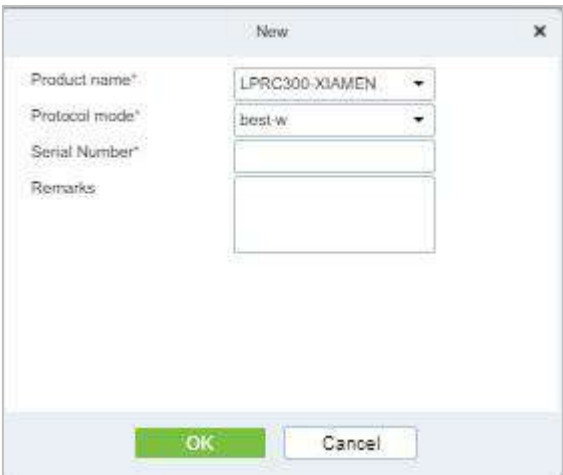Click **System > Communication > Authorized Device > New**, to add the authorized product device.



The 'New' dialog box contains four input fields: 'Product name' with a dropdown menu showing 'LPR300: XIAMEN', 'Protocol mode' with a dropdown menu showing 'best-w', an empty 'Serial Number' field, and an empty 'Remarks' text area. At the bottom are 'OK' and 'Cancel' buttons.

Figure 18- 57 Add Authorized Device

18.3.4.2 Export Key File

Click **System > Communication > Authorized Device**, Select the protocols to export and click the **Export Key File**, to export the key file of the authorized product device.

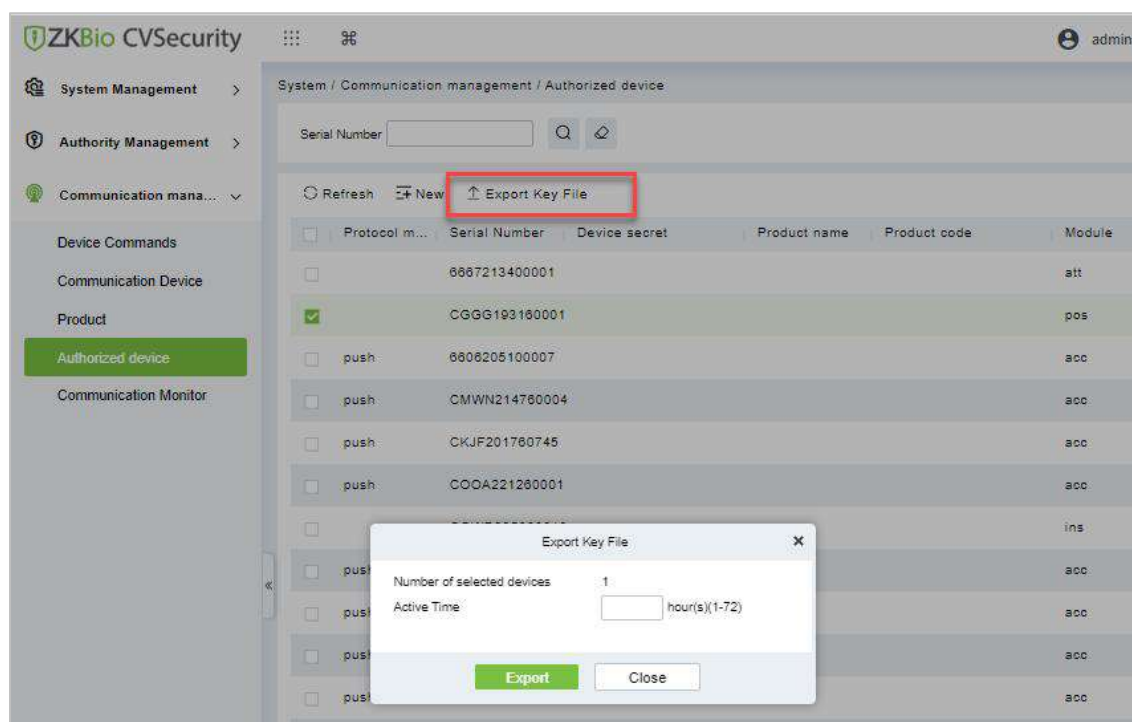


Figure 18- 58 Export Key Option

18.3.5 Communication Monitor

Click **System > Communication > Communication Monitor**, and the communication mode will be displayed.

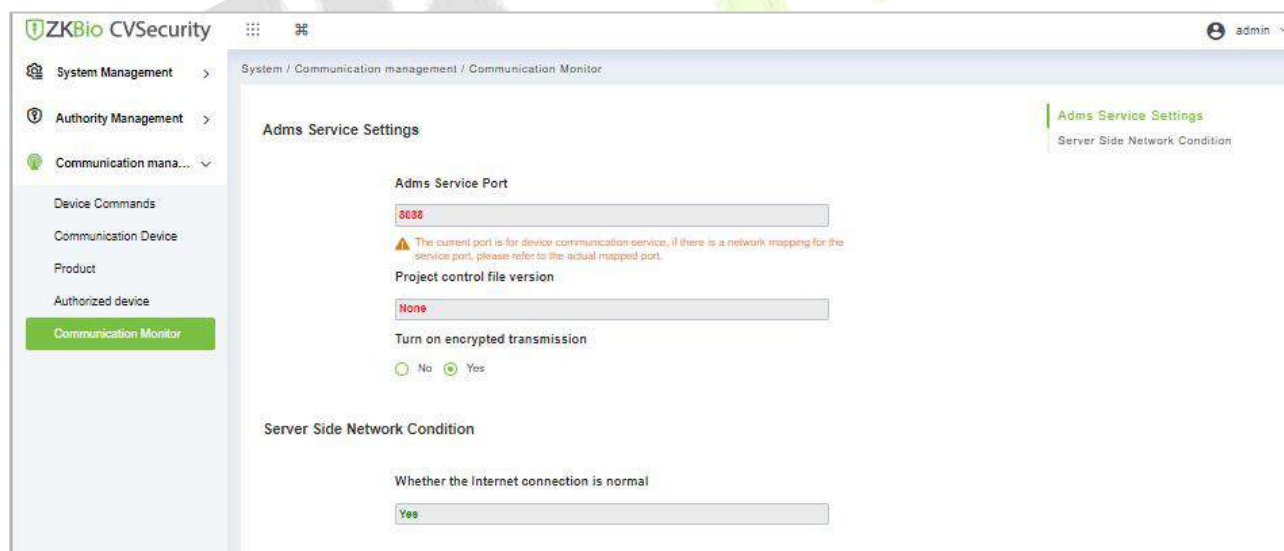


Figure 18- 59 Communication Monitor

18.4 Third Party Integration

18.4.1 LED Device

The system integrated outsourcing LED equipment (control card: lumens 3200/4200), provides a window to display data; it can provide customers personnel in the access area quantity statistics, real-time information about personnel going in and out and personnel information in the area, etc.

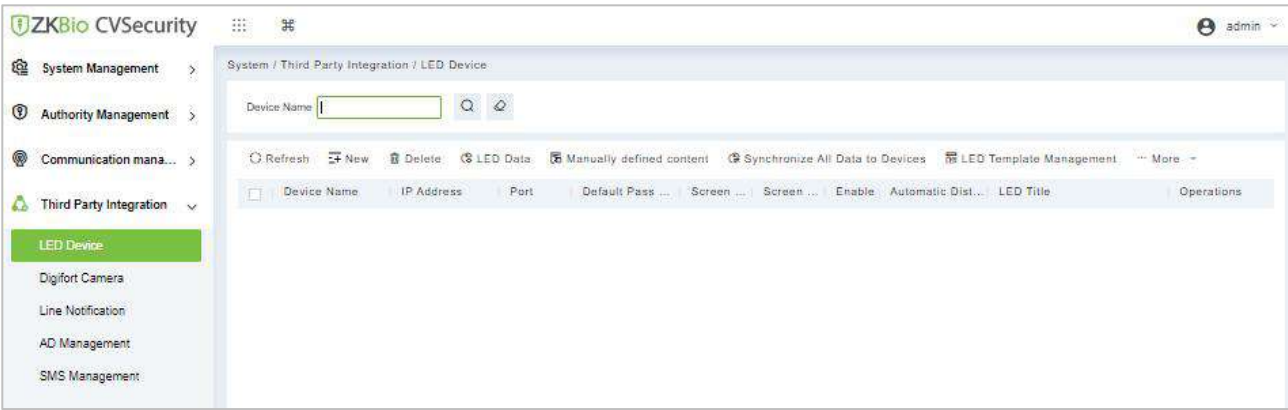


Figure 18- 60 LED Device

18.4.1.1 New

●Operation Step:

Step 1: Click **System> Extended Management> LED Device> New**. The page is displayed as follows:


Figure 18- 61 Add LED Device

Parameter	Description
Device Name	Enter the name of the LED device.
IP Address	Enter the IP address of the LED device.
Port	Enter the port number. The default communication port is 5200.
Default Pass Code	Displays the pass code. The default value is 255.255.255.255.
Screen Width	Width of the dot matrix (resolution).

Screen Height	Height of the dot matrix (resolution).
LED Title	Select whether to display the title. If the parameter is left blank, the title is not displayed.
Block Number	Number of blocks that the LED is divided into (Note that the blocks do not contain the title and system time blocks).
Show Time	It will display time on the LED screen. Once you select it, you will find two options to choose from: Single Line and Multi-line Display. Choose according to your choice.
Automatic Data Distribute	By default, this parameter is selected. You send data to the LED in the access control module only when you select this parameter. Otherwise, the content to be sent needs to be manually defined.
Delete Data in the Device When New	Delete the original data in the device when adding an LED device.

Table 18-6 Description Add LED Device Parameter

After you click **Block Layout**, the following box is displayed:

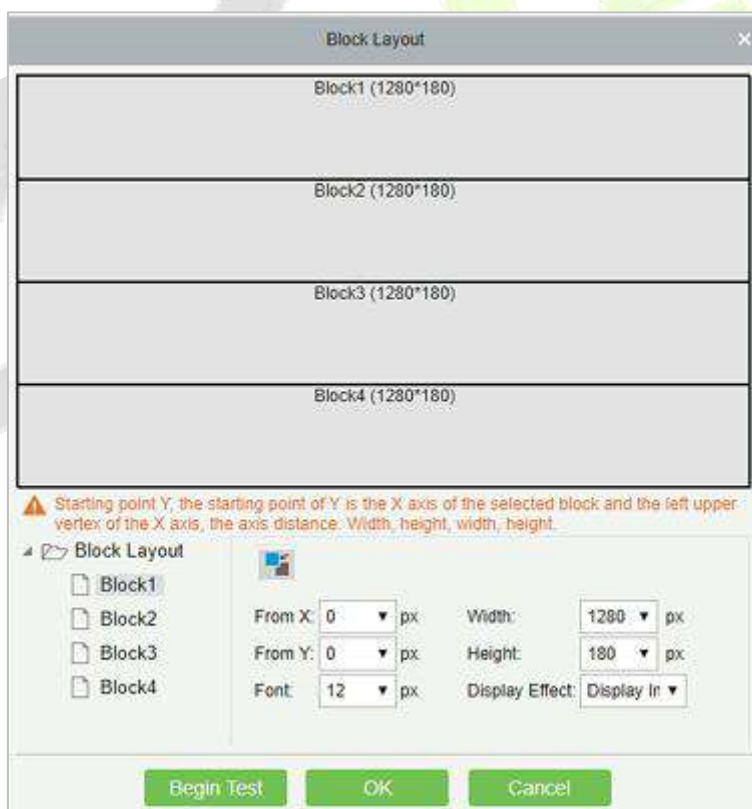**Figure 18- 62 Block Layout****Notes:**

Parameters must be set for each block.

The height of each block must be equal to or larger than 12. Otherwise, the letters cannot be completely displayed.

The total height of all blocks cannot be larger than the screen height.

18.4.1.2 Delete

Click a device name or **Delete** under Operation in the device list and click **OK** to delete the device or click **Cancel** to cancel the operation. Select one or more devices and click Delete above the list and click **OK** to delete the selected device(s) or click **Cancel** to cancel the operation.

18.4.1.3 LED Data

LED data option let you view the details about outsourcing LED equipment such as zone device block details etc. user can add new LED data in this interface also.

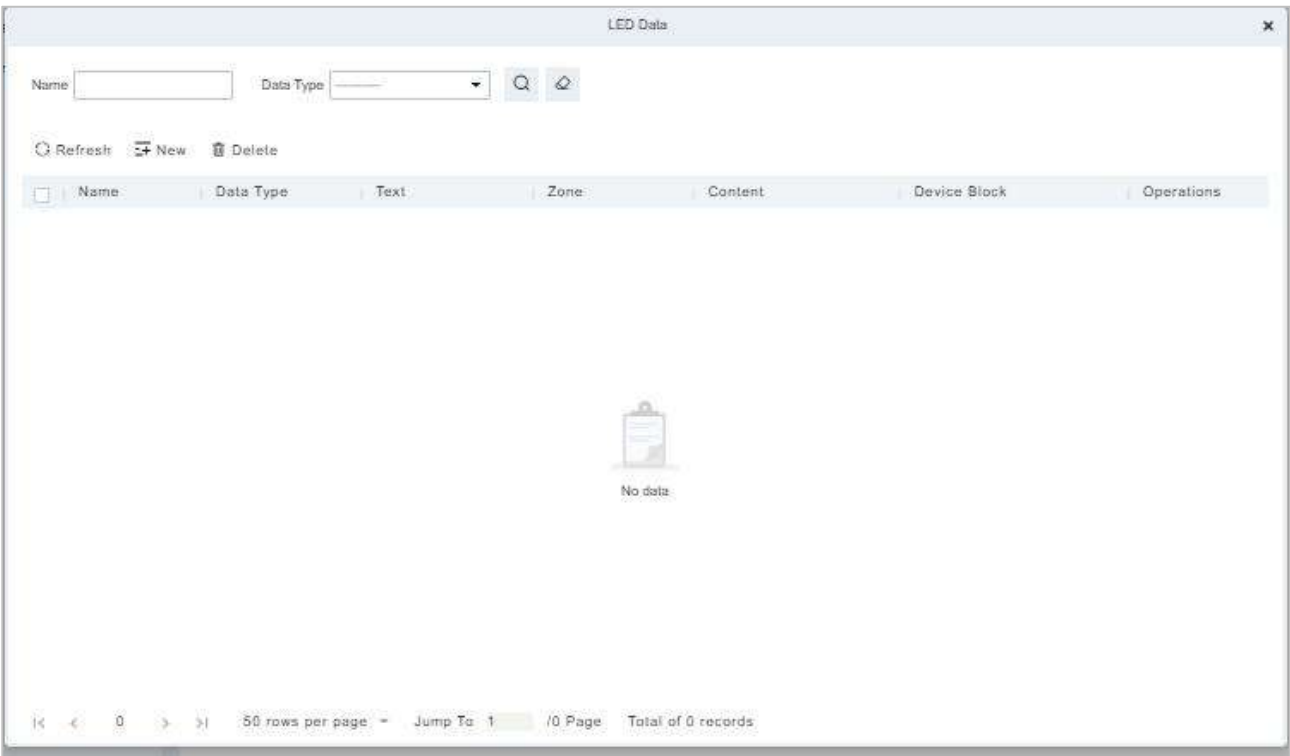


Figure 18- 63 LED Data

18.4.1.4 Manually Defined Content

Select a device and click **Manually Defined Content**. The page is displayed as follows:



Figure 18- 64 Manually Defined Content Option

Notes:

At least one block must be selected for the distribution of manually defined content.

After the manually defined content is selected, the access control module cannot send data to the LED device.

Contact the technical support team for the intermediate table, line notification, active directory page, and other materials.

18.4.1.5 LED Template Management

Through this function, you can create a template for the blocks. This template you can directly use at the time of adding an LED device. When you are adding an LED device, then after defining the dimensions of the block, you will be prompted to save the template as shown below:

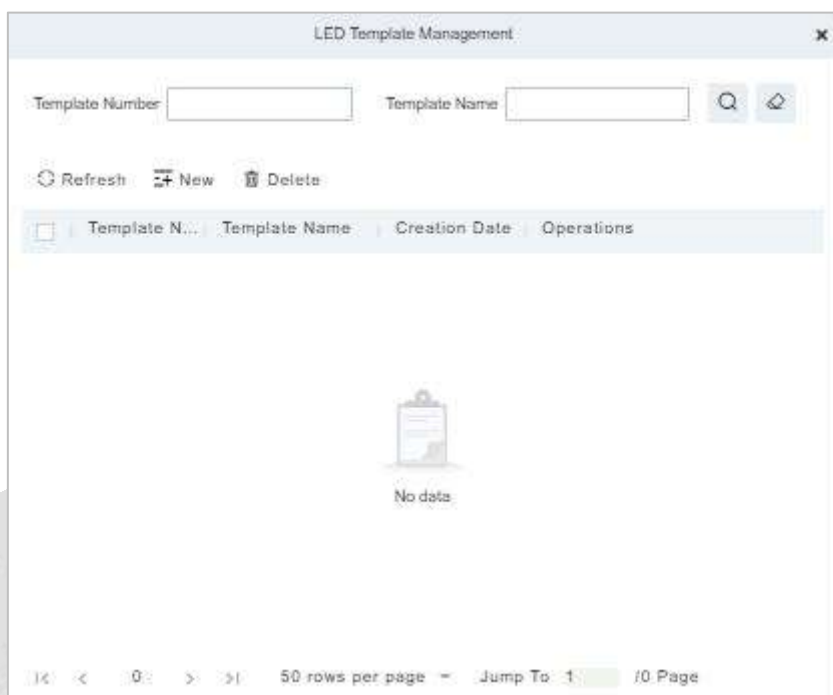


Figure 18- 65 LED Template Management

18.4.1.6 Synchronize All Data to Devices

Synchronize the LED block layout and LED data set in the system to the device. Select a device, click **Synchronize All Data to Devices**, and then click **Synchronize** to synchronize the data.

18.4.1.7 Edit

Click a device name or **Edit** under operation to go to the edit page. After editing the device, click **OK** to save the setting.

18.4.1.8 Enable/Disable

Select a device and click **Enable/Disable** to start/stop using the device. If the device is enabled, data is transmitted to the device. Otherwise, no data is transmitted to the device.

18.4.1.9 Restart

After you restart the device, the LED control card system will be restarted, data on the screen is cleared and data saved in the system is restored. After the device is successfully restarted, click **Synchronize All Data to Devices** to display all distributed content on the LED screen.

18.4.1.10 Modify IP Address

Modify the IP address of the device. The default IP address of the control card is 192.168.1.222.

18.4.2 Digifort Camera

It's integrated with third-party camera management system and the client uses "Digifort" to manage the cameras.

18.4.2.1 Sync with Server

It will help you to synchronize device with the server.

18.4.2.2 Delete

Click **Third Party Integration > Digifort Camera**, then select a Device Name, and click **Delete > OK** to delete.

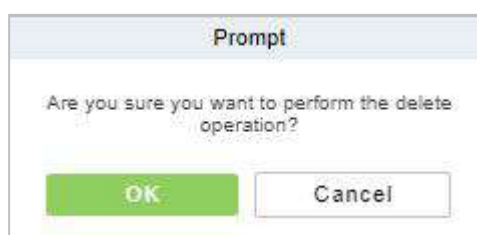


Figure 18- 66 Delete Option

18.4.2.3 Parameters

Click Third Party Integration > Digifort Camera > Parameters > to update the server details.

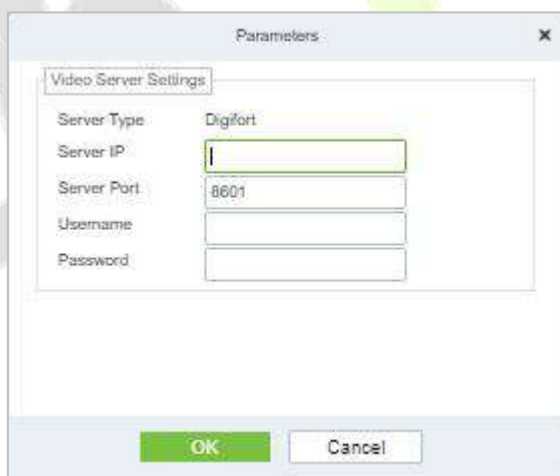


Figure 18- 67 Digifort Camera Device Parameters

Parameter	Description
Server Type	By default, the server settings "Digifort".
Server IP	Enter the Arteco Server IP.
Server Port	Enter the Arteco Server Port.Default value is 8601
Username	Enter the Arteco User Username.

Password	Enter the User Password.
----------	--------------------------

Table 18-7 Description Digifort Camera Parameter

18.4.3 Arteco Intergration

Please refer to the attached operating instructions for ARTECO.



18.4.4 Line Notification

Click System > Third Party integration > Line Notification to enter the interface:

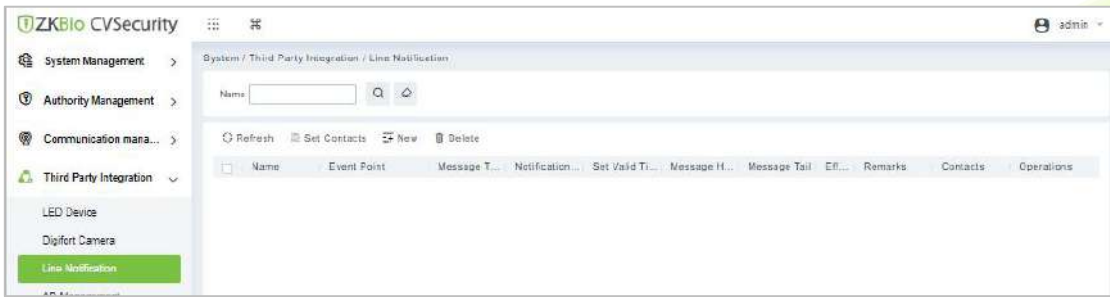


Figure 18- 68 Line Notification Interface

18.4.4.1 Refresh

Click **Refresh** at the upper part of the list to load the new temporary line Notification.

18.4.4.2 Set Contacts

Step 1: Add Line Integration. Log in ZKBio CVSecurity and go to **System > Third Part Integration > Line Integration**, then click **Set Contacts**.



Figure 18- 69 Set Contacts Option

Step 2: After the windows is displayed, please click **New**.



Figure 18- 70 Add Contacts Option

Step 3: After the windows is displayed, please click **Click to enter**.

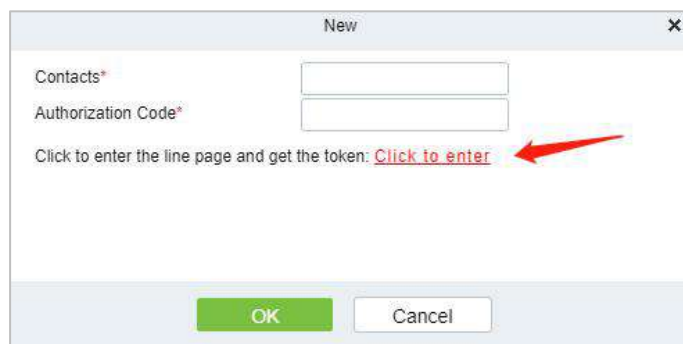


Figure 18-71 New Option

Step 4: Line web page, please use the account and password of line to log in.



Figure 18-72 Line Interface

Step 5: After login, slide down and click **Generate token**.


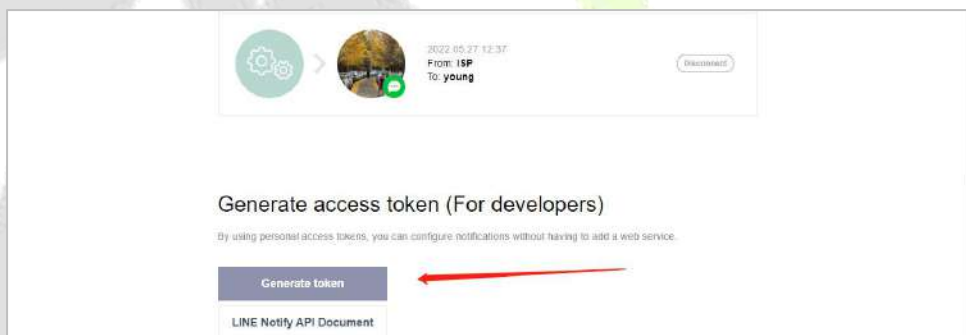


Figure 18-73 Generate Token option

Step 6: Fill in the name of token and select the group you created earlier, then click Generate token

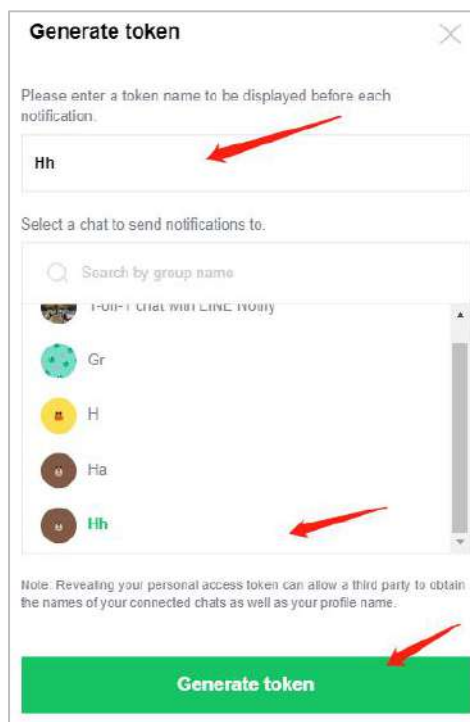Note: The group you selected is used to receive Line-linked messages, please make sure that the group members do not disclose information security.



Generate token

Please enter a token name to be displayed before each notification.

Hh

Select a chat to send notifications to.

Search by group name


- 1-011-1 Chat with LIVE hourly
- Gr
- H
- Ha
- Hh

Note: Revealing your personal access token can allow a third party to obtain the names of your connected chats as well as your profile name.

Generate token

Figure 18- 74 Generate Token Option

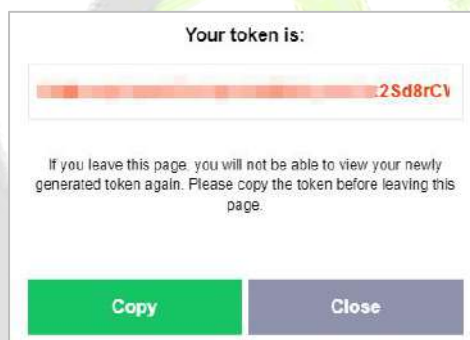Step 7: Please click **Copy**.



Your token is:


2Sd8rCv

If you leave this page, you will not be able to view your newly generated token again. Please copy the token before leaving this page.

Copy **Close**

Figure 18- 75 Token Interface

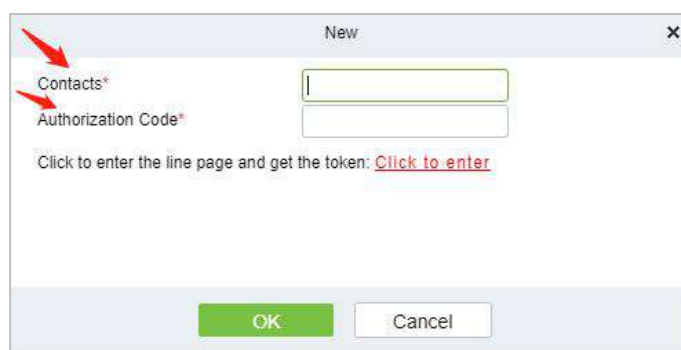Step 8: Back to **ZKBio CVSecurity > System Page**, paste the Authorization Code and fill in Contacts.



New

Contacts*

Authorization Code*

Click to enter the line page and get the token: [Click to enter](#)

OK **Cancel**

Figure 18- 76 Add Contact Option

18.4.4.3 New

Step 1: Click **Third Party > Line Notification > New** to enter the Add Levels editing interface:

Figure 18-77 Add Line Notification

Step 2: Fill in all the required details and save. Once saved, you will get the template at the Line Notification device adding interface.

18.4.4.4 Delete

Click **Third Party > Line management**, then select a receiver, and click **Delete > OK** to delete.

18.4.5 AD Management

18.4.5.1 Server Configuration

● Operation Step:

Step 1: In the System module, select **Third Party Integration > AD Management**.

Step 2: In the **AD Management** interface, fill in the **Server Configuration** as required in the details below.

Figure 18-78 Ad Management Interface

18.4.5.2 AD Field Setting

● Operation Step:

Step 1: In the System module, select **Third Party Integration > AD Management**.

Step 2: In the **AD Management** interface, fill in the **AD field setting** as required in the details below.

AD field setting

Database Fields	Import AD fields
Personnel ID	Description
First Name	name
Last Name	Last name
Department Name	Department
Mobile Phone	Mobile
Email	Email

Reset configuration

Figure 18- 79 AD Field Setting

18.4.5.3 Synchronize Permission Group Information

● Operation Step:

Step 1: In the System module, select **Third Party Integration > AD Management**.

Step 2: In the **AD Management** interface, fill in the **Synchronize permission group information** as required in the details below.

Synchronize permission group information

☐ Synchronization permission group

☐ Synchronize members in permission group

Domain Node

Please perform the synchronization permission group first, otherwise the synchronization may fail.

Test connection


Figure 18- 80 Synchronize Permission Group Information

18.4.5.4 AD Data Timing Import

● Operation Step

Step 1: In the System module, select **Third Party Integration > AD Management**.

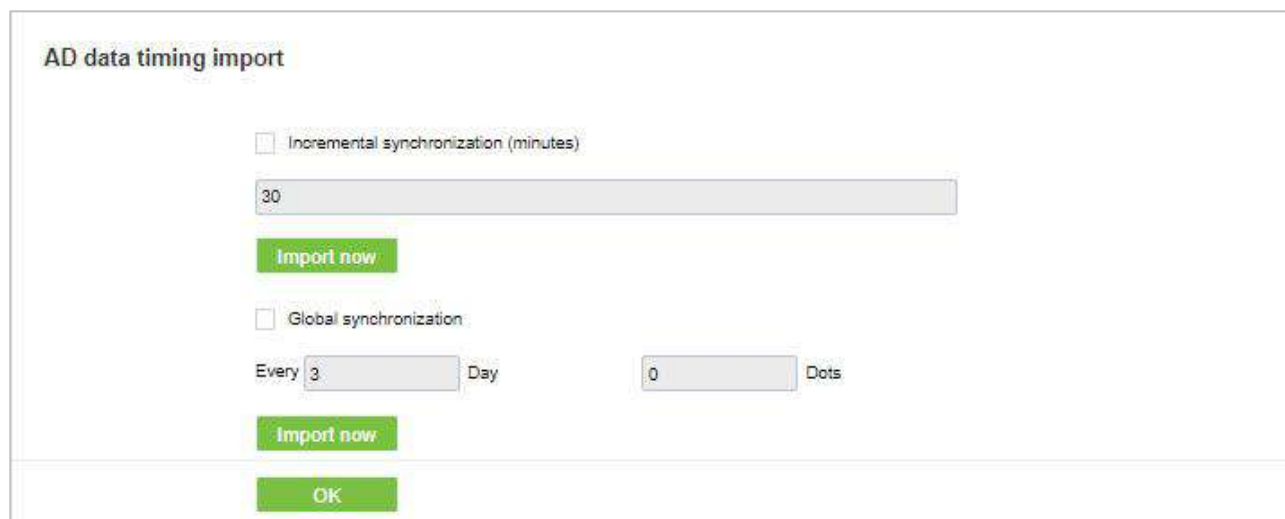Step 2: In the **AD Management** interface, fill in the **AD data timing import** as required in the details below.



AD data timing import

☐ Incremental synchronization (minutes)

30

Import now

☐ Global synchronization

Every 3 Day 0 Dots

Import now


OK

Figure 18- 81 AD Data Timing Import

Note: Please refer to the documentation for more details [3-ZKBio CVSecurity AD \(Active Directory\) Function Introduction.pdf](#)

18.4.6 SMS Management

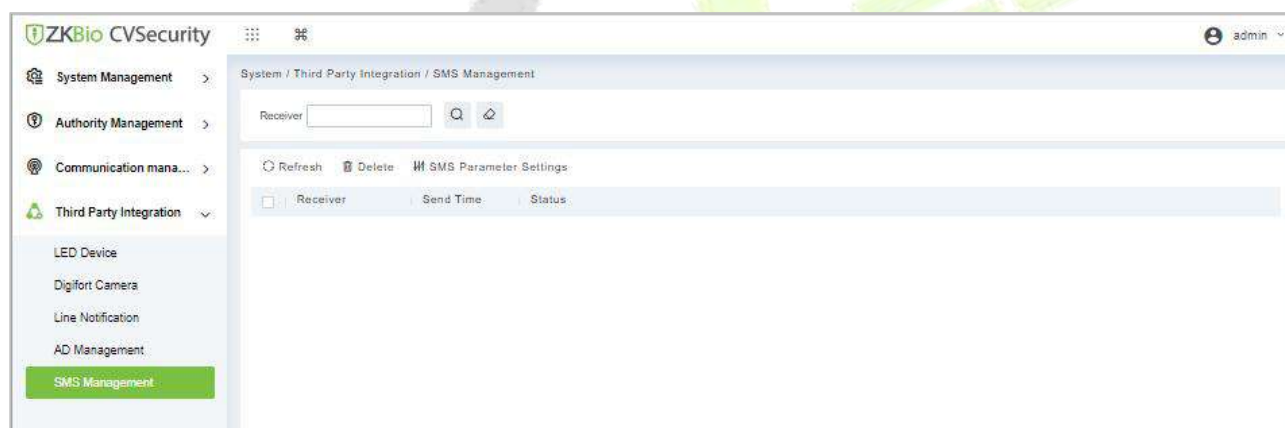The SMS Management feature helps in sending text messages to the personnel in case of any access or elevator event. If the checkbox is selected, the message will be sent to the corresponding person.



ZKBio CVSecurity admin

System / Third Party Integration / SMS Management

Receiver

Refresh Delete SMS Parameter Settings

<input type="checkbox"/>	Receiver	Send Time	Status
<input type="checkbox"/>			

LED Device
Digitfort Camera
Line Notification
AD Management
SMS Management

Figure 18- 82 SMS Management Interface

18.4.6.1 Refresh

Click **Refresh** at the upper part of the list to load a new temporary SMS Management.

18.4.6.2 Delete

Click **Third Party > SMS Management**, then select a receiver, and click **Delete > OK** to delete.

18.4.6.3 SMS Parameter Settings

Supports sending text message to Personnel once any access or elevator event occurs.

After selecting the checkbox next to the Mobile Number, the system will send an email to the relevant person once access or an elevator event occurs.

SMS Parameter Settings

Modem-SMS

AWS-SMS

SMS Parameter Settings

Port*

Phone Number*

SMS Service Center Number*

Get

Test Send

Receiver

Content

Test Send

OK

Cancel

Figure 18- 83 Modern SMS Parameter Setting

SMS Parameter Settings

Modem-SMS

AWS-SMS

SMS Parameter Settings

Accesskey*

SecretKey*

Enable

Test Send

Receiver

Content

Test Send

OK

Cancel

Figure 18- 84 AWS-SMS Prameter Settings

19 Service Center

This module integrates the device and event logging of the system module. Users can import a map to the map center to view the distribution of monitoring points and alarm sources. When an alarm occurs, users can view the location and surrounding conditions of the alarm source, select a suitable monitoring point, and view video live, playback, and human movement functions.

19.1 Device Center

19.1.1 Device

Devices added to the access control and video module are displayed on the screen, and basic device information is displayed, as shown in figure below.



The screenshot shows a web interface for the 'Service Center / Device Center / Device' page. It includes a search bar for 'Device Name' and buttons for 'Refresh' and 'Device synchronization'. Below is a table with columns: Serial Number, Device Name, Device Model, Firmware V..., IP Address, Belong Areas, Source Mo..., Status, and Operation. Three devices are listed: ProfaceX, DBL522-01, and AS 1700.

Serial Number	Device Name	Device Model	Firmware V...	IP Address	Belong Areas	Source Mo...	Status	Operation
CN3M212460001	ProfaceX	TDE08M-TI/M	ZAM170-NF-Vi	192.168.134.168	Area Name	Access	⛔	⚙️
21024127099SL8000137	192.168.134.59	DBL522-01		192.168.134.59	Area Name	Intelligent Vide	⛔	⚙️
1673eae8ab554805b3874535b6b56	AS 1700	IVS1600		192.168.134.101		Intelligent Vide	✅	⚙️

Figure 19- 1 Device Display Page

● Device Synchronization:

Synchronize data of the system to the device. Select device, click Synchronize Data to Devices and click OK to complete synchronization.

Note: Synchronize Data to Devices will delete all data in the device first (except transactions), and thus download all settings again. Please keep the internet connection stable and avoid power down situations. If the device is working normally, please use this function with caution. Execute it in rare user situations to avoid impact on normal use of the device.

19.2 Event Center

Through the definition of the event level and type, it makes the level prompt for the record generated under real-time monitoring.

19.2.1 The Event Type

The software contains event types by default. You cannot add new event types. You can customize the level of the event type.

This section describes how to modify step.

Modify Event Type

●Operation Step:

Step 1: In the Service Center module, choose Event Center > Event Type.

Step 2: On the **Event Type** page, select the event type to be modified and click **Event Level**. The Event Level dialog box is displayed.

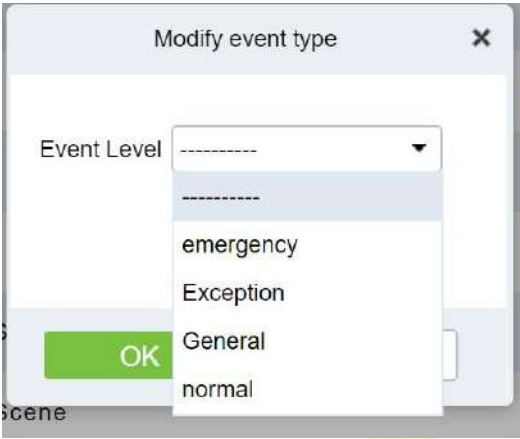


Figure 19- 2 Modify Event Level Page

Step 3: After selecting the desired level, Click **OK** to complete changing the event type level.

19.2.2 The Event Record

This screen records all events generated on the platform, as shown in figure below



Figure 19- 3 Event Recording Page

19.3 Notification Center

●Notification Record

This interface records the notification reminding events generated by the attendance and visitor module.

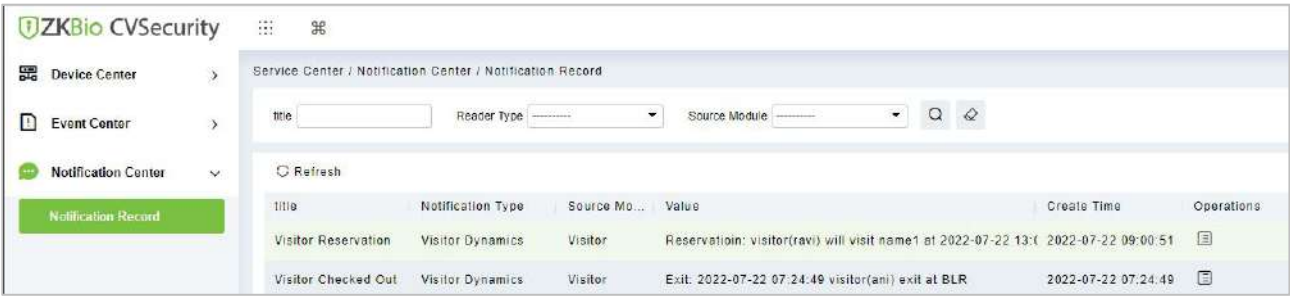


Figure 19- 4 Notification Record Page

19.4 Map Center

You can import a map to set monitoring points. When an alarm occurs, you can immediately view the location of the alarm source and surrounding conditions, select an appropriate monitoring point, and view live videos, playback, and personnel movements.

19.4.1 Real-Time Monitoring


Alarms generated in the access control and video modules are displayed on the real-time monitoring interface. You can query access control and video events by category. When an alarm is generated, you can view the location of the alarm source and surrounding conditions, select a suitable monitoring point, and view the live video, playback, and personnel movement. Operation that can handle doors in batches.

19.4.1.1 Personnel Movement

This paper introduces the configuration Step for real-time monitoring of personnel movement in the service center module.

● Operation Step

Step 1: In the Service Center module, choose "Map Center > Real-time Monitoring".

Step 2: On the real-time monitoring screen, click the icon on the right  in the personnel Trend window that is displayed, set related parameters.

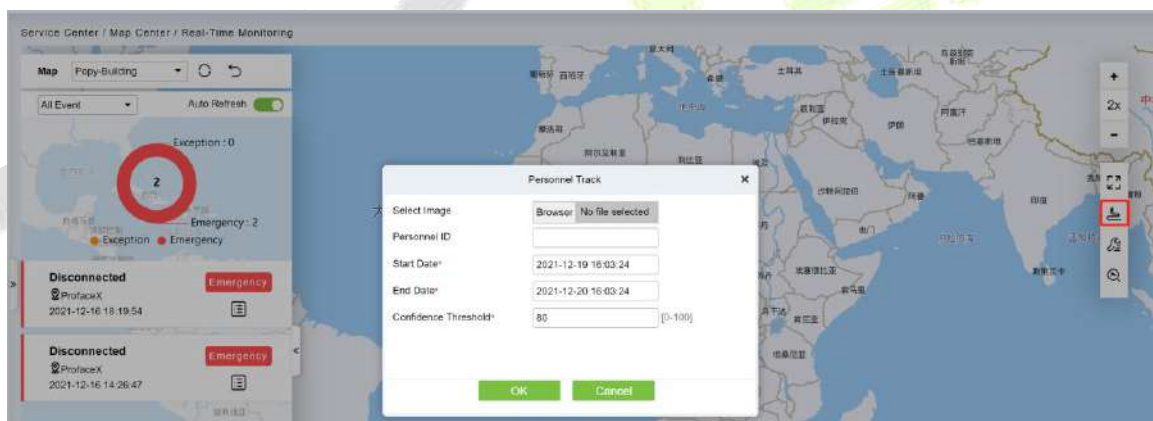


Figure 19- 5 Page for Querying Personnel Trends


Step 3: Click **OK** to display the movement chart on the map.

19.4.1.2 Batch Operation

This paper introduces the configuration Step for real-time monitoring of batch operation in the service center module.

● Operation Step:

Step 1: In the Service Center module, choose "Map Center > Real-time Monitoring".

Step 2: On the real-time monitoring screen, click the icon on the right  in the personnel Trend window that is displayed, set related parameters,


● Remote Opening / Remote Closing:

It can control one door or all doors.

To control a single door, right click over it, and click **Remote Opening/ Closing** in the pop-up dialog box. To control all doors, directly click **Remote Opening/ Closing** behind Current All.

In remote opening, user can define the door opening duration (The default is 15s). You can select **Enable Intraday Passage Mode Time Zone** to enable the intraday door passage mode time zones, or set the door to Normal Open, then the door will not be limited to any time zones (open for 24 hours).

To close a door, select **Disable Intraday Passage Mode Time Zone** first, to avoid enabling other normal open time zones to open the door, and then select **Remote Closing**.

 **Note:** If **Remote Opening /Closing** fails, check whether the devices are disconnected or not. If disconnected, check the network.

- **Activate Lockdown:**

It will remotely set the door status to locked status. After this, the door wouldn't receive any operations, such as card reading and remote operations. This function is supported only by certain devices.

- **Deactivate Lockdown:**

It will unlock a locked door. This function is supported only by certain devices.

- **Cancel Alarm:**

Once an alarming door is displayed on the interface, the alarm sound will be played. Alarm cancellation can be done for single door and all doors. To control a single door, move the cursor over the door icon, a menu will pop-up, then click **Remote Opening/Closing** in the menu. To control all doors, directly click **Remote Opening/Closing** behind Current All.

 **Note:** If cancel the alarm fails, check if any devices are disconnected. If found disconnected, check the network.

- **Remote Normally Open:**

It will set the device as normal open by remote

19.4.1.3 Search Device


This paper introduces the configuration Step for real-time monitoring of search device in the service center module.

Add a Door

This paper introduces the configuration Step of map configuration and door addition in the service center module.

- **Operation Step:**

Step 1: In the service Center module, choose "**Map Center > Map Configuration**".

Step 2: On the map configuration screen, select the map of the desired area and click on the right of the screen  to add the gate.

Step 3: In the Add Door list on the left of the page, drag the required **Access Control** device to place it on the map,

Step 4: Click **Submit** under the left door bar to complete the operation of adding a door on the map.

Adding a Camera

This section describes how to add camera Step for map configuration in the Service Center module.

- **Operation Step:**

Step 1: In the Service Center module, choose "**Map Center > Map Configuration**".

Step 2: On the map configuration screen, select the map of the desired area and click on the right of the screen to add a camera.

Step 3: In the Add Camera list on the left of the screen drag the required camera device to place it on the map,

Others

This section describes how to add others Step for map configuration in the Service Center module.

● Operation Step:

Step 1: In the Service Center module, choose "**Map Center > Real Time Monitoring**".

Step 2: On the map configuration screen, select the map of the desired area and click on the right of the screen to add Others.

Step 3: In the Add Other list on the left of the screen drag the required other device to place it on the map,

Map

Click the Map: It will show the area of the map

Defense Area

It will show the defence area in the map

19.4.1.4 Handle Video Alarm Details

This section describes the Step configuration for handling video alarm event details in the Service Center module.

● Operation Step

Step 1: In the Service Center module, choose "**Map Center > Real-time Monitoring**".

Step 2: On the real-time monitoring screen, select a video alarm in the left pane and click ⓘ to display detailed information. As shown in Figure 14-6.

Instructions:

Function description of the detailed information interface:

1. Preview: Displays the live view of the current video device.
2. Playback: Plays back the records generated by alarm events.
3. Trend: record the corresponding trend record of personnel.
4. Report: You can note the event status.

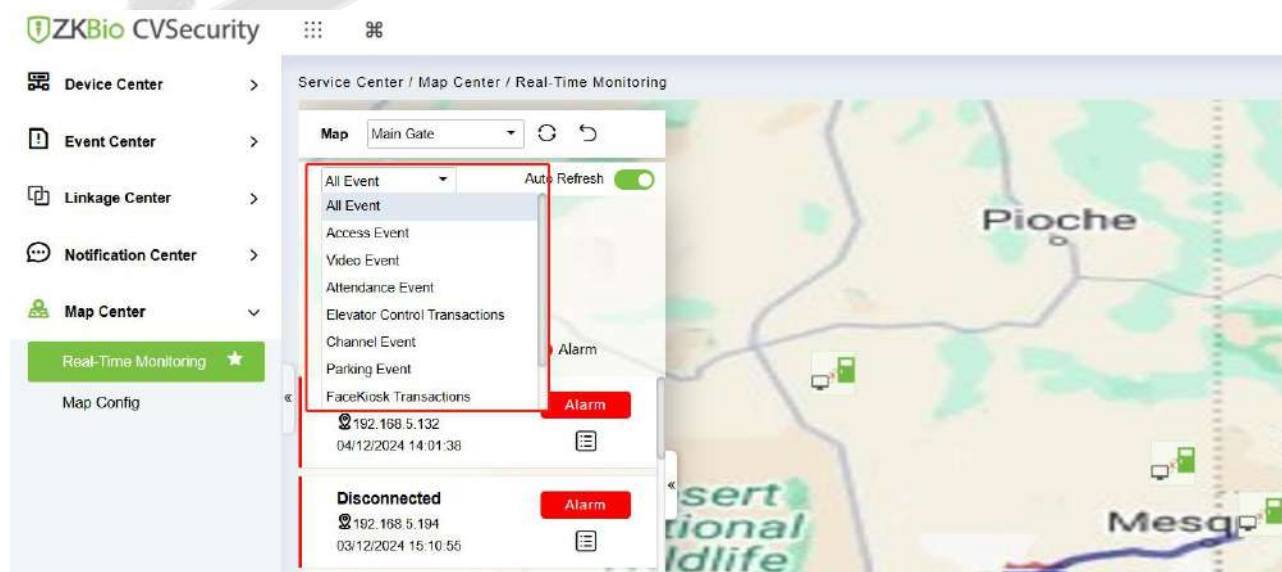


Figure 19- 6 Video Alarm Details Screen


Step 3: After viewing the detailed information and remarks, click **Submit**.

19.4.1.5 Handle Door Alarms in Details

This section describes the Step configuration for handling gate alarm event details in the Service Center module.

● Operation Step:

Step 1: In the Service Center module, choose "**Map Center > Real-time Monitoring**".

Step 2: On the real-time monitoring page, select the event for which the access control alarm is generated in the left pane and click . The detailed information is displayed.

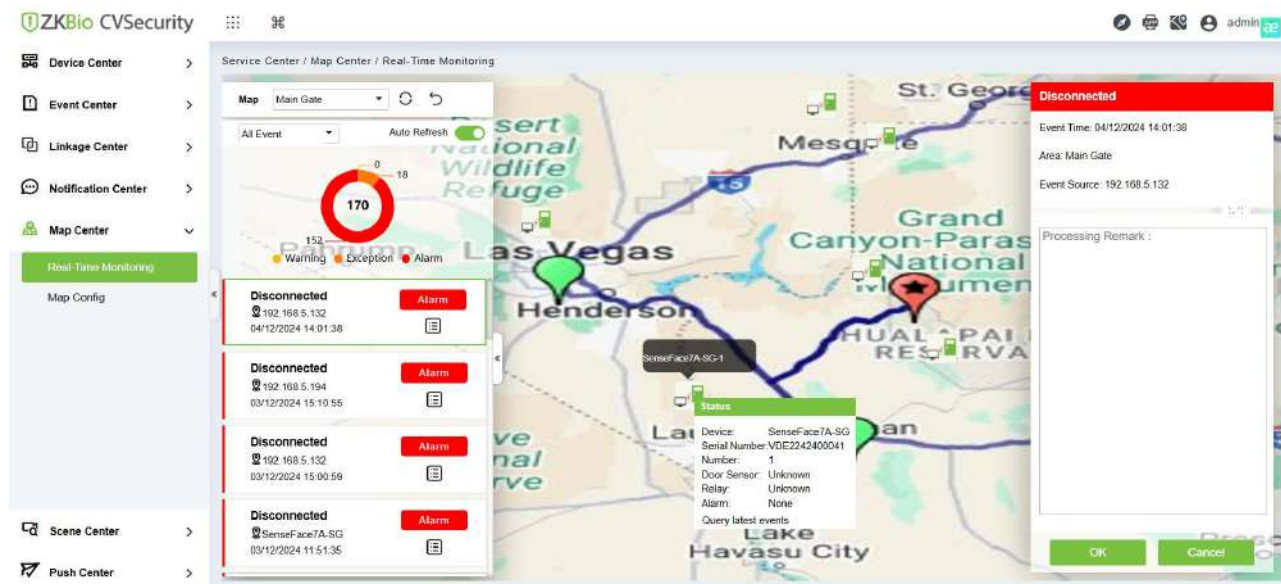


Figure 19-7 Access Alarm Details Page







Step 3: After filling in the report remarks, click **Submit**.

19.4.2 Map Configuration

By importing the map and configuring the corresponding monitoring points, the distribution of the current monitoring points can be intuitively displayed.

● Instructions:

Table 18-1 describes the ICONS on the map configuration page.

Icon	Instructions
	Full screen.
	The refresh.
	Return to the previous level.
	Drag ICONS of Access Control and camera and move coordinates; After Operation is finished, click  , can be saved.
	Add the icon of the Access Control device.







Icon	Instructions
	Add a camera icon.
	Add sub maps.
	Operation to zoom in and out of the map.
	Move the mouse over the "door or Video" device on the map and right click it out.
	Add a map.
	The editor.

Table 19-1 Map Configuration Icons

●The Premise Conditions:


- 1.The access control device is added to the Access Control module.
- 2.Add the camera device under the video module.

19.4.2.1 Add Map

This section describes how to add Step of map configuration in the Service Center module.


●Operation Step:

Step 1: In the Service Center module, choose "**Map Center > Map Configuration**".

Step 2: In the map configuration screen, click on the left bar  . The page for adding a map is displayed, as shown in Figure 14-8. For details about the parameters, see Table 18-2.

New

Area Name*



Map Path*

Browser

No file selected

Map Type*

General Map

Save and New

OK

Cancel

Figure 19- 8 Add Map Page

The Map Type	Parameter	Instructions
Normal Mapping	Name	Select the area to which you want to add the map. For details about how to configure regions, see 18.2 Region Settings.

The Map Type	Parameter	Instructions
(Using the map drawn by the user, as the background loading,)	Map Path	<p>Select the map you want to add, that is, the map image file that exists on the local server in advance.</p> <p>Instructions</p> <ul style="list-style-type: none"> Map is supported formats. Jpe \. JPG \. JPEG \. GIF \. PNG \. BMP \. Ico \. SVG \. SVGZ \. Tif \. Tiff \. Ai \. DRW \. PCT \. PSP \. XCF \. PSD \. Raw \. Webp image file. Map image file size should not exceed 1120 × 380px.
Hypergraph	Name	Select the area to which you want to add the map. For details about how to configure regions, see 18.2 Region Settings.
	Map Path	To set up a GIS server, set parameters on the server, and then set these parameters.
	Route Analysis Path	
	Projection	
	The Center X/Y Coordinate	Fill in the latitude and longitude.
	Initialize The Scaling Level	The general choice for initial scaling is around 13.
	Maximum Zoom Level/Minimum Zoom Level	Custom map zoom size.
Google Maps	Area	Select the area to which you want to add the map. For details about how to configure regions, see 18.2 Region Settings.
	The Map Key	<p>Log on to the platform for https://cloud.google.com/maps-platform for registration for the key.</p> <p>Instructions: You need to turn on the Directions API on Google's platform to map people's movements.</p>
	Initialize The Scaling Level	The general choice for initial scaling is around 13.
	The Center X/Y Coordinate	Fill in the latitude and longitude.
Baidu Map	Area	Select the area to which you want to add the map. For details about how to configure regions, see 18.2 Region Settings.
	The Map Key	Log in to http://lbsyun.baidu.com/ to register and obtain the key.

The Map Type	Parameter	Instructions
	Initialize The Scaling Level	The general choice for initial scaling is around 13.
	The Center X/Y Coordinate	Fill in the latitude and longitude.

Table 19-2 Parameters for Adding a Map

Step 3: Set parameters based on the type of the map to be added and Click **OK** to finish adding the map.

19.4.2.2 Add Sub-map (Optional)

This section describes how to add sub-map configuration Step on the map in the **Service Center** module.

● Operation Step:

Step 1: In the Service Center module, choose "**Map Center > Map Configuration**".

Step 2: Select a region map and click on the "Add Map" to add sub-maps.

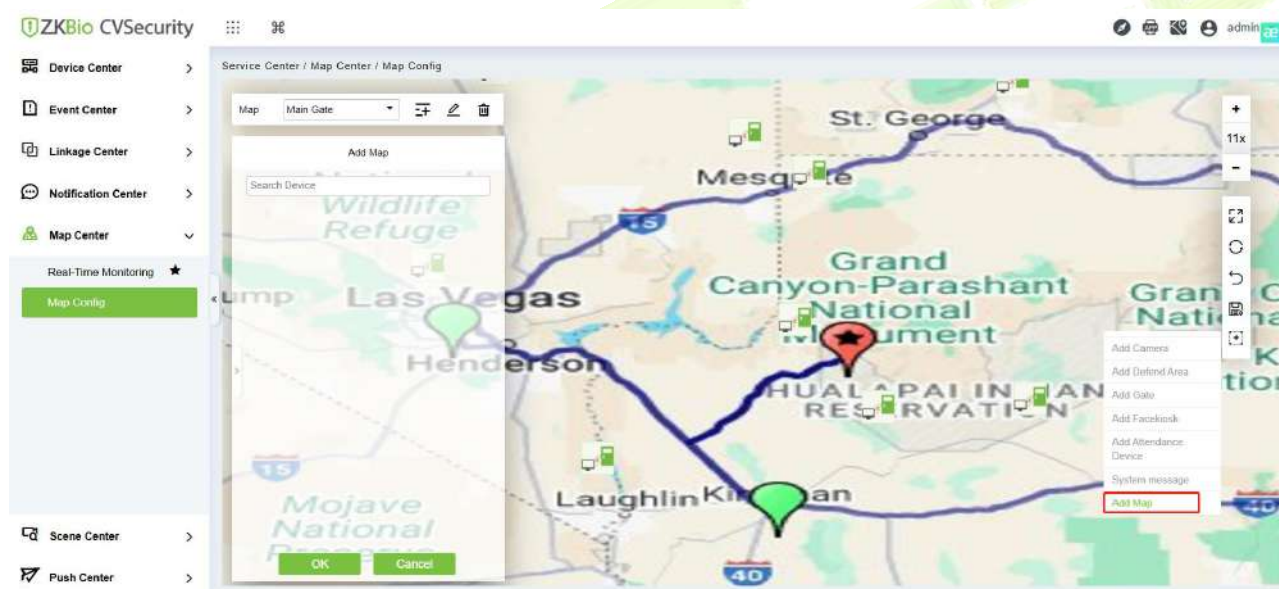


Figure 19- 9 Add Sub-map Page

Step 3: Click **OK** under add map on the left to complete the configuration of the sub-map.

19.4.2.3 Add Door

This paper introduces the configuration Step of map configuration and door addition in the service center module.

● Operation Step

Step 1: In the service Center module, choose "**Map Center > Map Configuration**".

Step 2: On the map configuration screen, select the map of the desired area and click "**Add Door**" on the right of the screen to add the gate.

Step 3: In the Add Door list on the left of the page, drag the required **Access Control** device to place it on the map, as shown in Figure 14-10.

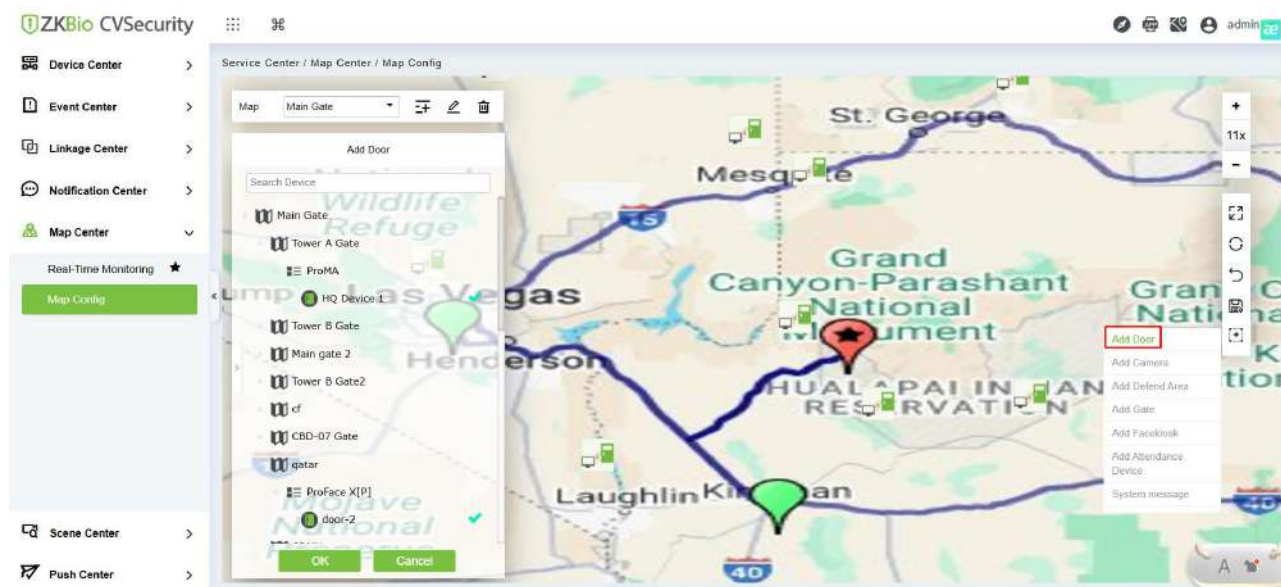


Figure 19- 10 Add Door Page

Step 4: Click **Submit** under the left door bar to complete the operation of adding a door on the map.

19.4.2.4 Add Camera

This section describes how to add camera Step for map configuration in the Service Center module.

● Operation Step

Step 1: In the Service Center module, choose "**Map Center > Map Configuration**".

Step 2: On the map configuration screen, select the map of the desired area and click "**Add Cameras**" on the right of the screen to add a camera.

Step 3: In the Add Camera list on the left of the screen, drag the required camera device to place it on the map, as shown in Figure 14-11.

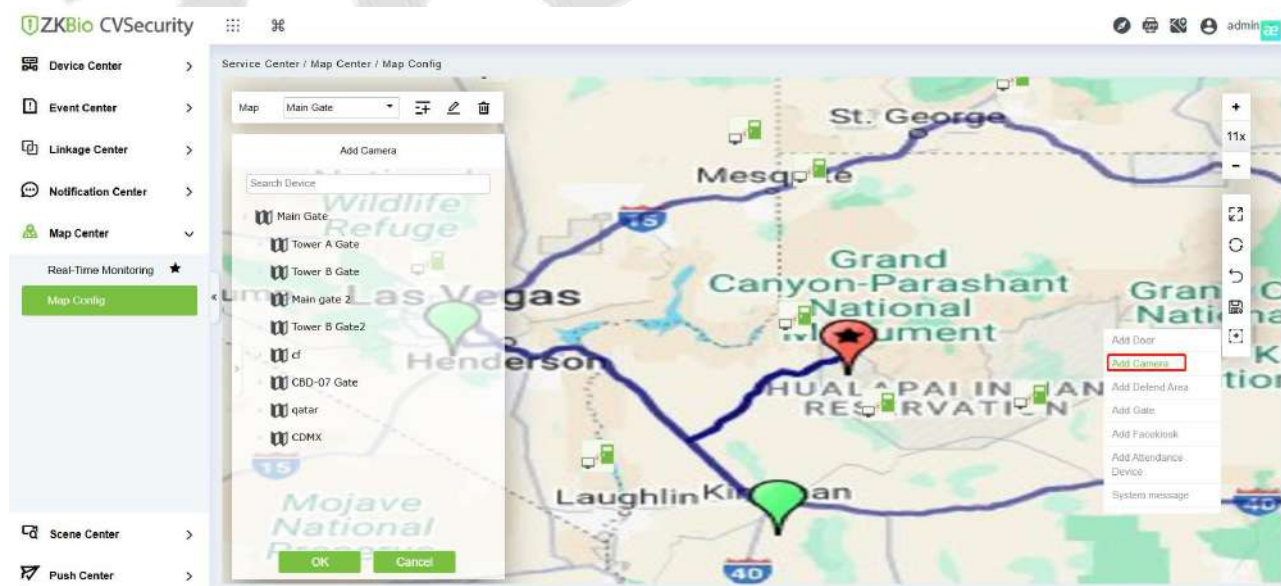


Figure 19- 11 Add Camera Screen

Step 4 Click **Submit** in the left column of Adding a camera to complete the configuration of adding a camera to the map.

19.4.2.5 Add Defence Area

We can view the Intrusion Alarm states in real time through the map center.

Step 1: Go to **Service Center > Map Center > Map Config**. Click , start adding defence area.



Figure 19- 12 Adding Defense Interface

Step 2: Click the **Adding Defence Area** on the left of the screen, drag the required partition or zone to place it on the map.

Step 3: Click **OK** the left column of **Adding Defence Area** to complete the configuration of adding a partition.

19.4.2.6 Map

Click the Map: It will show the area of the map.

19.5 Scene Center

19.5.1 Scene Configuration

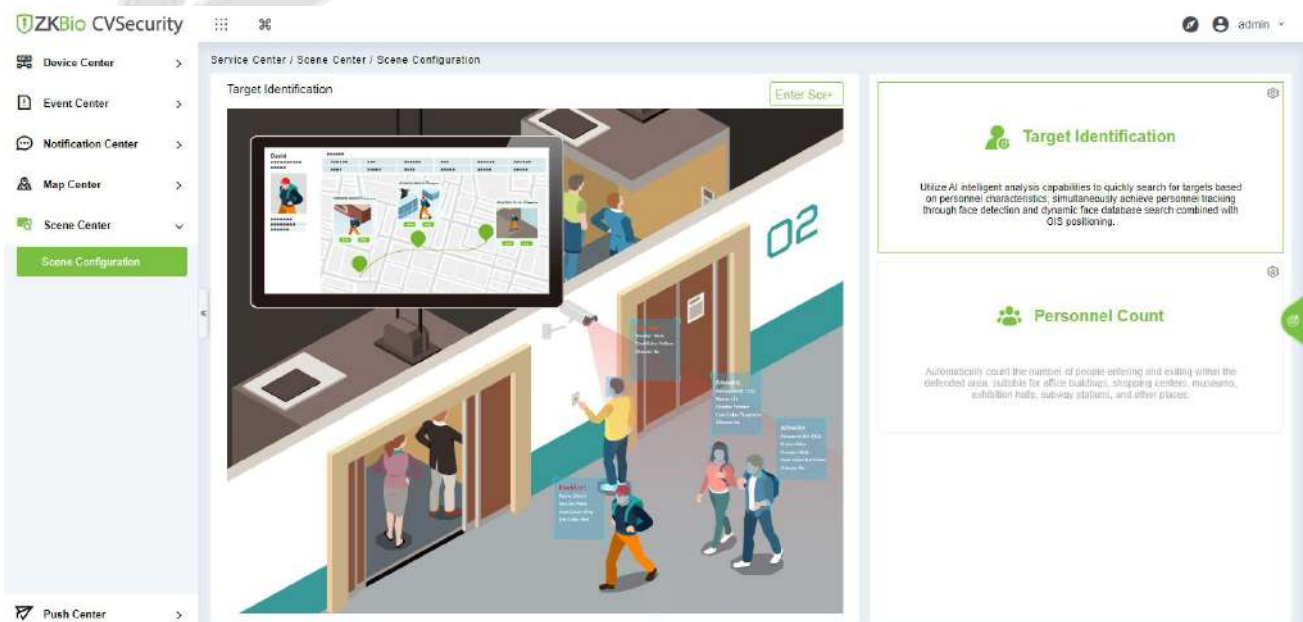


Figure 19- 13 Scene Center Interface

19.5.1.1 Target Identification

Click this icon  into Target Identification Guide:

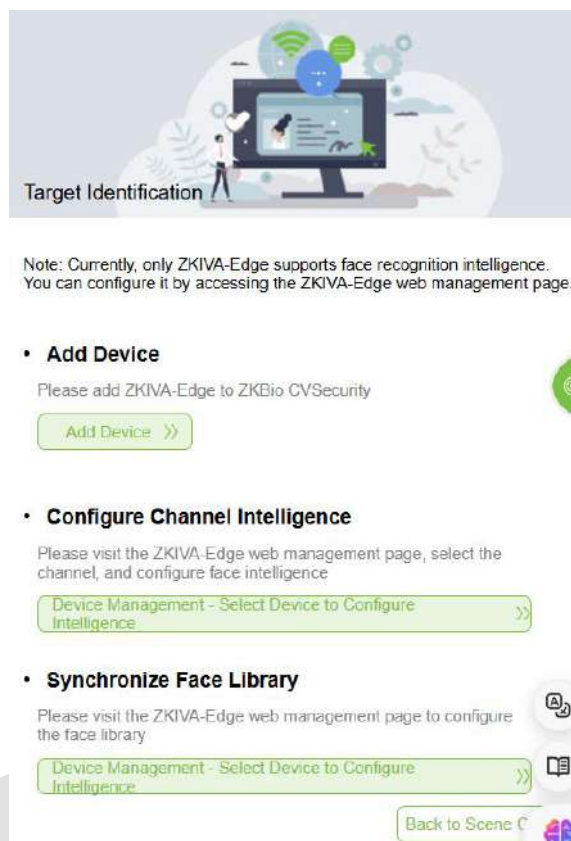


Figure 19- 14

Note: Currently, only ZKIVA-Edge supports face recognition intelligence. You can configure it by accessing the ZKIVA-Edge web management page.

● Operation Step

Step1: Add Device

Click **Add Device**, the system will automatically jump to **[Smart Video Surveillance] > [Device Management] > [Device]**, you can add ZKIVA-Edge devices here, and you can refer 4.1 Device Management for specific operation.

Step2: Synchronize Face Library

1. Click Synchronize Face Library to jump to **[Smart Video Surveillance] > [Device Management] > [Device]**, in this page we can configure the face library.

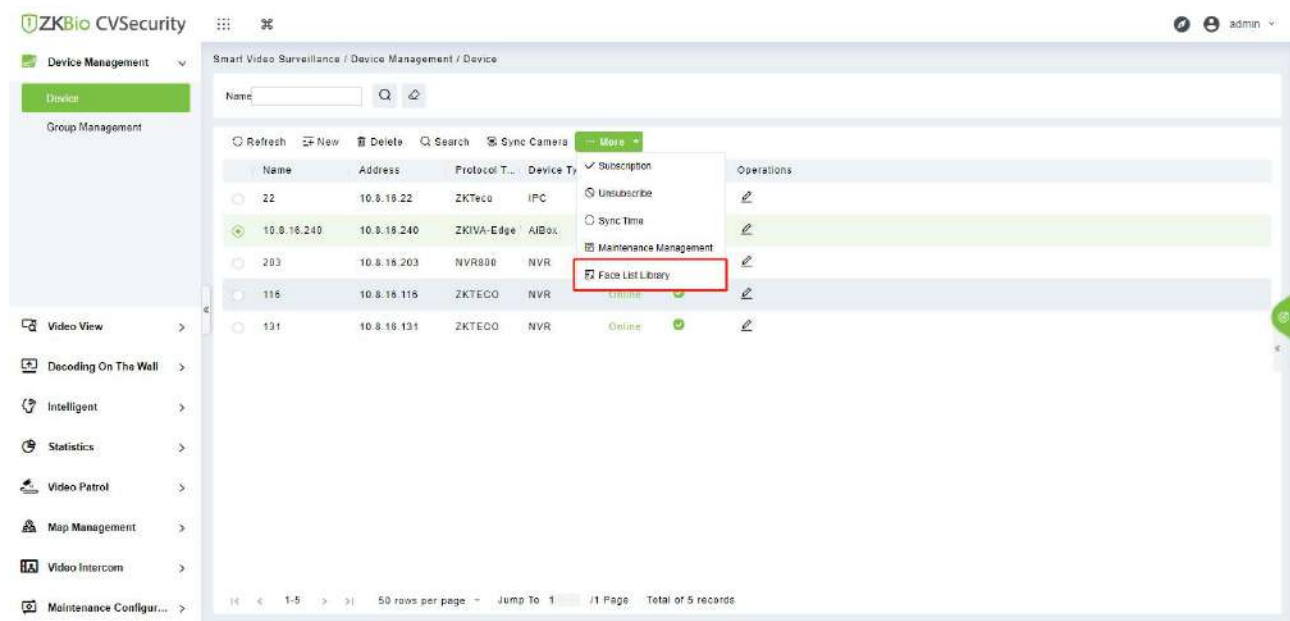


Figure 19-15

2. Select the face library to be added

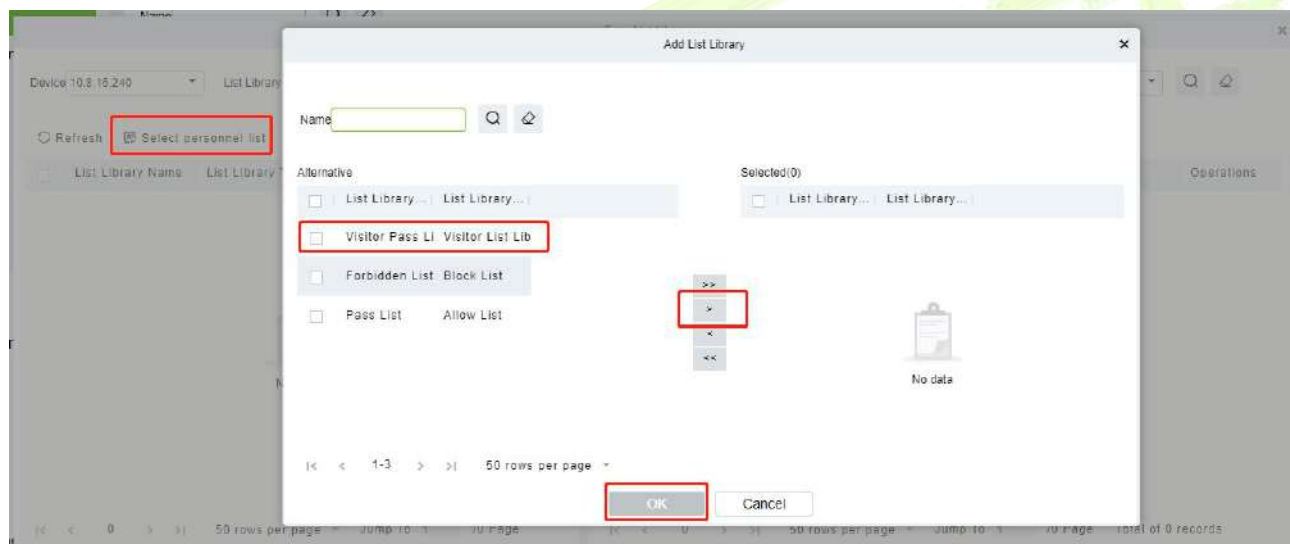


Figure 19-16

Step 3: Configure Channel Intelligent

The Face Intelligence configuration feature is now moved to the web side of the device, Please visit the ZKIVA-Edge web management page, select the channel, and configure face intelligence.

1. Click Configure Channel Intelligent to jump to [Smart Video Surveillance]>[Device Management] > [Device]
2. Click [Smart Video Surveillance]>[Device Management]>[Device]>[Maintenance Management] to jump to device web management page.

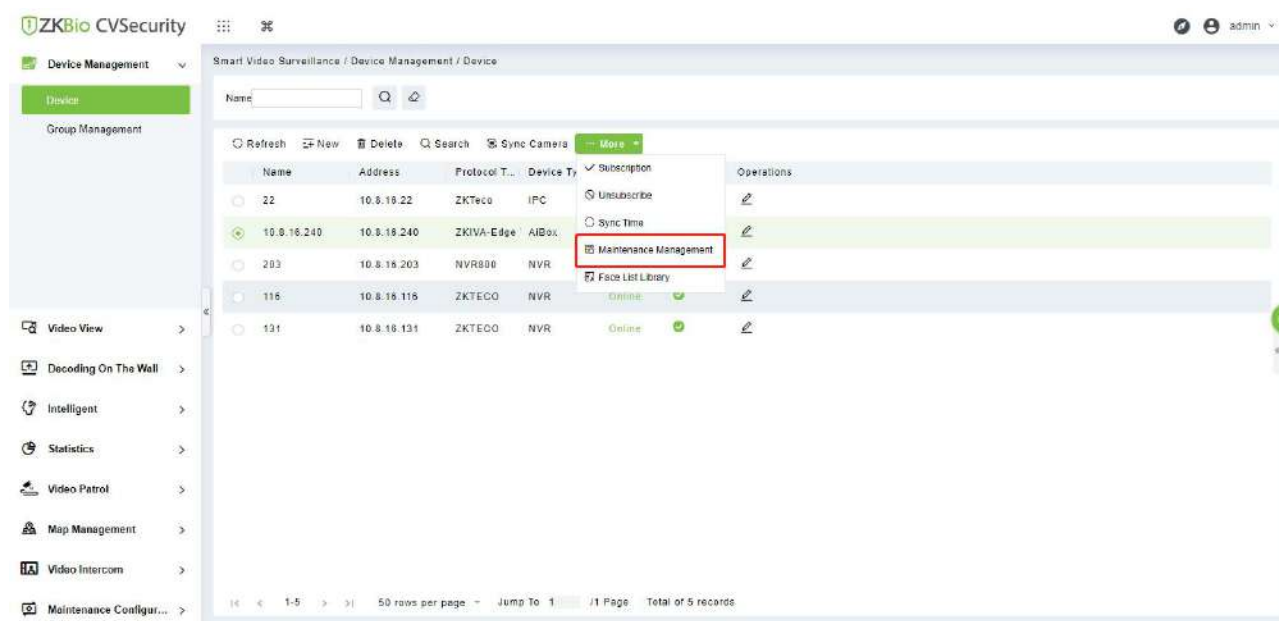


Figure 19- 17

Note: Take the web management page of ZKIVA-Edge T1 for example :

1. Click [Data connect]>[Active reporting] >[Server address] to fill in the server address and active report your server IP to device.

Server address Format: http://main (ip):port/

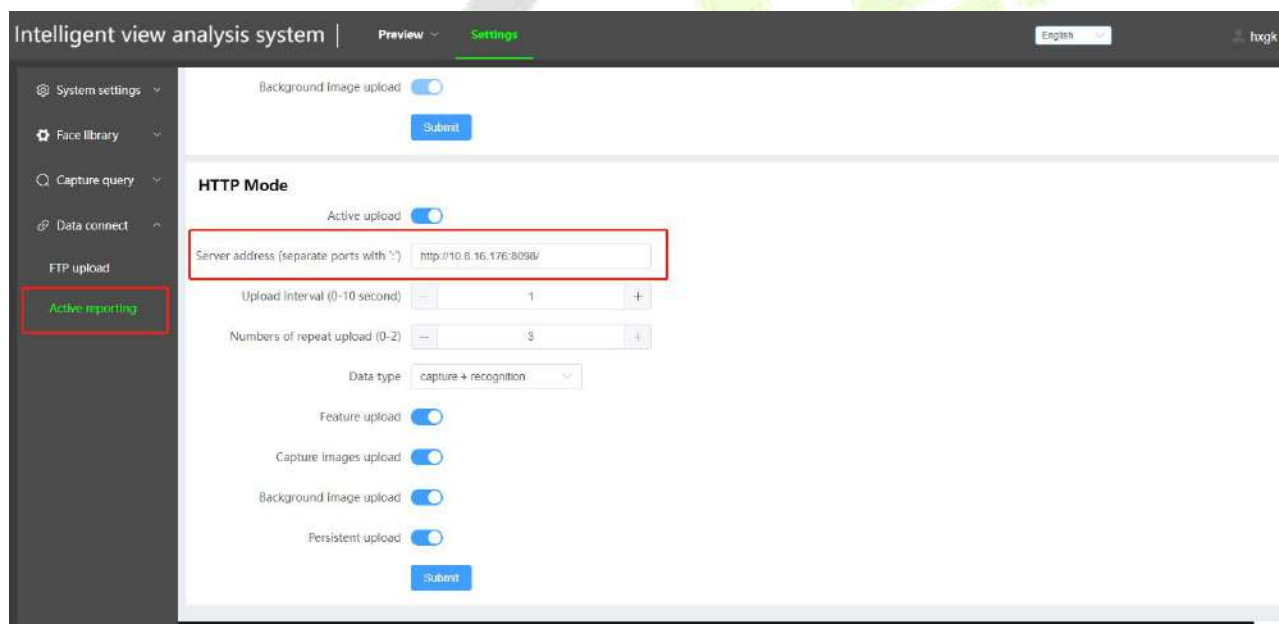


Figure 19- 18

2. Click [Channel management]>[View/Edit] to visit the channel management interface.

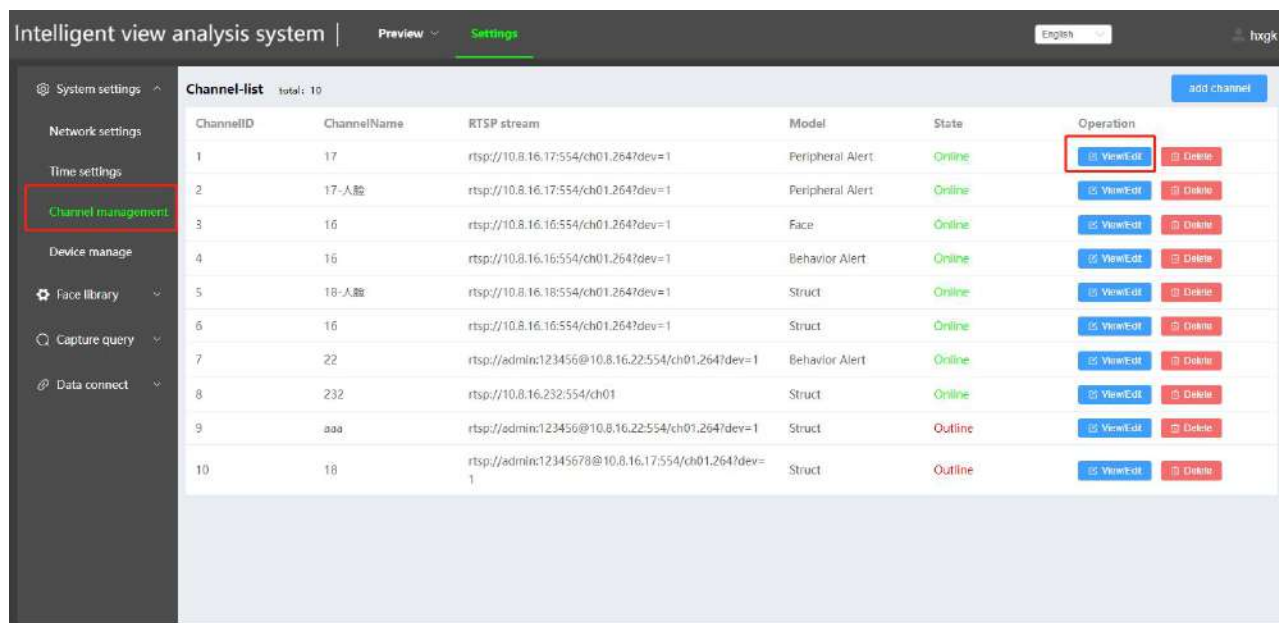


Figure 19-19

3. Select the type of channel as Face to perform face recognition rule configuration and then submit the configuration to enable the Target identification.

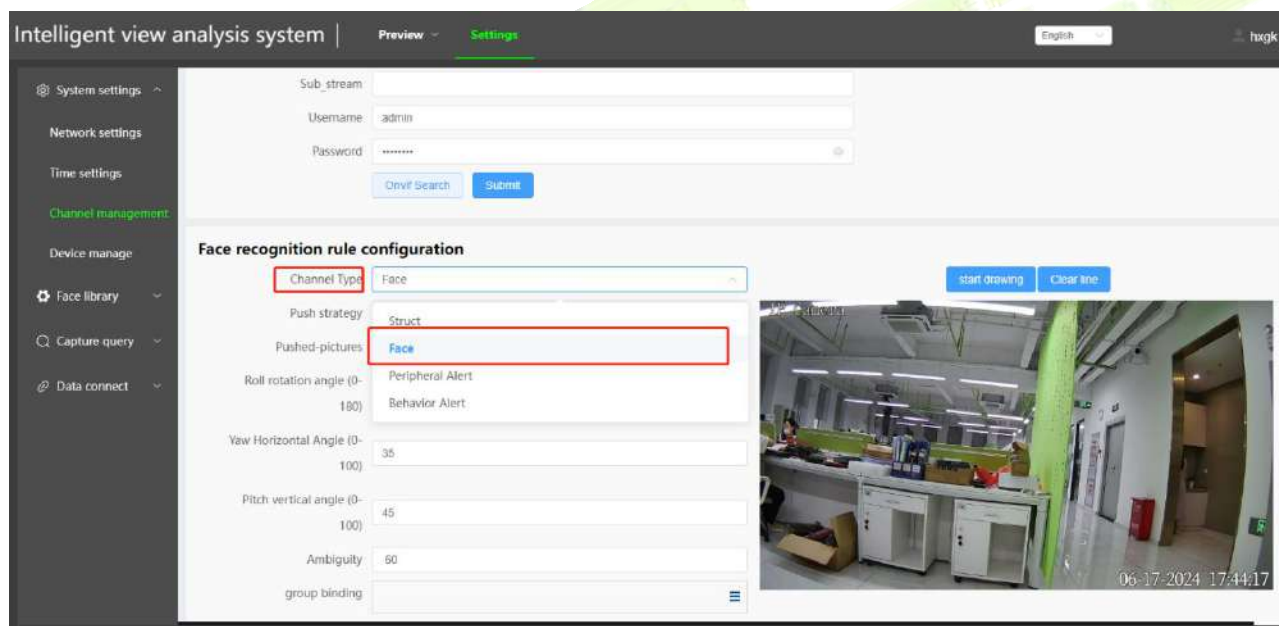


Figure 19-20

● Target Identification Scene Page

Click **Enter Scene** to enter the target identification function.

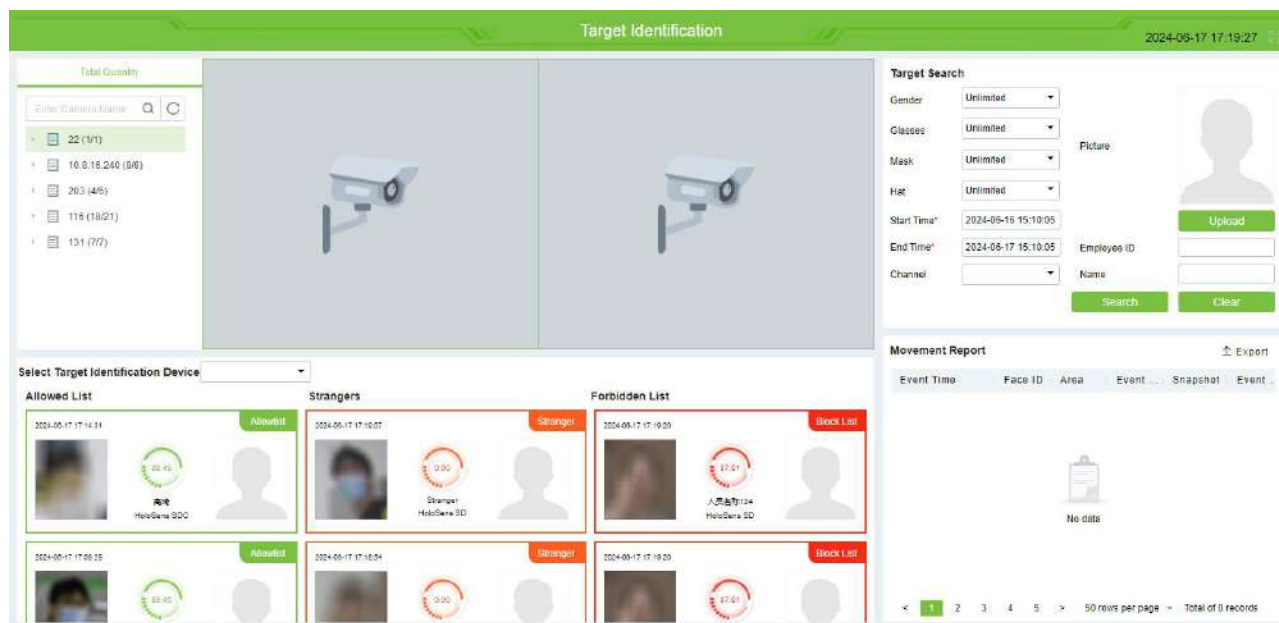


Figure 19-21

● Quick Search

Right-click on the list of triggered events to quickly retrieve people.



Figure 19-22

● Target Search

It is possible to track personnel's passage by searching for their name, employee ID, photo, gender, whether they are wearing glasses, a mask, or a hat.

Target Search

Gender

Unlimited

Glasses

Unlimited

Mask

Unlimited

Hat

Unlimited

Start Time*

2024-06-17 11:19:45

End Time*

2024-06-18 11:19:45

Channel

Picture

Upload

Employee ID

Name

Search

Clear

Figure 19- 23

● Movement Report

In the movement report, you can see the movement track of specific personnel, and click **[export]** to export the movement track report of personnel.

Movement Report

Export

Event Time	Face ID	Area	Event ...	Snapshot	Event ...
2024-06-18 10:01:5	3170156	Area Nam	HoloSens		Mask AI
2024-06-18 10:01:5	3170156	Area Nam	HoloSens		Target F
2024-06-17 17:24:2	3170156	Area Nam	HoloSens		Target F
2024-06-17 17:18:3	3170156	Area Nam	HoloSens		Target F
2024-06-17 13:35:4	3170156	Area Nam	HoloSens		Mask AI
2024-06-17 13:35:4	3170156	Area Nam	HoloSens		Target F

< 1 2 3 4 5 >


50 rows per page

共9条记录

Figure 19- 24

19.5.1.2 Personnel Count

Click this icon into Personnel Count Guide:

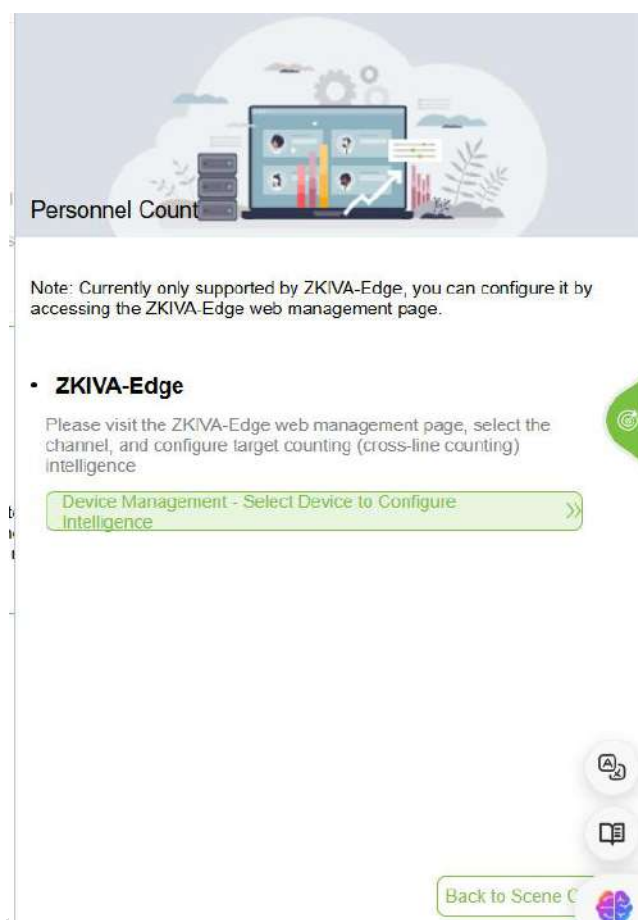**Figure 19- 25**

Note: Currently, only ZKIVA-Edge T2 supports Cross-line statistics intelligence. You can configure it by accessing the ZKIVA-Edge T2 web management page.

● Operation Step

Step1: Add Device

Add ZKIVA Edge device, please refer to 18.5.1.1 Target Identification for details.

Step2: ZKIVA-Edge

Visit the ZKIVA-Edge web management page, select the channel, and configure target counting (cross-line counting) intelligence.

Take the web management page of ZKIVA-Edge T2 for example :

1. Click [Setting]>[Task Setting] to add a new task.

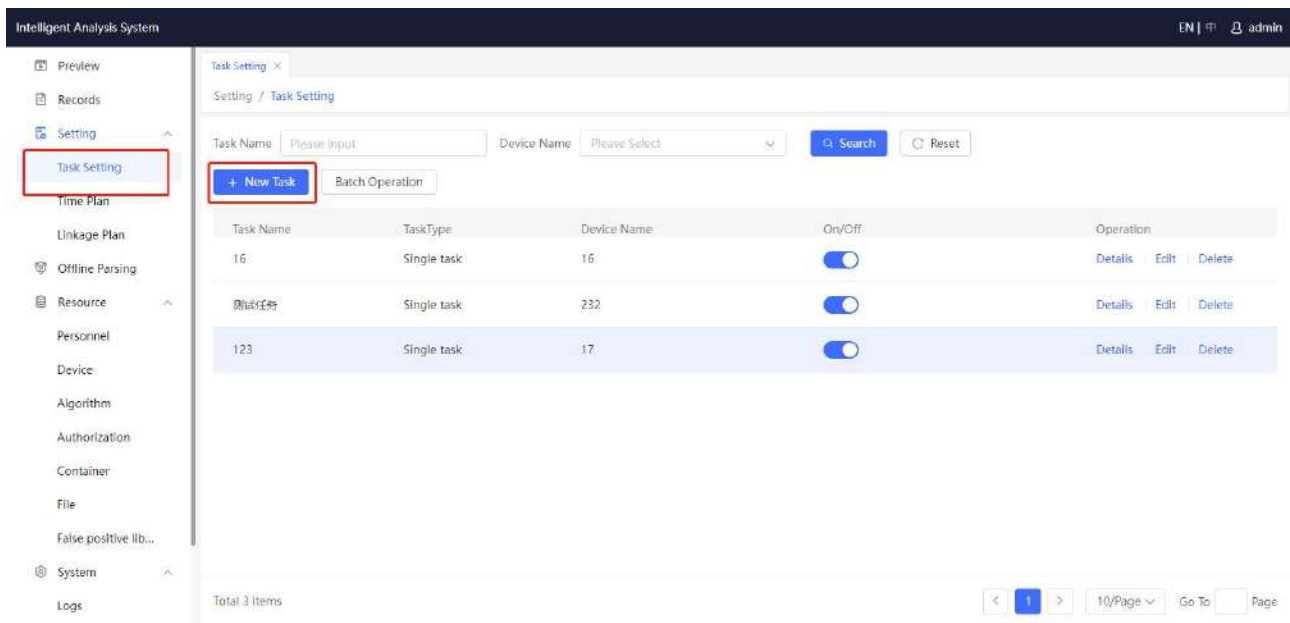


Figure 19-26

2. Perform basic configuration, and then click Submit.

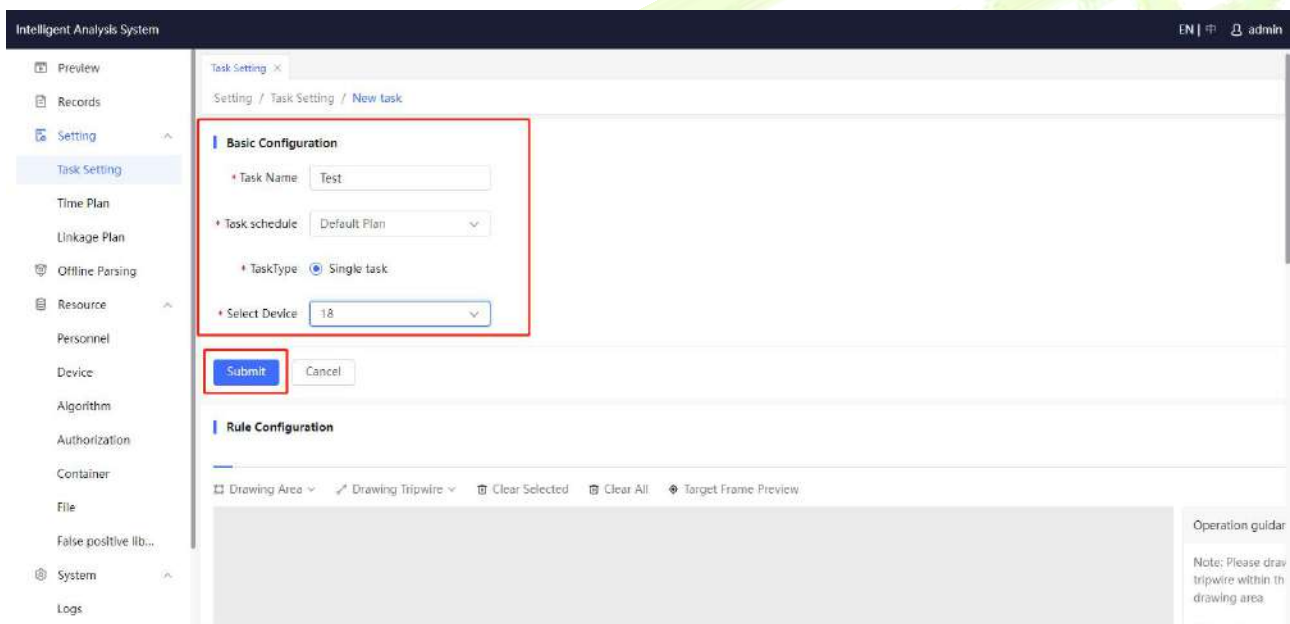


Figure 19-27

3. After submit the basic setting, click [Drawing Tripwire]>[Entry/Exit Tripwire] to draw entry and exit tripwire, select the configured algorithm and submit it.

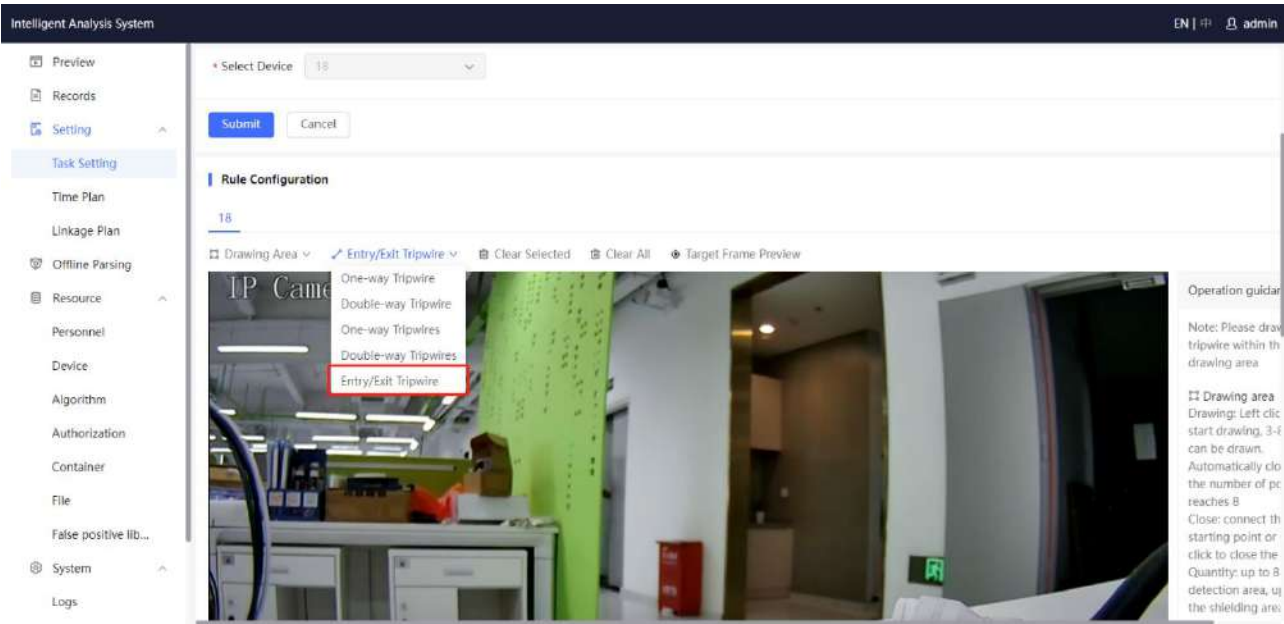


Figure 19-28

● Personnel Count Scene Page

Click **Enter Scene** to enter the personnel count function.

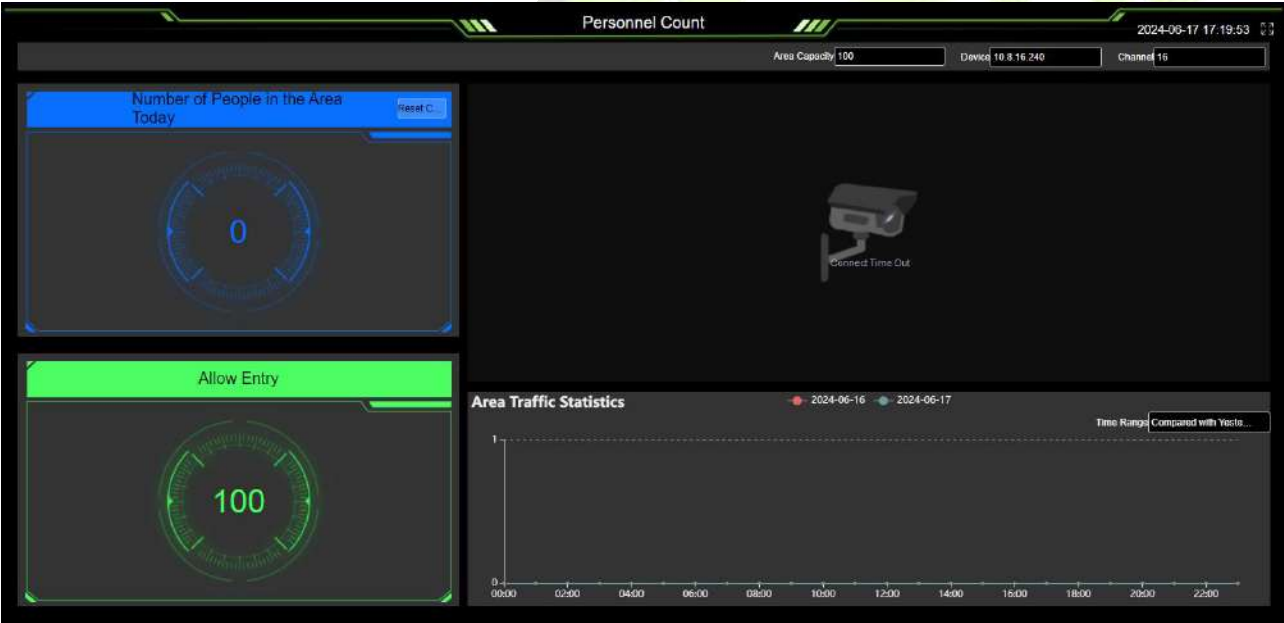


Figure 19-29

19.6 Push Center

19.6.1 Push Configuration

Add New

● Operation Step:

Step 1: In the Service Center module, choose "**Push Center > Push Configuration**".

Step 2: In the **Push Configuration** interface, click **Add New** and fill in the relevant parameters, as shown in Figure 18-13. Please refer to Table 18-3 for parameter description.

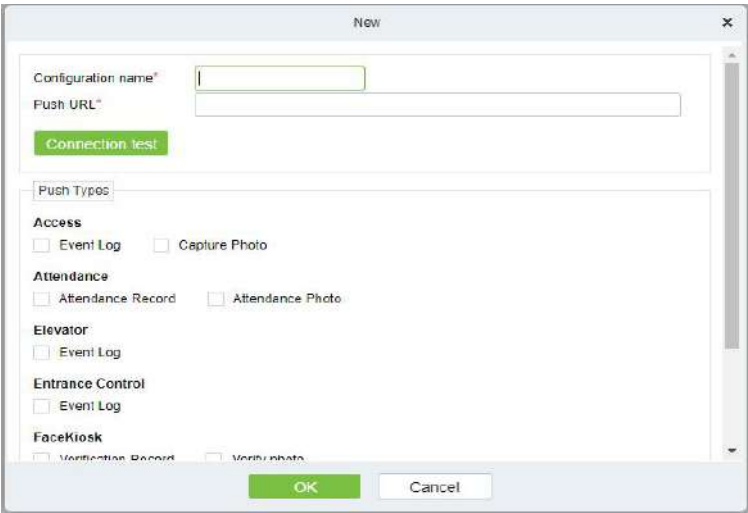


Figure 19- 30 Add Push Configuration

Parameter	Description
Configuration Name	Enter the configuration name
Push URL	Enter the push URL


Table 19-3 Parameters for New

Delete

Select one or more push configuration and click **Delete** at the upper part of the list and click **OK** to delete the selected push configuration Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single push configuration.

Docking Example

It will show the example of data format as a code.

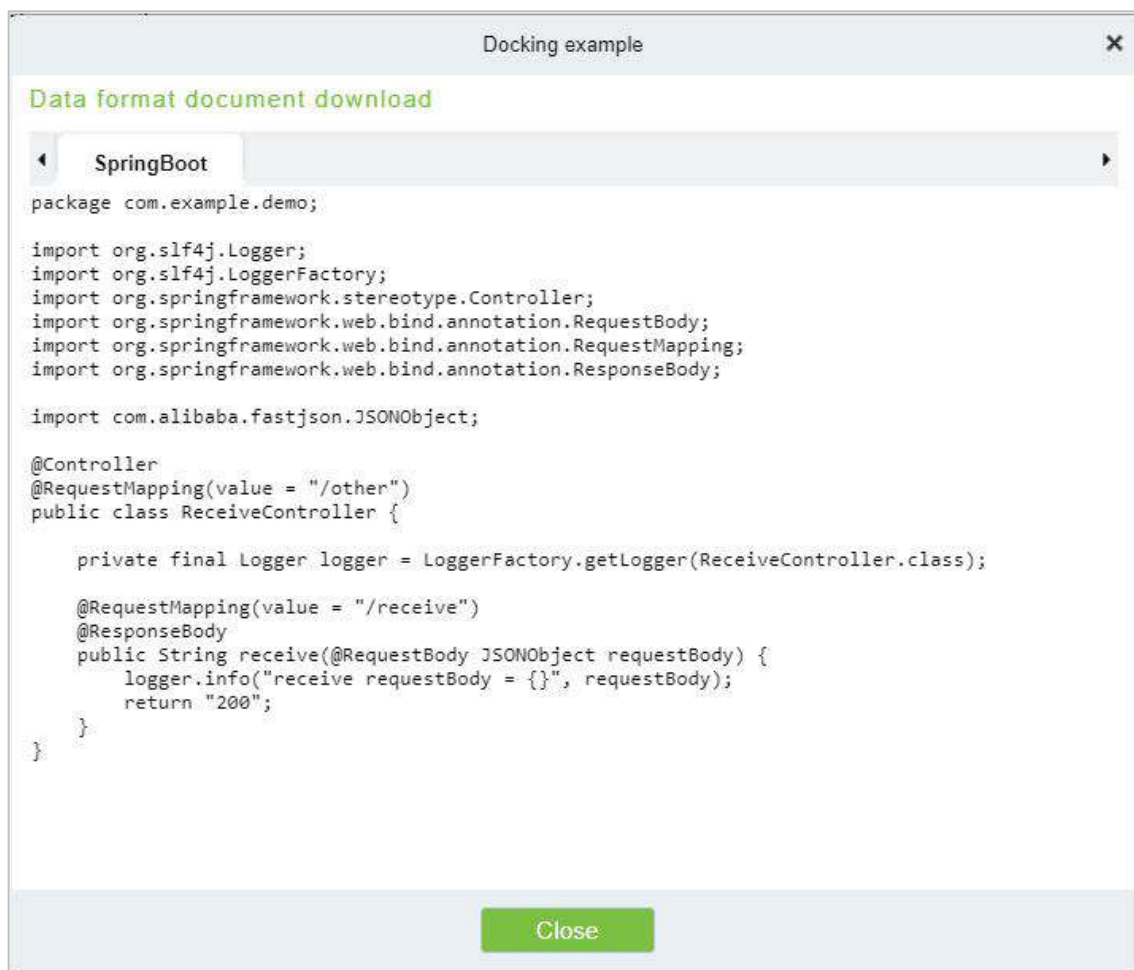**Figure 19- 31 Docking Example**

19.6.2 Push Exception Record

Delete

Select one or more push exception record and click **Delete** at the upper part of the list and click **OK** to delete the selected. push exception record Click **Cancel** to cancel the operation or click **Delete** in the operation column to delete a single push exception record.

Re-push

If the data sync failed one time it will re-sync the data automatically to the software and device.

Manual Push

Manual push is we need to sync the data from device to the software.

ZKTeco Industrial Park, No.32, Industrial Road,
Tangxia Town, Dongguan, China.
Phone : +86 769 - 82109991
Fax : +86 755 - 89602394
WWW.zkteco.com

